





PROJECT REFERENCE NO.	SHEET NO.
R-2562D	EC-23/CONST.23
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
CONST. REV.	
R/W REV.	



CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 23

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

(120)
N. W. HESTER, JR., ET AL

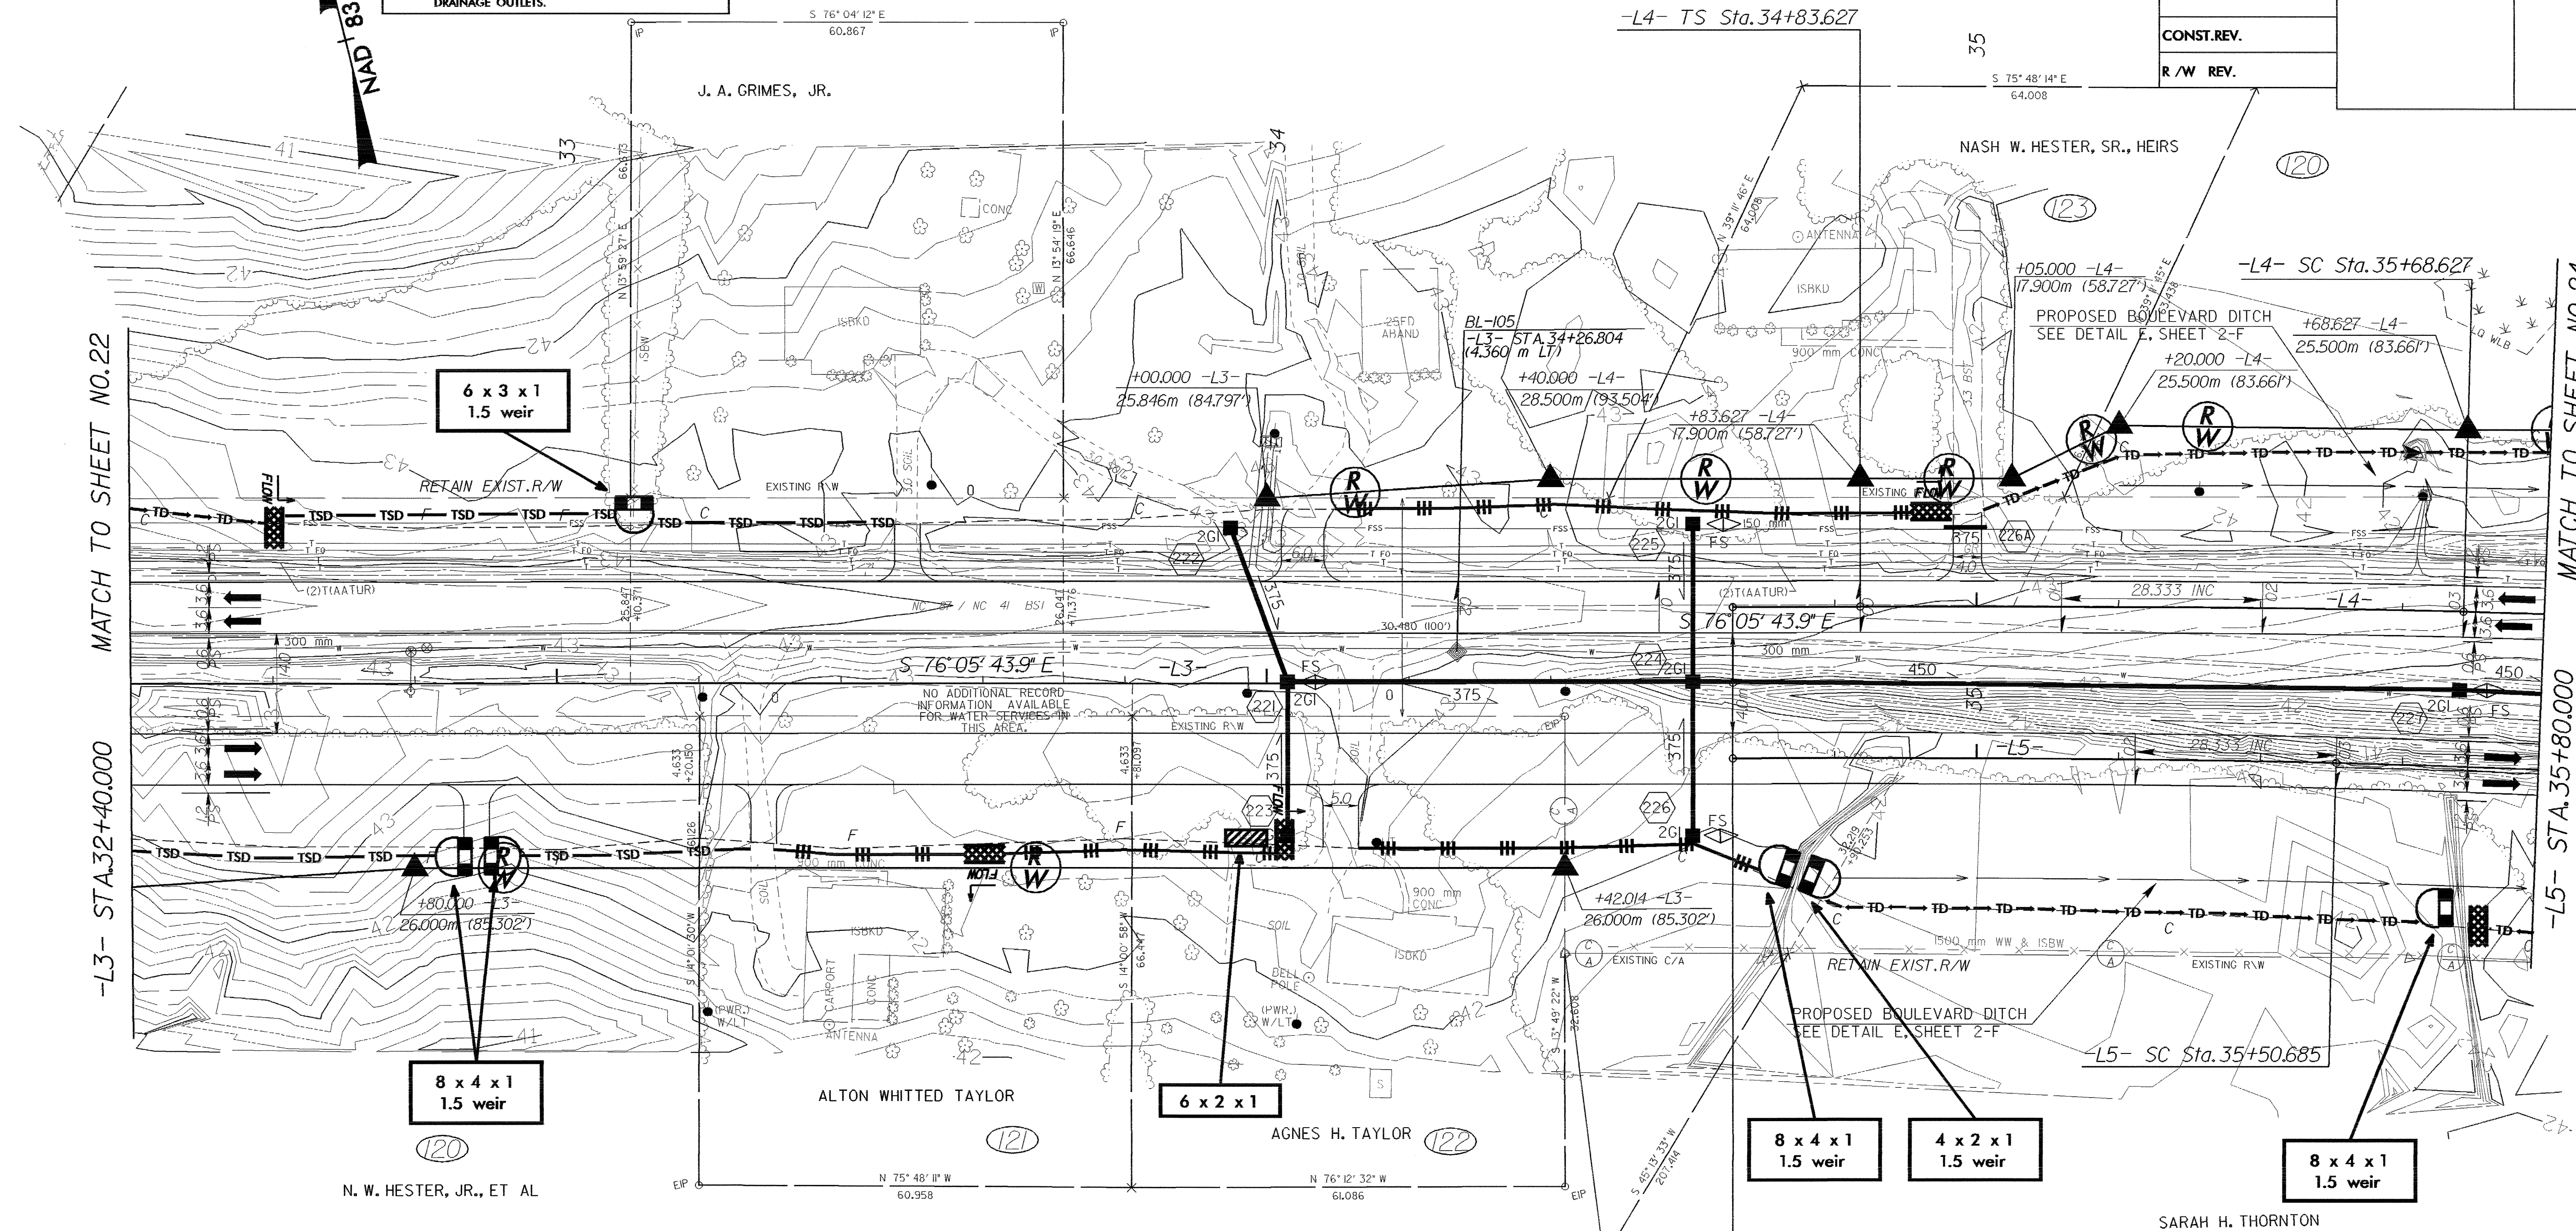

-L4-

PIs Sta. 35+40.295 Os = 1' 23' 40.8"	PI Sta. 37+44.896 Δ = 11' 31' 46.8" (RT)	PIs Sta. 39+48.311 Os = 1' 23' 40.8"
Ls = 85.000	L = 351.349	Ls = 85.000
LT = 56.668	T = 176.270	LT = 56.668
ST = 28.335	R = 1,746.000	ST = 28.335
	SE = 0.03	

-L5-

PIs Sta. 35+22.353 Os = 1' 24' 38.9"	PI Sta. 37+24.444 Δ = 11' 29' 50.5" (RT)	PIs Sta. 39+25.371 Os = 1' 24' 38.9"
Ls = 85.000	L = 346.351	Ls = 85.000
LT = 56.668	T = 173.759	LT = 56.668
ST = 28.335	R = 1,726.000	ST = 28.335
	SE = 0.03	

-L3- POT Sta. 34+65.685 LB=
-L4- POT Sta. 34+65.685 LA (10.6 LT) =
-L5- TS Sta. 34+65.685 LA (10.6 RT)

BEGIN EXISTING
CONTROLLED ACCESS
-L3- POT Sta. 34+41.999
38.096m (124.987')

NOTE: ALL Y LINE RADII ARE 10m
UNLESS OTHERWISE NOTED
NOTE: ALL DRIVES ARE 3.6m WITH
3m RADIUS UNLESS OTHERWISE NOTED
NOTE: ALL DRIVES IN C&G ARE 6m
UNLESS OTHERWISE NOTED
SEE SHEET 37 FOR -L3- PROFILE
SEE SHEET 37 FOR -L4- PROFILE
SEE SHEET 38 FOR -L5- PROFILE