


PROJECT REFERENCE NO.	SHEET NO.
R-2237B	EC-5/CONST 6
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 6

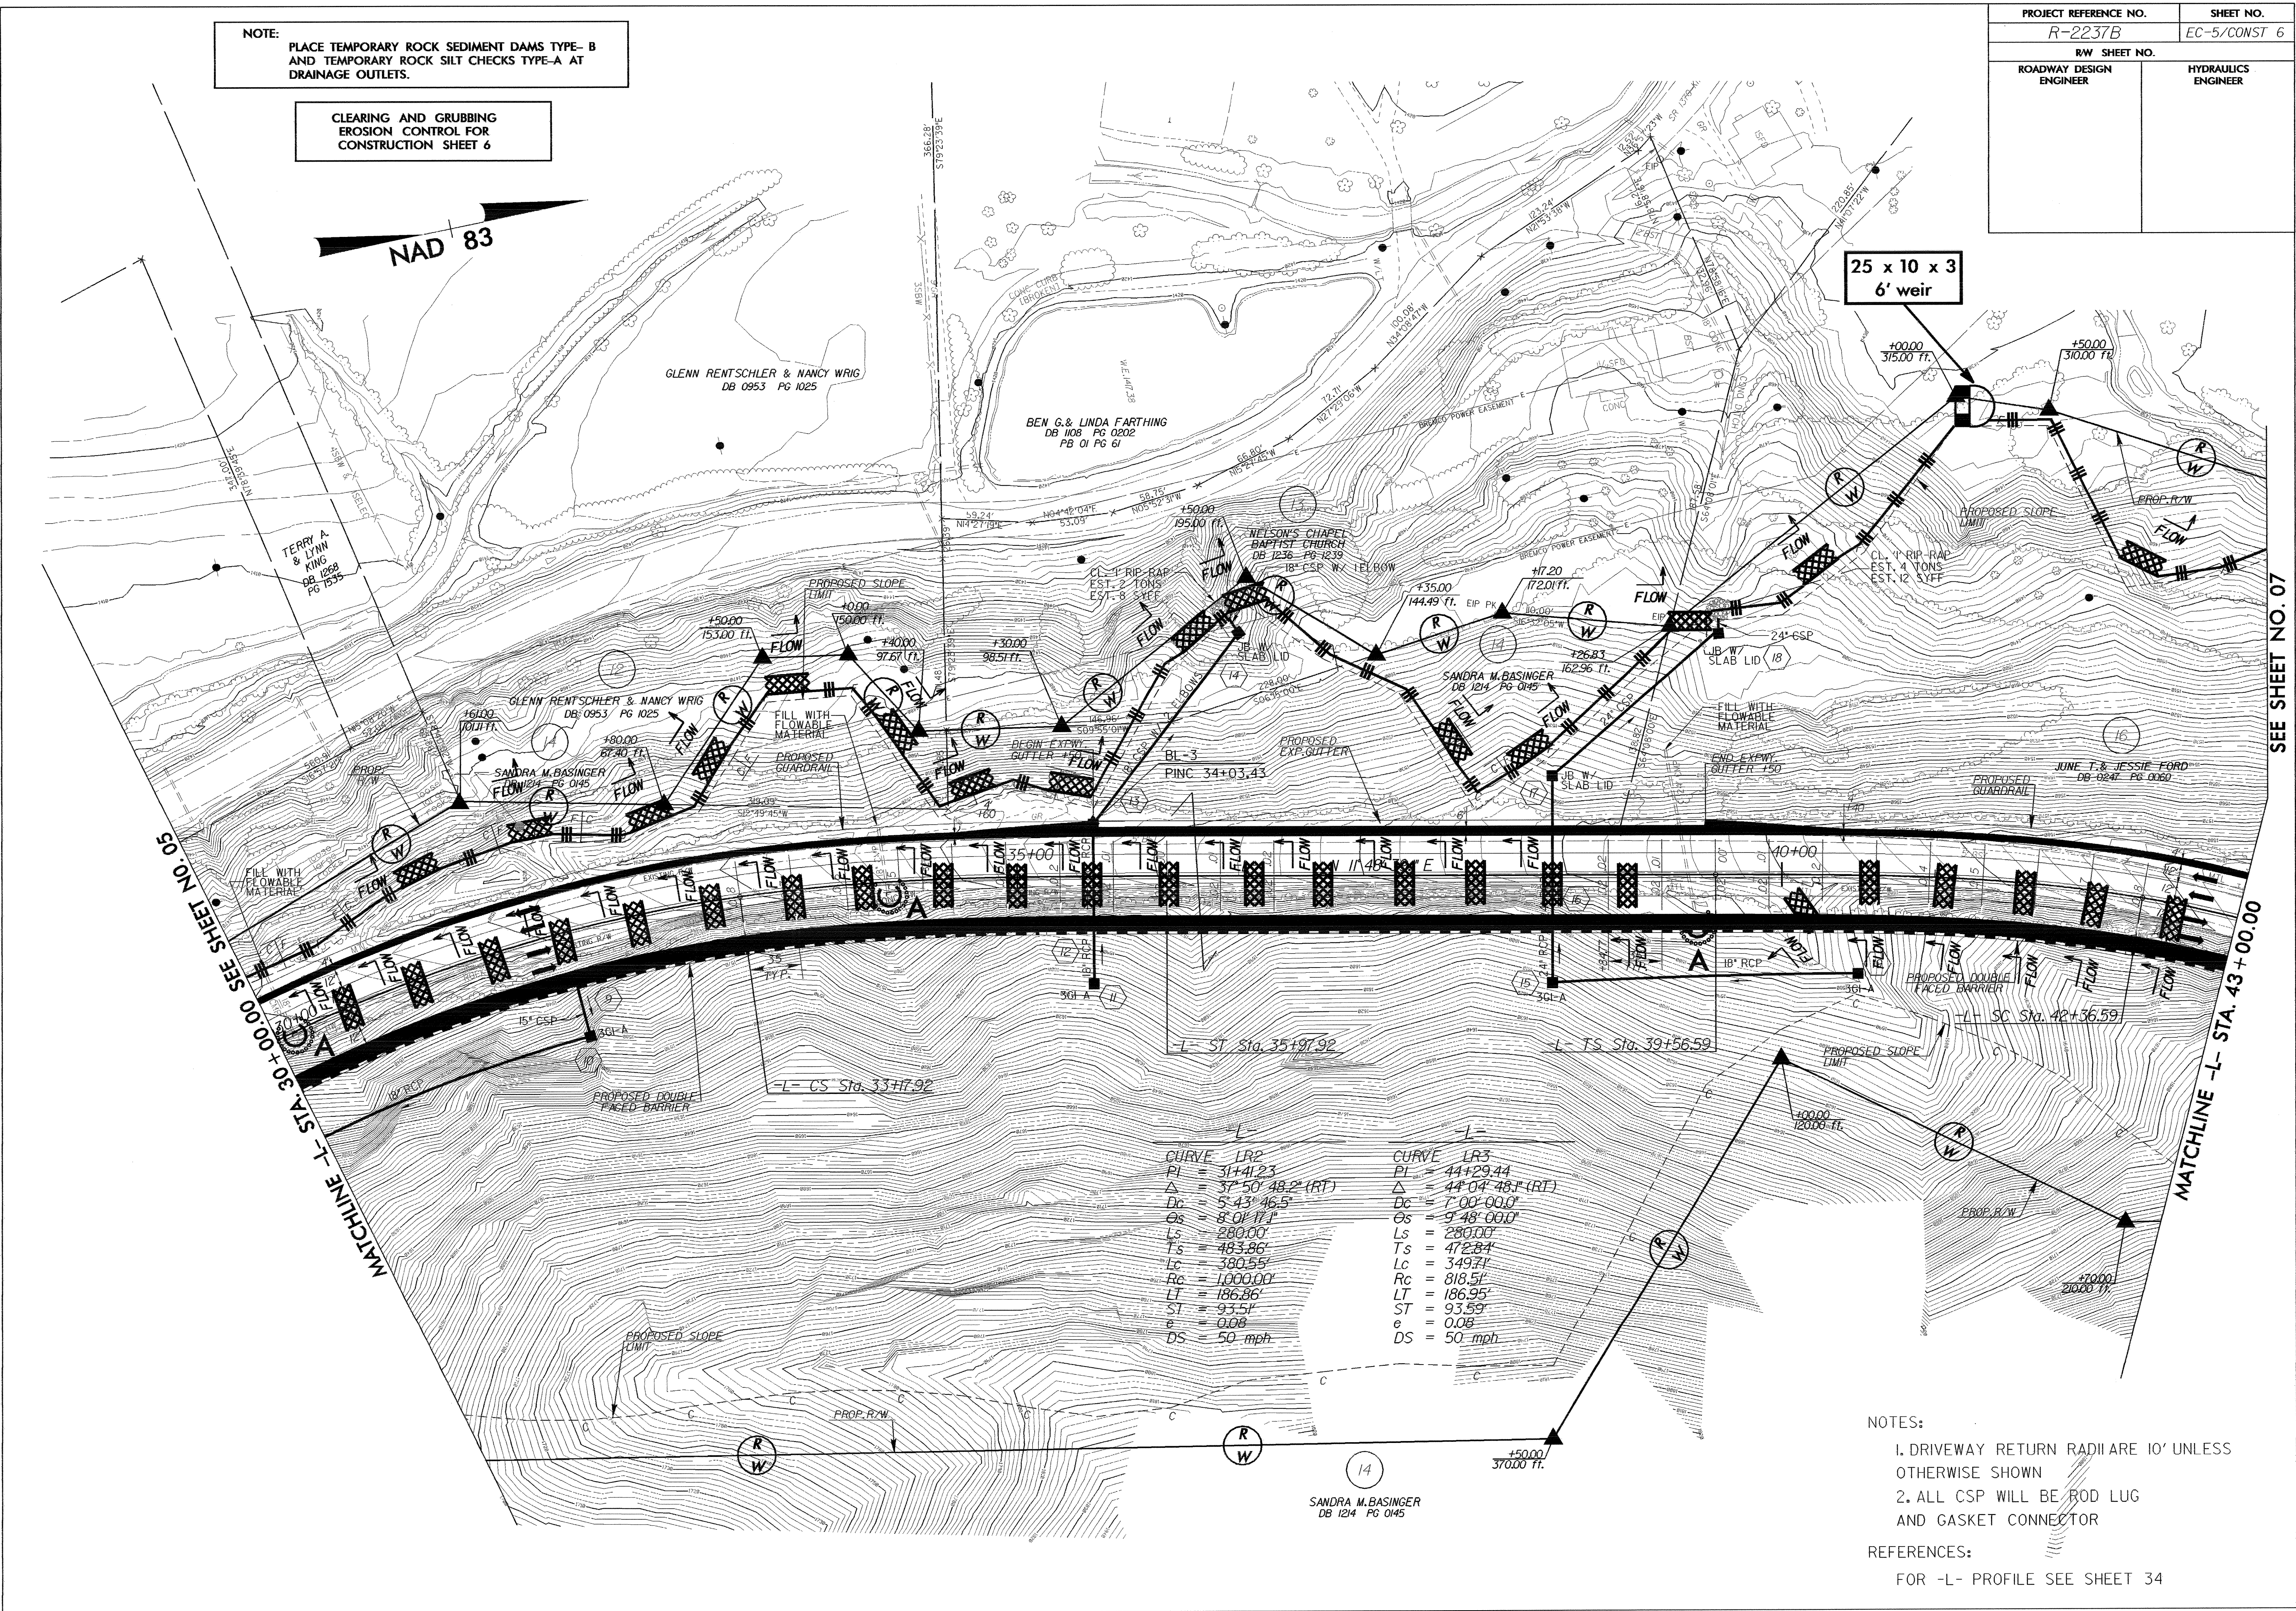

-L-		-L-	
CURVE	LR2	CURVE	LR3
PI	= 31+41.23	PI	= 44+29.44
Δ	= 37° 50' 48.2" (RT)	Δ	= 44° 04' 48.1" (RT)
Dc	= 5° 43' 46.5"	Dc	= 7° 00' 00.0"
Os	= 8° 01' 17.1"	Os	= 9° 48' 00.0"
Ls	= 280.00'	Ls	= 280.00'
Ts	= 483.86'	Ts	= 472.84'
Lc	= 380.55'	Lc	= 349.71'
Rc	= 1,000.00'	Rc	= 818.51'
LT	= 186.86'	LT	= 186.95'
ST	= 93.51'	ST	= 93.59'
e	= 0.08'	e	= 0.08'
DS	= 50 mph	DS	= 50 mph

NOTES:
1. DRIVEWAY RETURN RADIARE 10' UNLESS OTHERWISE SHOWN
2. ALL CSP WILL BE ROD LUG AND GASKET CONNECTOR

REFERENCES:
FOR -L- PROFILE SEE SHEET 34

MATCHLINE -L- STA. 30+00.00 SEE SHEET NO. 05

MATCHLINE -L- STA. 43+00.00 SEE SHEET NO. 07