

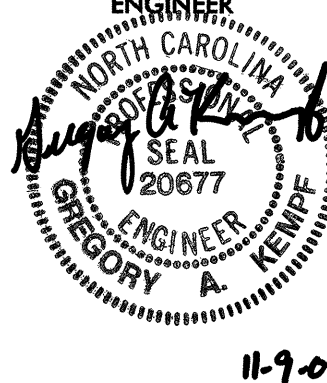
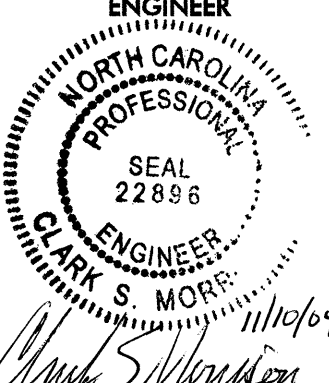
5/28/99

11/09/2004 12:27:28 PM
 7846001\plan\sheet\1102.dwg

REVISIONS

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1.5" IN DEPTH OR GREATER THAN 2" IN DEPTH.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D3	PROP. VARIABLE DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2.5" IN DEPTH OR GREATER THAN 4' IN DEPTH.
E1	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E2	PROP. APPROX. 3.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 399 LBS. PER SQ. YD.
E3	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
E4	PROP. APPROX. 6.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 371 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
J1	PROP. 6" AGGREGATE BASE COURSE.
J2	PROP. 8" AGGREGATE BASE COURSE.
K	SUBGRADE TO BE TREATED WITH CEMENT TO A DEPTH OF 7", AT AN AVERAGE RATE OF 55 LBS. PER SQ. YD., AS DIRECTED BY THE ENGINEER. SUBBASE TO BE TREATED WITH CEMENT TO A DEPTH OF 7", AT AN AVERAGE RATE OF 55 LBS. PER SQ. YD., AND AGGREGATE BASE COURSE AT AN AVERAGE RATE OF 250 LBS. PER SQ. YD., AS DIRECTED BY THE ENGINEER SUBBASE TO BE TREATED WITH LIME TO A DEPTH OF 8", AT AN AVERAGE RATE OF 20 LBS. PER SQ. YD., AS DIRECTED BY THE ENGINEER
R	PROP. EXPRESSWAY GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V	MILLING BITUMINOUS PAVEMENT 2.5" DEPTH (SEE DETAIL SHEET 2-B)
W1	WEDGING DETAIL 1 (SEE DETAIL SHEET 2-B)
W2	WEDGING DETAIL 2 (SEE DETAIL SHEET 2-B)

PROJECT REFERENCE NO. <i>R-2237B</i>	SHEET NO. <i>2</i>
RW SHEET NO.	
ROADWAY DESIGN ENGINEER  GREGORY A. KEMPE	PAVEMENT DESIGN ENGINEER  CLARK S. MORRIS
<i>11-9-04</i>	
HDR Engineering, Inc. of the Carolinas 3733 National Drive Raleigh, N.C. 27612	NC DEPARTMENT OF TRANSPORTATION PAVEMENT MANAGEMENT UNIT 1020 BIRCH RIDGE DRIVE RALEIGH, NORTH CAROLINA