

NOTE:
UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE:
TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS








NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

PROJECT REFERENCE NO. B-4058	SHEET NO. EC-3/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

-L-	
PI Sta 12+39.09 Δ = 1' 59' 30.7" (LT) D = 3' 49' 11.0" L = 313.95' T = 157.55' R = 1,500.00' SE = .06	PI Sta 19+41.14 Δ = 3' 29' 03.1" (LT) D = 0' 50' 00.2" L = 418.07' T = 209.10' R = 6,875.00' SE = .02

DESIGN EXCEPTION REQUIRED FOR SAG VERTICAL CURVES, MAXIMUM GRADE, AND STOPPING SIGHT DISTANCES.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

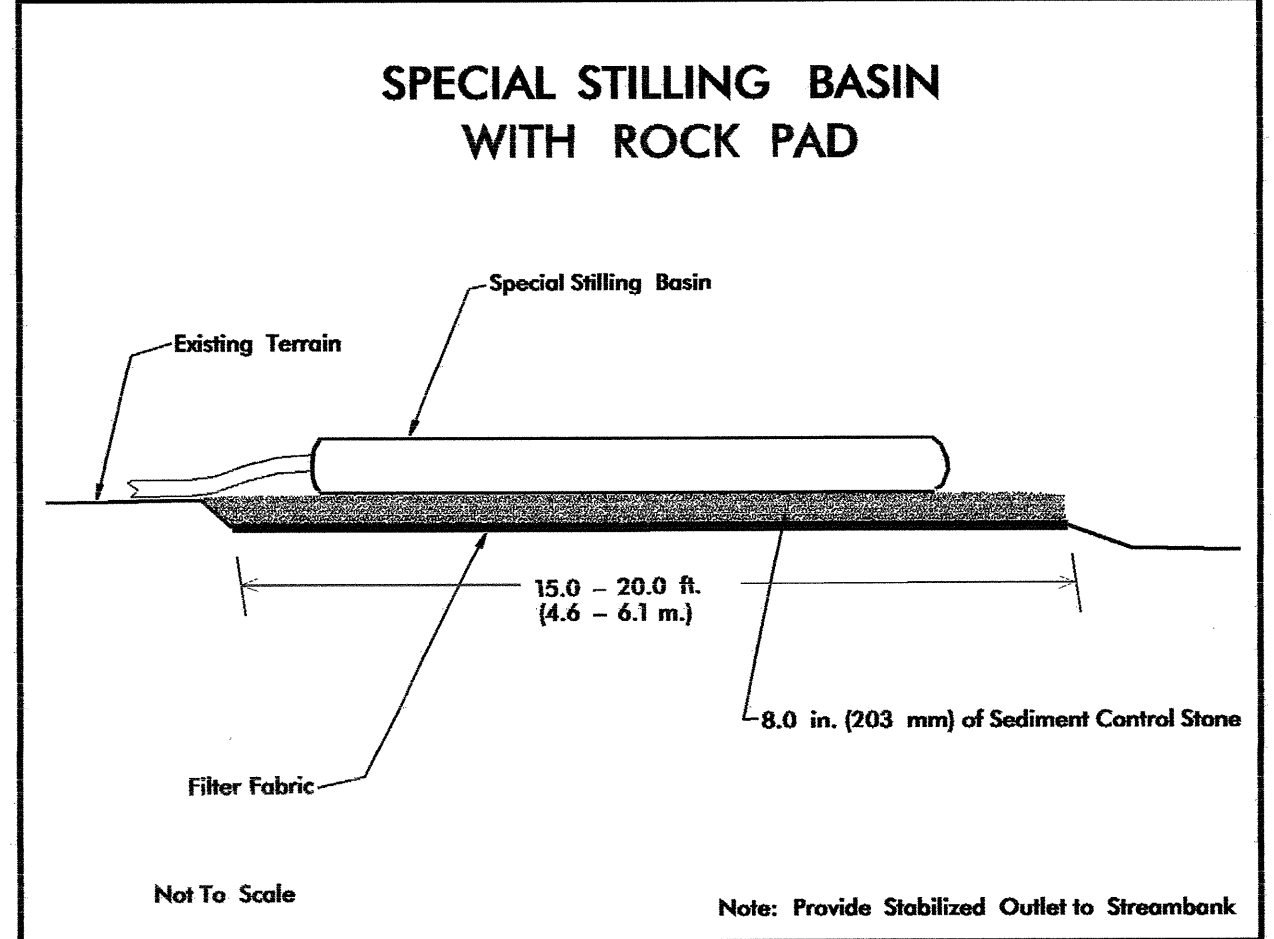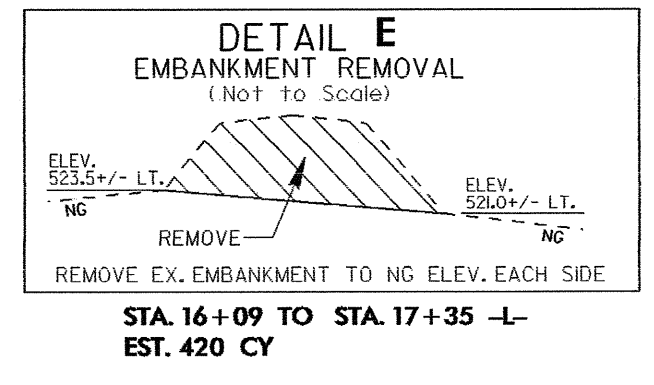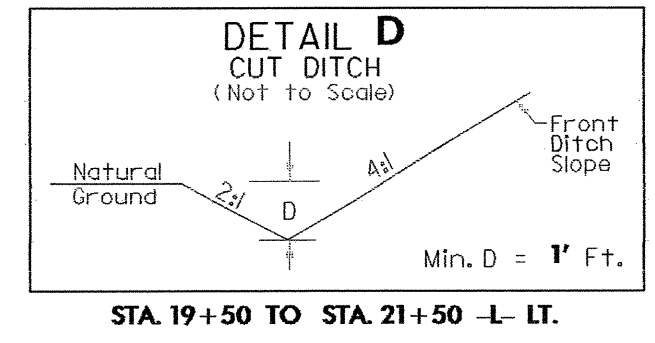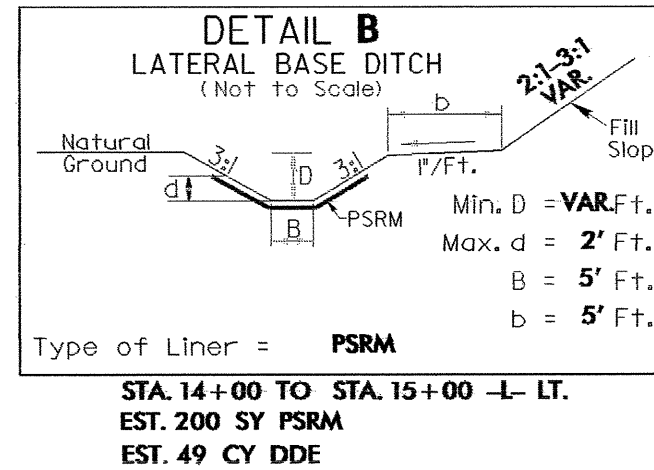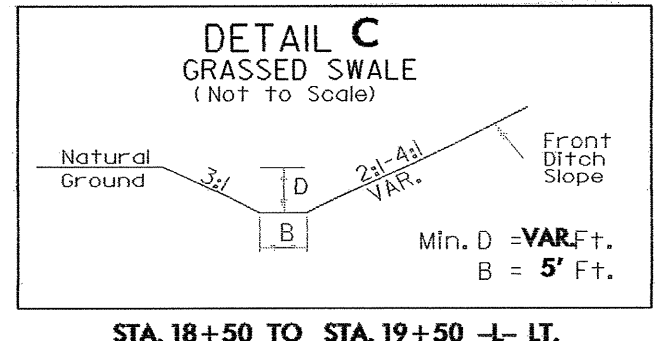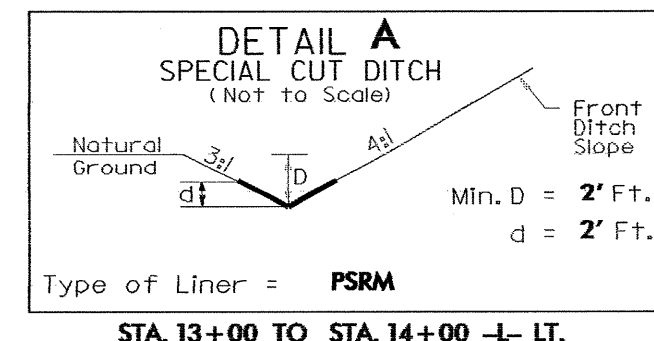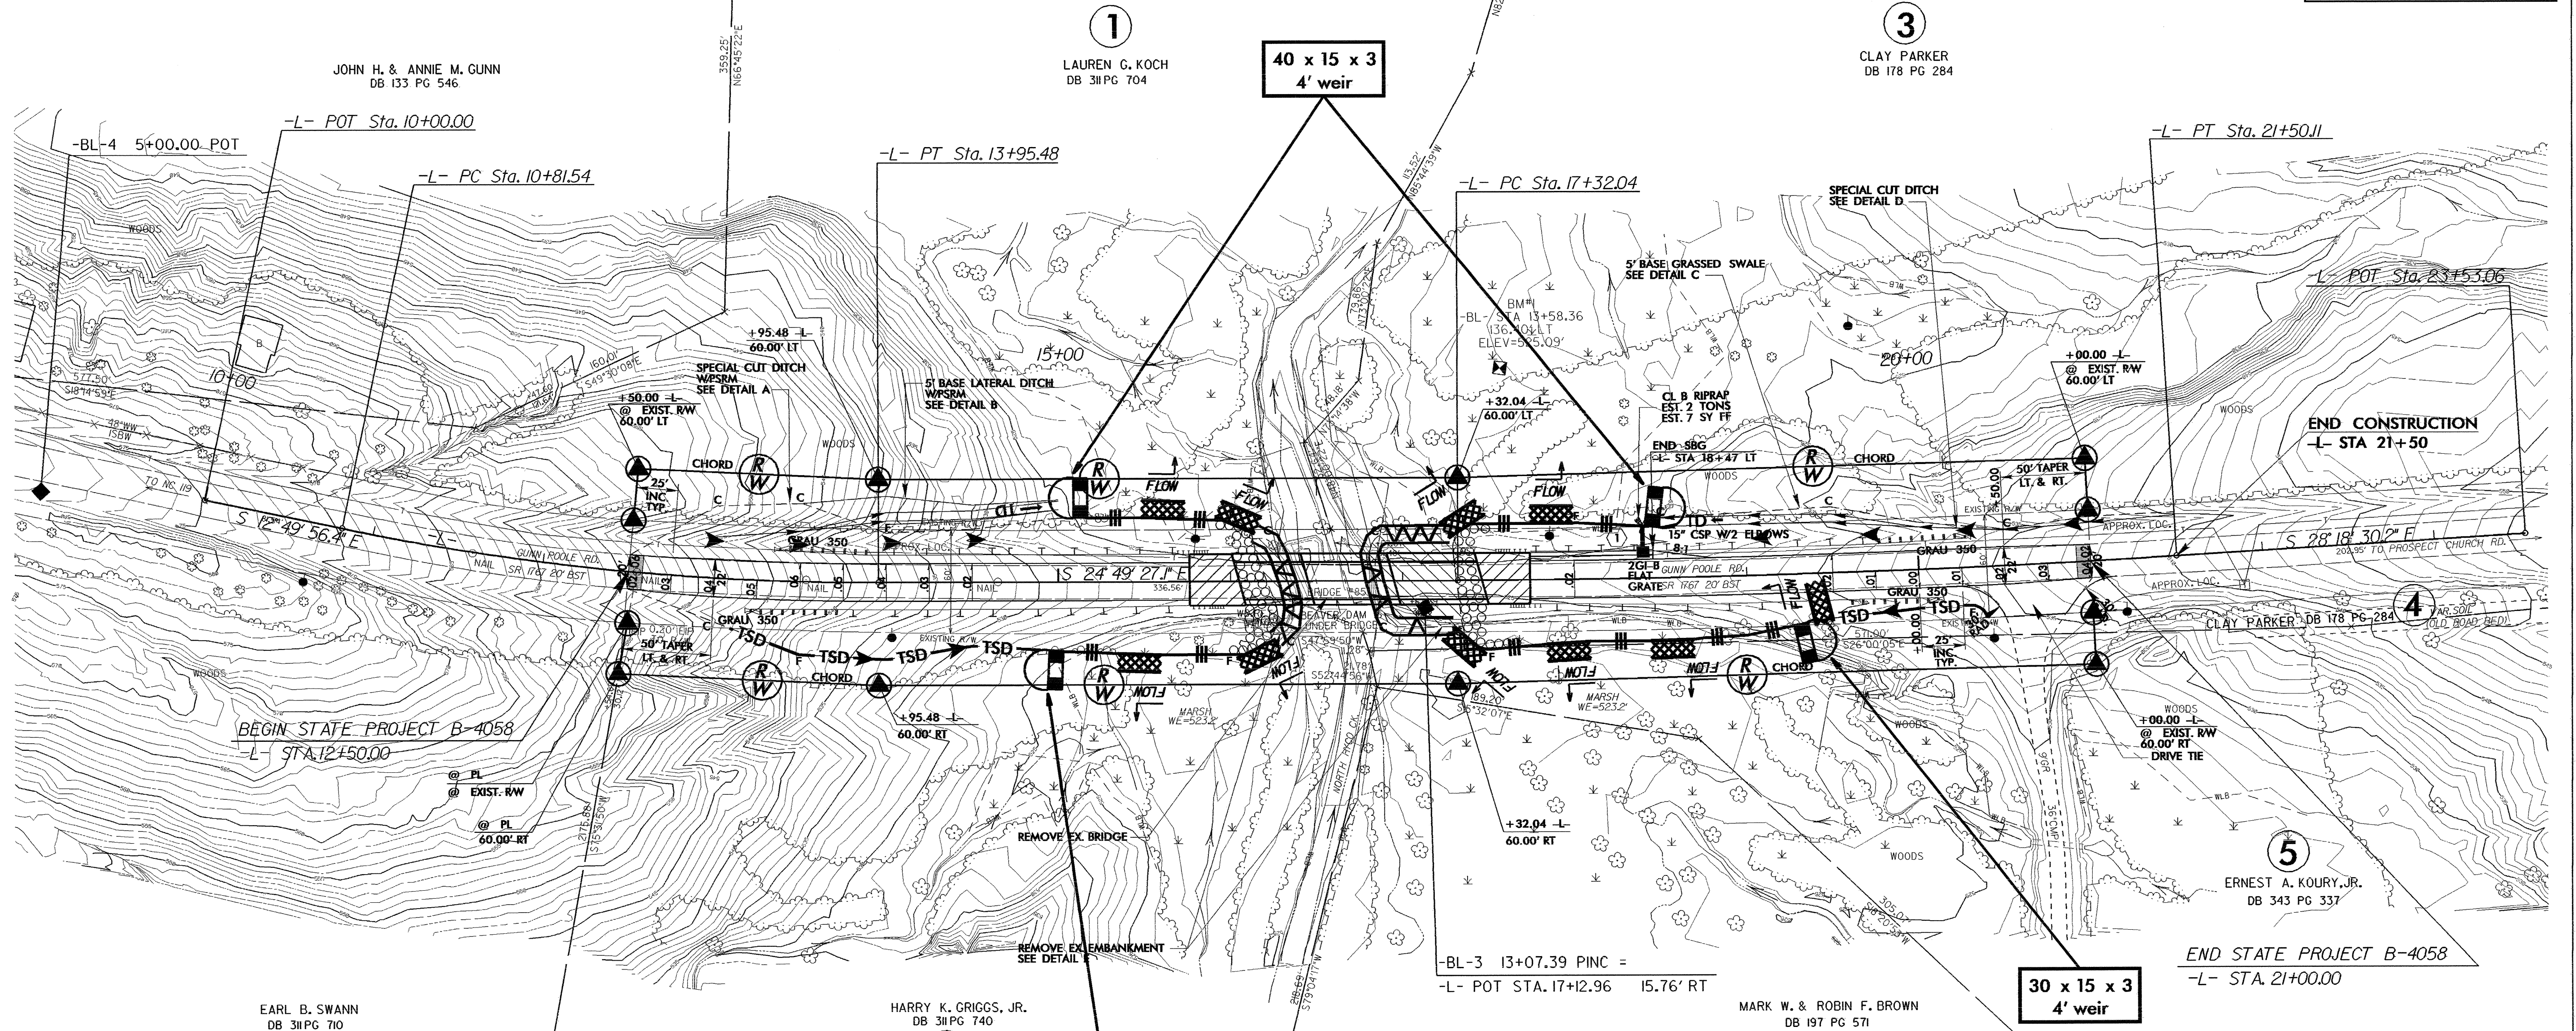

SEE SHEET 5 FOR -L- PROFILE
SEE SHEETS S-1 THRU S-2 FOR STRUCTURE PLANS