
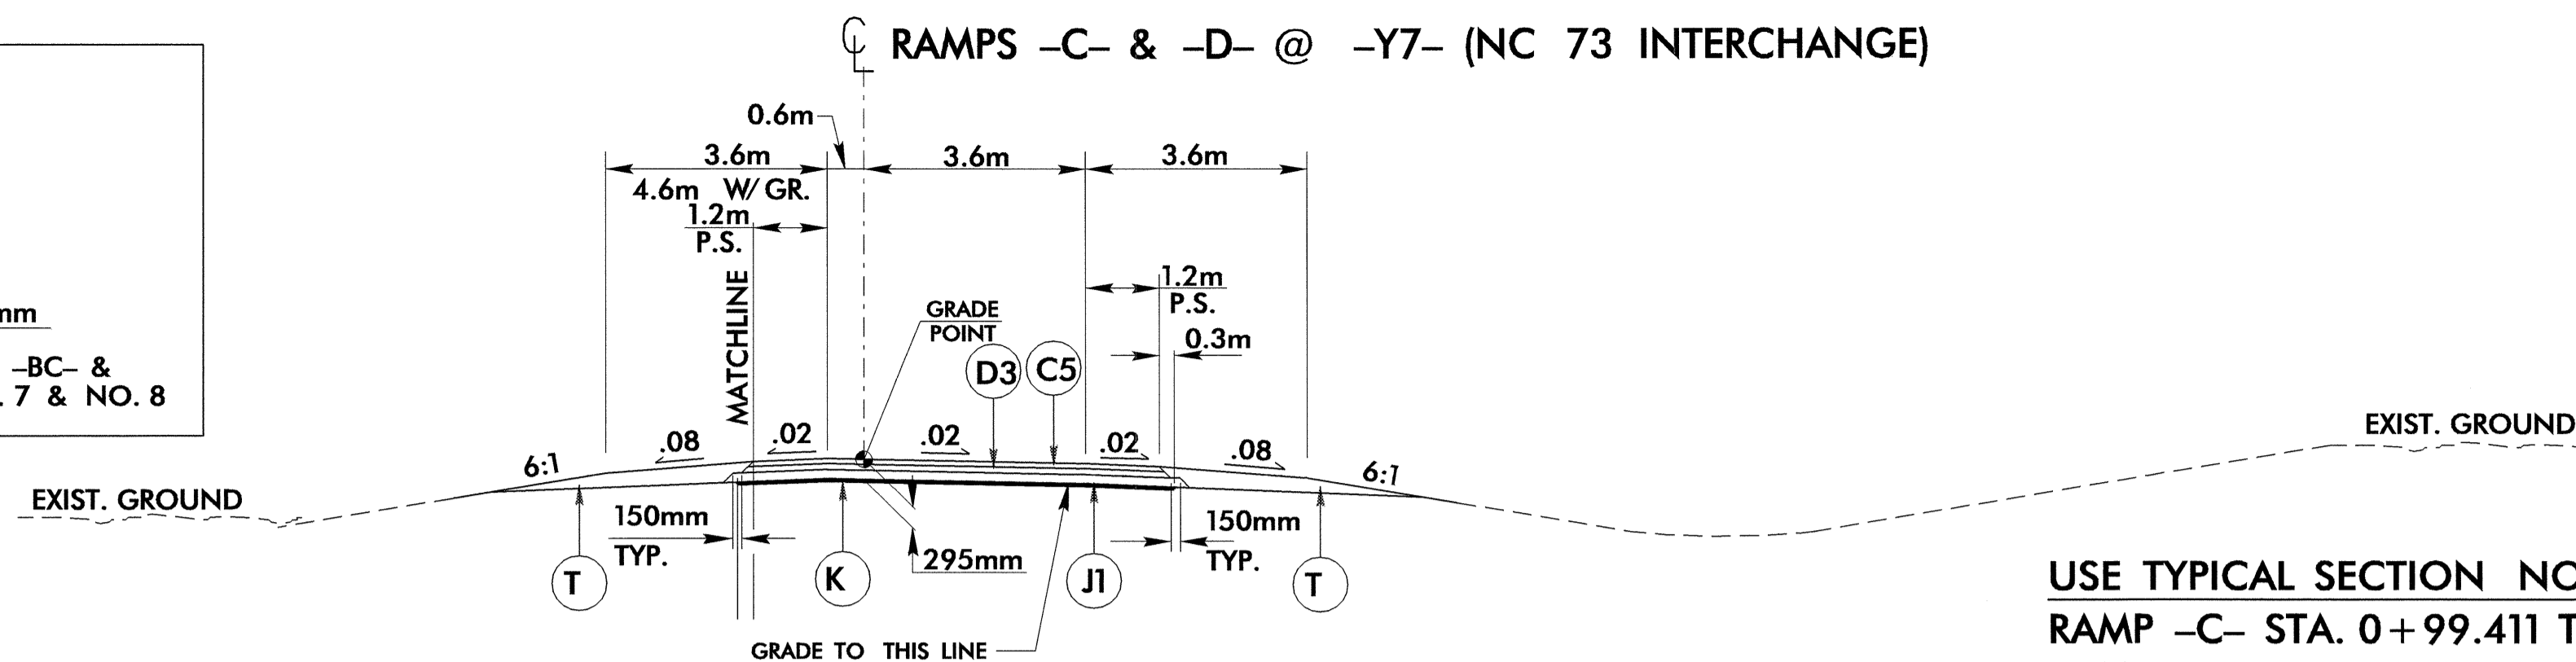




C4	40mm S9.5B
C5	80mm S9.5B
D3	65mm I19.0B
D5	100mm I19.0B
J1	150mm ABC
K	SUBBASE
R1	750mm CONC. CURB & GUTTER
R3	DOUBLE FACED CONC. BARRIER
R4	SHOULDER BERM GUTTER
T	EARTH MATERIAL

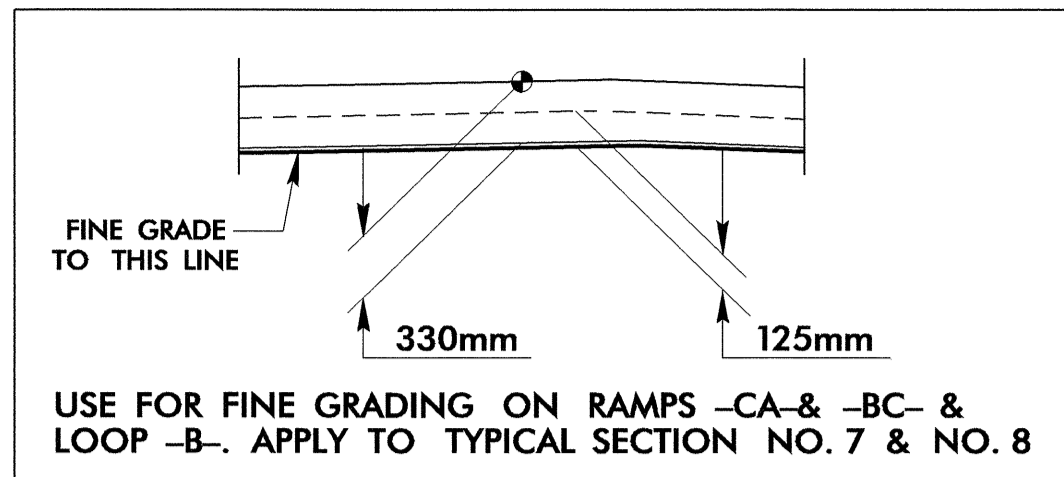

**TYPICAL SECTION NO. 6**

**USE TYPICAL SECTION NO. 6 AS FOLLOWS:**  
 RAMP -C- STA. 0+99.411 TO STA. 2+20.000  
 RAMP -D- STA. 1+02.731 TO STA. 4+51.184





NOTE: REFER TO DETAILS D & E IN GUARDRAIL AND SHOULDER BERM GUTTER LOCATIONS

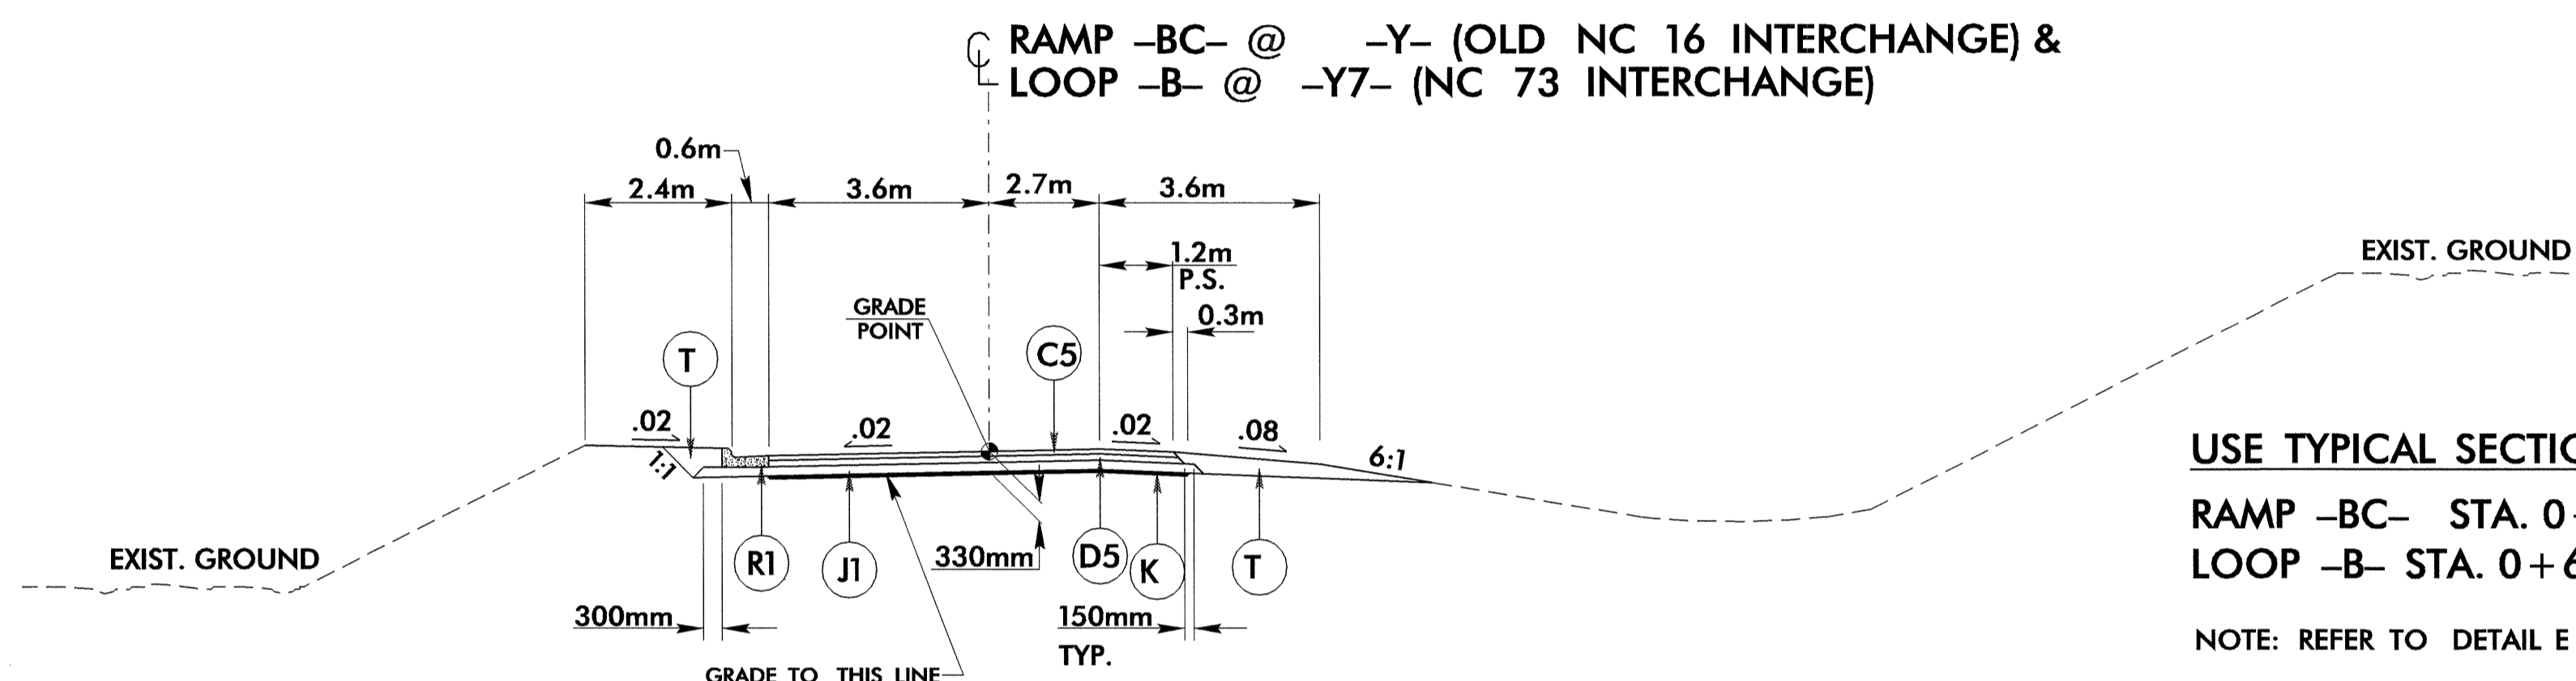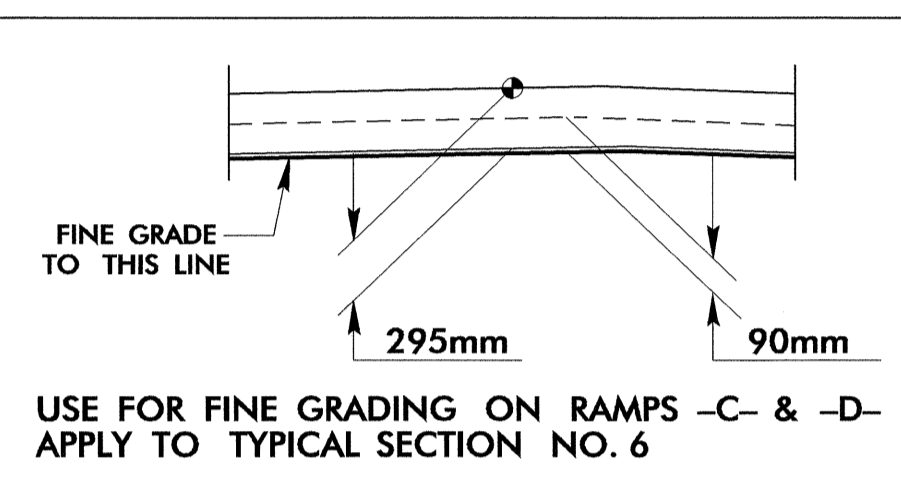

**TYPICAL SECTION NO. 7**

**USE TYPICAL SECTION NO. 7 AS FOLLOWS:**  
 RAMP -BC- STA. 0+74.077 TO STA. 3+58.605  
 LOOP -B- STA. 0+68.479 TO STA. 2+98.940



NOTE: REFER TO DETAIL E IN GUARDRAIL LOCATIONS

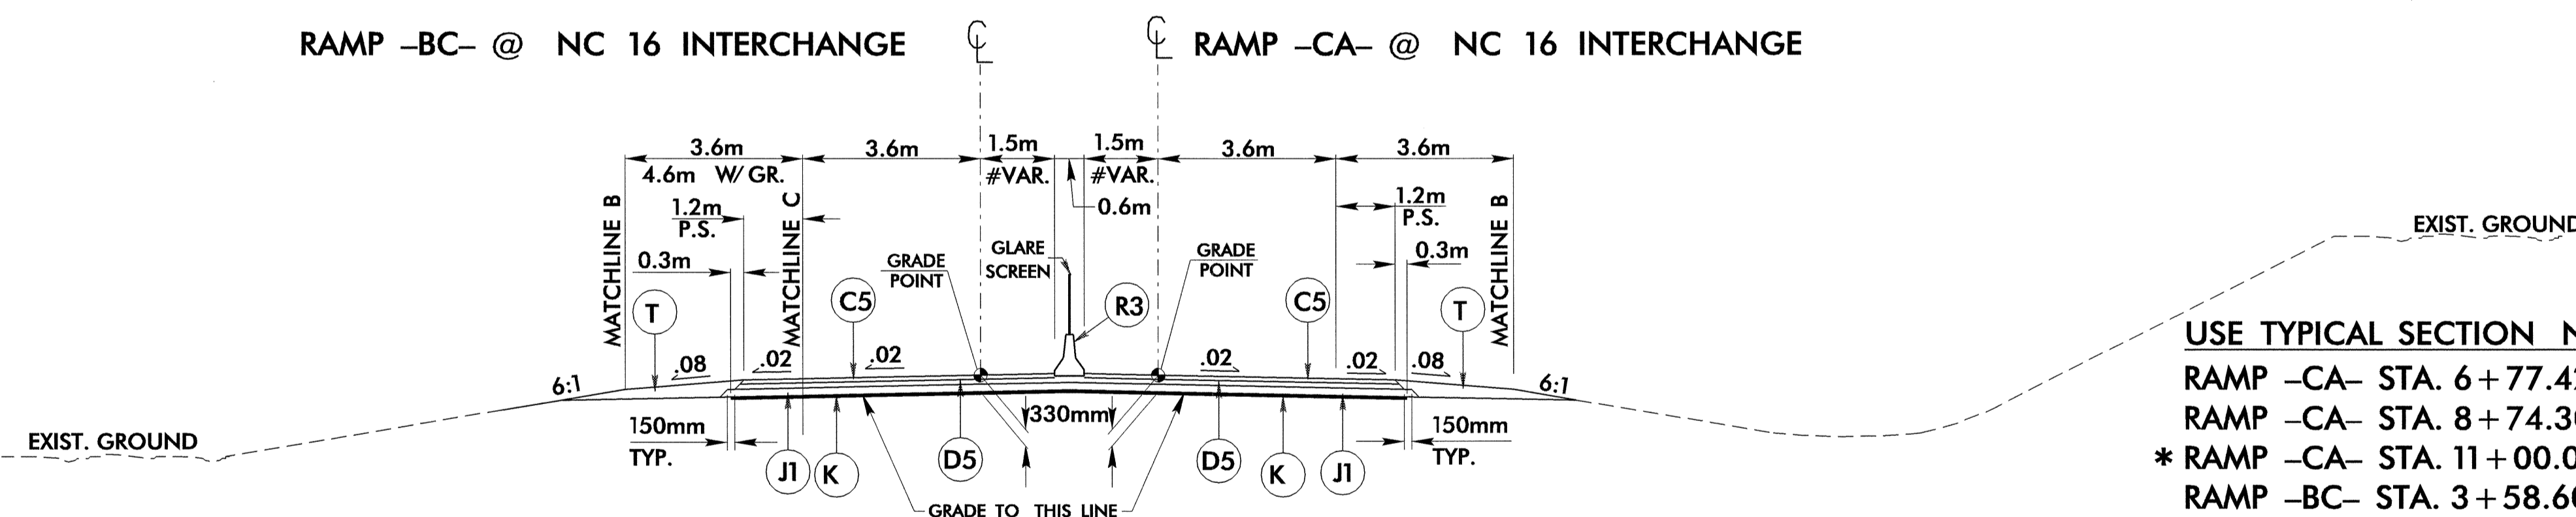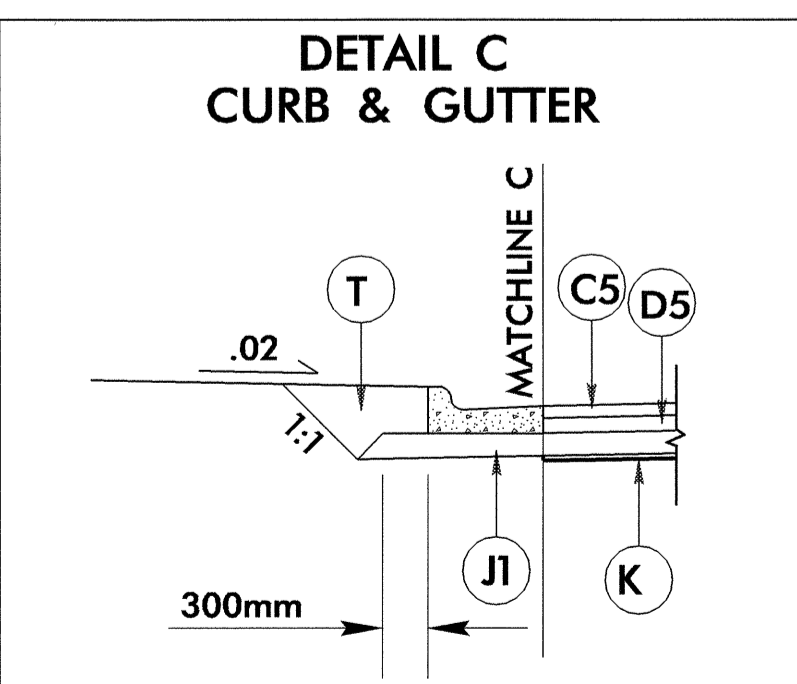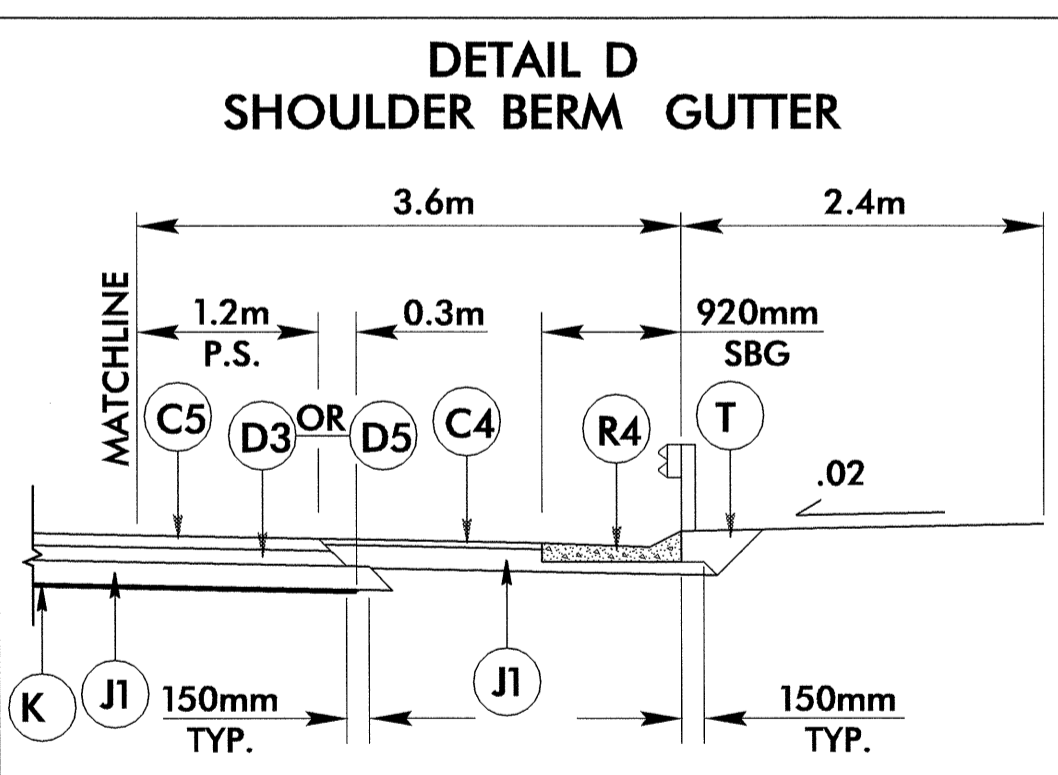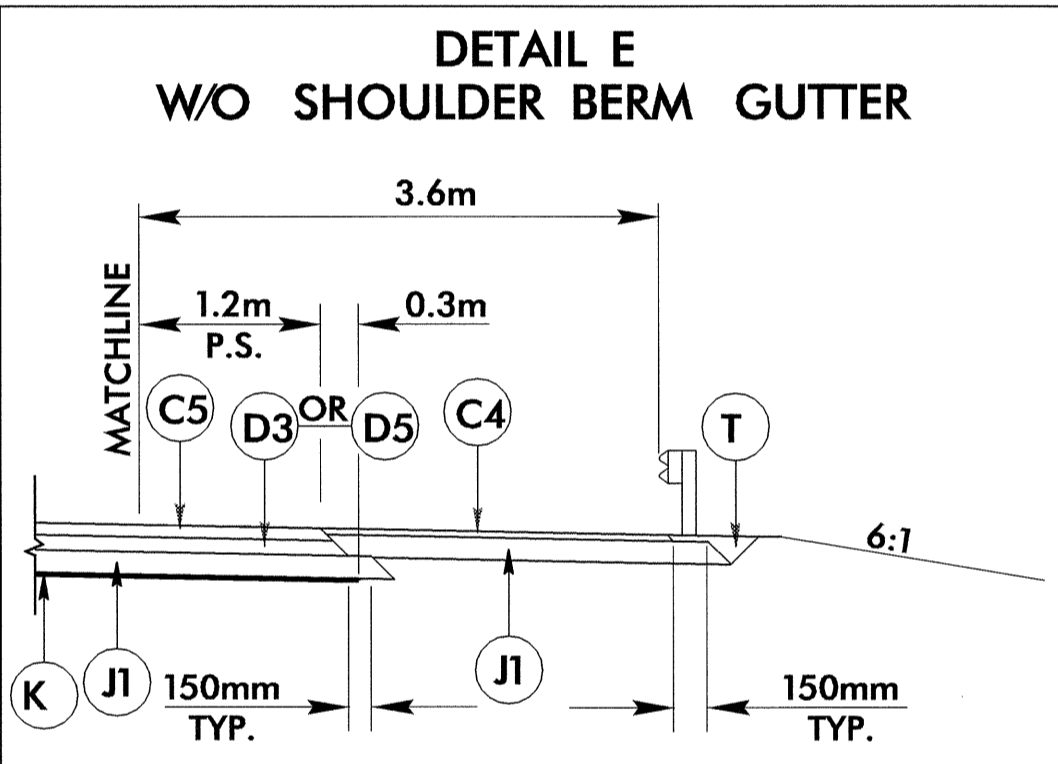

**TYPICAL SECTION NO. 8**

**USE TYPICAL SECTION NO. 8 AS FOLLOWS:**  
 RAMP -CA- STA. 6+77.428 TO STA. 8+07.900 (BEG. BRIDGE)  
 RAMP -CA- STA. 8+74.300 (END BRIDGE) TO STA. 11+00.000  
 \* RAMP -CA- STA. 11+00.000 TO STA. 11+64.905  
 RAMP -BC- STA. 3+58.605 TO STA. 4+86.201 (BEG. BRIDGE)  
 RAMP -BC- STA. 5+52.601 (END BRIDGE) TO STA. 7+80.000  
 \* RAMP -BC- STA. 7+80.000 TO STA. 8+48.193

NOTE: \* SEE DETAILS A & B AT MATCHLINE B  
 # VARIABLE WIDTH  
 RAMP -CA- STA. 6+77.428 TO STA. 7+66.328  
 RAMP -CA- STA. 9+68.262 TO STA. 11+64.905  
 NOTE: PROP. MEDIAN BARRIER W/GLARE SCREEN REQUIRED  
 RAMP -BC- STA. 3+25.000 TO STA. 8+43.000  
 PROP. 750mm CONC. CURB & GUTTER REQUIRED (SEE DETAIL C AT MATCHLINE C)  
 RAMP -BC- STA. 3+58.605 TO STA. 4+44.872.000 LEFT  
 NOTE: REFER TO DETAILS D & E IN GUARDRAIL AND SHOULDER BERM GUTTER LOCATIONS

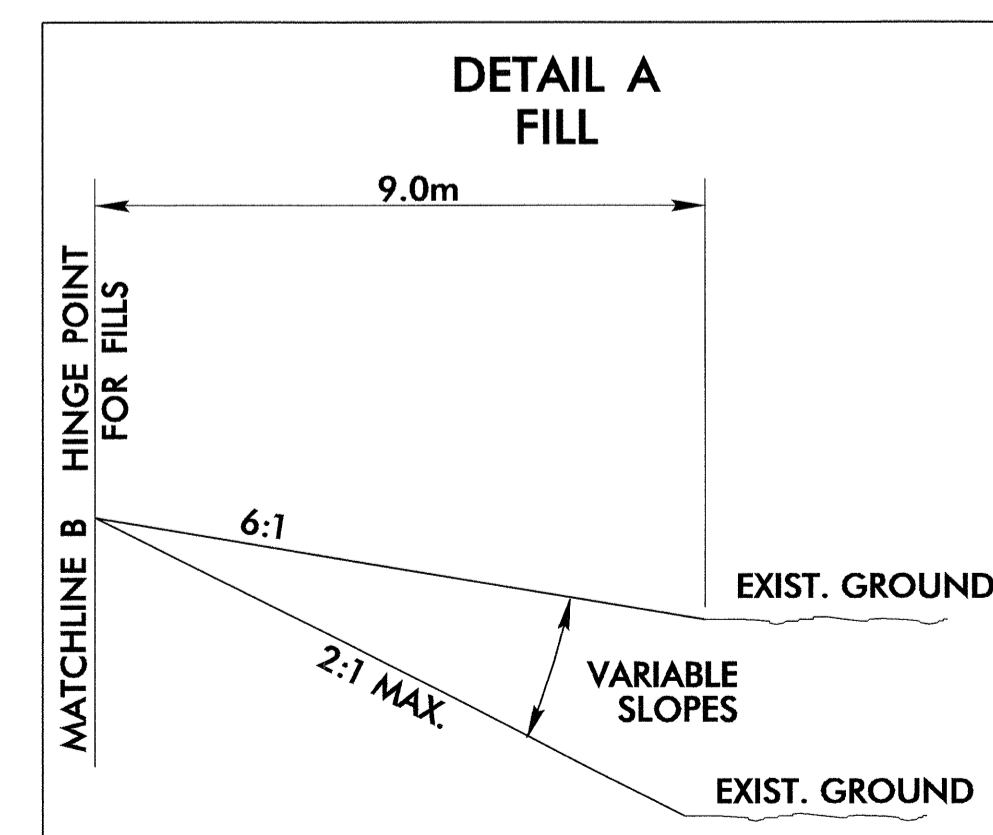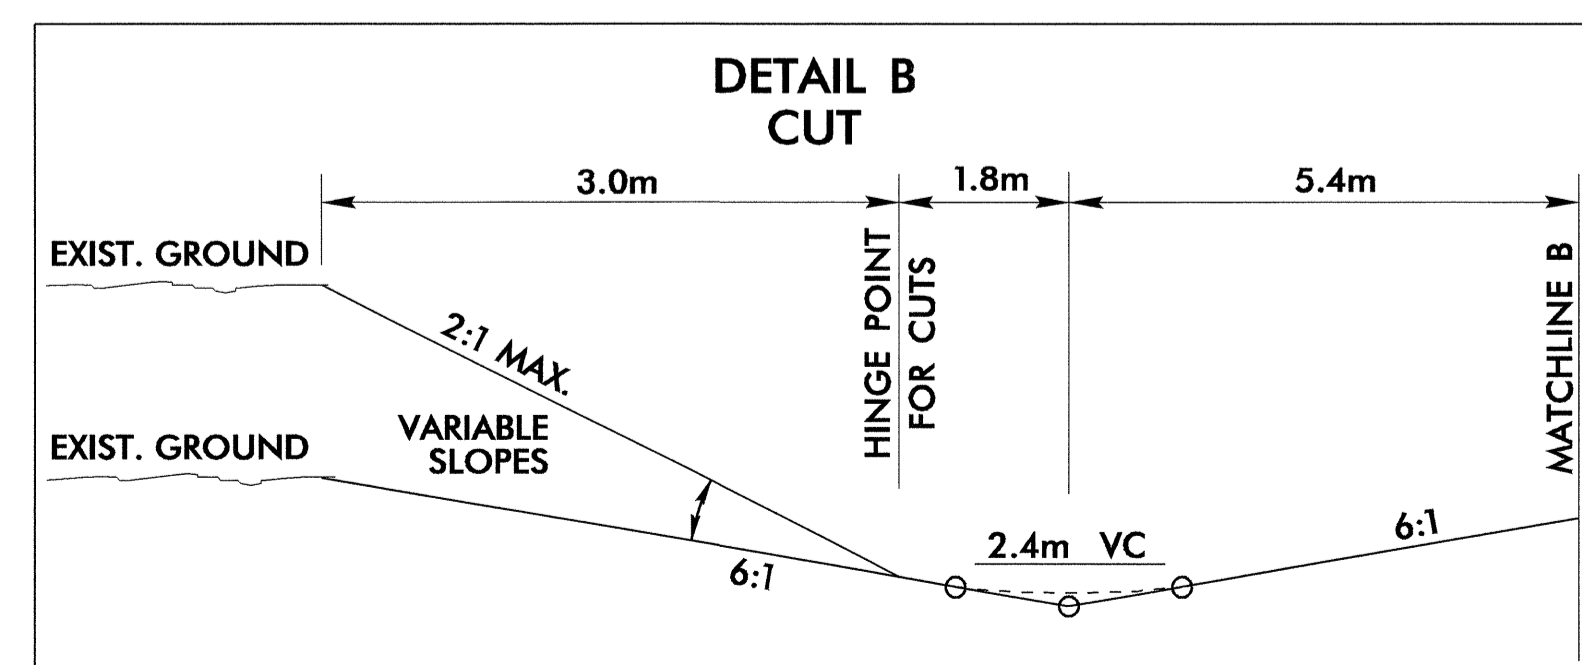

PROJECT REFERENCE NO.	SHEET NO.
R-2206AA	2-C
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER

08-OCT-2004 15:59 2296a.typ  
SECalhoun rd-09oce34