

2/13/98

PAVEMENT SCHEDULE

C1	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.
C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 50 mm IN DEPTH.
C4	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.
C5	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.
C6	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 50 mm IN DEPTH.
D1	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 196 kg PER SQ. METER.
D2	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm OR GREATER THAN 110 mm IN DEPTH.
D3	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.
D4	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 196 kg PER SQ. METER.
D5	PROP. APPROX. 100 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 245 kg PER SQ. METER.
D6	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm OR GREATER THAN 110 mm IN DEPTH.
D7	PROP. APPROX. 70 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 171.5 kg PER SQ. METER.
E1	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER.
E2	PROP. APPROX. 250 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 306.25 kg PER SQ. METER IN EACH OF TWO LAYERS.
E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
J1	PROP. 150 mm AGGREGATE BASE COURSE.
J2	PROP. 200 mm AGGREGATE BASE COURSE.
K	SUBBASE TO BE TREATED WITH LIME TO A DEPTH OF 200mm, AT A RATE OF 11 KG. PER SQ. METER, AS DIRECTED BY THE ENGINEER. OR SUBBASE TO BE TREATED WITH CEMENT TO A DEPTH OF 180mm, AT A RATE OF 30 KG. PER SQ. METER, AS DIRECTED BY THE ENGINEER. OR SUBBASE TO BE TREATED WITH AGGREGATE AT A RATE OF 135 KG. PER SQ. METER AND CEMENT AT A RATE OF 30 KG. PER SQ. METER TO A DEPTH OF 180 mm, AS DIRECTED BY THE ENGINEER.
R1	750 mm CONCRETE CURB AND GUTTER.
R2	125 mm MONOLITHIC CONCRETE ISLAND.
R3	DOUBLE FACED CONCRETE BARRIER
R4	SHOULDER BERM GUTTER
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE WEDGING DETAILS)


METRIC

PROJECT REFERENCE NO. **R-2206AA** SHEET NO. **2**


ROADWAY DESIGN ENGINEER
PAVEMENT DESIGN ENGINEER

PROFESSIONAL SEAL
15356
DAVID ALLEN
10-19-04


PROFESSIONAL SEAL
13368
CHI CHEN
10/19/04

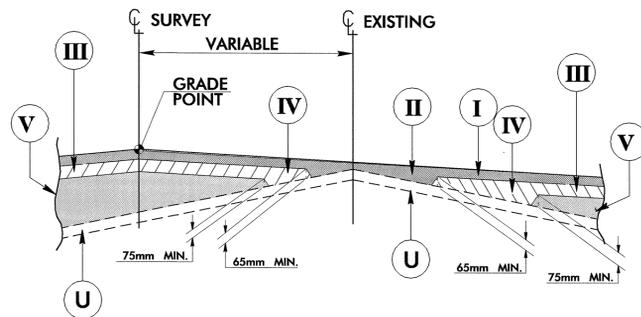


TYPICAL SECTION NO. 1	I	II	III	IV	V
TYPICAL SECTION NO. 11 & 12	C2	C3	D1	D2	E3
	C5	C6	D5	D6	

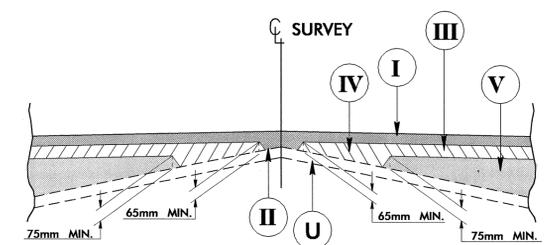


DETAILS SHOWING METHODS OF WEDGING

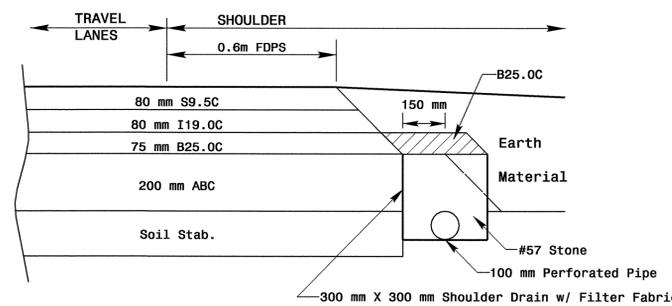

MEDIAN SHOULDER DRAIN DETAIL

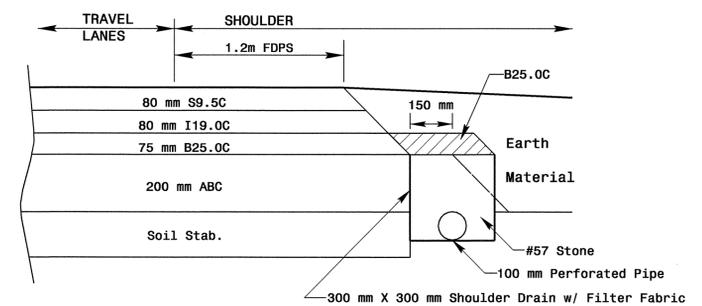

OUTSIDE SHOULDER DRAIN DETAIL

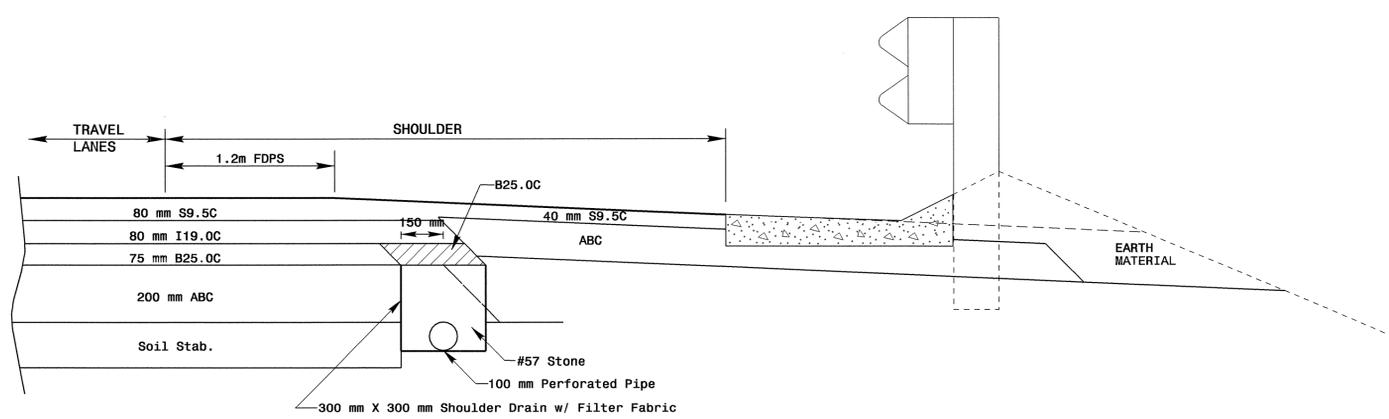

OUTSIDE SHOULDER DRAIN DETAIL

* USE IN GUARDRAIL AND SHOULDER BERM GUTTER LOCATIONS

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

19-OCT-2004 09:50:22 2206aa.tpd
SEC/houn rd-09oce34