

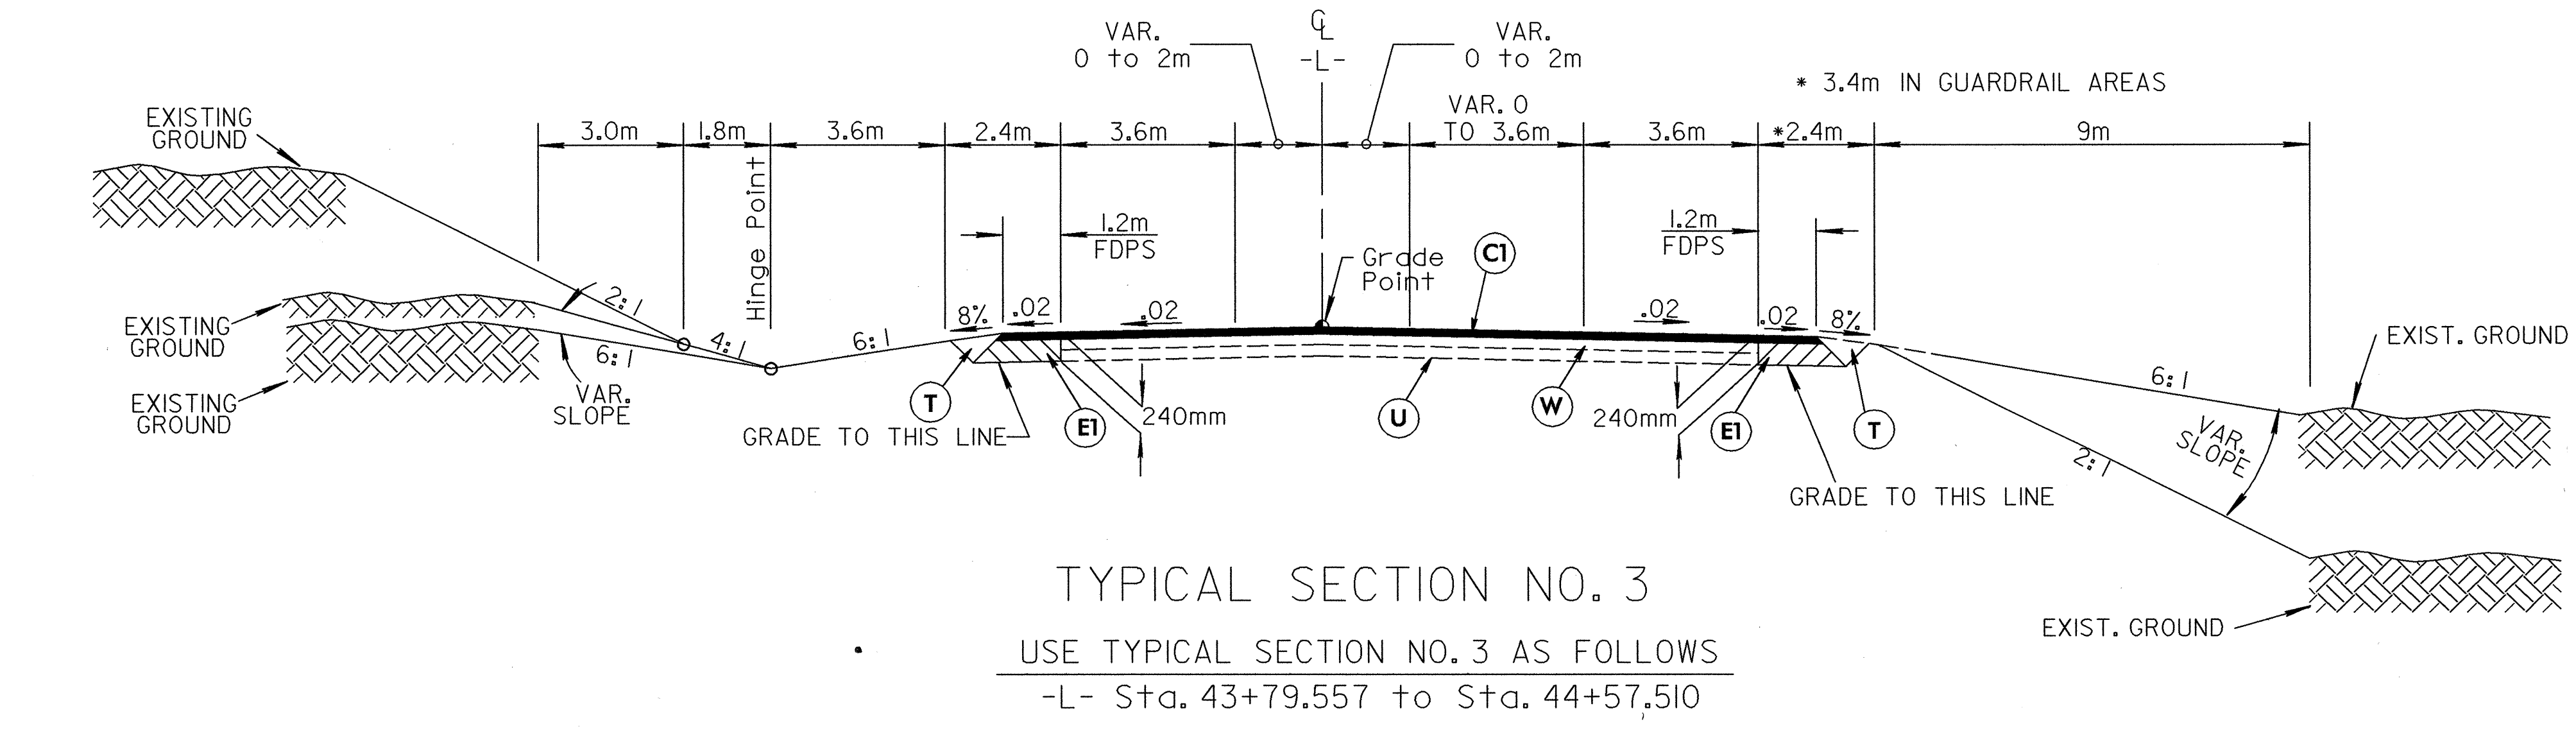
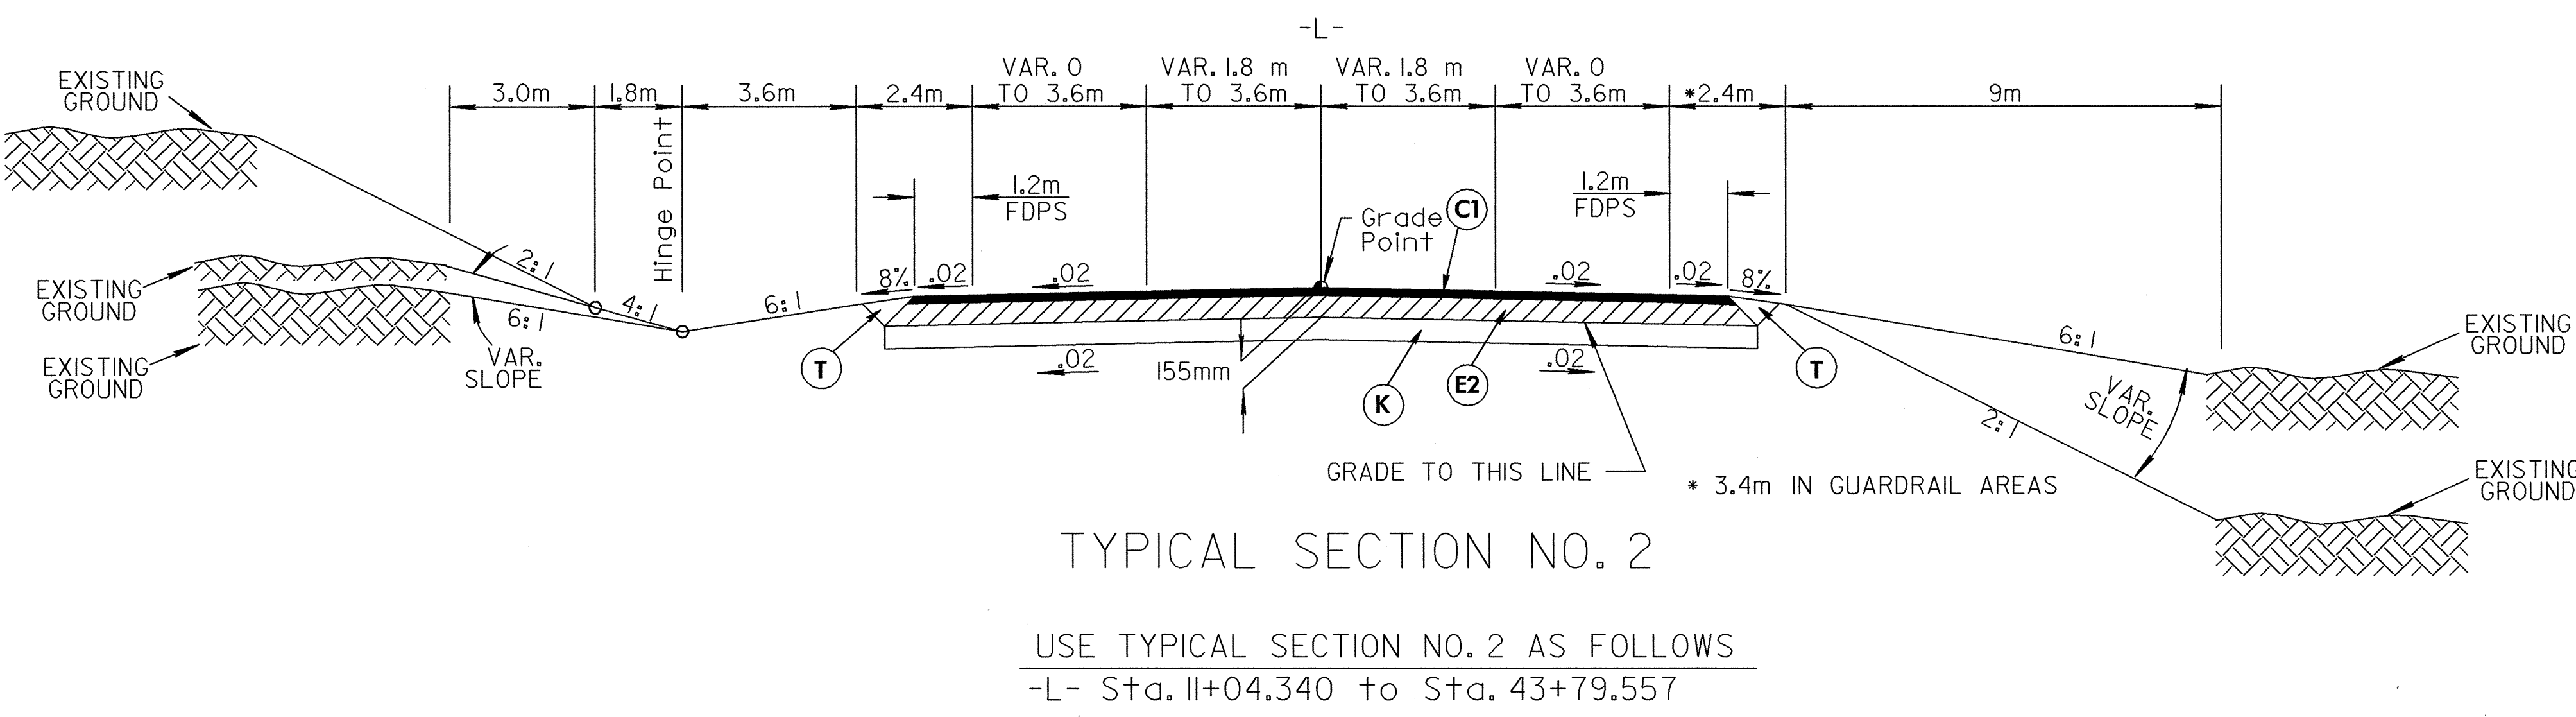


PROJECT REFERENCE NO. R-3303	SHEET NO. 2
ROADWAY DESIGN ENGINEER GREG S. PUNYIS 22999	PAVEMENT DESIGN ENGINEER SEAN S. HARRIS 22999
WANG ENGINEERING CO., INC. 15200 WESTON PARKWAY SUITE 101 CARY, NC 27513	

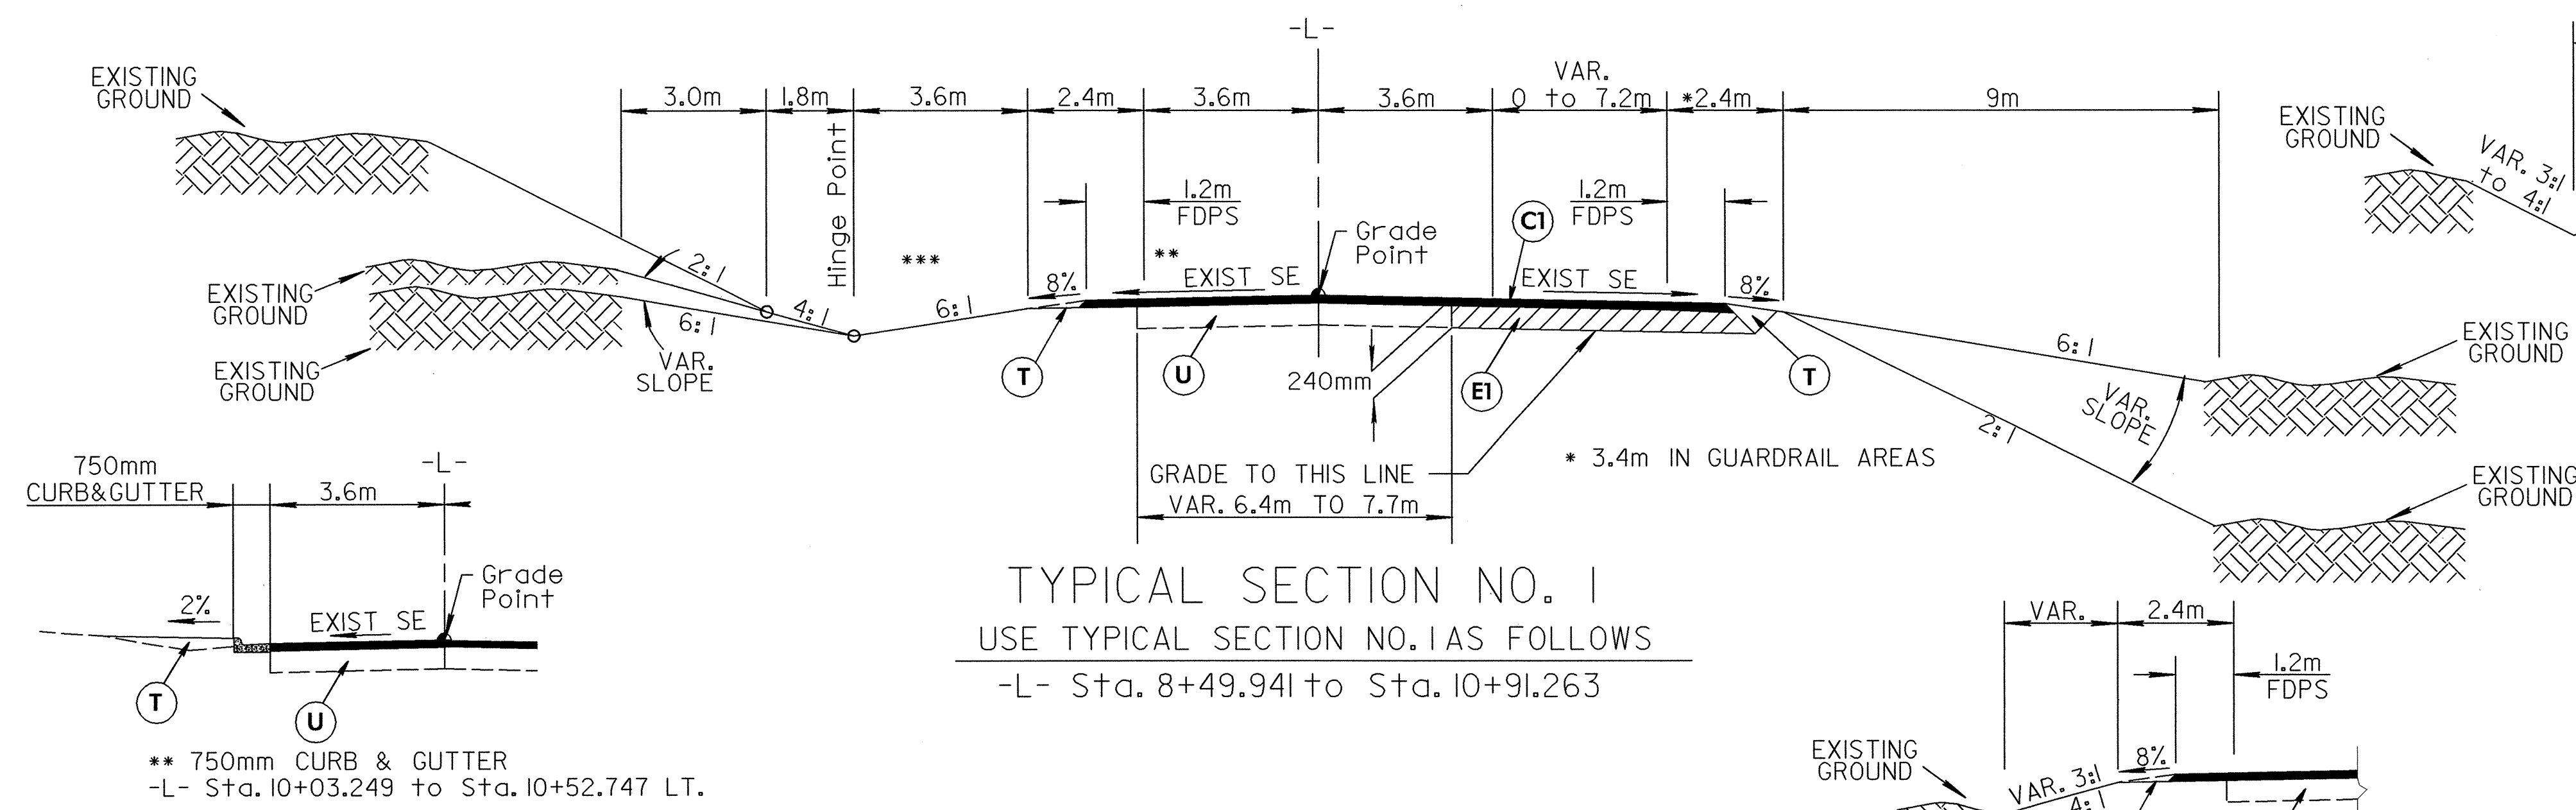

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.
C2	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 60 kg PER SQ. METER PER 25 mm DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 30 mm OR GREATER THAN 40 mm IN DEPTH.
E1	PROP. APPROX. 160 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 196 kg PER SQ. METER. IN EACH OF TWO LAYERS.
E2	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER.
E3	PROP. APPROX. 130 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 318.50 kg PER SQ. METER.
E4	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 245 kg PER SQ. METER.
E5	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 61.25 kg PER SQ. METER PER 25 mm DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 75 mm OR GREATER THAN 140 mm IN DEPTH.
K	SUBBASE TO BE TREATED WITH LIME TO A DEPTH OF 200 mm, AT A RATE OF 11 kg PER SQ. METER AS DIRECTED BY THE ENGINEER. OR SUBBASE TO BE TREATED WITH CEMENT TO A DEPTH OF 180 mm, AT A RATE OF 30 kg PER SQ. METER AS DIRECTED BY THE ENGINEER.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL).

NOTE: ALL SLOPES 1:1 UNLESS OTHERWISE SPECIFIED

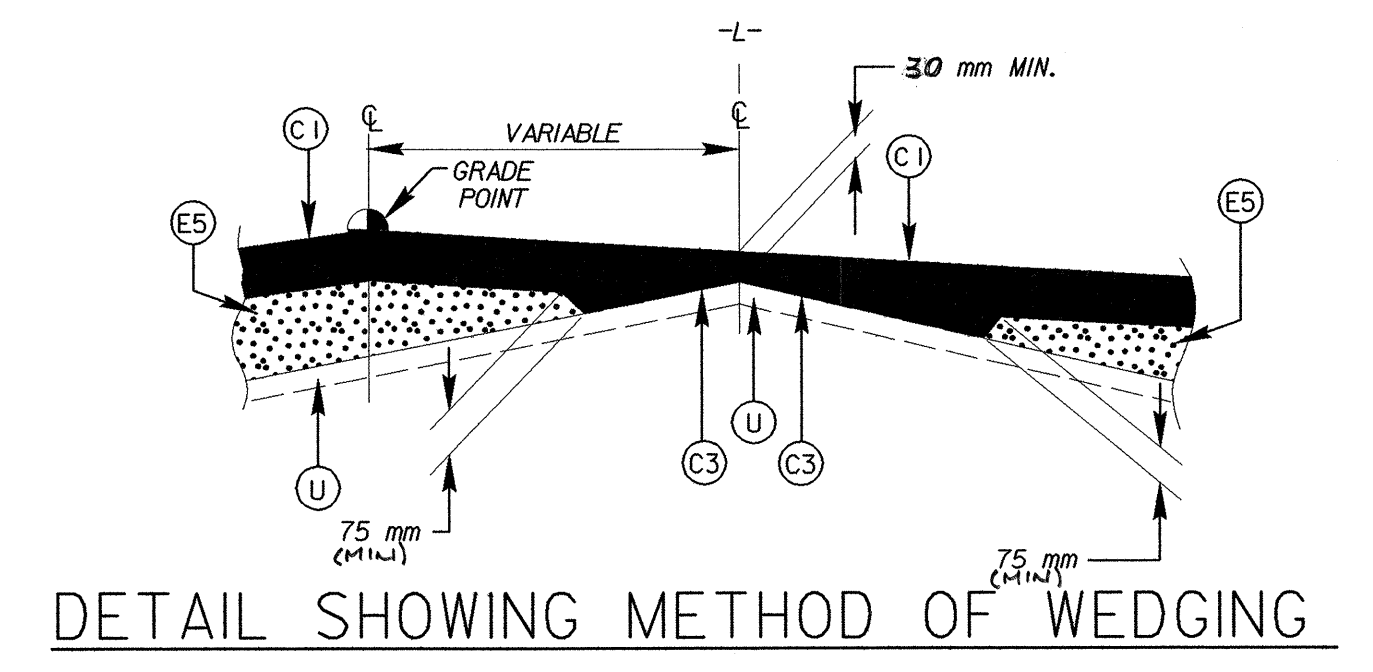

W:\Roadway\1703\170303_01_1703.dwg 06/28/2004 09:13:03 PM