
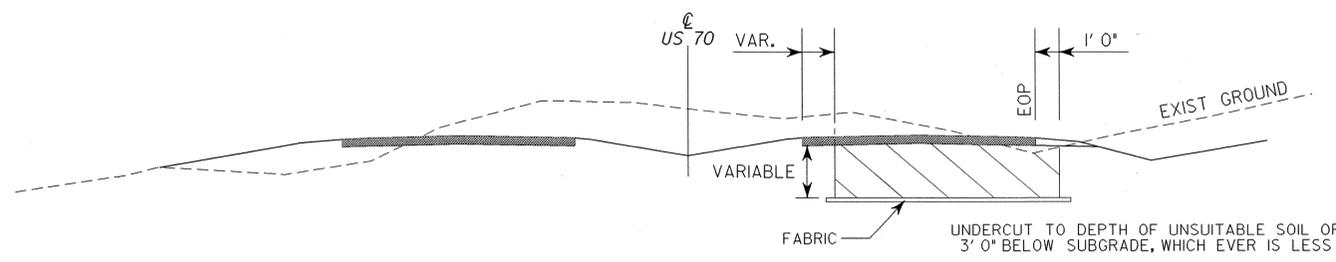
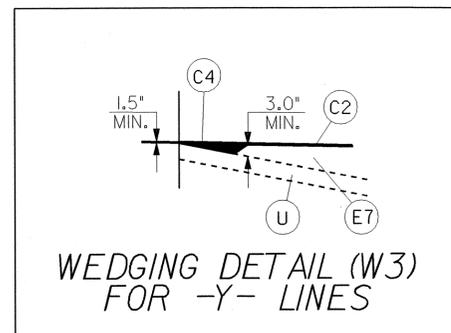
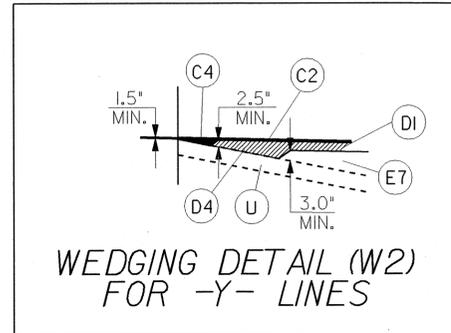


PAVEMENT SCHEDULE

A1	6" JOINTED CONCRETE DRIVEWAY, REINFORCED WITH WIRE MESH.
C1	PROP. APPROX. 2.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. APPROX. 3.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. APPROX. 3.0" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS PER SQ. YD. IN EACH OF TWO LAYERS.
C4	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS PER SQ. YD. PER 1.0" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1.5" OR GREATER THAN 3" IN DEPTH.
C5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS PER SQ. YD. PER 1.0" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1.5" OR GREATER THAN 3" IN DEPTH.
D1	PROP. APPROX. 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS PER SQ. YD.
D2	PROP. APPROX. 3.0" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS PER SQ. YD.
D3	PROP. APPROX. 3.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 399 LBS PER SQ. YD.
D4	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS PER SQ. YD. PER INCH DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4.0" IN DEPTH.
D5	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS PER SQ. YD. PER INCH DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4.0" IN DEPTH.
E1	PROP. APPROX. 4.0" ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS PER SQ. YD.
E2	PROP. APPROX. 5.0" ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS PER SQ. YD.
E6	PROP. APPROX. 7.5" ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 427.5 LBS PER SQ. YD. IN EACH OF TWO LAYERS.
E7	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS PER SQ. YD. PER INCH DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3.0" OR GREATER THAN 5.5" IN DEPTH.
E8	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS PER SQ. YD. PER INCH DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3.0" OR GREATER THAN 5.5" IN DEPTH.
J1	PROP. 8" AGGREGATE BASE COURSE
J2	PROP. 6" AGGREGATE BASE COURSE
J3	VARIABLE DEPTH AGGREGATE BASE COURSE
K	SUBBASE TO BE TREATED WITH LIME TO A DEPTH OF 8 IN., AT A RATE OF 20 LBS. PER SQ. YARD, AS DIRECTED BY THE ENGINEER OR SUBBASE TO BE TREATED WITH CEMENT TO A DEPTH OF 7 IN., AT A RATE OF 55 LBS. PER SQ. YARD, AS DIRECTED BY THE ENGINEER OR SUBBASE TO BE TREATED WITH AGGREGATE AT A RATE OF 250 LBS. PER SQ. YARD AND CEMENT AT A RATE OF 55 LBS. PER SQ. YARD, TO A DEPTH OF 7 IN. AS DIRECTED BY THE ENGINEER
P	PRIME COAT
R1	CONCRETE EXPRESSWAY GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W1	VARIABLE DEPTH BITUMINOUS PAVEMENT (SEE WEDGING DETAIL FOR -L- LINE)
W2	VARIABLE DEPTH BITUMINOUS PAVEMENT (SEE WEDGING DETAIL FOR -Y- LINES)
W3	VARIABLE DEPTH BITUMINOUS PAVEMENT (SEE WEDGING DETAIL FOR -Y- LINES)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS OTHERWISE NOTED

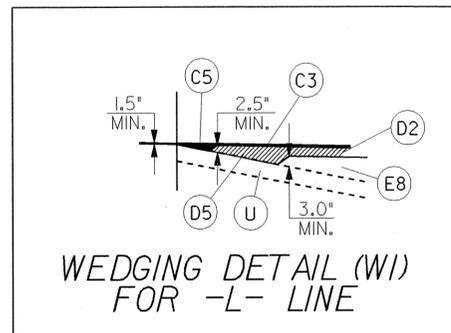

UNDERCUT DETAIL
UNDERCUT EXCAVATION AND FABRIC TO BE USED AT LOCATIONS AS DIRECTED BY THE ENGINEER

6/2/99

08-OCT-2004 11:41 AM P:\Po\J\2911d.r.dwg - tjb.dgn