


PROJECT REFERENCE NO.	SHEET NO.
B-3310	EC-5/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE: TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS



NOTE: UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

SKETCH SHOWING BRIDGE PAVEMENT IN RELATION TO BRIDGE


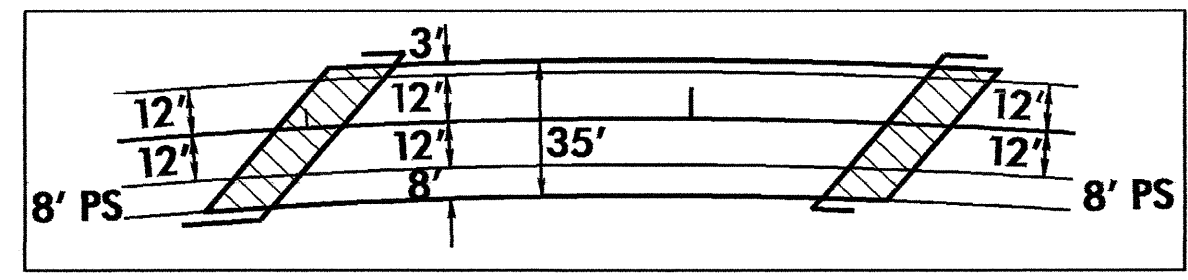


-L- CURVE
 PI Sta 22+44.71
 $\Delta = 52^\circ 22' 24.5''$ (RT)
 $D = 3^\circ 30' 00.0''$
 $L = 1,496.39'$
 $T = 805.04'$
 $R = 1,637.02'$
 $SE = 0.06$ FT/FT
 $RO = 106'$
 $V = 60$ MPH

-DRV- CURVES
 PI Sta 10+50.98 $\Delta = 78^\circ 12' 10.3''$ (RT) $D = 57^\circ 57' 28.1''$ $L = 13.65'$ $T = 8.13'$ $R = 10.00'$
 PI Sta 11+59.94 $\Delta = 15^\circ 48' 55.0''$ (RT) $D = 7^\circ 41' 39.2''$ $L = 205.55'$ $T = 103.43'$ $R = 744.66'$

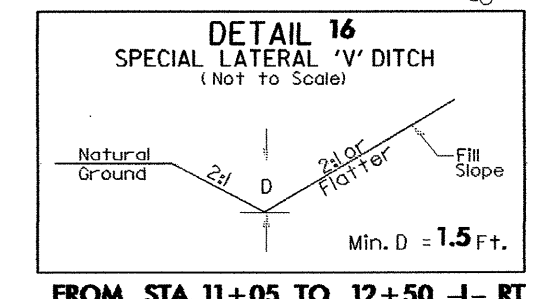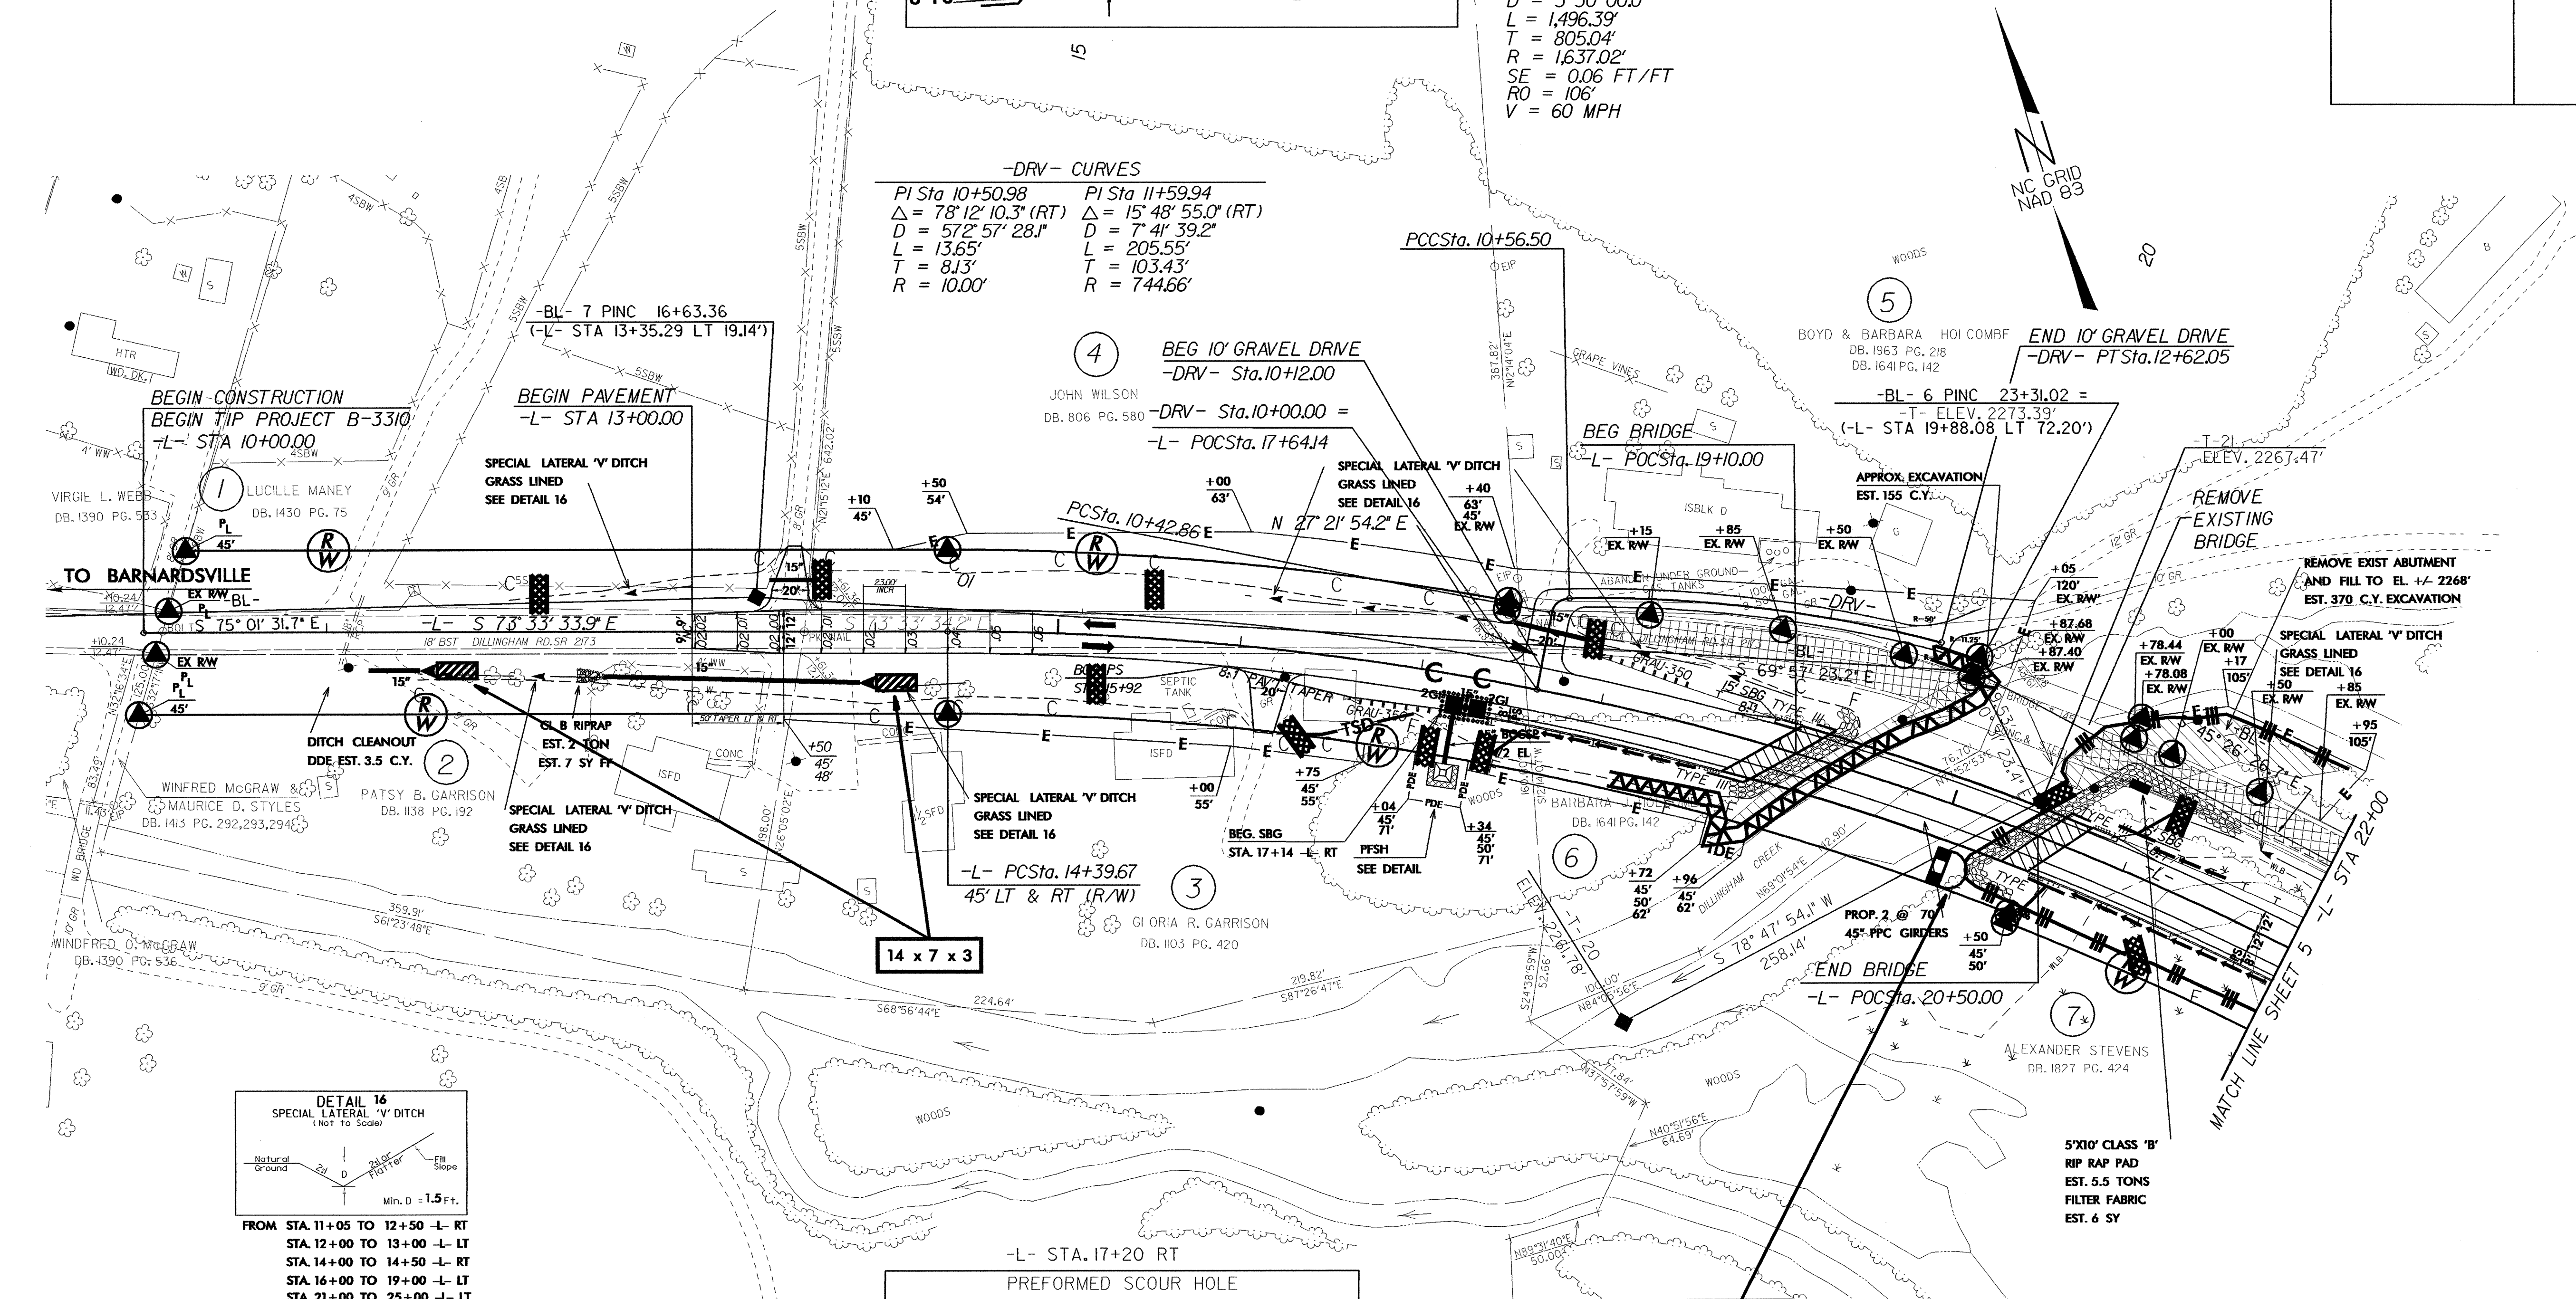

FROM STA. 11+05 TO 12+50 -L- RT
 STA. 12+00 TO 13+00 -L- LT
 STA. 14+00 TO 14+50 -L- RT
 STA. 16+00 TO 19+00 -L- LT
 STA. 21+00 TO 25+00 -L- LT

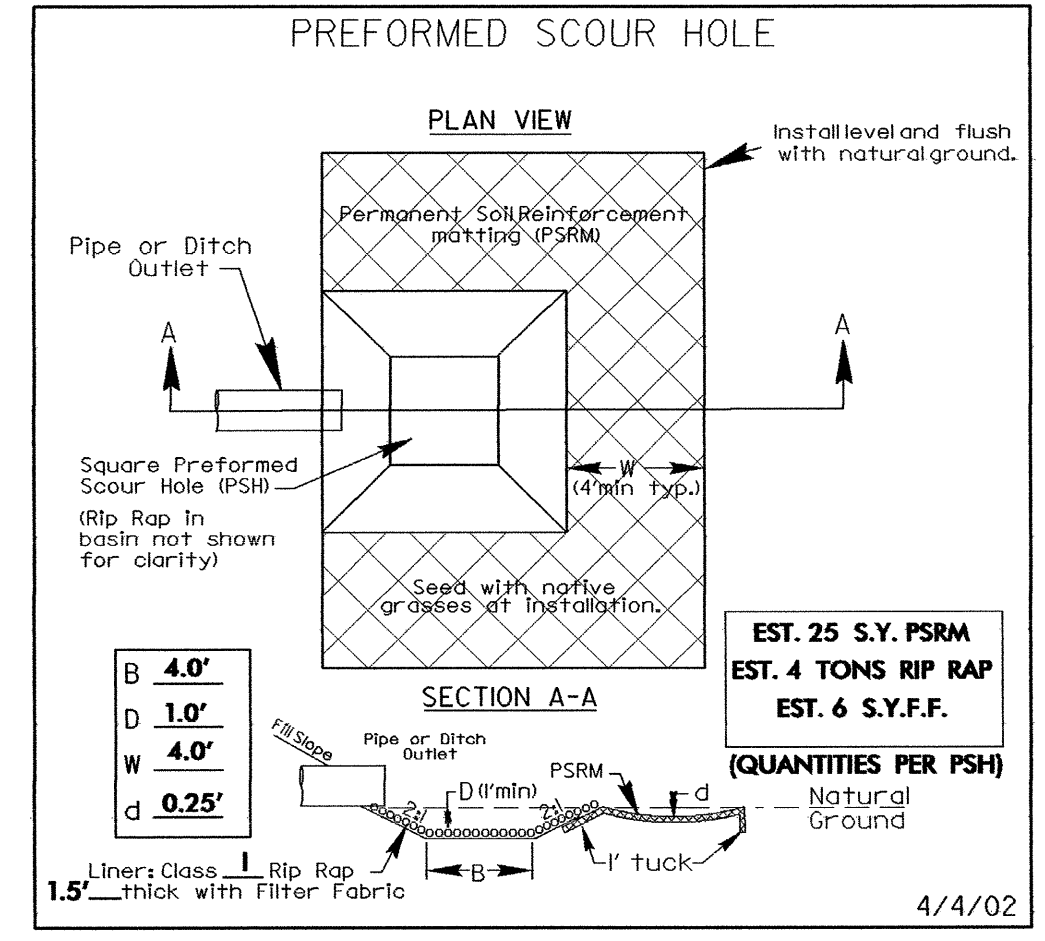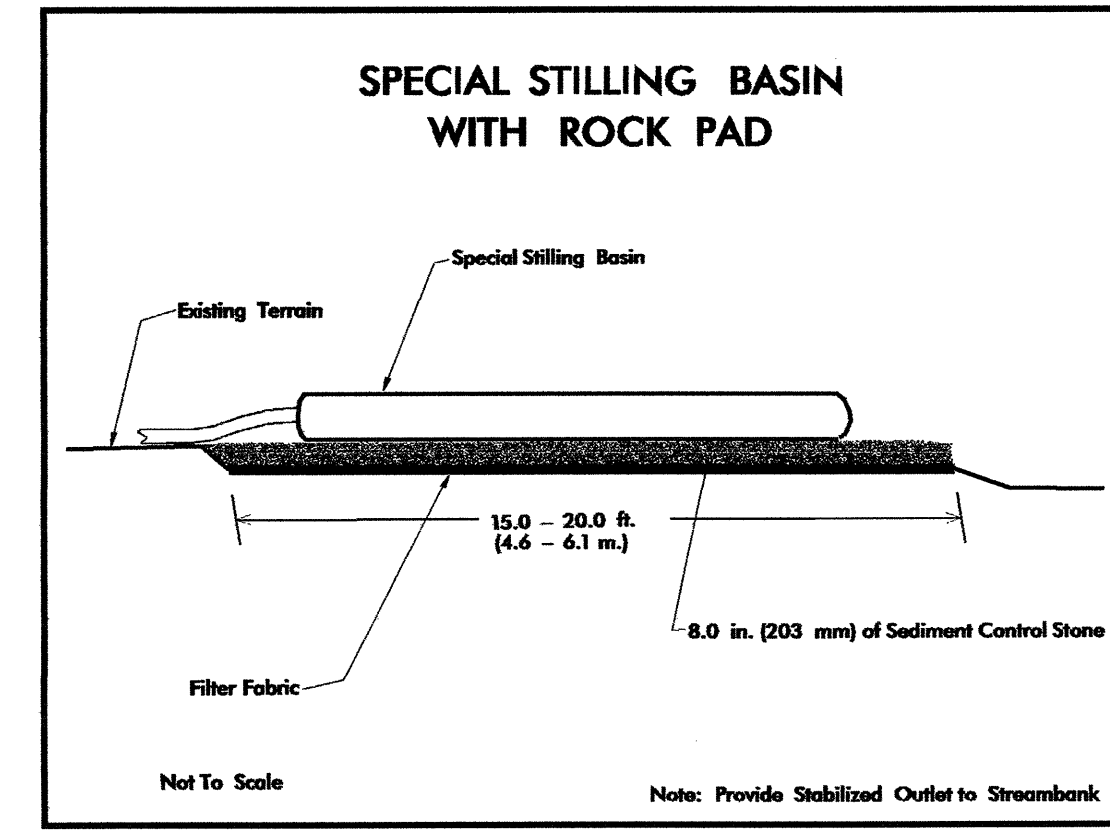

20 x 9 x 3
4' weir

- PAVEMENT REMOVAL
- ABUTMENT REMOVAL
- ALL DRIVEWAY RADII ARE 10'
- PS = PAVED SHOULDER
- SBG = SHOULDER BERM GUTTER
- FOR -L- PROFILE SEE SHEET 6
- FOR STRUCTURE PLANS SEE SHT S-1 TO S-XX

DESIGN EXCEPTION REQUIRED FOR HORIZONTAL STOPPING SIGHT DISTANCE.