



PROJECT REFERENCE NO.	SHEET NO.
B-3646	EC-3/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

SPECIAL STILLING BASIN WITH ROCK PAD

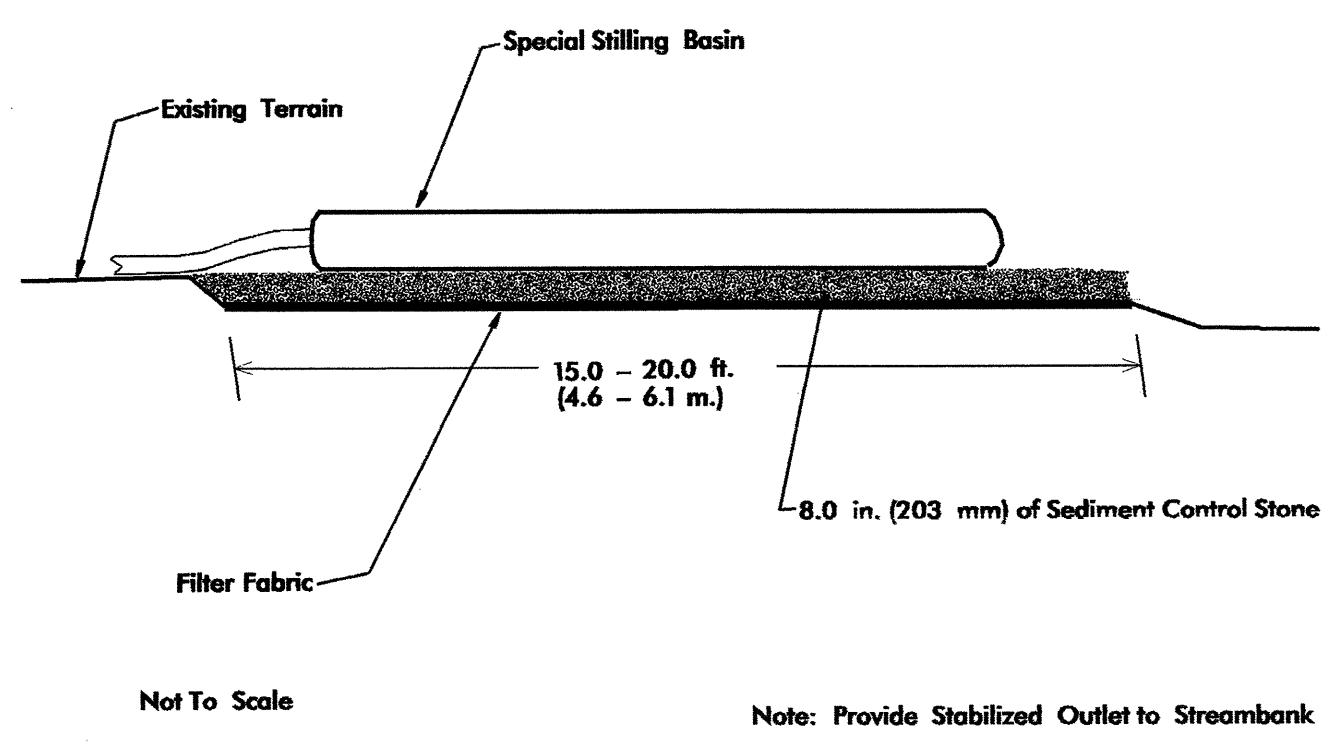

NOTE: UTILIZE SPECIAL STILLING BASIN AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

SKETCH OF PAVEMENT IN RELATIONSHIP TO PROPOSED BRIDGE


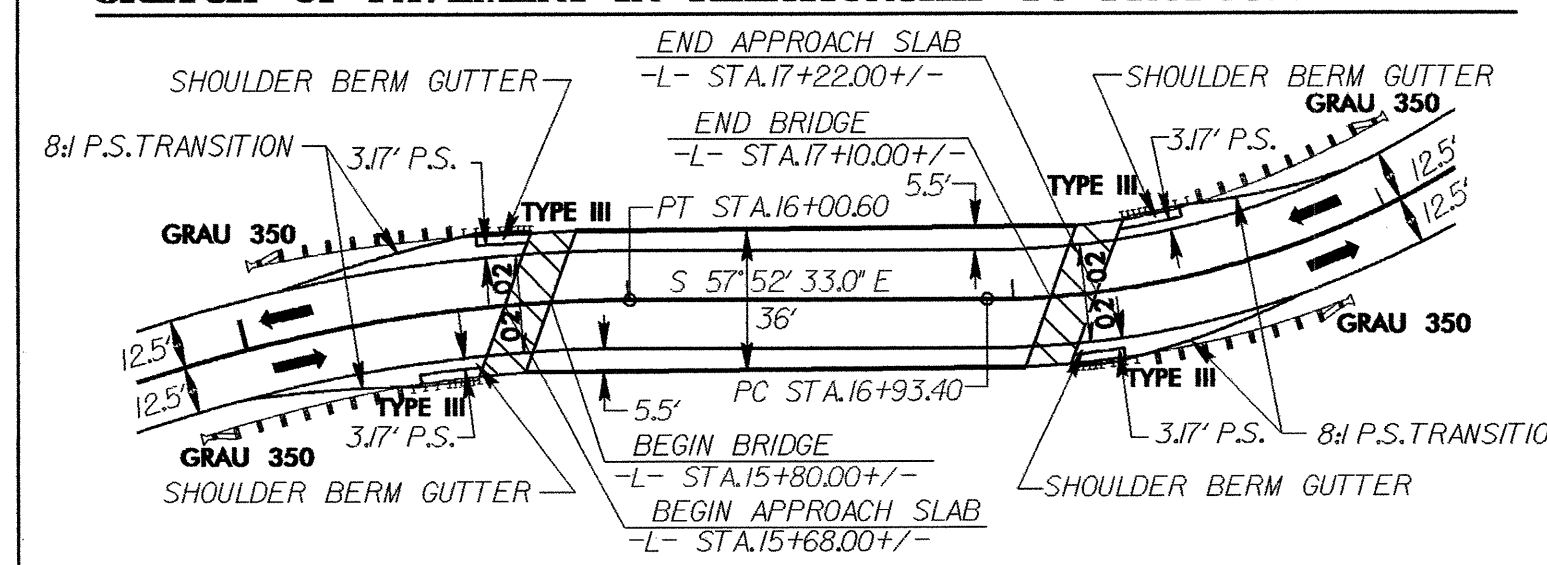


NAD 83

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

SHOULDER BERM GUTTER
 -L- STATIONS 15+44.76 - 15+59.31 RT
 -L- STATIONS 15+60.00 - 15+75.00 LT
 -L- STATIONS 17+16.00 - 17+32.00 RT
 -L- STATIONS 17+33.00 - 17+49.00 LT

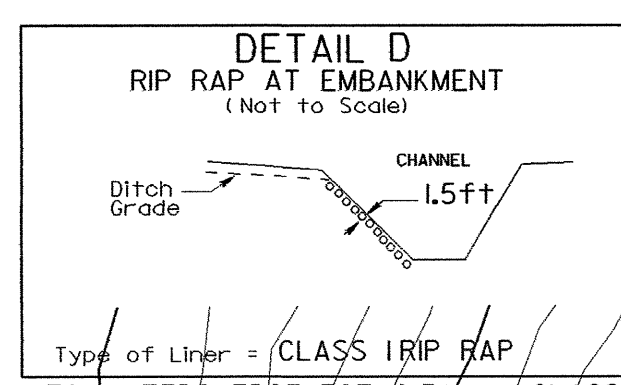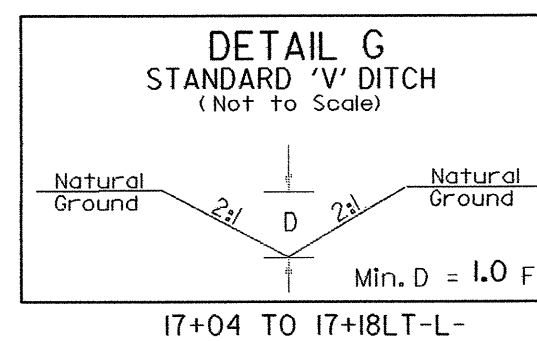


-BL- 3
PINC 11+35.91
-L- STA. 15+16.89
OFFSET 112.21' LT

16 x 7 x 3
4' weir
15 x 7 x 3
4' weir

-BL- 4 PINC 13+74.98
-T- PINC 17+66.44
ELEV. = 619.37
-L- STA. 17+86.23
OFFSET 218.52' LT
PCSta. 16+93.40

-BL- 5
PINC 17+43.61
-L- STA. 22+24.69
OFFSET 20.80' LT

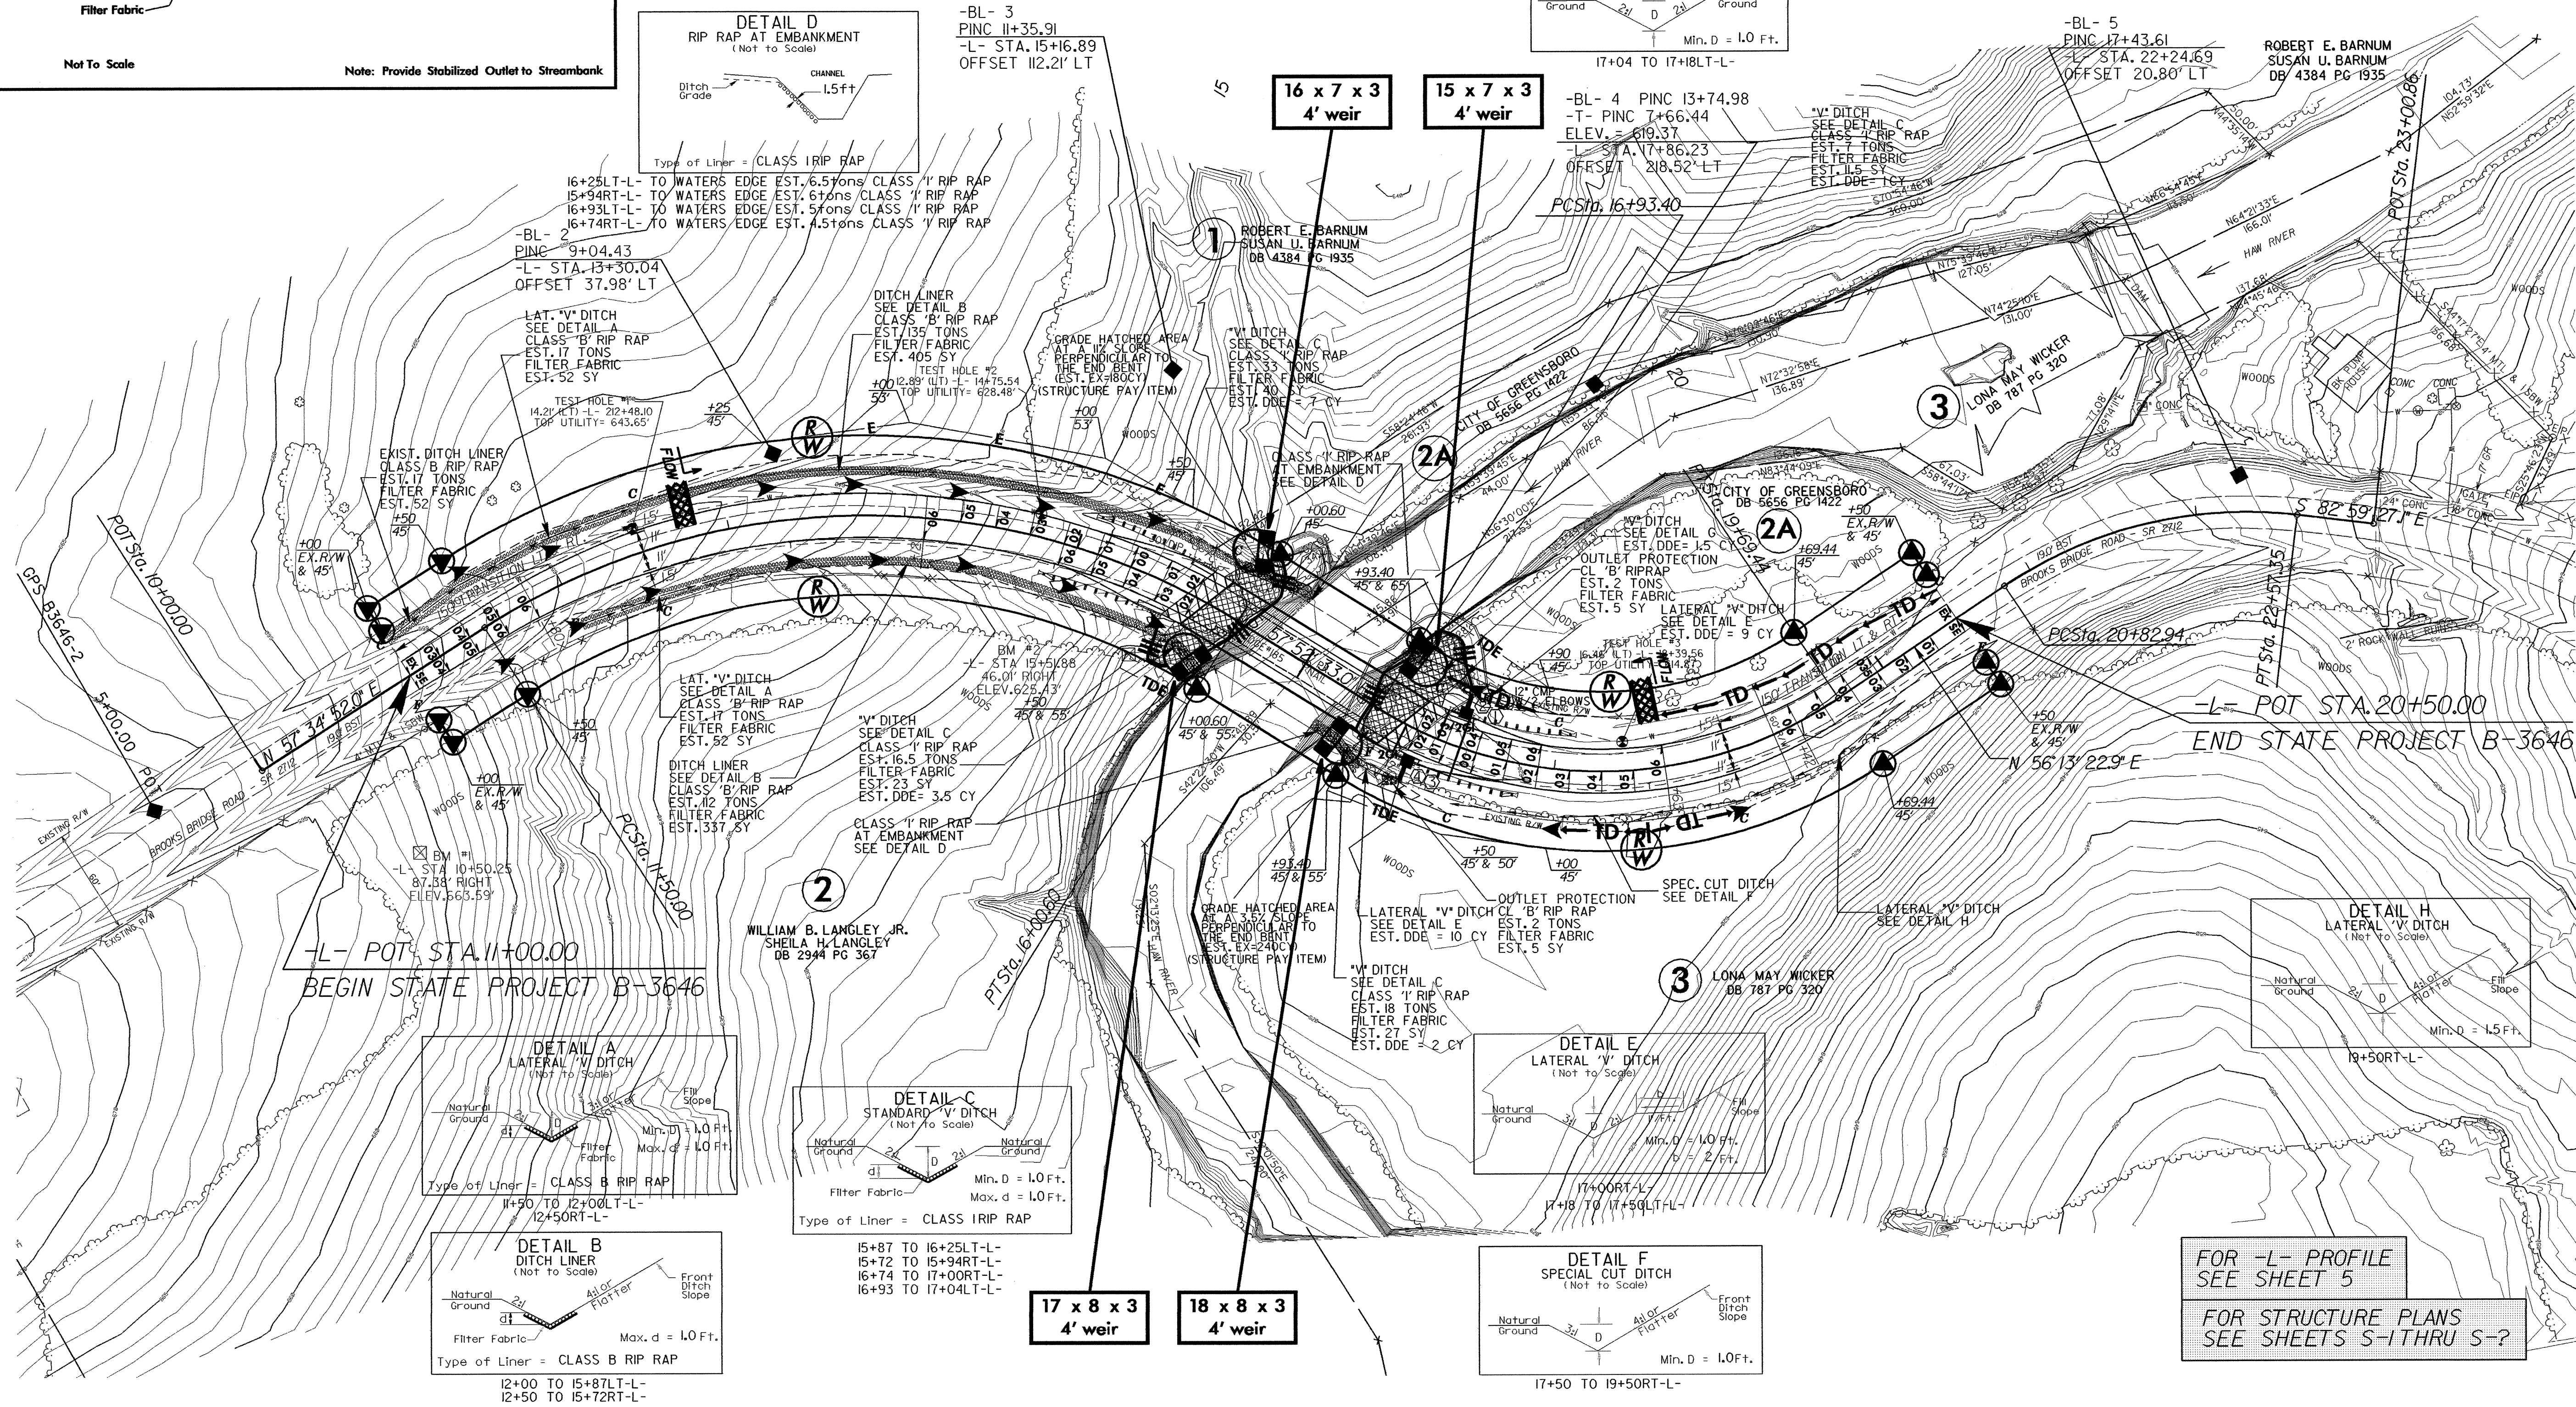

FOR -L- PROFILE SEE SHEET 5

FOR STRUCTURE PLANS SEE SHEETS S-1 THRU S-?