

NOTE: UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

**SHOULDER BERM GUTTER**









-L- STATION 16+00.00 TO 16+33.56 LT.  
-L- STATION 16+00.00 TO 16+50.84 RT.  
-L- STATION 18+27.84 TO 19+40.00 LT.  
-L- STATION 18+51.58 TO 19+40.00 RT.

**-L-**

PI Sta 16+15.01  
 $\Delta = 46^{\circ} 26' 56.5''$  (RT)  
 $D = 4' 16.329''$   
 $L = 1,086.32'$   
 $T = 575.00'$   
 $R = 1,340.00'$   
 $S.E. = 0.04$  (SEE PLANS)  
 $INC. = 25'$   
 $RO = 100'$

**BEGIN TIP PROJECT B-3649**

-L- POT Sta. 9+62.64

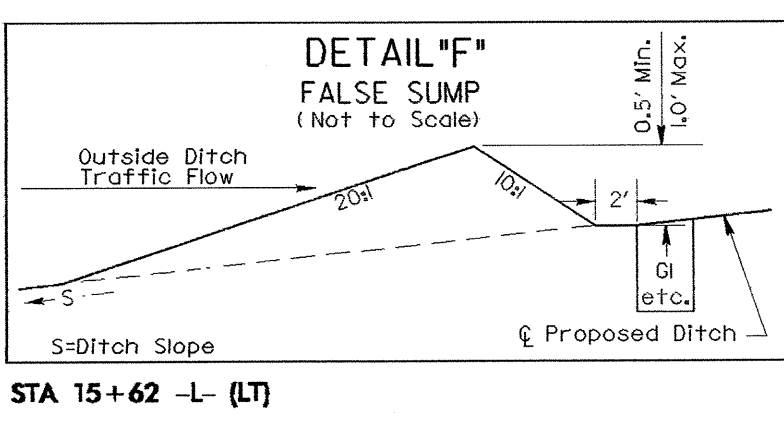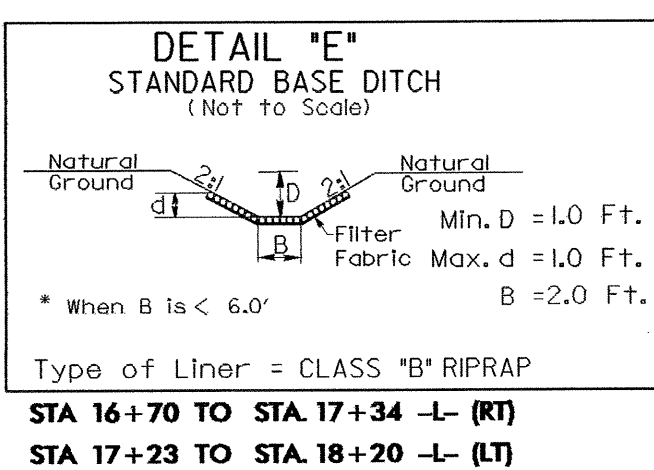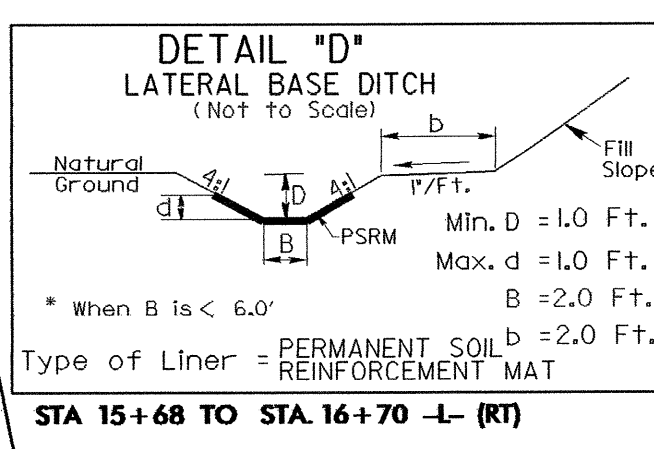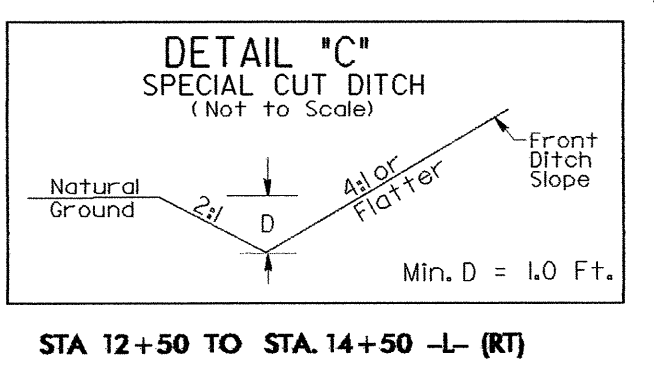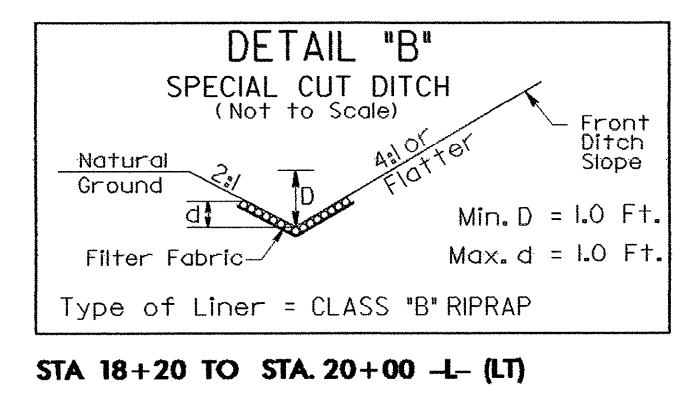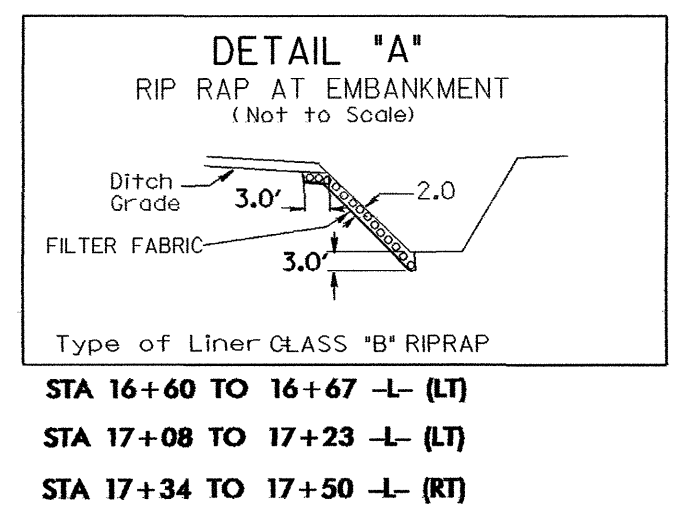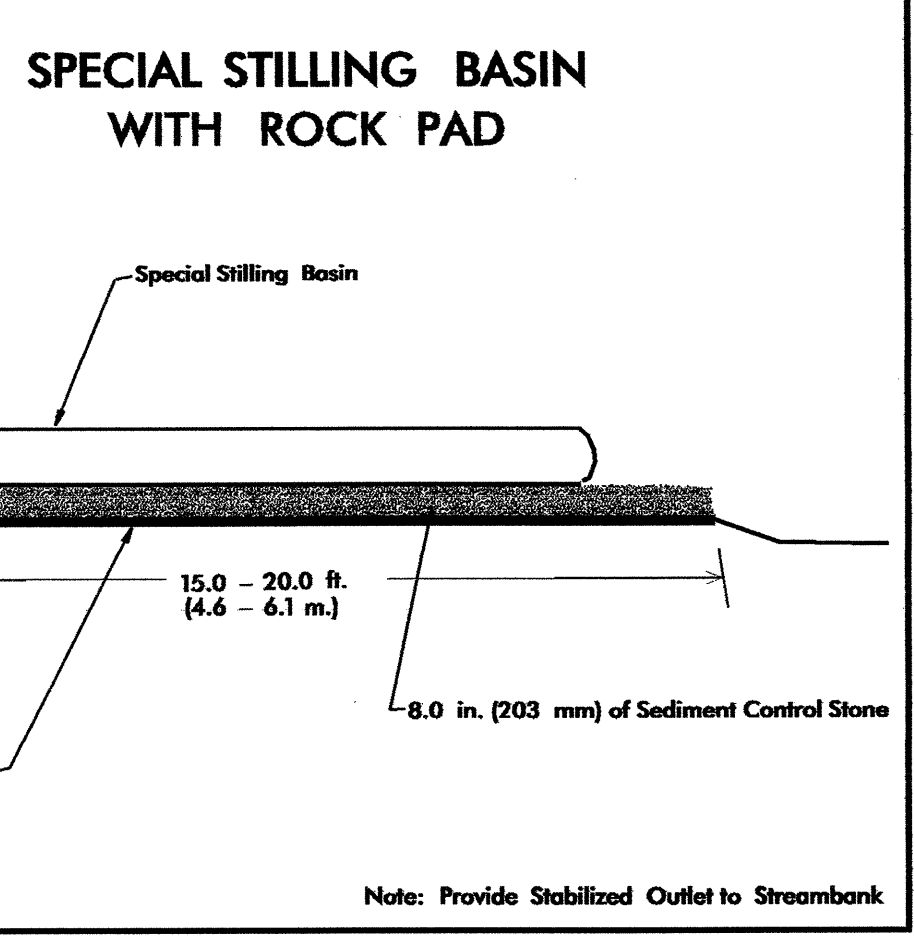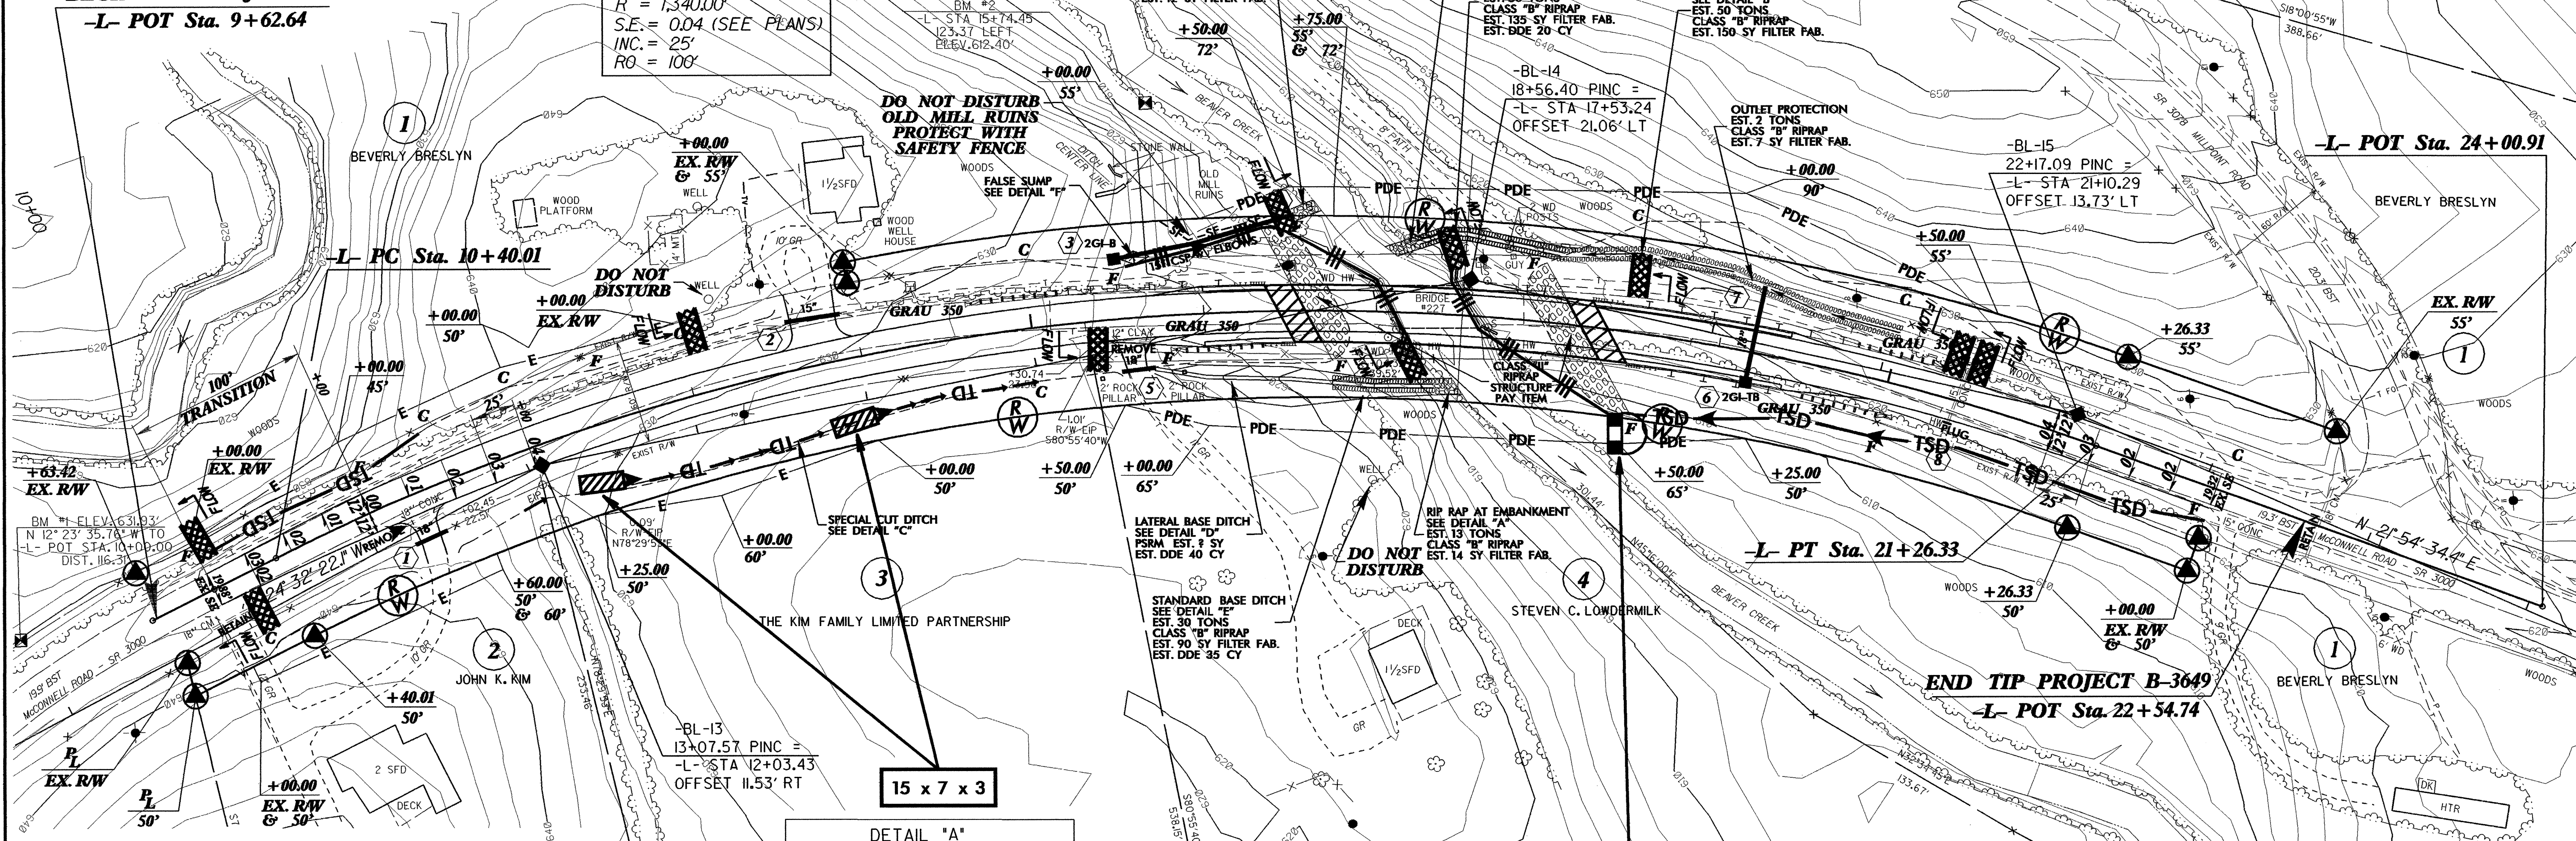

**FOR -L- PROFILE SEE SHEET 5**

**FOR STRUCTURE PLANS SEE SHEETS S-1 THRU S-?**