

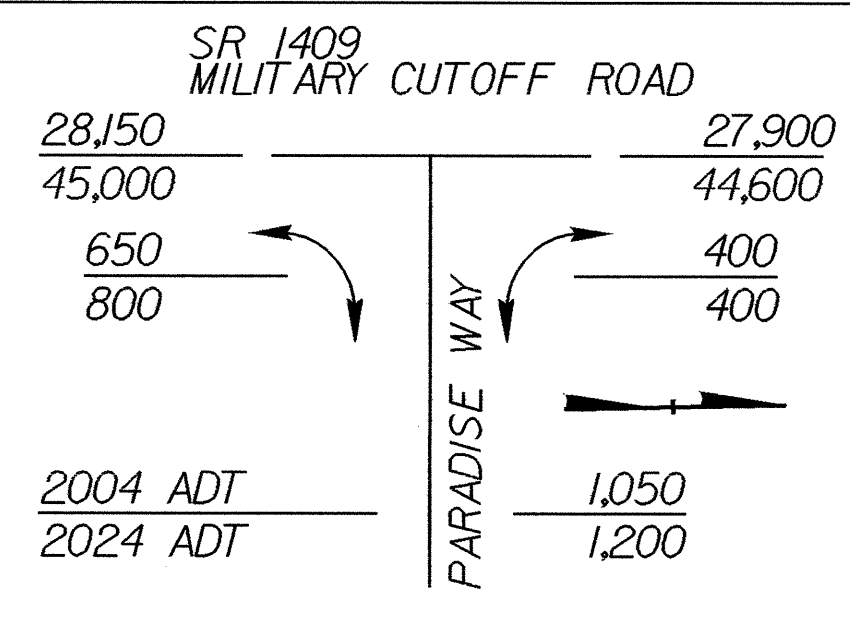


NOTE:  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B  
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT  
DRAINAGE OUTLETS.

CLEARING AND GRUBBING  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 12

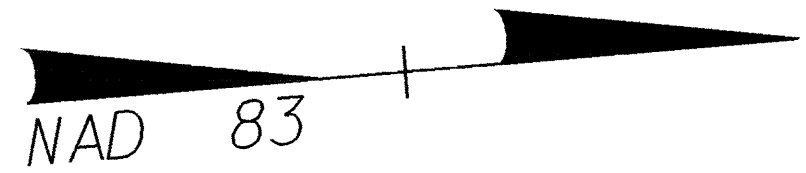


-L-  
PI Sta 45+08.549  
 $\Delta = 1' 45' 16.2''$  (LT)  
L = 107.023  
T = 53.516  
R = 3,495.000  
SE = NC



CONST. REV.  
R/W REV.

PROJECT REFERENCE NO.	SHEET NO.
U-2734	EC-12/CONST.12
R/W SHEET NO.	12
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE: SEE SHEETS NO. 20 & 21 FOR -L- PROFILE  
SEE SHEET NO. 25 FOR -Y5- PROFILE  
SEE SHEET NO. 26 FOR -Y13- PROFILE  
SEE SHEET NO. 2-P FOR INTERSECTION DETAIL OF -Y13- & -Y5-

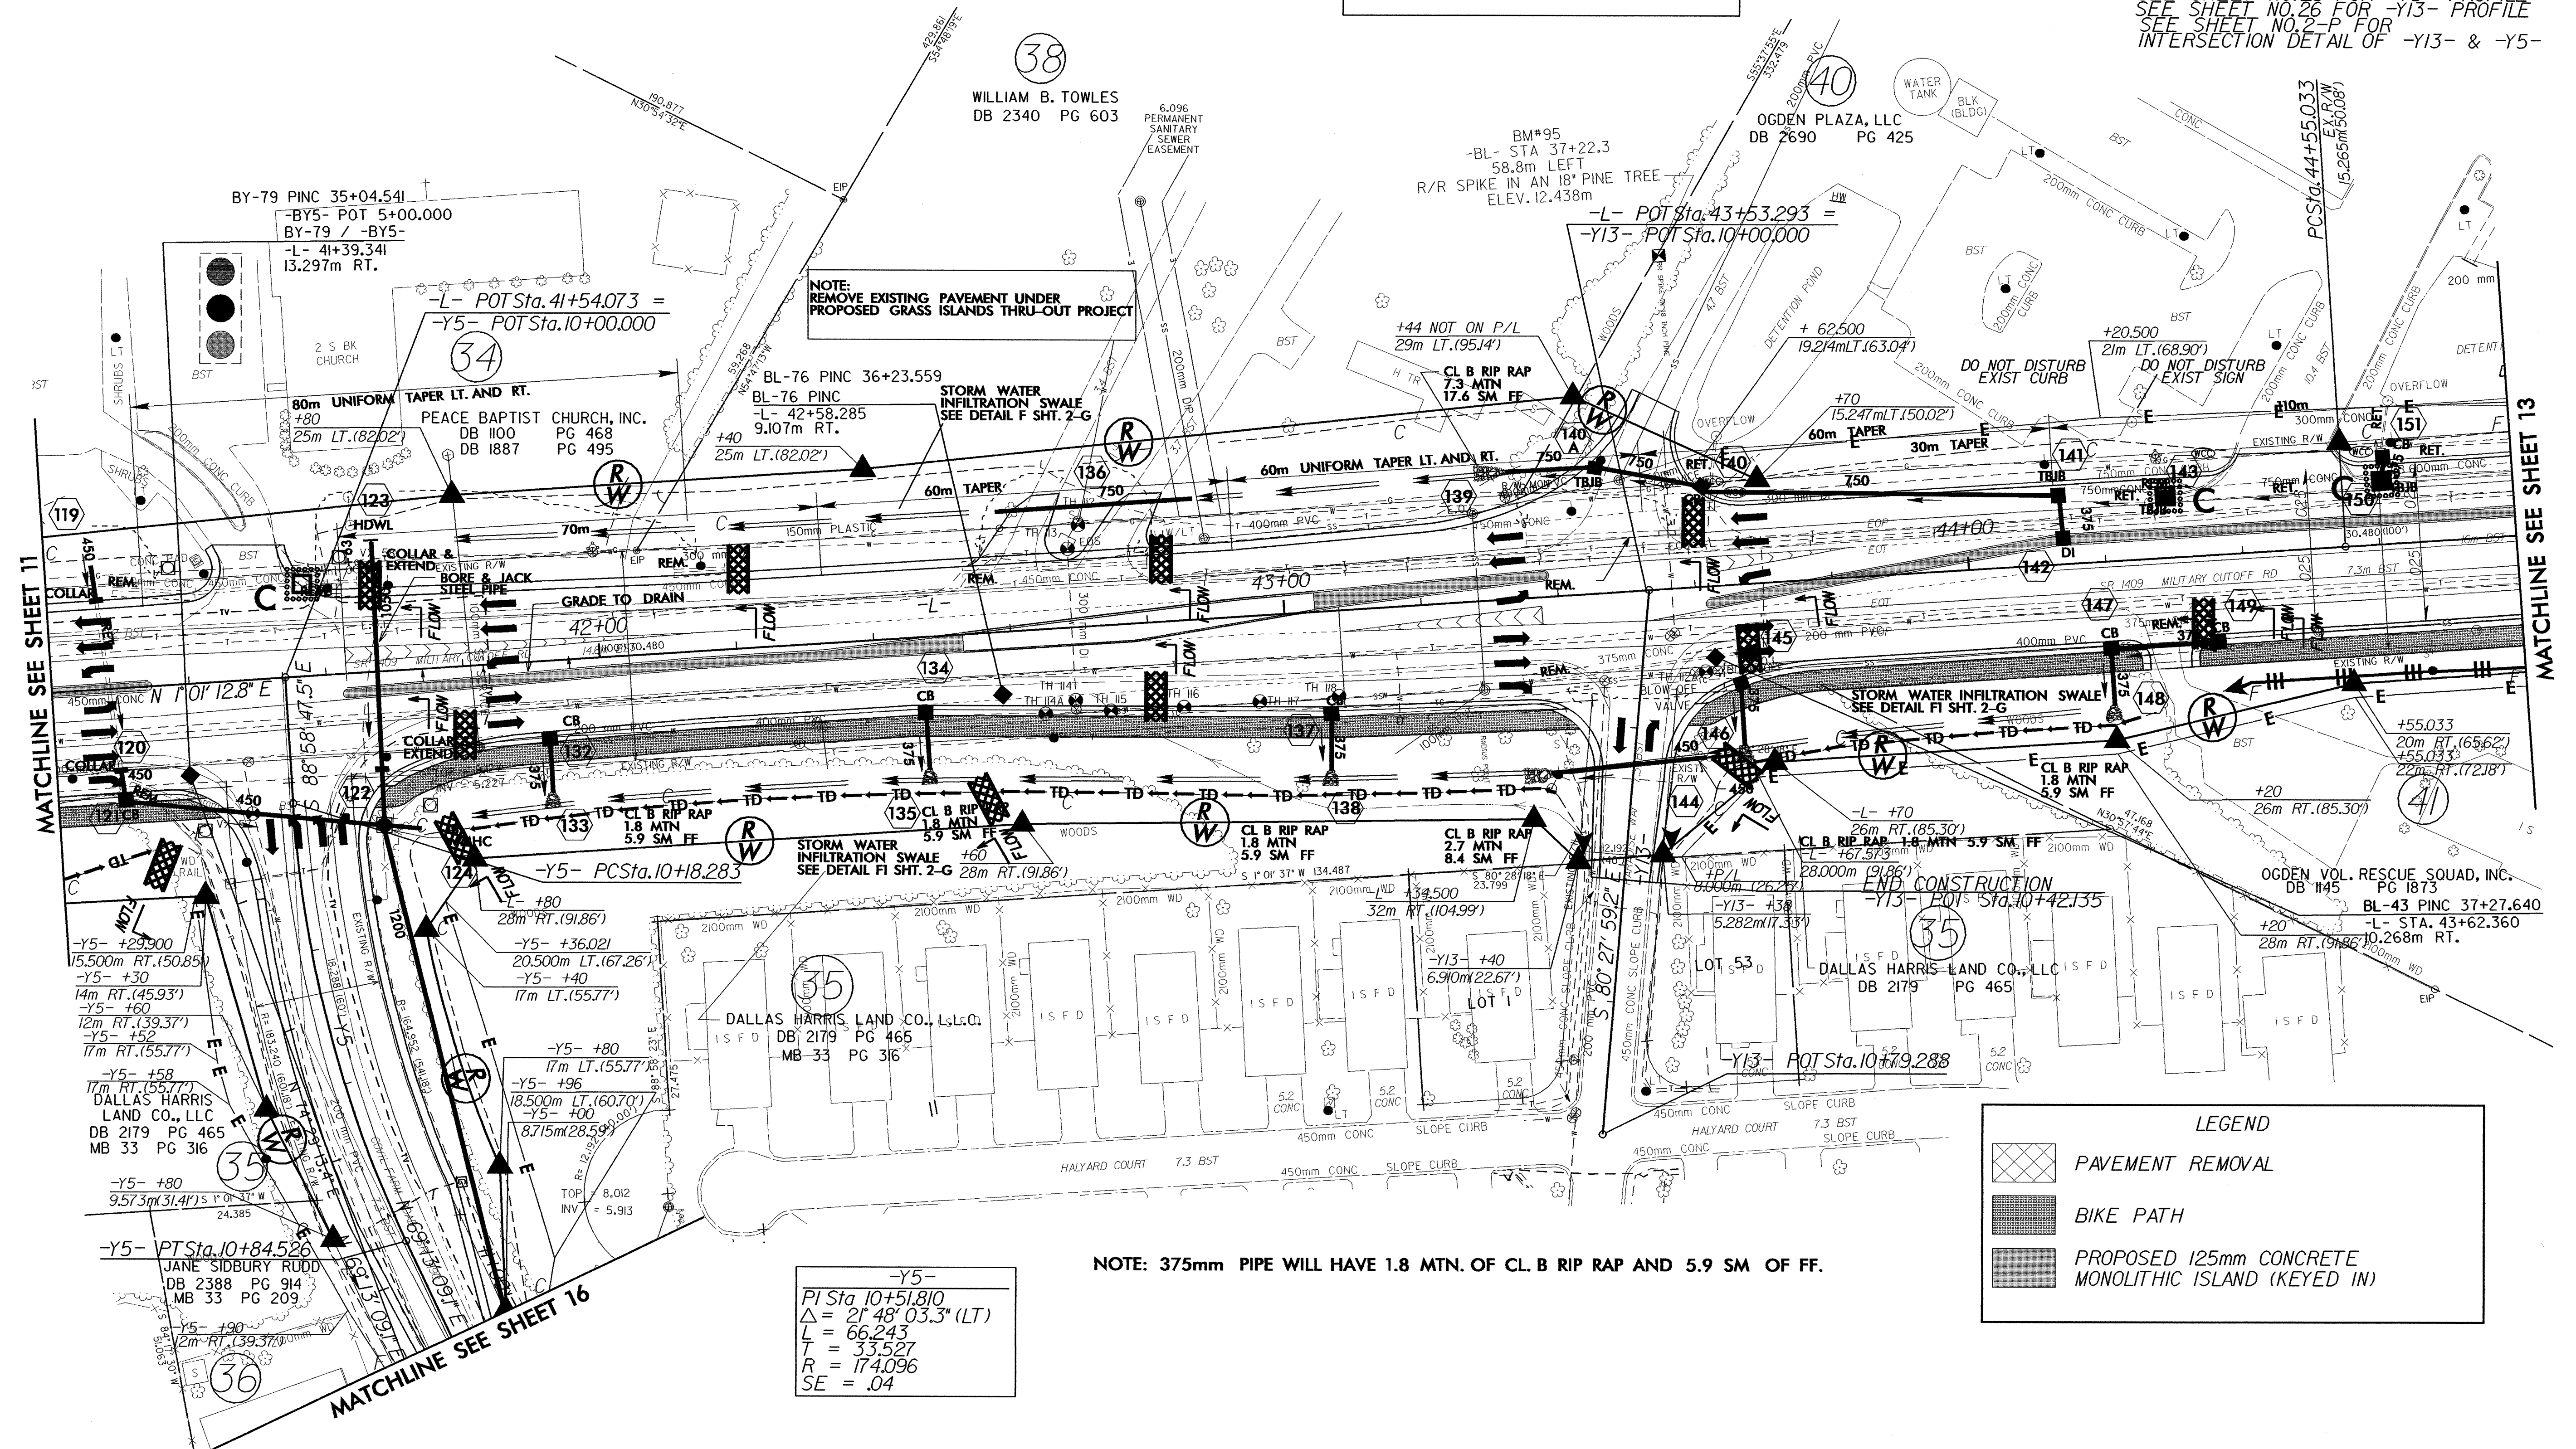

MATCHLINE SEE SHEET 11

MATCHLINE SEE SHEET 13

MATCHLINE SEE SHEET 16

-Y5-  
PI Sta 10+51.810  
 $\Delta = 2' 48' 03.3''$  (LT)  
L = 66.243  
T = 33.527  
R = 174.096  
SE = .04

NOTE: 375mm PIPE WILL HAVE 1.8 MTN. OF CL. B RIP RAP AND 5.9 SM OF FF.

LEGEND

	PAVEMENT REMOVAL
	BIKE PATH
	PROPOSED 125mm CONCRETE MONOLITHIC ISLAND (KEYED IN)