

**V** DESIGN = 45 MPH

NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN WHERE APPLICABLE.


NOTE: TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE- B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.


-DETI-		-L-	
PI Sta 11+10.59	PI Sta 14+45.99	PI Sta 17+70.64	PI Sta 18+09.49
$\Delta = 15^{\circ} 44' 26.0" (LT)$	$\Delta = 31^{\circ} 34' 41.0" (RT)$	$\Delta = 15^{\circ} 39' 02.4" (LT)$	$\Delta = 0^{\circ} 11' 12.6" (RT)$
D = 7' 09' 43.1"	D = 7' 09' 43.1"	D = 7' 09' 43.1"	D = 0' 17' 11.3"
L = 219.78'	L = 440.91'	L = 218.52'	L = 65.22'
T = 110.59'	T = 226.21'	T = 109.95'	T = 32.61'
R = 800.00'	R = 800.00'	R = 800.00'	R = 20,000.00'
SE = VAR., SEE PLANS	SE = 0.04	SE = VAR., SEE PLANS	SE = NC

**-DETOUR 1-**

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 6

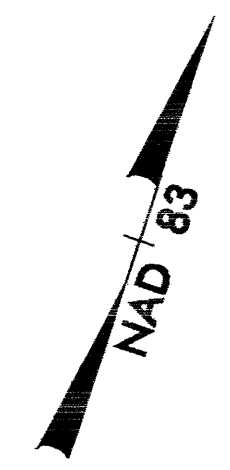

-L- STA.11+50.00 BEGIN STATE PROJECT B-3629  
 -L- STA.11+50.00 BEGIN F.A.PROJECT BRZ-1565(3)

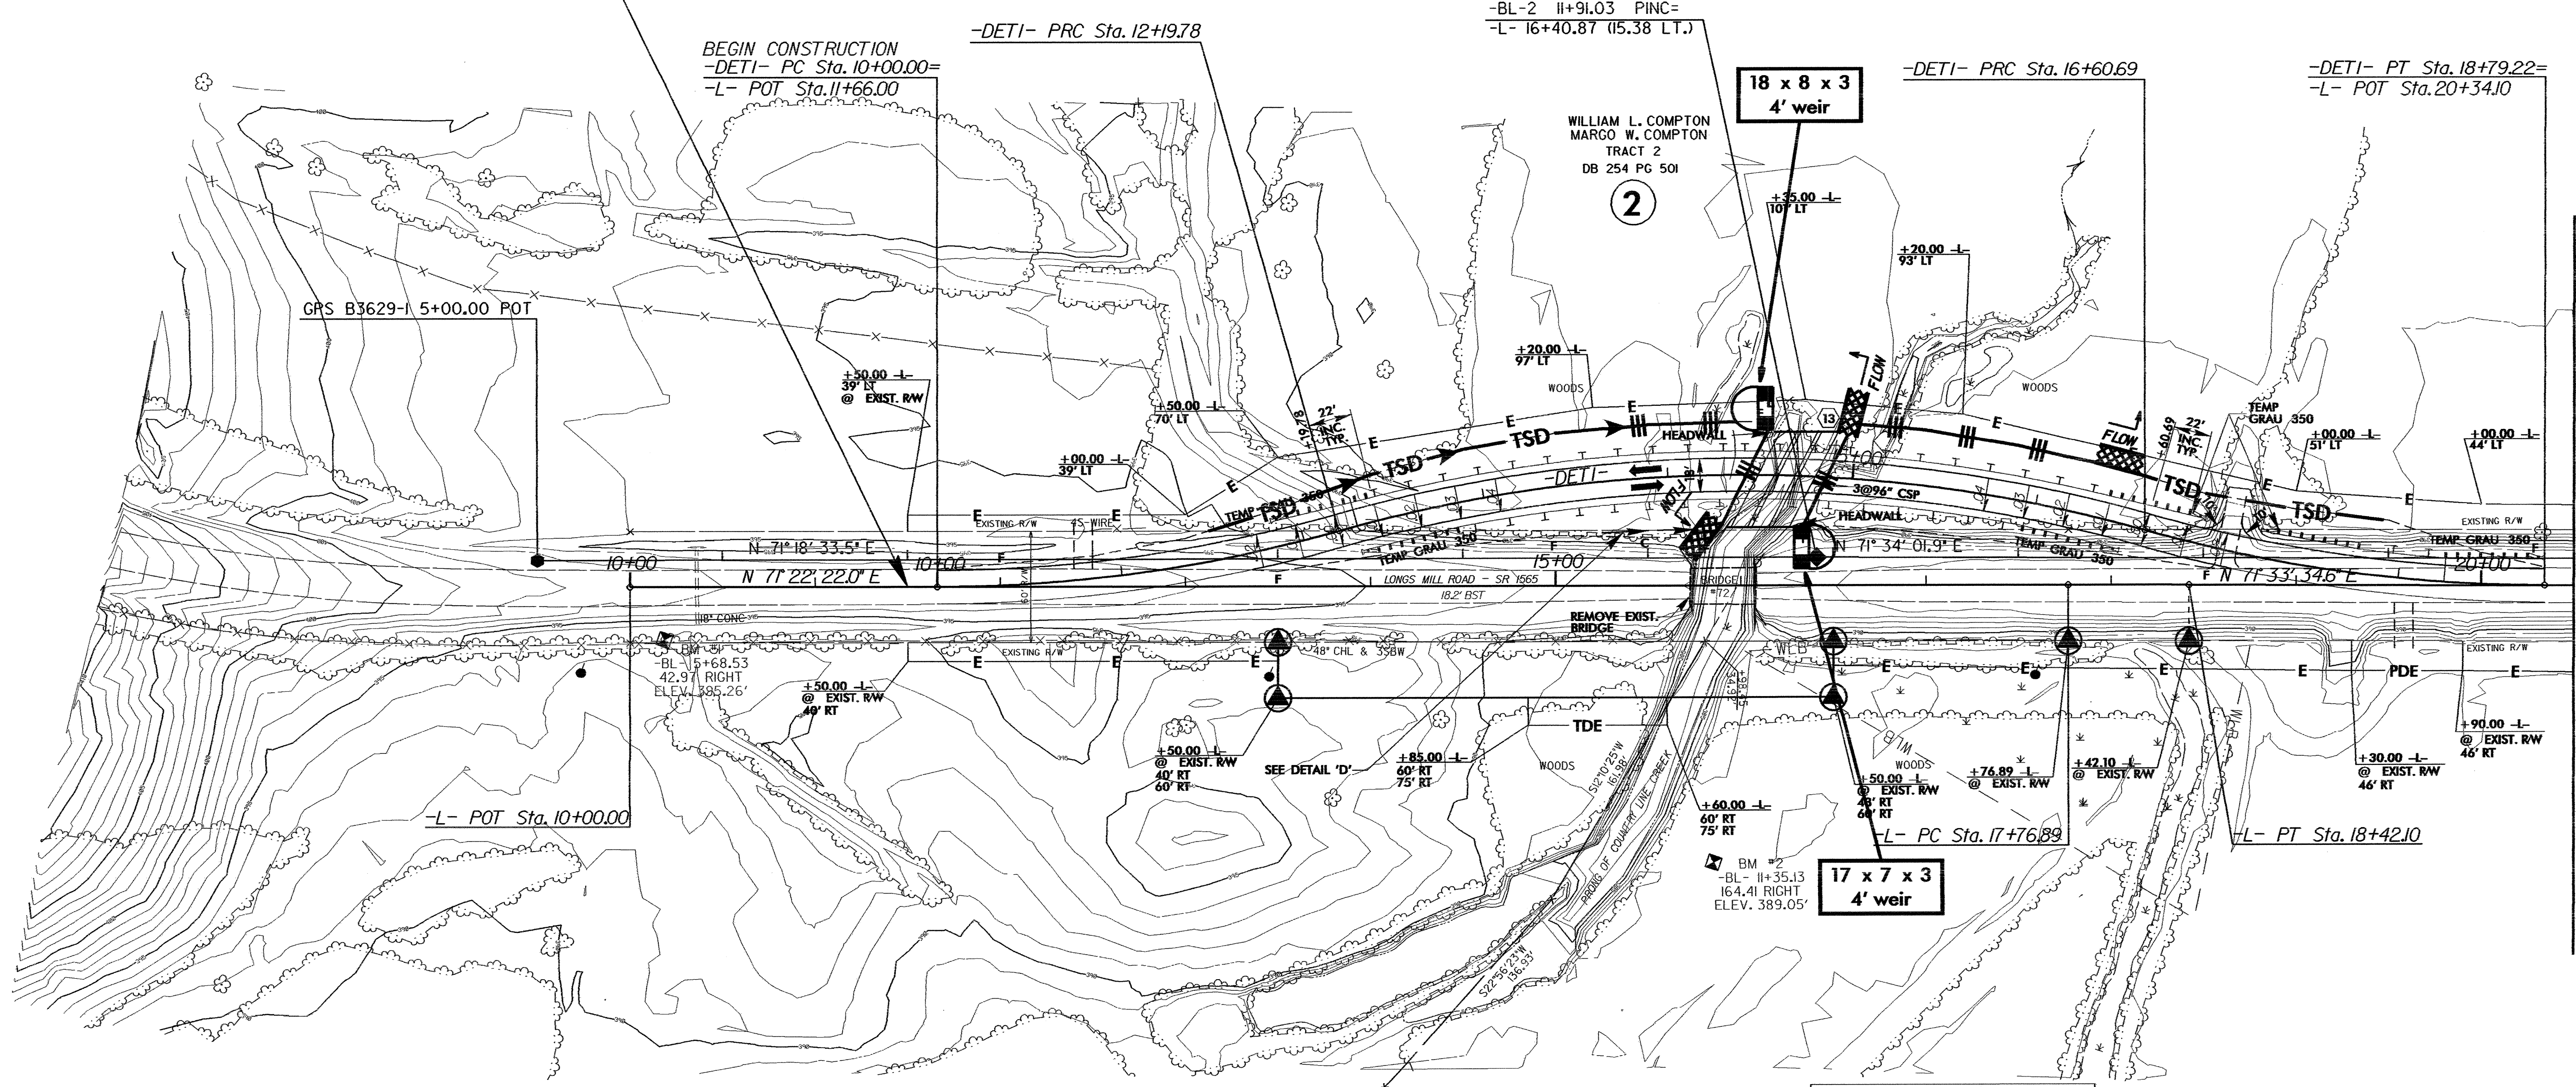


MATCHLINE -L- STA. 20 + 50, SEE SHEET 7

DAVID W. SIMS  
DB 239 PG 454

1

RONALD L. DANIEL  
DB 197 PG 6

3

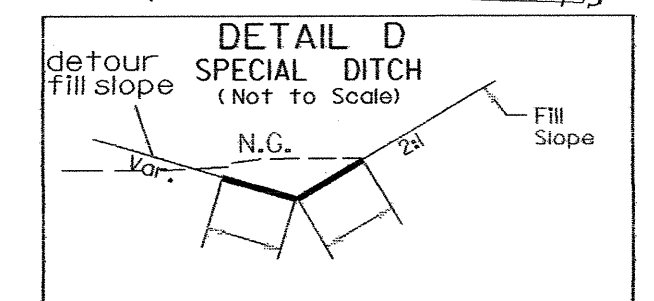

STA. 13+64.48 -DETI- TO STA. 14+4.48 -DETI- RT.

SEE SHEET 9 FOR -DETI- LINE PROFILE