

PROJECT REFERENCE NO.		SHEET NO.	
B-3865		EC-3/CONST.2-B	
RW SHEET NO.			
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	


DETOUR I

-DETI- CURVE DATA

PI Sta 1+07.85 Δ = 18° 33' 42.2" (RT) D = 8° 40' 52.2" L = 213.82' T = 107.85' R = 660.00' RUNOFF = SEE PLANS SE = SEE PLANS V = 45 MPH	PI Sta 4+55.46 Δ = 40° 13' 06.0" (LT) D = 8° 40' 52.2" L = 463.28' T = 241.65' R = 660.00' RUNOFF = SEE PLANS SE = 0.06 V = 45 MPH	PI Sta 7+47.81 Δ = 12° 13' 49.5" (RT) D = 8° 40' 52.2" L = 140.88' T = 70.71' R = 660.00' RUNOFF = SEE PLANS SE = SEE PLANS V = 45 MPH
---	--	--

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 2B

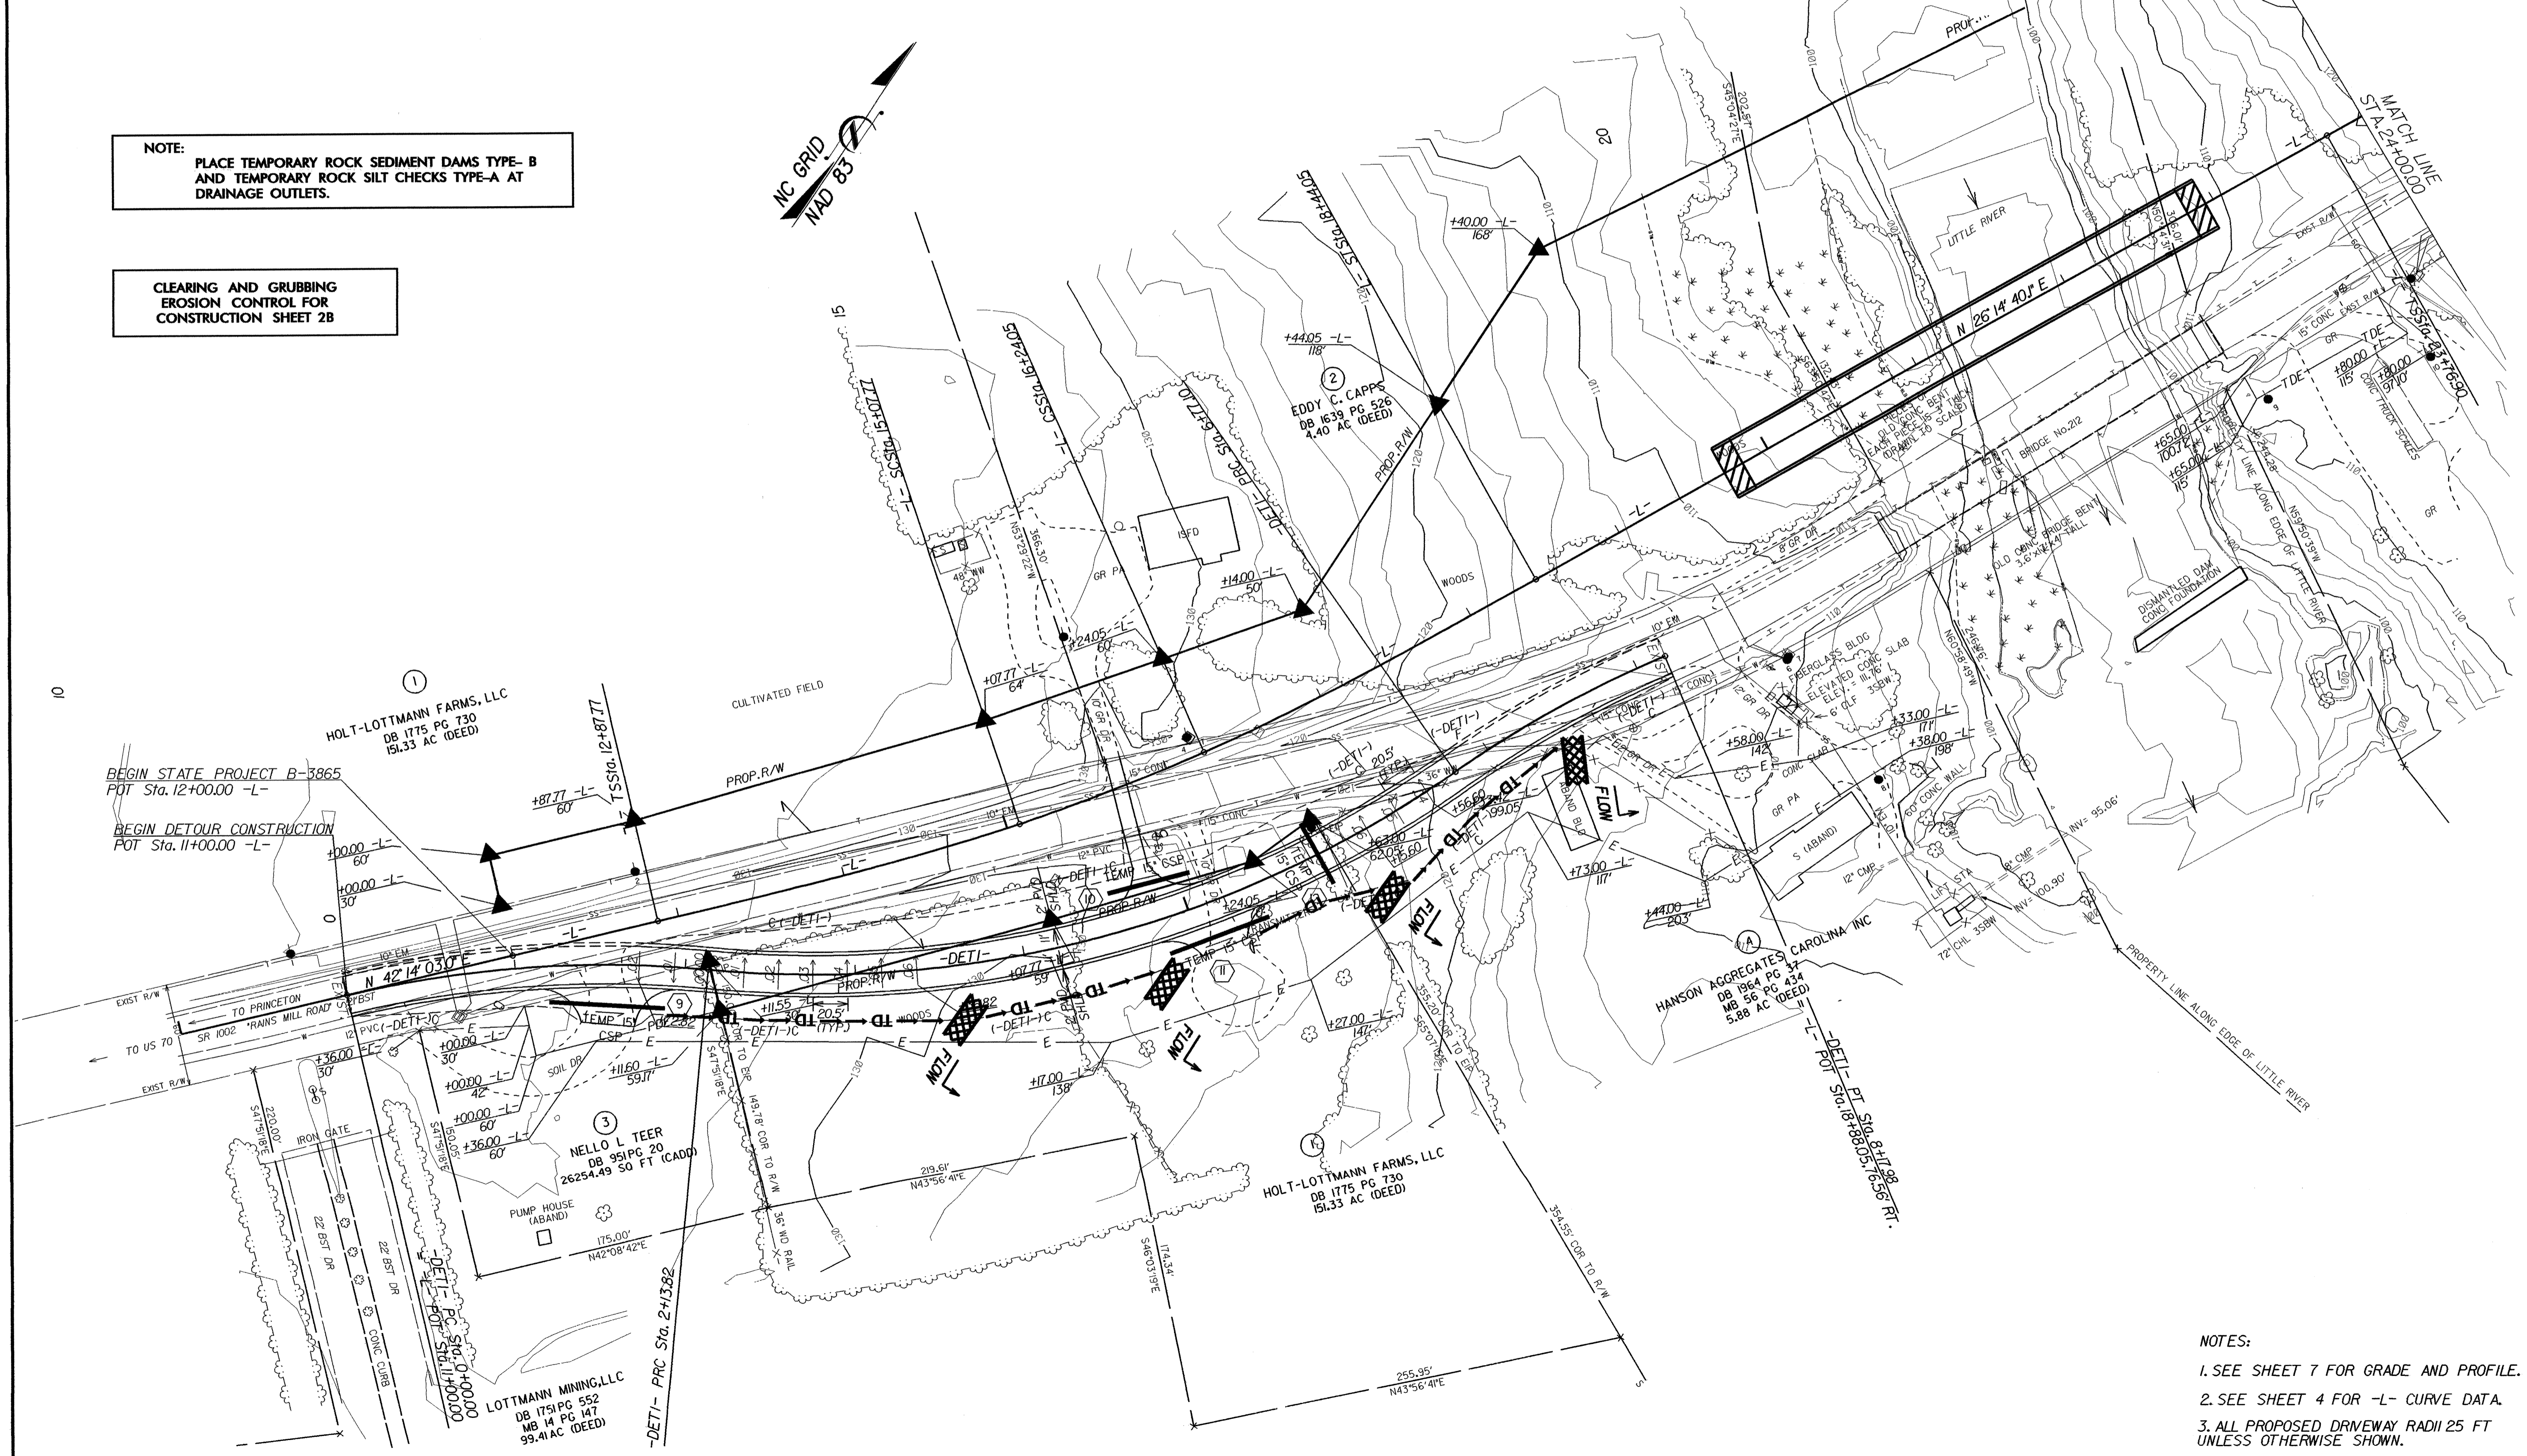

- NOTES:
1. SEE SHEET 7 FOR GRADE AND PROFILE.
 2. SEE SHEET 4 FOR -L- CURVE DATA.
 3. ALL PROPOSED DRWEMAY RADII 25 FT UNLESS OTHERWISE SHOWN.