


6/16/04

NOTE: ALL MEASUREMENTS ARE IN METERS UNLESS OTHERWISE NOTED.



PROJECT REFERENCE NO. U-2912		SHEET NO. 2-A
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER	

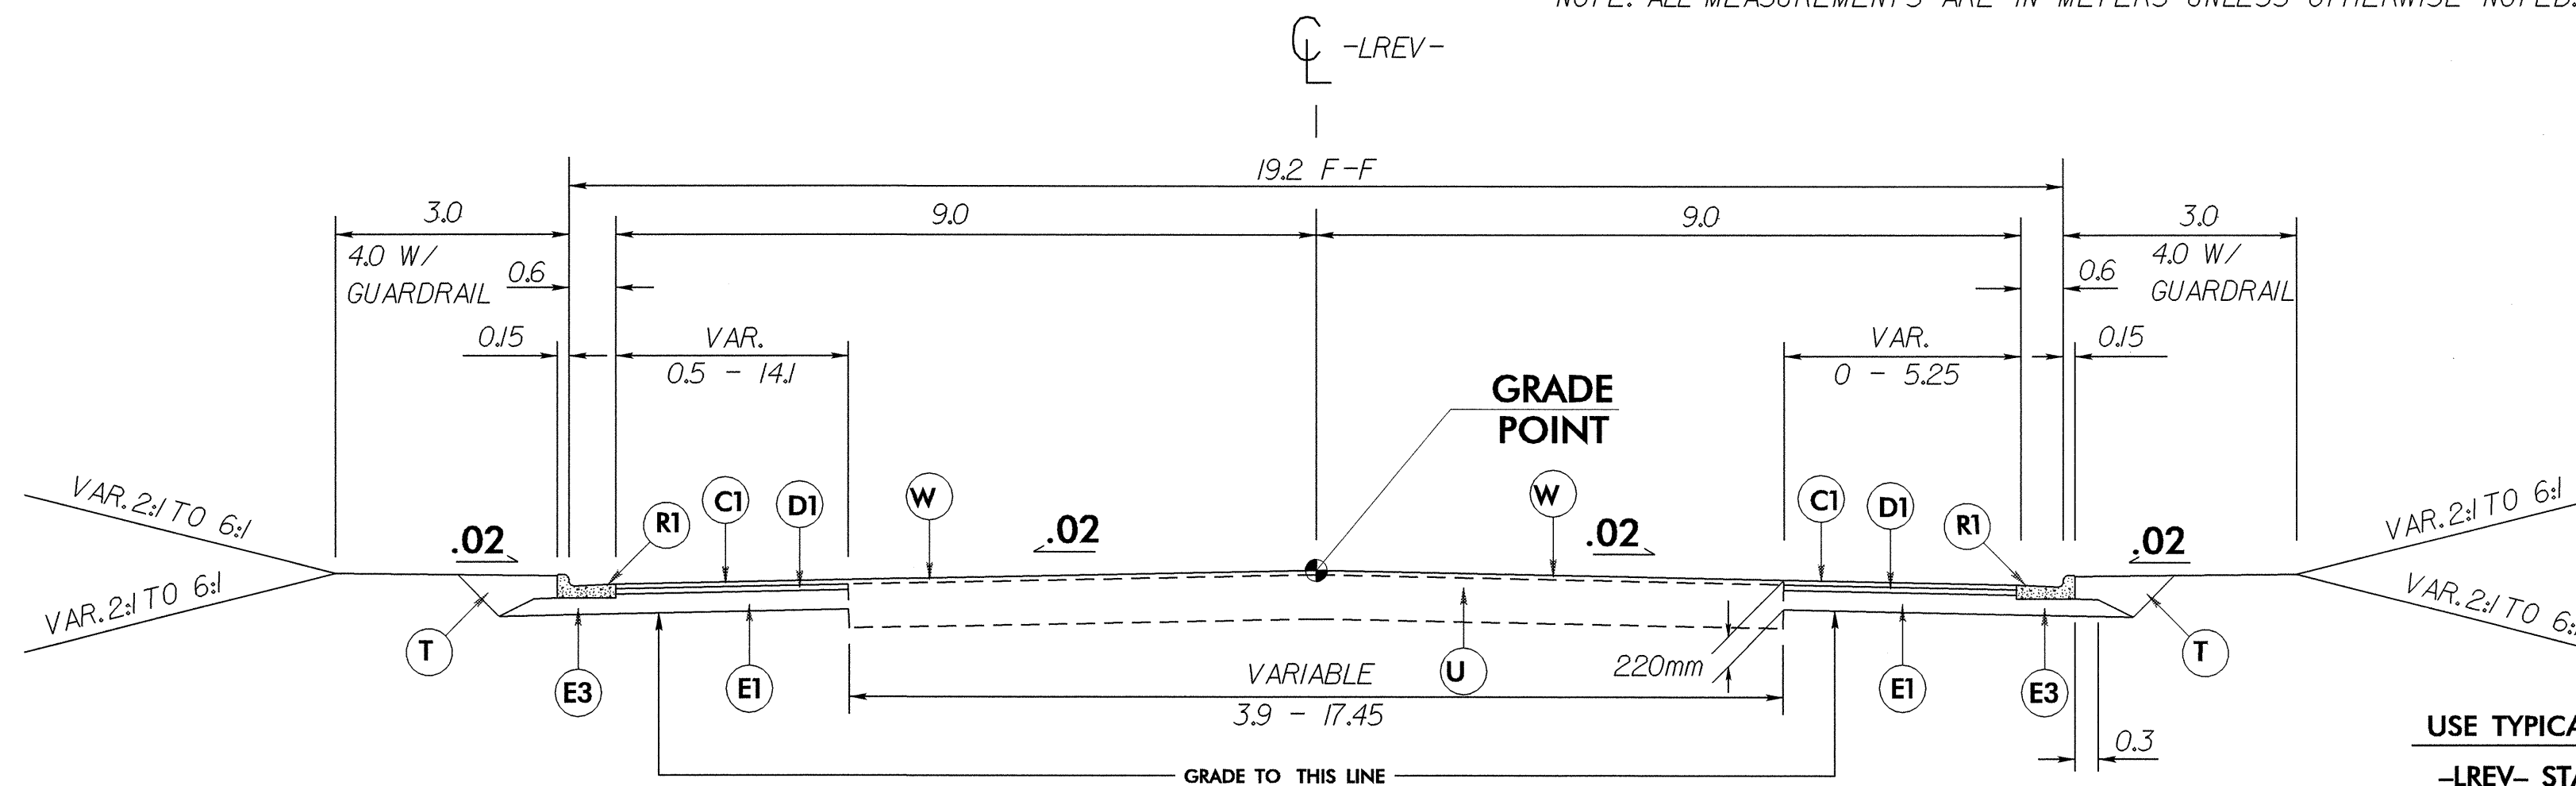


TYPICAL SECTION NO. 4

USE TYPICAL SECTION NO. 4

-LREV- STA. 22+60 TO 30+00
 NOTE: FROM 22+40 TO 22+60
 TRANSITION FROM TYP.
 SECT. NO. 3 TO TYP. SECT. NO. 4
 NOTE: FROM 30+00 TO 30+20
 TRANSITION FROM T.S. NO. 4
 TO T.S. NO. 3
 -LREV- STA. 35+00 TO 38+06.43


NOTE: FOR TEMPORARY PAVEMENT (-LREV- 21+80 TO 24+80) USE 80mm S9.5B AND 75mm B25.0B
 NOTE: FOR TEMPORARY PAVEMENT (-LREV- 29+20 TO 32+80) USE 80mm S9.5B AND 75mm B25.0B

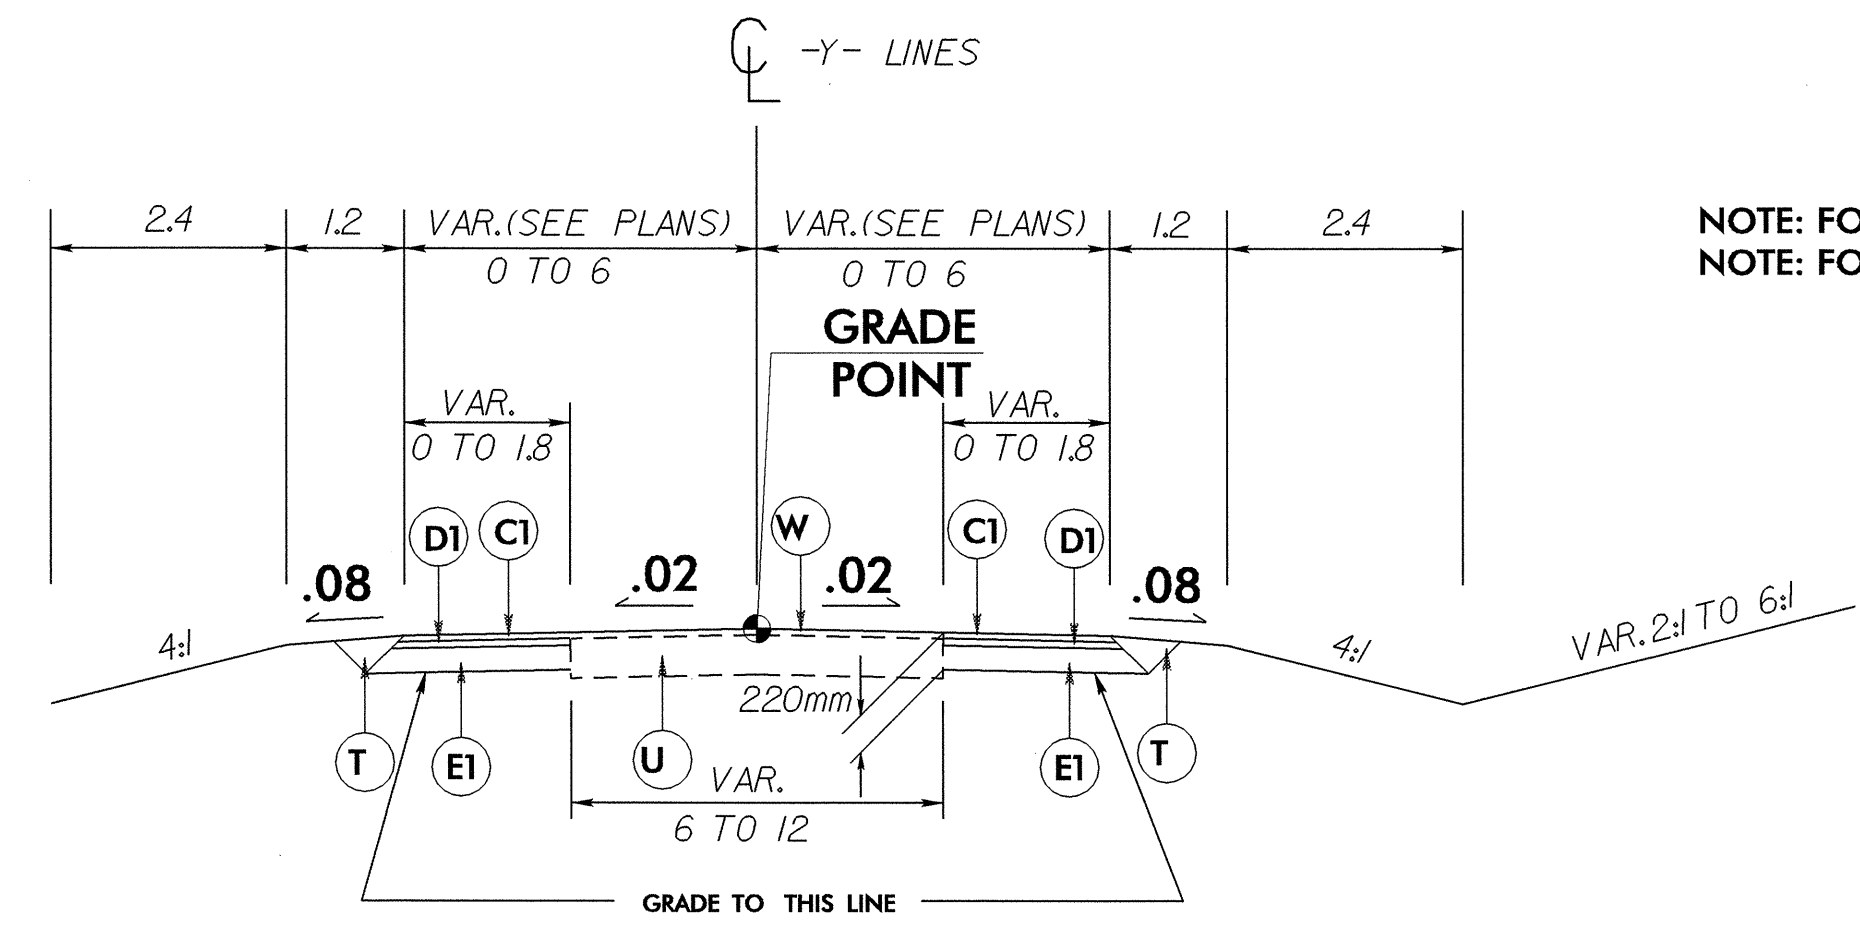

TYPICAL SECTION NO. 5

USE TYPICAL SECTION NO. 5

-Y1- STA. 10+00 TO 10+20
 NOTE: -Y2- STA. 10+00 TO 10+60
 OVERLAY WITH 40mm S9.5B.
 -Y2- STA. 10+60 - 10+90
 -Y4- STA. 10+25 TO 10+50
 NOTE: -Y6- STA. 10+20.00 TO 10+40
 OVERLAY WITH 40mm S9.5B
 -Y6- STA. 10+20 TO 10+78.77

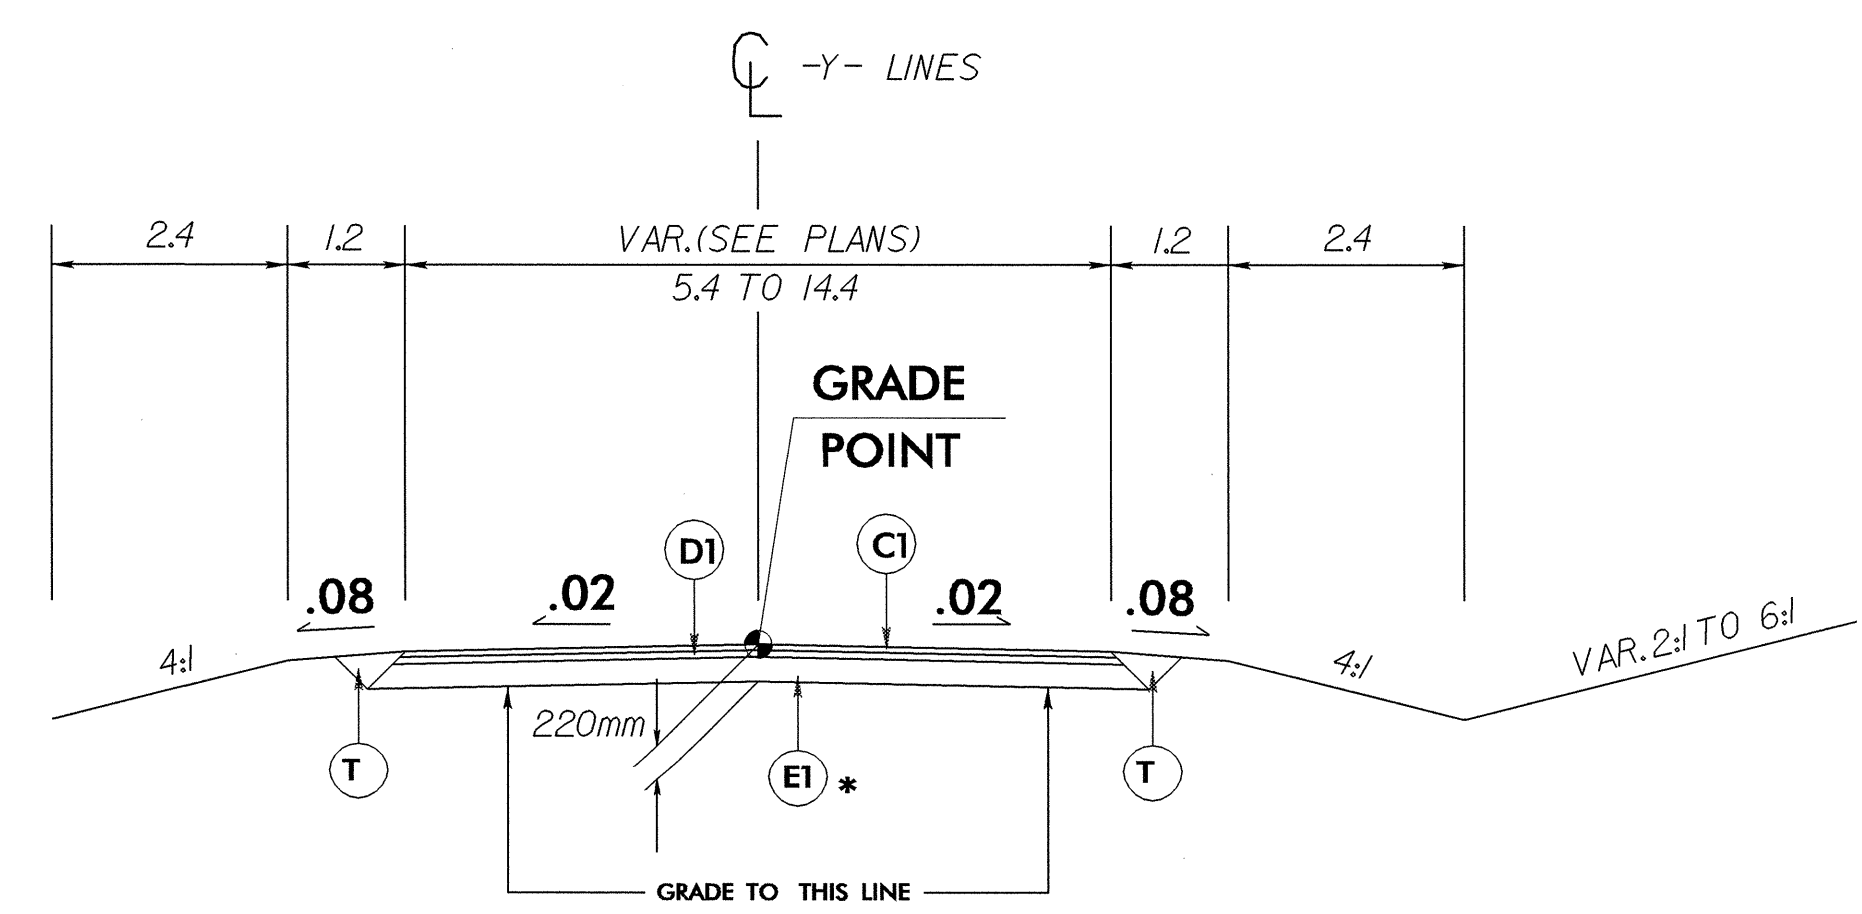

TYPICAL SECTION NO. 6

USE TYPICAL SECTION NO. 6

-Y1- STA. 10+20 - 10+77.91
 -Y2- STA. 10+90 - 11+03.72
 -Y3- STA. 10+09 TO 10+61.96
 -Y4- STA. 10+09.02 TO 10+25
 -Y7- STA. 10+09.02 TO 10+60
 * -Y8- STA. 10+20 TO 11+00
 -Y9- STA. 10+00 TO 10+22.80
 -Y10- STA. 10+00 TO 10+34.68

* FOR -Y8- USE (C1) & (E2)

PAVEMENT SCHEDULE

C1	80mm S9.5B
C2	VAR.DEPTH S9.5B
C3	40mm S9.5B
D1	65mm 119.0B
D2	VAR.DEPTH 119.0B
E1	75mm B25.0B
E2	100mm B25.0B
E3	VAR.DEPTH B25.0B
R1	750mm CONC.C & G
R2	EXIST. 750mm CONC.C & G TO BE REMOVED.
R3	EXIST. 750mm CONC.C & G TO BE RETAINED.
R4	200 mm X 450 mm CONC.CURB.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	WEDGING

02-NOV-2004 14:56
 TDGoins AT 10:28:32 P12.TYP