



OR

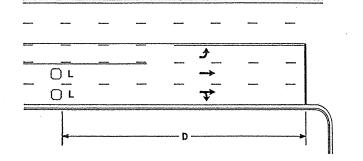

L = 6ft X	D		d Limit	Speed
Wired	(m)	ft	(km/hr)	mph
C	(75)	250	(64)	40
Wired	(90)	300	(72)	45
1	(110)	355	(80)	50
•	(130)	420	(88)	5 5

6ft (1.8m X 1.8m) in series for TS1 Controllers separately for TS2, 170, and 2070L Controllers

Volume Density Operation

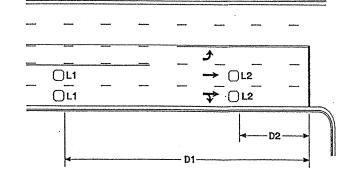

L1 = 6ft X 6ft

 $L2 = 6ft \times 6ft$

(1.8m X 1.8m)

(1.8m X 1.8m) Wired in series


Wired in series

Speed Limit			D1	1)2
mph	(km/hr)	ft	(m)	ft	(m)
40	(64)	250	(75)	80	(25)
45	(72)	300	(90)	90	(27)
50	(80)	355	(110)	100	(30)
55	(88)	420	(130)	110	(35)


"Stretch" Operation

[<35 mph (56 km/hr)]

Low Speed Detection



L = 6ft X 6ft (1.8m X 1.8m) Wired in series




PROJECT REFERENCE NO. SHEET NO.

8 OF 14 SIG 1

 $L = 6ft \times 60ft (1.8m \times 18.0m)$ Quadrupole loop, wired separately


Left Turn Lane Detection

OR

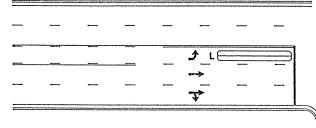

L = 6ft X 60ft (1.8m X 18.0m) Quadrupole loop or, with limited space: 6ft X 50ft (1.8m X 15.0m) Quadrupole loop or 6ft X 40ft (1.8m X 12.0m) Quadrupole loop


Presence Loop Detection

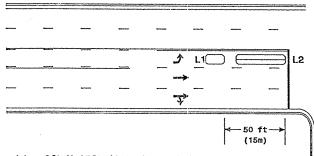

L1 = 6ft X 15ft (1.8m X 4.6m) Queue detector L2 = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop

Queue Loop Detection


Standard Turn





Right Turn Lane Detection

 $L1 = 6ft \times 60ft (1.8m \times 18.0m)$ Quadrupole loop L2 = 6ft X 6ft (1.8m X 1.8m) [Minimum] Presence loop Wired separately


L3 = 6ft X 30ft (1.8m X 9.0m) Quadrupole loop Wired in series








Side Street Detection



 $L = 6ft \times 60ft (1.8m \times 18.0m)$ Quadrupole loop Wired to separate detectors/channels

Presence Loop Placement at Stop Lines



Note: Loop may be located in advance of stop line when stop line is greater than 15' (4.5m) from edge of intersecting roadway; or, when loop detects a permitted or exclusive/permitted left turn.

Single 6' X 6' (1.8m X 1.8m) loop (wired separately):

roop (write och	our accity,
Length of Lead-in ft (m)	Number of Turns
< 250 (75)	3
250-375 (75-115)	4
375-525 (115-160)	5
> 525 (160)	6

Recommended Number of Turns

Quadrupole loops: Use 2-4-2 turns 6' X 15' (1.8m X 4.6m) Loops:

Lead-in < 150' (45 m), use 2 turns Lead-in > 150' (45 m), use 3 turns



Typical Loop Locations

PLAN DATE: JULY 2003 REVIEWED BY: PREPARED BY: P L Alexander REVIEWED BY:

SCALE N/A