



WE Design Your Tomorrow . . .

136

Transportation
Planning
Bridge/Structural
Civil/Site
Construction Observation

Project: R-5185 County: Harnett

PROJECT SPECIAL PROVISIONS
Utility Construction

Revise the *Standard Special Provisions for Roads and Structures*, July, 2006, as follows:

Division 15

Utility Owners' Contact Information:

Page 15-1, Article 1500-2 Cooperation with the Utility Owner, paragraph 2, add the following sentences:

There are multiple water and sewer lines on this project that belong to different utility companies. They are listed below with the appropriate contact person.

1. Harnett County owns a 12" water line on Sheets UC-2 through UC-6. The contact for the Harnett County Department of Public Utilities is Mr. Tim Payseur. He can be reached by telephone at (910) 893-7575, extension 3275.
2. The Town of Lillington owns an 8" gravity sewer line on Sheets UC-4 through UC-7. The contact person for the town for sewer is Mr. Randy Hazen. He can be reached by telephone at (910) 893-8086.

Before beginning work on any utility line owned by Harnett County, the Contractor shall contact Harnett County to schedule a preconstruction conference. The conference must be completed at least 2 days before beginning construction.

BREAKDOWN AND REBUILD MANHOLE:


Manholes that will require rebuilding shall have the frame and cover removed, the manhole taper removed, and necessary manhole wall removed. Reconstruction shall include rebuilding manhole wall, manhole taper, and replacing frame and cover. All work shall meet the approval of the Engineer.

Manhole construction shall also conform to the applicable requirements of Section 840 of the Standard Specifications.

Payment for removing and replacing manhole frame and cover, removing and rebuilding manhole taper and removing and rebuilding manhole wall will be based on a unit price for each manhole.

The quantity of sewer manholes rebuilt and accepted will be measured and paid for at the contract unit price each for "Break Down and Rebuild Manhole". Such price and payments will be full compensation for all labor, materials, breaking down manhole, new manhole construction, steps, excavation, backfilling, and incidentals necessary to complete the work as required.

Pay Item	Pay Unit
Break Down and Rebuild Manhole	Each

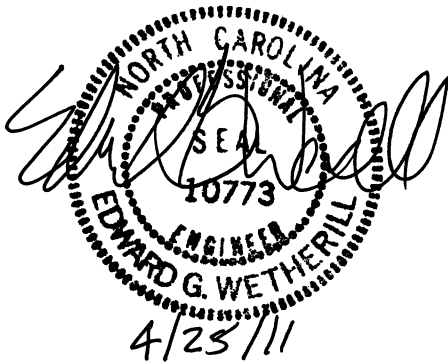



WE Design Your Tomorrow . . .

138

Transportation
Planning
Bridge/Structural
Civil/Site
Construction Observation

Project: R-5185 County: Harnett

PROJECT SPECIAL PROVISIONS
Utilities by Others

GENERAL:

The following utility companies have facilities that will be in conflict with the construction of this project.

- A) **Progress Energy Carolinas, Inc.(Power/Distribution)**
J. B. Jones (919) 481-6153
- B) **Time Warner Cable (Cable TV)**
Jack Crabb (910) 401-5034
- C) **CenturyLink (Telephone)**
Kevin Godwin (910) 366-2142
- D) **Piedmont Natural Gas (Gas)**
Jimmie Wood (919) 920-7759

The conflicting facilities of these concerns will be adjusted prior to the date of availability, unless otherwise noted and are therefore listed in these special provisions for the benefit of the Contractor. All utility work listed herein will be done by the utility owner. All utilities are shown on the plans from the best available information.

The Contractor's attention is directed to Article 105-8 of the NCDOT "Standard Specifications for Roads and Structures" dated January 2006.

Utilities Requiring Adjustments:

- A) **Progress Energy Carolinas, Inc. (Power/Distribution)**
 - 1. A new aerial distribution power pole line, with cable TV attached, will be installed further left and right of Line-L- between Sta.14+95 and Sta.57+25. See Utilities By Others Plans for details.
- B) **Time Warner Cable (Cable TV)**
 - 1. Time Warner Cable is attached to Progress Energy Power poles and will be relocated with Progress Energy Power. Time Warner requires 30 (thirty) days notice prior to Progress Energy completing their work and 10 (ten) days to complete their work. See Utilities By Others Plans for details.



WE Design Your Tomorrow . . .

139

Transportation
Planning
Bridge/Structural
Civil/Site
Construction Observation

C) CenturyLink (Buried Telephone and Fiber Optic)

1. CenturyLink has existing buried telephone cable and fiber optic throughout the project that will be relocated. See Utilities By Others Plans for details.

D) Piedmont Natural Gas

1. New buried Piedmont Natural Gas facilities will be relocated further left of Line-L- between Sta.31+00 and Sta.57+40. Piedmont Natural Gas relocations will be coordinated with the installation of proposed water lines and with proposed drainage. Piedmont Natural Gas will need 2 (two) weeks notice and 1 (one) week to complete their work at each site. See Utilities By Others Plans for details.