


PAVEMENT SCHEDULE	
A	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
B	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
C	SHOULDER RECONSTRUCTION


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
 * MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.

12CR.10181.2 12CR.10551.2
 12CR.20181.3 12CR.305521.2
 12CR.301805.1
 12CR.301808.3
 12CR.301816.2
 12CR.301822.1
 12CR.301825.2
 12CR.301828.1


PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
	7	10
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION

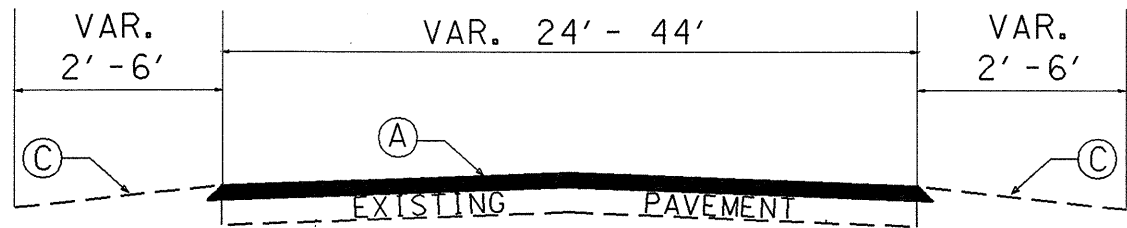


TYPICAL SECTION NO. 1

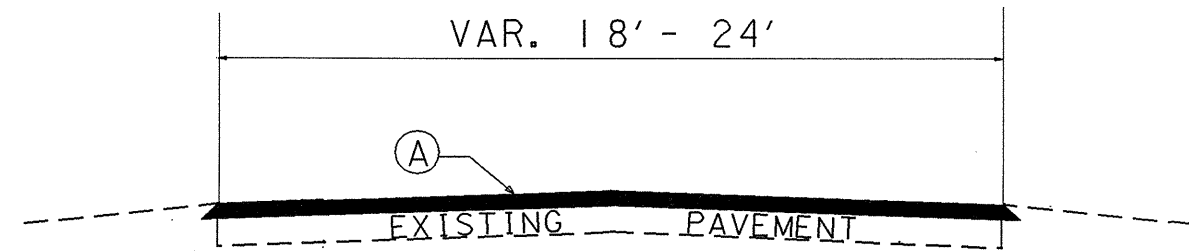


TYPICAL SECTION NO. 2

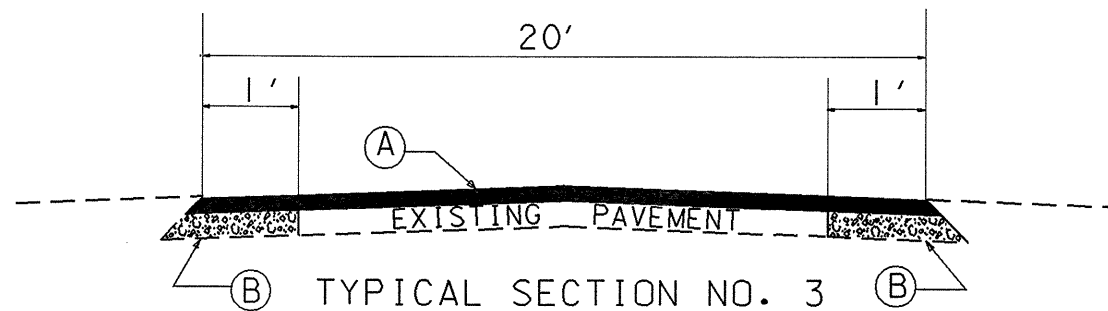


TYPICAL SECTION NO. 3

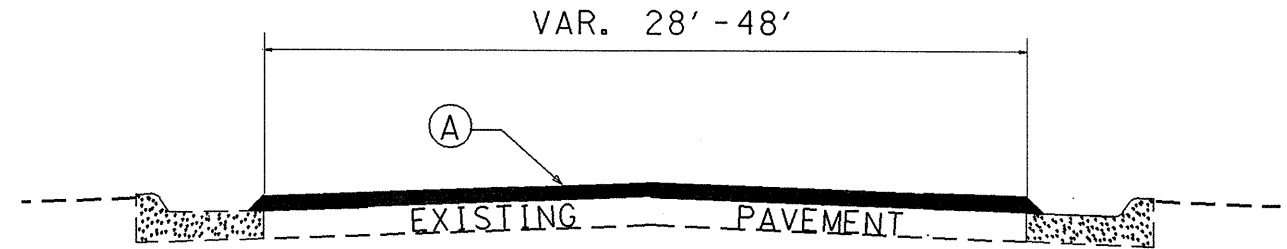


TYPICAL SECTION NO. 4

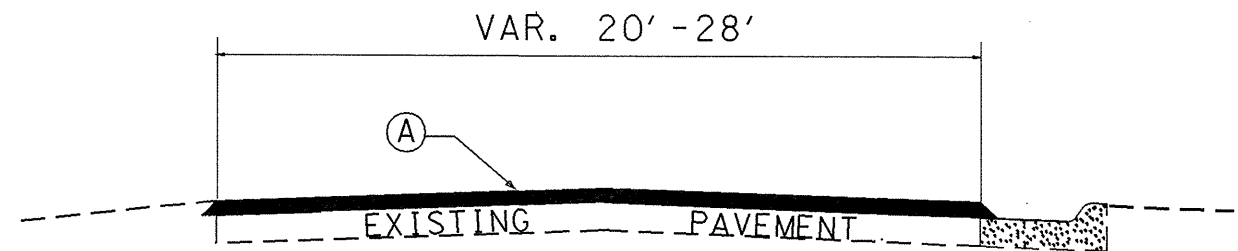

TYPICAL SECTION NO. 5

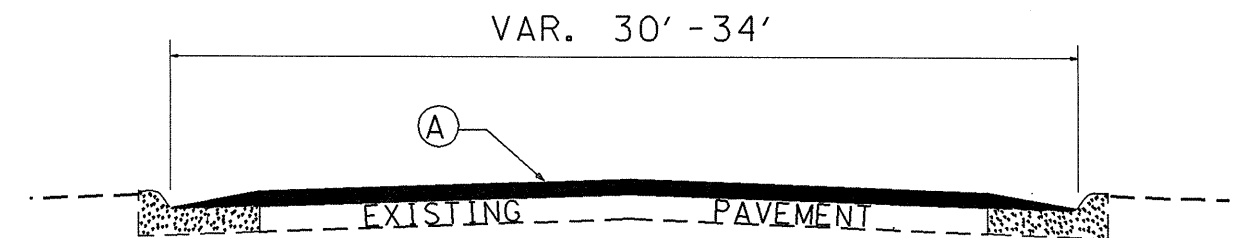

TYPICAL SECTION NO. 6

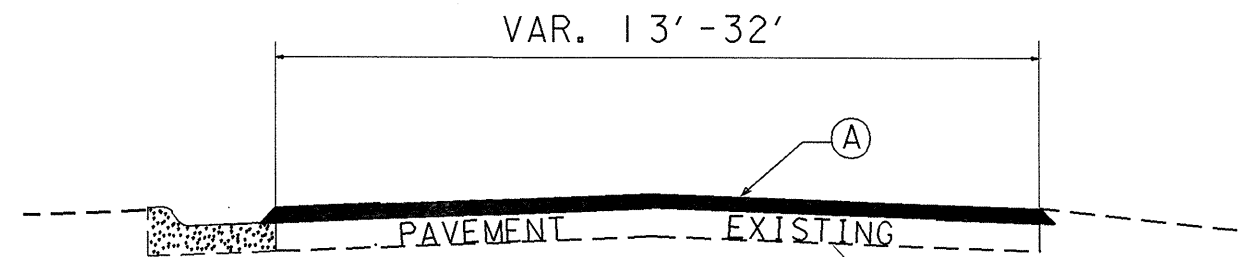

TYPICAL SECTION NO. 7