
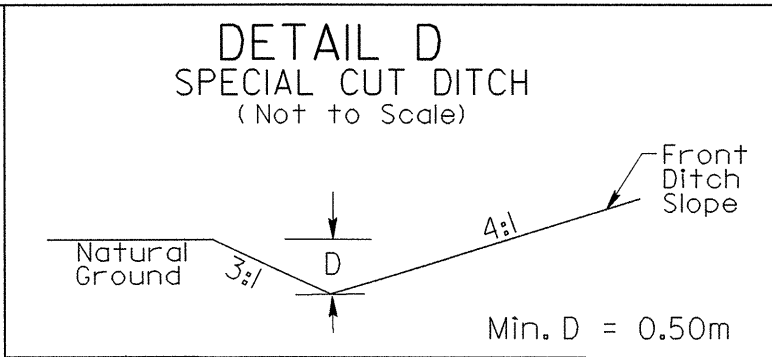
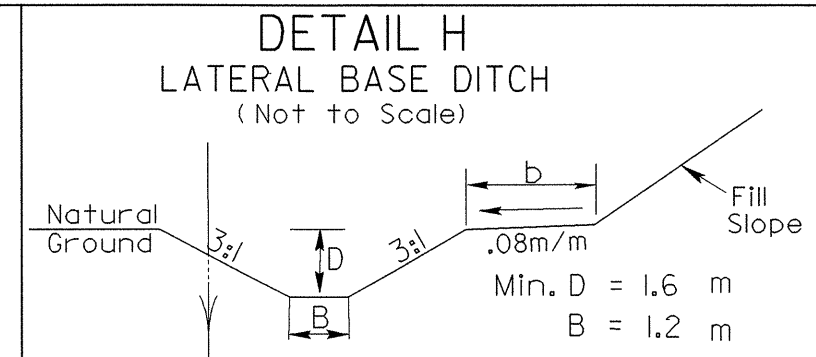


UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK
SHOWN ON THIS SHEET WILL
BE DONE BY OTHERS

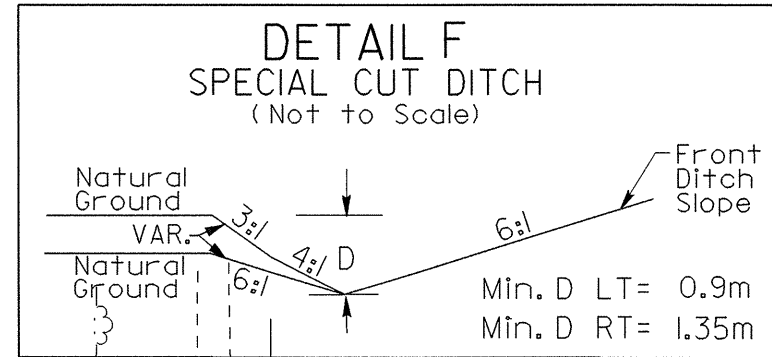

STA 185+40 TO STA 187+12 -L- LT
STA 187+58 TO STA 189+00 -L- LT
STA 185+40 TO STA 187+12 -L- RT

STA 188+30 TO STA 189+00 -L- RT

STA 10+22 TO STA 11+00 -Y3- RT


LATERAL V' DITCH
STA 187+58 TO 191+59 -L- LT
Q10 = 0.33 cms
SLOPE = 0.0018 m/m
DEPTH OF FLOW = 0.40m
VELOCITY = 0.47 m/s

MATCHLINE -L- STA. 185 + 40.000
SEE SHEET UO-10

MATCHLINE -L- STA. 185 + 40.000
SEE SHEET UO-10

MATCHLINE -L- STA. 185 + 40.000
SEE SHEET UO-10

- NOTES:
1. DRIVES IN SHOULDER SECTION, RADIUS = 1.5m @ E.O.P. (UNLESS OTHERWISE NOTED ON PLANS).
 2. OFFSET FROM R/W TO 200x450 CURB = 0.0m (TYP.).
 3. OFFSET FROM E.O.P. TO 200x450 CURB = 1.8m (TYP.).
 4. DO NOT DISTURB UNDERGROUND STORAGE TANK ON PARCEL 47.

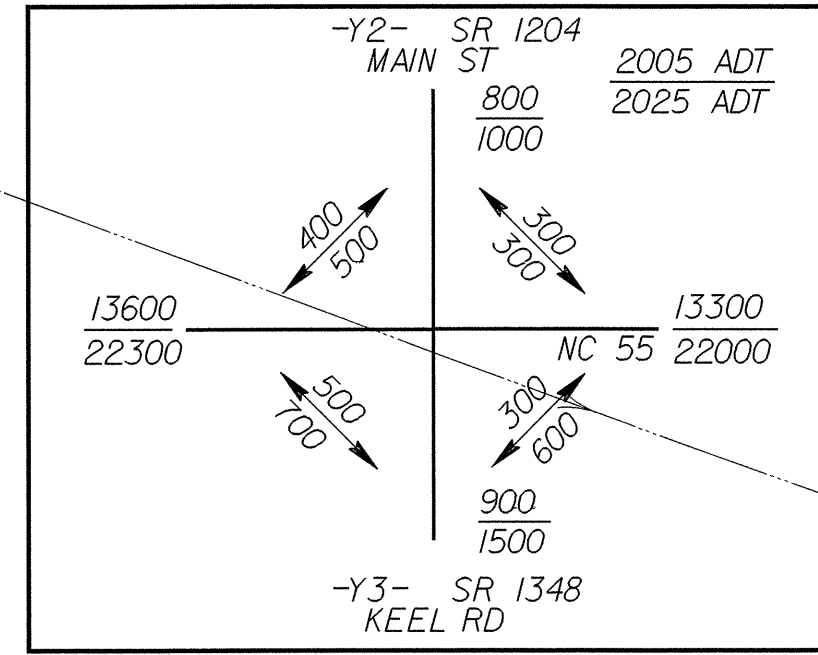

SEE SHEET NO. 33 FOR -L- PROFILE
SEE SHEET NO. 41 FOR -Y2- PROFILE
SEE SHEET NO. 41 FOR -Y3- PROFILE
SEE SHEET NO. 2-H FOR -Y2- & -Y3- INTERSECTION DETAILS.