


**Project Special Provisions
Structures and Culverts**

Table of Contents

| | Page # |
|---|-------------------|
| Falsework and Formwork (4-1-11) | 1 |
| Submittal of Working Drawings (4-1-11) | 7 |
| Crane Safety (8-15-05) | 14 |
| Grout for Structures (7-12-07) | 14 |
| Curing Concrete (6-12-09) | 17 |
| Soldier Pile Retaining Walls (9-21-10) | 18 |
| Precast Reinforced Box Culvert at Sta. 86+21.00 -L- (SPECIAL) | 28 |
| Cast-In-Place Simulated Rock Form Liner Finish (SPECIAL) | 34 |

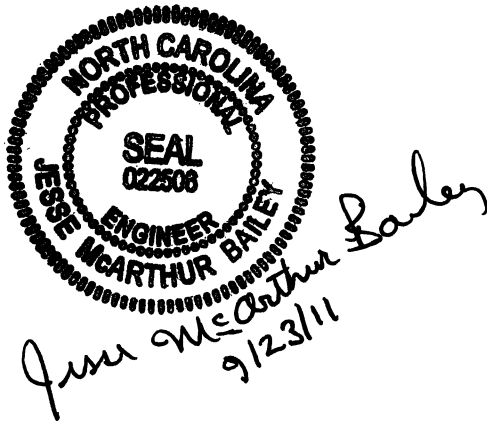

Jesse McArthur Bailey
9/23/11

PROJECT SPECIAL PROVISIONS
STRUCTURES AND CULVERTS

PROJECT U-3812

ASHE COUNTY

FALSEWORK AND FORMWORK

(4-1-11)

1.0 DESCRIPTION

Use this Special Provision as a guide to develop temporary works submittals required by the Standard Specifications or other provisions; no additional submittals are required herein. Such temporary works include, but are not limited to, falsework and formwork.

Falsework is any temporary construction used to support the permanent structure until it becomes self-supporting. Formwork is the temporary structure or mold used to retain plastic or fluid concrete in its designated shape until it hardens. Access scaffolding is a temporary structure that functions as a work platform that supports construction personnel, materials, and tools, but is not intended to support the structure. Scaffolding systems that are used to temporarily support permanent structures (as opposed to functioning as work platforms) are considered to be falsework under the definitions given. Shoring is a component of falsework such as horizontal, vertical, or inclined support members. Where the term "temporary works" is used, it includes all of the temporary facilities used in bridge construction that do not become part of the permanent structure.

Design and construct safe and adequate temporary works that will support all loads imposed and provide the necessary rigidity to achieve the lines and grades shown on the plans in the final structure.

2.0 MATERIALS

Select materials suitable for temporary works; however, select materials that also ensure the safety and quality required by the design assumptions. The Engineer has authority to reject material on the basis of its condition, inappropriate use, safety, or nonconformance with the plans. Clearly identify allowable loads or stresses for all materials or manufactured devices on the plans. Revise the plan and notify the Engineer if any change to materials or material strengths is required.

3.0 DESIGN REQUIREMENTS**A. Working Drawings**

Provide working drawings for items as specified in the contract, or as required by the Engineer, with design calculations and supporting data in sufficient detail to permit a structural and safety review of the proposed design of the temporary work.

On the drawings, show all information necessary to allow the design of any component to be checked independently as determined by the Engineer.

When concrete placement is involved, include data such as the drawings of proposed sequence, rate of placement, direction of placement, and location of all construction joints. Submit the number of copies as called for by the contract.

When required, have the drawings and calculations prepared under the guidance of, and sealed by, a North Carolina Registered Professional Engineer who is knowledgeable in temporary works design.

If requested by the Engineer, submit with the working drawings manufacturer's catalog data listing the weight of all construction equipment that will be supported on the temporary work. Show anticipated total settlements and/or deflections of falsework and forms on the working drawings. Include falsework footing settlements, joint take-up, and deflection of beams or girders. Falsework hangers that support concentrated loads and are installed at the edge of thin top flange concrete girders (such as bulb tee girders) shall be spaced so as not to exceed 75% of the manufacturer's stated safe working load. Use of dual leg hangers (such as Meadow Burke HF-42 and HF-43) are not allowed on concrete girders with thin top flanges. Design the falsework and forms supporting deck slabs and overhangs on girder bridges so that there will be no differential settlement between the girders and the deck forms during placement of deck concrete.

When staged construction of the bridge deck is required, detail falsework and forms for screed and fluid concrete loads to be independent of any previous deck pour components when the mid-span girder deflection due to deck weight is greater than $\frac{3}{4}$ ".

Note on the working drawings any anchorages, connectors, inserts, steel sleeves or other such devices used as part of the falsework or formwork that remains in the permanent structure. If the plan notes indicate that the structure contains the necessary corrosion protection required for a Corrosive Site, epoxy coat, galvanize or metalize these devices. Electroplating will not be allowed. Any coating required by the Engineer will be considered incidental to the various pay items requiring temporary works.

Design falsework and formwork requiring submittals in accordance with the 1995 AASHTO *Guide Design Specifications for Bridge Temporary Works* except as noted herein.

1. Wind Loads

Table 2.2 of Article 2.2.5.1 is modified to include wind velocities up to 110 mph (177 km/hr). In addition, Table 2.2A is included to provide the maximum wind speeds by county in North Carolina.

Table 2.2 - Wind Pressure Values

| Height Zone feet (m) above ground | Pressure, lb/ft ² (kPa) for Indicated Wind Velocity, mph (km/hr) | | | | |
|--------------------------------------|--|---------------|---------------|----------------|----------------|
| | 70 (112.7) | 80 (128.7) | 90 (144.8) | 100 (160.9) | 110 (177.0) |
| 0 to 30 (0 to 9.1) | 15 (0.72) | 20 (0.96) | 25 (1.20) | 30 (1.44) | 35 (1.68) |
| 30 to 50 (9.1 to 15.2) | 20 (0.96) | 25 (1.20) | 30 (1.44) | 35 (1.68) | 40 (1.92) |
| 50 to 100 (15.2 to 30.5) | 25 (1.20) | 30 (1.44) | 35 (1.68) | 40 (1.92) | 45 (2.15) |
| over 100 (30.5) | 30 (1.44) | 35 (1.68) | 40 (1.92) | 45 (2.15) | 50 (2.39) |

2. Time of Removal

The following requirements replace those of Article 3.4.8.2.

Do not remove forms until the concrete has attained strengths required in Article 420-16 of the Standard Specifications and these Special Provisions.

Do not remove forms until the concrete has sufficient strength to prevent damage to the surface.

Table 2.2A - Steady State Maximum Wind Speeds by Counties in North Carolina

| COUNTY | 25 YR (mph) (km/hr) | COUNTY | 25 YR (mph) (km/hr) | COUNTY | 25 YR (mph) (km/hr) |
|------------|---------------------------|-------------|---------------------------|--------------|---------------------------|
| Alamance | 70 (112.7) | Franklin | 70 (112.7) | Pamlico | 100 (160.9) |
| Alexander | 70 (112.7) | Gaston | 70 (112.7) | Pasquotank | 100 (160.9) |
| Alleghany | 70 (112.7) | Gates | 90 (144.8) | Pender | 100 (160.9) |
| Anson | 70 (112.7) | Graham | 80 (128.7) | Perquimans | 100 (160.9) |
| Ashe | 70 (112.7) | Granville | 70 (112.7) | Person | 70 (112.7) |
| Avery | 70 (112.7) | Greene | 80 (128.7) | Pitt | 90 (144.8) |
| Beaufort | 100 (160.9) | Guilford | 70 (112.7) | Polk | 80 (128.7) |
| Bertie | 90 (144.8) | Halifax | 80 (128.7) | Randolph | 70 (112.7) |
| Bladen | 90 (144.8) | Harnett | 70 (112.7) | Richmond | 70 (112.7) |
| Brunswick | 100 (160.9) | Haywood | 80 (128.7) | Robeson | 80 (128.7) |
| Buncombe | 80 (128.7) | Henderson | 80 (128.7) | Rockingham | 70 (112.7) |
| Burke | 70 (112.7) | Hertford | 90 (144.8) | Rowan | 70 (112.7) |
| Cabarrus | 70 (112.7) | Hoke | 70 (112.7) | Rutherford | 70 (112.7) |
| Caldwell | 70 (112.7) | Hyde | 110 (177.0) | Sampson | 90 (144.8) |
| Camden | 100 (160.9) | Iredell | 70 (112.7) | Scotland | 70 (112.7) |
| Carteret | 110 (177.0) | Jackson | 80 (128.7) | Stanley | 70 (112.7) |
| Caswell | 70 (112.7) | Johnston | 80 (128.7) | Stokes | 70 (112.7) |
| Catawba | 70 (112.7) | Jones | 100 (160.9) | Surry | 70 (112.7) |
| Cherokee | 80 (128.7) | Lee | 70 (112.7) | Swain | 80 (128.7) |
| Chatham | 70 (112.7) | Lenoir | 90 (144.8) | Transylvania | 80 (128.7) |
| Chowan | 90 (144.8) | Lincoln | 70 (112.7) | Tyrell | 100 (160.9) |
| Clay | 80 (128.7) | Macon | 80 (128.7) | Union | 70 (112.7) |
| Cleveland | 70 (112.7) | Madison | 80 (128.7) | Vance | 70 (112.7) |
| Columbus | 90 (144.8) | Martin | 90 (144.8) | Wake | 70 (112.7) |
| Craven | 100 (160.9) | McDowell | 70 (112.7) | Warren | 70 (112.7) |
| Cumberland | 80 (128.7) | Mecklenburg | 70 (112.7) | Washington | 100 (160.9) |
| Currituck | 100 (160.9) | Mitchell | 70 (112.7) | Watauga | 70 (112.7) |
| Dare | 110 (177.0) | Montgomery | 70(112.7) | Wayne | 80 (128.7) |
| Davidson | 70 (112.7) | Moore | 70 (112.7) | Wilkes | 70 (112.7) |
| Davie | 70 (112.7) | Nash | 80 (128.7) | Wilson | 80 (128.7) |
| Duplin | 90 (144.8) | New Hanover | 100 (160.9) | Yadkin | 70 (112.7) |
| Durham | 70 (112.7) | Northampton | 80 (128.7) | Yancey | 70 (112.7) |
| Edgecombe | 80 (128.7) | Onslow | 100 (160.9) | | |
| Forsyth | 70 (112.7) | Orange | 70 (112.7) | | |

B. Review and Approval

The Engineer is responsible for the review and approval of temporary works' drawings.

Submit the working drawings sufficiently in advance of proposed use to allow for their review, revision (if needed), and approval without delay to the work.

The time period for review of the working drawings does not begin until complete drawings and design calculations, when required, are received by the Engineer.

Do not start construction of any temporary work for which working drawings are required until the drawings have been approved. Such approval does not relieve the Contractor of the responsibility for the accuracy and adequacy of the working drawings.

4.0 CONSTRUCTION REQUIREMENTS

All requirements of Section 420 of the Standard Specifications apply.

Construct temporary works in conformance with the approved working drawings. Ensure that the quality of materials and workmanship employed is consistent with that assumed in the design of the temporary works. Do not weld falsework members to any portion of the permanent structure unless approved. Show any welding to the permanent structure on the approved construction drawings.

Provide tell-tales attached to the forms and extending to the ground, or other means, for accurate measurement of falsework settlement. Make sure that the anticipated compressive settlement and/or deflection of falsework does not exceed 1 inch (25 mm). For cast-in-place concrete structures, make sure that the calculated deflection of falsework flexural members does not exceed 1/240 of their span regardless of whether or not the deflection is compensated by camber strips.

A. Maintenance and Inspection

Inspect and maintain the temporary work in an acceptable condition throughout the period of its use. Certify that the manufactured devices have been maintained in a condition to allow them to safely carry their rated loads. Clearly mark each piece so that its capacity can be readily determined at the job site.

Perform an in-depth inspection of an applicable portion(s) of the temporary works, in the presence of the Engineer, not more than 24 hours prior to the beginning of each concrete placement. Inspect other temporary works at least once a month to ensure that they are functioning properly. Have a North Carolina Registered Professional Engineer inspect the cofferdams, shoring, sheathing, support of excavation structures, and support systems for load tests prior to loading.

B. Foundations

Determine the safe bearing capacity of the foundation material on which the supports for temporary works rest. If required by the Engineer, conduct load tests to verify proposed bearing capacity values that are marginal or in other high-risk situations.

The use of the foundation support values shown on the contract plans of the permanent structure is permitted if the foundations are on the same level and on the same soil as those of the permanent structure.

Allow for adequate site drainage or soil protection to prevent soil saturation and washout of the soil supporting the temporary works supports.

If piles are used, the estimation of capacities and later confirmation during construction using standard procedures based on the driving characteristics of the pile is permitted. If preferred, use load tests to confirm the estimated capacities; or, if required by the Engineer conduct load tests to verify bearing capacity values that are marginal or in other high risk situations.

The Engineer reviews and approves the proposed pile and soil bearing capacities.

5.0 REMOVAL

Unless otherwise permitted, remove and keep all temporary works upon completion of the work. Do not disturb or otherwise damage the finished work.

Remove temporary works in conformance with the contract documents. Remove them in such a manner as to permit the structure to uniformly and gradually take the stresses due to its own weight.

6.0 METHOD OF MEASUREMENT

Unless otherwise specified, temporary works will not be directly measured.

7.0 BASIS OF PAYMENT

Payment at the contract unit prices for the various pay items requiring temporary works will be full compensation for the above falsework and formwork.

SUBMITTAL OF WORKING DRAWINGS**(4-1-11)****1.0 GENERAL**

Submit working drawings in accordance with Article 105-2 of the *Standard Specifications* and this provision. For this provision, “submittals” refers to only those listed in this provision. The list of submittals contained herein does not represent a list of required submittals for the project. Submittals are only necessary for those items as required by the contract. Make submittals that are not specifically noted in this provision directly to the Resident Engineer. Either the Structure Design Unit or the Geotechnical Engineering Unit or both units will jointly review submittals.

If a submittal contains variations from plan details or specifications or significantly affects project cost, field construction or operations, discuss the submittal with and submit all copies to the Resident Engineer. State the reason for the proposed variation in the submittal. To minimize review time, make sure all submittals are complete when initially submitted. Provide a contact name and information with each submittal. Direct any questions regarding submittal requirements to the Resident Engineer, Structure Design Unit contacts or the Geotechnical Engineering Unit contacts noted below.

In order to facilitate in-plant inspection by NCDOT and approval of working drawings, provide the name, address and telephone number of the facility where fabrication will actually be done if different than shown on the title block of the submitted working drawings. This includes, but is not limited to, precast concrete items, prestressed concrete items and fabricated steel or aluminum items.

2.0 ADDRESSES AND CONTACTS

For submittals to the Structure Design Unit, use the following addresses:

Via US mail:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1581 Mail Service Center
Raleigh, NC 27699-1581

Attention: Mr. P. D. Lambert, P. E.

Via other delivery service:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1000 Birch Ridge Drive
Raleigh, NC 27610

Attention: Mr. P. D. Lambert, P. E.

Submittals may also be made via email.

Send submittals to:

plambert@ncdot.gov (Paul Lambert)

Send an additional e-copy of the submittal to the following address:

jgaither@ncdot.gov (James Gaither)

For submittals to the Geotechnical Engineering Unit, use the following addresses:

For projects in Divisions 1-7, use the following Eastern Regional Office address:

Via US mail:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
1570 Mail Service Center
Raleigh, NC 27699-1570

Via other delivery service:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
3301 Jones Sausage Road, Suite 100
Garner, NC 27529

For projects in Divisions 8-14, use the following Western Regional Office address:

Via US mail:

Mr. John Pilipchuk, L. G., P. E.
Western Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

Via other delivery service:

Mr. John Pilipchuk, L. G., P. E.
Western Region Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

The status of the review of structure-related submittals sent to the Structure Design Unit can be viewed from the Unit's web site, via the "Contractor Submittal" link.

Direct any questions concerning submittal review status, review comments or drawing markups to the following contacts:

Primary Structures Contact:

Paul Lambert
(919) 250 – 4041
(919) 250 – 4082 facsimile
plambert@ncdot.gov

Secondary Structures Contacts:

James Gaither (919) 250 – 4042
David Stark (919) 250 – 4044

Eastern Regional Geotechnical Contact (Divisions 1-7):

K. J. Kim
(919) 662 – 4710
(919) 662 – 3095 facsimile
kkim@ncdot.gov

Western Regional Geotechnical Contact (Divisions 8-14):

John Pilipchuk
(704) 455 – 8902
(704) 455 – 8912 facsimile
jpilipchuk@ncdot.gov

3.0 SUBMITTAL COPIES

Furnish one complete copy of each submittal, including all attachments, to the Resident Engineer. At the same time, submit the number of hard copies shown below of the same complete submittal directly to the Structure Design Unit and/or the Geotechnical Engineering Unit.

The first table below covers “Structure Submittals”. The Resident Engineer will receive review comments and drawing markups for these submittals from the Structure Design Unit. The second table in this section covers “Geotechnical Submittals”. The Resident Engineer will receive review comments and drawing markups for these submittals from the Geotechnical Engineering Unit.

Unless otherwise required, submit one set of supporting calculations to either the Structure Design Unit or the Geotechnical Engineering Unit unless both units require submittal copies in which case submit a set of supporting calculations to each unit. Provide additional copies of any submittal as directed.

STRUCTURE SUBMITTALS

| Submittal | Copies Required by Structure Design Unit | Copies Required by Geotechnical Engineering Unit | Contract Reference Requiring Submittal ¹ |
|--|---|---|---|
| Arch Culvert Falsework | 5 | 0 | Plan Note, SN Sheet & "Falsework and Formwork" |
| Box Culvert Falsework ⁷ | 5 | 0 | Plan Note, SN Sheet & "Falsework and Formwork" |
| Cofferdams | 6 | 2 | Article 410-4 |
| Evazote Joint Seals ⁶ | 9 | 0 | "Evazote Joint Seals" |
| Expansion Joint Seals (hold down plate type with base angle) | 9 | 0 | "Expansion Joint Seals" |
| Expansion Joint Seals (modular) | 2, then 9 | 0 | "Modular Expansion Joint Seals" |
| Expansion Joint Seals (strip seals) | 9 | 0 | "Strip Seals" |
| Falsework & Forms ² (substructure) | 8 | 0 | Article 420-3 & "Falsework and Formwork" |
| Falsework & Forms (superstructure) | 8 | 0 | Article 420-3 & "Falsework and Formwork" |
| Girder Erection over Railroad | 5 | 0 | Railroad Provisions |
| Maintenance and Protection of Traffic Beneath Proposed Structure | 8 | 0 | "Maintenance and Protection of Traffic Beneath Proposed Structure at Station ____" |
| Metal Bridge Railing | 8 | 0 | Plan Note |
| Metal Stay-in-Place Forms | 8 | 0 | Article 420-3 |

| | | | |
|--|---------------------------|---|--|
| Metalwork for Elastomeric Bearings ^{4,5} | 7 | 0 | Article 1072-10 |
| Miscellaneous Metalwork ^{4,5} | 7 | 0 | Article 1072-10 |
| Optional Disc Bearings ⁴ | 8 | 0 | “Optional Disc Bearings” |
| Overhead Signs | 13 | 0 | Article 903-3(C) & Applicable Provisions |
| Placement of Equipment on Structures (cranes, etc.) | 7 | 0 | Article 420-20 |
| Pot Bearings ⁴ | 8 | 0 | “Pot Bearings” |
| Precast Concrete Box Culverts | 2, then 1 reproducible | 0 | “Optional Precast Reinforced Concrete Box Culvert at Station ____” |
| Precast Retaining Wall Panels | 10 | 1 | Article 1077-2 |
| Prestressed Concrete Cored Slab (detensioning sequences) ³ | 6 | 0 | Article 1078-11 |
| Prestressed Concrete Deck Panels | 6 and 1 reproducible | 0 | Article 420-3 |
| Prestressed Concrete Girder (strand elongation and detensioning sequences) | 6 | 0 | Articles 1078-8 and 1078-11 |
| Removal of Existing Structure over Railroad | 5 | 0 | Railroad Provisions |
| Revised Bridge Deck Plans (adaptation to prestressed deck panels) | 2, then 1 reproducible | 0 | Article 420-3 |
| Revised Bridge Deck Plans (adaptation to modular expansion joint seals) | 2, then 1 reproducible | 0 | “Modular Expansion Joint Seals” |
| Sound Barrier Wall Casting Plans | 10 | 0 | Article 1077-2 & “Sound Barrier Wall” |
| Sound Barrier Wall Steel Fabrication Plans ⁵ | 7 | 0 | Article 1072-10 & “Sound Barrier Wall” |

| | | | |
|-------------------------------------|-----------|---|---|
| Structural Steel ⁴ | 2, then 7 | 0 | Article 1072-10 |
| Temporary Detour Structures | 10 | 2 | Article 400-3 & “Construction, Maintenance and Removal of Temporary Structure at Station _____” |
| TFE Expansion Bearings ⁴ | 8 | 0 | Article 1072-10 |

FOOTNOTES

1. References are provided to help locate the part of the contract where the submittals are required. References in quotes refer to the provision by that name. Articles and subarticles refer to the *Standard Specifications*.
2. Submittals for these items are necessary only when required by a note on plans.
3. Submittals for these items may not be required. A list of pre-approved sequences is available from the producer or the Materials & Tests Unit.
4. The fabricator may submit these items directly to the Structure Design Unit.
5. The two sets of preliminary submittals required by Article 1072-10 of the *Standard Specifications* are not required for these items.
6. Submittals for Fabrication Drawings are not required. Submittals for Catalogue Cuts of Proposed Material are required. See Section 5.A of the referenced provision.
7. Submittals are necessary only when the top slab thickness is 18” or greater.

GEOTECHNICAL SUBMITTALS

| Submittal | Copies Required by Geotechnical Engineering Unit | Copies Required by Structure Design Unit | Contract Reference Requiring Submittal¹ |
|---|---|---|--|
| Drilled Pier Construction Plans ² | 1 | 0 | “Drilled Piers” |
| Crosshole Sonic Logging (CSL) Reports ² | 1 | 0 | “Crosshole Sonic Logging” & “Drilled Piers” |
| Pile Driving Equipment Data Form ^{2,3} | 1 | 0 | Article 450-5 & “Piles” |
| Pile Driving Analyzer (PDA) Reports ² | 1 | 0 | “Pile Driving Analyzer” & “Piles” |
| Retaining Walls ⁴ | 8 | 2 | Applicable Provisions |
| Contractor Designed Shoring ⁴ | 7 | 2 | “Temporary Shoring”, “Anchored Temporary Shoring” & “Temporary Soil Nail Walls” |

FOOTNOTES

- References are provided to help locate the part of the contract where the submittals are required. References in quotes refer to the provision by that name. Articles refer to the *Standard Specifications*.
- Submit one hard copy of submittal to the Resident or Bridge Maintenance Engineer. Submit a second copy of submittal electronically (PDF via email) or by facsimile, US mail or other delivery service to the Geotechnical Engineering Unit. Electronic submission is preferred.
- Download Pile Driving Equipment Data Form from the following link:
www.ncdot.org/doh/preconstruct/highway/geotech/formdet/
See second page of form for submittal instructions.
- Electronic copies of submittal are required. See referenced provision.

CRANE SAFETY**(8-15-05)**

Comply with the manufacturer specifications and limitations applicable to the operation of any and all cranes and derricks. Prime contractors, sub-contractors, and fully operated rental companies shall comply with the current Occupational Safety and Health Administration regulations (OSHA).

Submit all items listed below to the Engineer prior to beginning crane operations involving critical lifts. A critical lift is defined as any lift that exceeds 75 percent of the manufacturer's crane chart capacity for the radius at which the load will be lifted or requires the use of more than one crane. Changes in personnel or equipment must be reported to the Engineer and all applicable items listed below must be updated and submitted prior to continuing with crane operations.

CRANE SAFETY SUBMITTAL LIST

- A. **Competent Person:** Provide the name and qualifications of the "Competent Person" responsible for crane safety and lifting operations. The named competent person will have the responsibility and authority to stop any work activity due to safety concerns.
- B. **Riggers:** Provide the qualifications and experience of the persons responsible for rigging operations. Qualifications and experience should include, but not be limited to, weight calculations, center of gravity determinations, selection and inspection of sling and rigging equipment, and safe rigging practices.
- C. **Crane Inspections:** Inspection records for all cranes shall be current and readily accessible for review upon request.
- D. **Certifications:** By July 1, 2006, crane operators performing critical lifts shall be certified by NC CCO (National Commission for the Certification of Crane Operators), or satisfactorily complete the Carolinas AGC's Professional Crane Operator's Proficiency Program. Other approved nationally accredited programs will be considered upon request. All crane operators shall also have a current CDL medical card. Submit a list of anticipated critical lifts and corresponding crane operator(s). Include current certification for the type of crane operated (small hydraulic, large hydraulic, small lattice, large lattice) and medical evaluations for each operator.

GROUT FOR STRUCTURES**(7-12-07)****1.0 DESCRIPTION**

This special provision addresses grout for use in structures, including continuous flight auger (CFA) piles, micropiles, soil nail and anchored retaining walls and backfilling crosshole sonic logging (CSL) tubes or grout pockets, shear keys, dowel holes and recesses for cored slabs and box beams. This provision does not apply to grout placed in post-tensioning ducts for bridge beams, girders, or decks. Provide grout composed of portland

cement, water and at the Contractor's option, fine aggregate and/or pozzolan. If necessary, use set controlling admixtures. Proportion, mix and place grout in accordance with the plans, the applicable section of the *Standard Specifications* or special provision for the application and this provision.

2.0 MATERIALS

Refer to Division 10 of the *Standard Specifications*:

| Item | Article |
|--------------------------------------|---------|
| Portland Cement | 1024-1 |
| Water | 1024-4 |
| Fine Aggregate | 1014-1 |
| Fly Ash | 1024-5 |
| Ground Granulated Blast Furnace Slag | 1024-6 |
| Admixtures | 1024-3 |

At the Contractor's option, use an approved packaged grout in lieu of the materials above with the exception of the water. Contact the Materials and Tests (M&T) Unit for a list of approved packaged grouts. Consult the manufacturer to determine if the packaged grout selected is suitable for the application and meets the compressive strength and shrinkage requirements.

3.0 REQUIREMENTS

Unless required elsewhere in the Contract, provide non-metallic grout with minimum compressive strengths as follows:

| Property | Requirement |
|--------------------------------|---------------------|
| Compressive Strength @ 3 days | 2500 psi (17.2 MPa) |
| Compressive Strength @ 28 days | 4500 psi (31.0 MPa) |

For applications other than micropiles, soil nails and ground anchors, use non-shrink grout with shrinkage of less than 0.15%.

When using approved packaged grout, a grout mix design submittal is not required. Submit grout mix designs in terms of saturated surface dry weights on M&T Form 312U in accordance with the applicable section of the *Standard Specifications* or special provision for the structure. Use an approved testing laboratory to determine the grout mix proportions. Adjust proportions to compensate for surface moisture contained in the aggregates at the time of mixing. Changes in the saturated surface dry mix proportions will not be permitted unless a revised grout mix design submittal is accepted.

For each grout mix design, provide laboratory test results for compressive strength, density, flow and if applicable, aggregate gradation and shrinkage. Submit compressive strength for at least 3 cube and 2 cylinder specimens at the age of 3, 7, 14 and 28 days for a total of at least 20 specimens tested. Perform laboratory tests in accordance with the following:

| Property | Test Method |
|---|---|
| Compressive Strength | AASHTO T106 and T22 |
| Density | AASHTO T133 |
| Flow for Sand Cement Grout | ASTM C939 (as modified below) |
| Flow for Neat Cement Grout (no fine aggregate) | Marsh Funnel and Cup API RP 13B-1, Section 2.2 |
| Aggregate Gradation for Sand Cement Grout | AASHTO T27 |
| Shrinkage for Non-shrink Grout | ASTM C1090 |

When testing grout for flow in accordance with ASTM C939, modify the flow cone outlet diameter from $\frac{1}{2}$ to $\frac{3}{4}$ inch (13 to 19 mm).

When grout mix designs are submitted, the Engineer will review the mix designs and notify the Contractor as to their acceptability. Do not use grout mix designs until written acceptance has been received. Acceptance of grout mix designs or use of approved packaged grouts does not relieve the Contractor of responsibility to furnish a product that meets the Contract requirements.

Upon written request from the Contractor, a grout mix design accepted and used satisfactorily on a Department project may be accepted for use on other projects.

4.0 SAMPLING AND PLACEMENT

The Engineer will determine the locations to sample grout and the number and type of samples collected for field and laboratory testing. Use API RP 13B-1 for field testing grout flow and density of neat cement grout. The compressive strength of the grout will be considered the average compressive strength test results of 3 cube or 2 cylinder specimens at 28 days.

Do not place grout if the grout temperature is less than 50°F (10°C) or more than 90°F (32°C) or if the air temperature measured at the location of the grouting operation in the shade away from artificial heat is below 40°F (4°C).

Provide grout at a rate that permits proper handling, placing and finishing in accordance with the manufacturer's recommendations unless directed otherwise by the Engineer. Use grout free of any lumps and undispersed cement. Agitate grout continuously before placement.

Control grout delivery so the interval between placing batches in the same component does not exceed 20 minutes. Place grout before the time between adding the mixing water and placing the grout exceeds that in the table below.

| ELAPSED TIME FOR PLACING GROUT (with continuous agitation) | | |
|---|--|---|
| Air or Grout Temperature Whichever is Higher | Maximum Elapsed Time | |
| | No Set Retarding Admixture Used | Set Retarding Admixture Used |
| 90°F (32°C) or above | 30 min. | 1 hr. 15 min. |
| 80°F (27°C) through 89°F (31°C) | 45 min. | 1 hr. 30 min. |
| 79°F (26°C) or below | 60 min. | 1 hr. 45 min. |

5.0 MISCELLANEOUS

Comply with Articles 1000-9 through 1000-12 of the *Standard Specifications* to the extent applicable for grout in lieu of concrete.

CURING CONCRETE

(6-12-09)

The 2006 Standard Specifications shall be revised as follows:

Replace the first paragraph of Section **420-15(A) – Curing Concrete – General** with the following:

Unless otherwise specified in the contract, use any of the following methods except for membrane curing compounds on bridge deck and approach slab, or on concrete which is to receive epoxy protective coating in accordance with 420-18. Advise the Engineer in advance of the proposed method. Have all material, equipment, and labor necessary to promptly apply the curing on the site before placing any concrete. Cure all patches in accordance with this article. Improperly cured concrete is considered defective.

Replace the third paragraph of Section **420-15(C) – Curing Concrete – Membrane Curing Compound Method** with the following:

Seal the surface with a single uniform coating of the specified type of curing compound applied at the rate of coverage recommended by the manufacturer or as directed, but not less than 1 gallon per 150 square feet of surface area.

SOLDIER PILE RETAINING WALLS**(9-21-10)****1.0 GENERAL**

A soldier pile retaining wall consists of steel H piles driven or placed in drilled holes and partially filled with concrete and either precast concrete panels set in the pile flanges or a cast-in-place reinforced concrete face attached to the front of the piles. Timber lagging is typically used for temporary support of excavations during construction. Design and construct soldier pile retaining walls based on actual elevations and dimensions in accordance with the contract and accepted submittals. Use a Soldier Pile Wall Contractor prequalified by the NCDOT Contractual Services Unit for cantilever retaining walls work (work code 3010). For this provision, "soldier pile wall" refers to a soldier pile retaining wall. Also, "panels" refers to precast concrete panels and "concrete facing" refers to a cast-in-place reinforced concrete face.

2.0 SUBMITTALS

Two submittals are required which include the soldier pile wall design and construction submittals. Provide 11 hard copies of working drawings and 3 hard copies of design calculations for the soldier pile wall design submittal and 4 hard copies of the soldier pile wall construction submittal. Also, submit an electronic copy (PDF on CD or DVD) of each submittal. Provide the soldier pile wall construction submittal at least 30 calendar days before conducting the soldier pile wall preconstruction meeting. Do not begin soldier pile wall construction until the construction plan is accepted.

A. Soldier Pile Wall Design Submittal

A Design Engineer is required to design soldier pile walls. Use a Design Engineer approved as a Geotechnical Engineer (key person) for a consultant prequalified by the NCDOT Contractual Services Unit for the cantilever retaining wall design discipline.

The Retaining Wall Plans show a plan view, typical sections, details, notes and an elevation or profile view (wall envelope) for each soldier pile wall. Before beginning soldier pile wall design, survey existing ground elevations shown on the plans and other elevations in the vicinity of soldier pile walls as needed. Based on these elevations, finished grades and actual soldier pile wall dimensions and details, submit revised wall envelopes for review and acceptance. Use the accepted revised wall envelopes for design.

Design soldier pile walls in accordance with the plans and Article 11.8 of the *AASHTO LRFD Bridge Design Specifications* unless otherwise required. Also, design walls for a maximum deflection of 1.5% of the exposed wall height or 3" (75 mm), whichever is less. When a note on plans requires a live load (traffic) surcharge, use a surcharge load of 250 psf (12 kPa) with a load factor of 1.75 in accordance with Article 3.11.6.2 of the *AASHTO LRFD specifications*. For steel beam guardrail with 8' (2.4 m) posts above soldier pile walls, design walls for an additional horizontal load of 300 lbs/linear ft (4.38 kN/linear m) of wall. For concrete barrier rails with moment slabs above soldier

pile walls, design walls for an additional horizontal load of 500 lbs/linear ft (7.30 kN/linear m) of wall. Apply additional loads to the back of soldier pile walls at a depth of 2 ft (0.6m) below grade elevation.

Use a maximum H pile spacing of 10 ft (3 m). At the Contractor's option, use driven or drilled-in piles for soldier pile walls with concrete facing unless required otherwise on the plans. For soldier pile walls with panels, use drilled-in piles unless noted otherwise on the plans. Install drilled-in piles by excavating holes with diameters that result in at least 3" (75 mm) of clearance all around piles.

At the Contractor's option, use panels or concrete facing unless required otherwise on the plans. Design panels and concrete facing in accordance with the plans and Section 5 of the *AASHTO LRFD Bridge Design Specifications* unless otherwise required. Provide reinforcement of sufficient density to satisfy Article 5.7.3.4 of the AASHTO LRFD specifications. Use a minimum panel or concrete facing thickness of 6" (150 mm).

Provide temporary support of excavations for excavation heights greater than 4 ft (1.2 m) and timber lagging in accordance with the *AASHTO Guide Design Specifications for Bridge Temporary Works*. At the Contractor's option and when noted on the plans, provide a temporary slope in lieu of temporary support of excavations. Do not extend temporary slopes beyond right-of-way or easement lines. With the exception of fill sections or when using temporary slopes, backfill voids behind panels, lagging and piles with no. 57 stone. Place separation fabric between no. 57 stone and overlying fill or pavement section with the exception of when concrete pavement is placed directly on the stone.

Use 6 inch (150 mm) thick aggregate leveling pads beneath panels and concrete facing. Unless required otherwise on the plans, embed top of leveling pads a minimum of 1 ft (0.3 m) below where finished grade intersects the front face of soldier pile walls.

Provide geocomposite drain strips centered between each pair of adjacent piles. Attach drain strips to the excavation face, front face of timber lagging or back face of panels or concrete facing. Connect drain strips to leveling pads. Extend continuous drains along base of panels or concrete facing in front of piles and leveling pads. Provide drains meeting the requirements of an aggregate shoulder drain in accordance with Roadway Standard Drawing No. 816.02.

Unless shown otherwise on the plans, use cast-in-place reinforced concrete coping at top of walls for soldier pile walls with panels with dimensions shown on the plans. Extend coping or concrete facing a minimum of 6" (150 mm) above where finished grade intersects the back of soldier pile walls unless required otherwise on the plans. At the Contractor's option, connect coping to panels with dowels or extend coping down the back of panels a minimum of 6" (150 mm). When barriers are required above soldier pile walls, use concrete barrier rails with moment slabs as shown on the plans.

Submit working drawings and design calculations for review and acceptance in accordance with Article 105-2 of the *Standard Specifications*. Submit working drawings showing plan views, wall profiles with pile locations, typical sections and details of piles, drainage, temporary support of excavations, leveling pads, panels or concrete facing and reinforcing. If necessary, include details on working drawings for concrete barrier rails with moment slabs and obstructions extending through walls or interfering with piles, concrete barrier rails and moment slabs. Submit design calculations including deflection calculations for each wall section with different surcharge loads, geometry or material parameters. When using a software program for design, provide a hand calculation verifying the analysis of the tallest wall section. Also, submit design calculations for temporary support of excavations or slope stability calculations for temporary slopes, if applicable. Have soldier pile walls designed, detailed and sealed by the Design Engineer.

B. Soldier Pile Wall Construction Plan Submittal

Provide project specific installation information including a detailed construction sequence. For driven piles, submit proposed pile driving methods and equipment in accordance with Article 450-5 of the *Standard Specifications*. For drilled-in piles, submit installation details including drilling equipment and method for stabilizing holes. Also, submit details of excavations and temporary support of excavations and any other information shown on the plans or requested by the Engineer.

If alternate installation procedures are proposed or necessary, a revised construction plan submittal may be required. If the work deviates from the accepted submittal without prior approval, the Engineer may suspend soldier pile wall construction until a revised plan is submitted and accepted.

3.0 MATERIALS

Load, transport, unload and store soldier pile wall materials such that they are kept clean and free of damage. Damaged or deformed materials will be rejected.

Identify, store and handle drain strips and fabrics in accordance with ASTM D4873. Drain strips and fabrics with defects, flaws, deterioration or damage will be rejected. Do not leave drain strips and fabrics uncovered for more than 7 days.

Use timber lagging with a minimum allowable bending stress of 1000 psi (6.9 MPa) that meets the requirements of Article 1082-1 of the *Standard Specifications*.

A. Steel Piles

Use steel H piles meeting the requirements of Article 1084-1 of the *Standard Specifications*. For soldier pile walls with concrete facing, provide welded stud shear connectors in accordance with Article 1072-8 of the *Standard Specifications*. For soldier pile walls without concrete facing or veneers, galvanize steel piles in accordance with Section 1076 of the *Standard Specifications*.

For drilled-in piles, use excavatable flowable fill in accordance with Article 340-2 of the *Standard Specifications* and Class A Concrete in accordance with Article 1000-4 of the *Standard Specifications* except as modified herein. Provide concrete with a slump of 6 to 8 inches (150 to 200 mm). Use an approved high-range water reducer to achieve this slump.

1. Painting Piles

When a note on plans requires painting piles, smooth, clean, prepare and shop paint portions of galvanized piles that will not be encased in concrete below ground in accordance with Sections 442 and 1080 of the *Standard Specifications* with the exception of the following. Provide shop certification in accordance with Article 442-10 of the *Standard Specifications* regardless of the quantity of painted steel.

Smooth high spots and rough edges, such as metal drip lines, of galvanized surfaces in accordance with ASTM D6386. Clean galvanized surfaces to be painted with a 2500 psi (17.2 MPa) pressure washer. Allow surfaces to dry completely before beginning surface preparation.

Prepare galvanized surfaces to be painted by sweep blasting in accordance with ASTM D6386. Use an abrasive material and technique that roughens the surface while leaving base zinc layers intact. After sweep blasting, blow down blasted surfaces with clean, dry, compressed air free of contamination.

Apply paint to clean, dry surfaces free of visible zinc oxides or zinc hydroxides within 8 hours of surface preparation. Use the paint system below for painting piles gray. For painting piles other colors, contact the NCDOT Materials & Tests Unit for an appropriate paint system.

| Coat | Material* | Dry/Wet Film Thickness (mils) | |
|--------------|---------------|-------------------------------|---------|
| | | Min | Max |
| Intermediate | 1080-12 Brown | 3.0 DFT | 5.0 DFT |
| Stripe | 1080-12 White | 4.0 WFT | 7.0 WFT |
| Topcoat | 1080-12 Gray | 2.0 DFT | 4.0 DFT |
| Total | | 5.0 DFT | 9.0 DFT |

* See Article 1080-12 of the *Standard Specifications*

B. Wall Drainage Systems

Wall drainage systems consist of drain strips, drains and outlet components. Provide Type 3 Manufacturer's Certifications in accordance with Article 106-3 of the *Standard Specifications* for wall drainage materials. Furnish certifications with minimum average roll values (MARV) as defined by ASTM D4439 for core compressive strength and flow rate properties of drain strips. For testing drain strips, a lot is defined as a single day's production.

Use at least 12 inch (300 mm) wide prefabricated geocomposite drain strips consisting of a non-woven polypropylene geotextile bonded to one side of an HDPE or polystyrene drainage core, e.g., sheet drain. Provide drain strips with cores meeting the following requirements.

| Core Property | | ASTM Test Method | Requirement (MARV ¹) |
|---------------|------------------------------------|------------------|----------------------------------|
| (a) | Thickness | D5199 | ¼ - ½ inch (6 – 13 mm) |
| | Compressive Strength | (b) D1621 | 40 psi (276 kPa) |
| | Flow Rate (with a gradient of 1.0) | (c) D4716 | 5 gpm (1 l/s) ² |

¹ MARV does not apply to thickness
² per ft (m) of width tested

Use drain and outlet materials meeting the requirements of subsurface drainage materials in accordance with Section 1044 of the *Standard Specifications*.

C. Precast Concrete Panels

Provide precast concrete panels meeting the requirements of Sections 1000 and 1077 of the *Standard Specifications* and reinforcing steel meeting the requirements of Section 1070 of the *Standard Specifications*. Produce panels within ¼ inch (6 mm) of the panel dimensions shown in the accepted submittals. Damaged panels with excessive discoloration, chips or cracks as determined by the Engineer will be rejected.

A minimum compressive strength of 4000 psi (27.6 MPa) at 28 days is required. For testing panels for compressive strength, at least 4 cylinders are required per 2000 ft² (186 m²) of panel face area or a single day's production, whichever is less.

Unless an exposed aggregate finish is required, provide panels with a smooth flat final finish in accordance with Article 1077-11 of the *Standard Specifications*.

1. Exposed Aggregate Finish

When a note on plans requires panels with an exposed aggregate finish, provide an exposed aggregate finish for front faces of panels with a depth of exposure ranging from 0 to ¼ inch (0 to 6 mm). Before beginning panel production, furnish three 12" by 12" (300 mm by 300 mm) sample panels to establish acceptable variations in color, texture and uniformity of the finish. After the sample panels are accepted and within 30 days of beginning panel production, produce a reinforced test panel of the largest size that will be used for the soldier pile walls with the accepted exposed aggregate finish and in accordance with the accepted submittals. Acceptance of the appearance of the panels during production will be based on the test panel and accepted sample panels.

Use aggregate and cement from the same source as was used for the test panel and accepted sample panels to produce the panels. Provide access to visually inspect the entire finish of each completed panel and compare it to the test panel appearance before stacking panels. Replace the test panel with a new test panel every 3 months during panel production.

D. No. 57 Stone

Use standard size no. 57 stone meeting the requirements of Class VI Select Material in accordance with Section 1016 of the *Standard Specifications*.

E. Leveling Pads

Use Class VI Select Material in accordance with Section 1016 of the *Standard Specifications* for aggregate leveling pads.

F. Concrete Facing and Coping

Provide concrete facing and coping meeting the requirements of Section 1000 of the *Standard Specifications* and reinforcing steel meeting the requirements of Section 1070 of the *Standard Specifications*. Use Class A Concrete for concrete facing and coping in accordance with Article 1000-4 of the *Standard Specifications* and curing agents for concrete in accordance with Section 1026 of the *Standard Specifications*.

G. Masonry

Use masonry for brick veneers in accordance with Section 1040 of the *Standard Specifications*.

H. Separation Fabrics

Use separation fabrics meeting the requirements of Type 2 Engineering Fabric in accordance with Section 1056 of the *Standard Specifications*.

I. Joint Materials

Use joint materials in accordance with Section 1028 of the *Standard Specifications*.

4.0 PRECONSTRUCTION MEETING

Before starting soldier pile wall construction, conduct a preconstruction meeting to discuss the construction and inspection of the soldier pile walls. Schedule this meeting after all soldier pile wall submittals have been accepted. The Resident or Bridge Maintenance Engineer, Bridge Construction Engineer, Geotechnical Operations Engineer, Contractor and Soldier Pile Wall Contractor Superintendent will attend this preconstruction meeting.

5.0 CONSTRUCTION METHODS

Control drainage during construction in the vicinity of soldier pile walls. Direct run off away from soldier pile walls and areas above and behind walls. Contain and maintain no. 57 stone and backfill and protect material from erosion.

Perform necessary clearing and grubbing in accordance with Section 200 of the *Standard Specifications*. Notify the Engineer before blasting in the vicinity of soldier pile walls. Perform blasting in accordance with the contract. Install foundations located behind soldier

pile walls and within a horizontal distance equal to the tallest wall section before beginning soldier pile wall construction.

Do not excavate behind soldier pile walls unless a temporary slope is shown in the accepted submittals. If overexcavation occurs and is not approved, repair walls at no additional cost to the Department with a method proposed by the Contractor and accepted by the Engineer. A revised soldier pile wall construction plan may be required.

If a temporary slope is shown in the accepted submittals, excavate the slope before installing piles. Otherwise, install piles before excavating. Cure concrete for drilled-in piles a minimum of 7 days before proceeding with soldier pile wall construction.

Perform any welding in accordance with the contract. At the Contractor's option, welding may be performed in the field in lieu of employing an American Institute of Steel Construction (AISC) certified fabricator in accordance with Subarticle 1072-1(A) of the *Standard Specifications*. For field welding, use welders certified as a bridge welder in accordance with the NCDOT Field Welder Certification Program.

Use equipment and methods reviewed and accepted in the construction plan or approved by the Engineer. Inform the Engineer of any deviations from the accepted plan.

A. Pile Installation

Install piles in accordance with the accepted submittals and this provision. Contact the Engineer if the design pile embedment is not achieved. Do not splice piles. If necessary, cut off piles at elevations shown in the accepted submittals.

Install piles within 1 inch (25 mm) horizontally and vertically of plan location and with no negative batter (piles leaning forward). For soldier pile walls with concrete facing, be aware that alignment variations between piles may result in a thicker concrete facing in some locations in order to provide the minimum required facing thickness elsewhere. No additional payment will be made for concrete facing thicker than the minimum required. Locate piles such that the minimum required concrete facing thickness, if applicable, and clearance between the wall face and roadways is maintained for varying pile alignments.

For driven piles, drive piles to the specified elevations in accordance with Section 450 of the *Standard Specifications* with the exception of Article 450-6 or at the Contractor's option and when approved by the Engineer, use vibratory hammers to install full depth of piles.

For drilled-in piles, excavate holes at pile locations with the dimensions shown in the accepted submittals. If overexcavation occurs, fill to required elevations with no. 57 stone before setting piles. Before placing concrete, support and center piles in excavations and remove any fluid from drilled holes. After placing piles in holes, fill around piles with concrete to the elevations shown in the accepted submittals. Remove any fluid above the concrete and fill remaining portions of holes with flowable fill.

1. Pile Excavation

Use equipment of adequate capacity and capable of drilling through soil, rock, boulders, debris, man-made objects and any other materials encountered. Blasting is not permitted to advance excavations. Blasting for core removal is only permitted when approved by the Engineer. Dispose of drilling spoils in accordance with Section 802 of the *Standard Specifications* and as directed by the Engineer. Drilling spoils consist of all excavated materials including fluids removed from excavations by pumps or drilling tools.

If unstable, caving or sloughing soils are anticipated or encountered, stabilize holes with either slurry or temporary steel casings. When using slurry, submit slurry details including product information, manufacturer's recommendations for use, slurry equipment details and written approval from the slurry supplier that the mixing water is acceptable before beginning drilling. When using steel casings, use either the sectional type or one continuous corrugated or non-corrugated piece. Steel casings should consist of clean watertight steel of ample strength to withstand handling and driving stresses and the pressures imposed by concrete, earth and backfill. Use steel casings with an outside diameter equal to the hole size and a minimum wall thickness of ¼ inch (6 mm).

2. Concrete Placement

Check the water inflow rate at the bottom of holes after all pumps have been removed. If the inflow rate is less than 6" (150 mm) per half hour, remove any fluid and free fall concrete into excavations. Ensure that concrete flows completely around piles. If the water inflow rate is greater than 6" (150 mm) per half hour, propose and obtain acceptance of a concrete placement procedure before placing concrete. Place concrete in a continuous manner and remove all steel casings.

B. Excavation

If a temporary slope is shown in the accepted submittals, construct soldier pile walls by excavating the slope in accordance with the accepted submittals. Otherwise, construct soldier pile walls from the top down by removing material in front of walls and in between piles as needed.

Excavate in accordance with the accepted submittals and in staged horizontal lifts with heights not to exceed 5 ft (1.5 m). Use timber lagging or some other approved method for temporary support of excavations in accordance with the accepted submittals. Remove flowable fill as necessary to install timber lagging and ensure at least 3" (75 mm) of contact in the horizontal direction between the lagging and pile flanges.

Install temporary support within 24 hours of excavating each lift unless approved otherwise by the Engineer. The installation may be delayed if it can be demonstrated that the delay will not adversely affect the excavation face stability. If the excavation face will be exposed for more than 24 hours, use polyethylene sheets anchored at the top and bottom of the lift to protect the face from changes in moisture content.

If the excavation face becomes unstable at any time, suspend soldier pile wall construction and temporarily stabilize the face by immediately placing an earth berm against the unstable face. Soldier pile wall construction may not proceed until remedial measures are proposed by the Contractor and accepted by the Engineer. A revised soldier pile wall construction plan submittal may be required.

Do not excavate the next lift until the temporary support of excavations for the preceding lift is installed.

C. Wall Drainage Systems

Install wall drainage systems as shown in the accepted submittals. Place and secure geocomposite drain strips with the geotextile side facing away from the wall face. Ensure that drain strips continuously contact the surface to which they are attached and allow for full flow the entire height of the wall. Discontinuous drain strips are not allowed. If splices are needed, overlap drain strips a minimum of 12" (300 mm) such that flow is not impeded. Connect drain strips to leveling pads by embedding strip ends at least 4" (100 mm) into the no. 57 stone.

Construct drains in accordance with Section 816 of the *Standard Specifications*. Provide drains with positive drainage toward outlets.

D. Leveling Pads, Panels and Concrete Facing

Construct leveling pads and drains at elevations and with dimensions shown in the accepted submittals. Construct drains in accordance with Section 816 of the *Standard Specifications*. Compact no. 57 stone for aggregate leveling pads with a vibratory compactor to the satisfaction of the Engineer.

Set panels against pile flanges as shown in the accepted submittals. Ensure at least 2" (50 mm) of contact in the horizontal direction between the panel faces and pile flanges. If contact can not be maintained, remove panels, fill gaps with joint filler and reset panels. Support panels securely until enough no. 57 stone or backfill is placed to hold panels in place.

Construct cast-in-place reinforced concrete facing in accordance with the accepted submittals and Section 420 of the *Standard Specifications*. Do not remove forms until concrete achieves a minimum compressive strength of 2400 psi (16.5 MPa). Unless required otherwise on the plans, provide a Class 2 Surface Finish for concrete facing in accordance with Article 420-17 of the *Standard Specifications*.

Construct concrete facing joints at a maximum spacing of 30 ft (9 m) unless required otherwise on the plans. Half-inch (13 mm) thick expansion joints in accordance with Article 420-10 of the *Standard Specifications* are required every third joint. Half-inch (13 mm) deep grooved contraction joints in accordance with Subarticle 825-10(B) of the *Standard Specifications* are required for the remaining joints. Stop reinforcement 2" (50 mm) from either side of expansion joints.

If a brick veneer is required as shown on the plans, construct brick masonry in accordance with Section 830 of the *Standard Specifications*. Anchor brick veneers to panels and concrete facing with approved brick to concrete type anchors according to the manufacturer's specifications with a minimum vertical spacing of 16" (400 mm) and a minimum horizontal spacing of 32" (800 mm) with each row staggered 16" (400 mm) from the row of anchors above and below.

Seal joints above and behind soldier pile walls between concrete facing and ditches with joint sealer.

E. Backfill

For fill sections or if a temporary slope is shown in the accepted submittals, backfill behind piles and panels or concrete facing in accordance with Article 410-8 of the *Standard Specifications*. Otherwise, backfill voids behind panels, lagging and piles with no. 57 stone as shown in the accepted submittals. Ensure all voids between panels and lagging and between piles, lagging and the excavation face are filled with no. 57 stone. Compact stone to the satisfaction of the Engineer. When separation fabric is required, overlap fabric a minimum of 18" (450 mm) with seams oriented parallel to the wall face.

F. Coping

Construct concrete coping as shown in the accepted submittals and in accordance with Section 420 of the *Standard Specifications*. When single faced precast concrete barriers are placed in front of soldier pile walls, stop coping just above barriers such that coping does not interfere with placing barriers up against wall faces. Do not remove forms until concrete achieves a minimum compressive strength of 2400 psi (16.5 MPa). Provide a Class 2 Surface Finish for coping in accordance with Article 420-17 of the *Standard Specifications*.

Construct coping joints at a maximum spacing of 10 ft (3 m). Half-inch (13 mm) thick expansion joints in accordance with Article 420-10 of the *Standard Specifications* are required every third joint. Half-inch (13 mm) deep grooved contraction joints in accordance with Subarticle 825-10(B) of the *Standard Specifications* are required for the remaining joints. Stop coping reinforcement 2" (50 mm) from either side of expansion joints.

Seal joints above and behind soldier pile walls between coping and ditches with joint sealer.

G. Coating Cleaning and Repair

After wall construction is complete, clean exposed galvanized or painted surfaces of piles with a 2500 psi (17.2 MPa) pressure washer. Repair galvanized surfaces that are exposed and damaged in accordance with Article 1076-6 of the *Standard Specifications*. Repair painted surfaces that are exposed and damaged by applying 4.0 to 7.0 mils wet of a topcoat to damaged areas with brushes or rollers. Use the same

paint for damaged areas as used for the topcoat when painting piles initially. Feather or taper topcoats in damaged areas to be level with surrounding areas.

6.0 MEASUREMENT AND PAYMENT

Soldier Pile Retaining Walls will be measured and paid for in square feet (meters). Soldier pile walls will be measured as the exposed face area with the wall height equal to the difference between the top and bottom of wall elevation. The top of wall elevation is defined as the top of concrete facing or coping or top of panels for soldier pile walls with panels and without coping. The bottom of wall elevation is as shown on the plans and no payment will be made for portions of soldier pile walls below bottom of wall elevations.

The contract unit price for *Soldier Pile Retaining Walls* will be full compensation for providing design, submittals, labor, tools, equipment and soldier pile wall materials, installing piles, excavating, backfilling and providing temporary support of excavations, wall drainage systems, reinforcement, leveling pads, panels and concrete facing, backfill, no. 57 stone, fabrics, coping and any incidentals necessary to design and construct soldier pile walls in accordance with this provision. If necessary, the contract unit price for *Soldier Pile Retaining Walls* will also be full compensation for coating piles and providing brick veneers in accordance with the contract.

The contract unit price for *Soldier Pile Retaining Walls* does not include the cost for fences, handrails, ditches, guardrail and barriers associated with soldier pile walls as payment for these items will be made elsewhere in the contract.

Payment will be made under:

| Pay Item | Pay Unit |
|------------------------------|---------------------|
| Soldier Pile Retaining Walls | Square Foot (Meter) |

PRECAST REINFORCED CONCRETE (SPECIAL)
BOX CULVERT AT STATION 86+21.00 -L-

1.0 GENERAL

This Special Provision covers precast reinforced concrete box culverts intended for the construction of culverts and for the conveyance of storm water.

Where a precast reinforced box culvert is required on the plans, design the precast culvert sections in accordance with AASHTO M259 and provide the size and number of barrels as indicated on the plans. Precast wing walls will not be allowed. For culverts with less than 2 feet (0.6 m) of cover, design the precast culvert sections in accordance with AASHTO M273. Detail the culvert with cast in place wings. Provide a precast box culvert that meets the requirements of Section 1077 and any other applicable parts of the Standard Specifications. Reinforced concrete sills are required as shown on the plans.

The design of the precast members is the responsibility of the Contractor and is subject to review, comments and approval. Submit two sets of detailed plans for review. Include all details in the plans, including the size and spacing of the required reinforcement necessary to build the precast box culvert. Include checked design calculations for the precast members complying with the latest AASHTO Standard Specifications and requirements detailed herein. Have a North Carolina Registered Professional Engineer check and seal the plans and design calculations. After the plans are reviewed and, if necessary, the corrections made, submit one set of reproducible tracings on 22" x 34" sheets to become the revised contract plans.

A pre-installation meeting is required prior to installation. Representatives from the Contractor, the precast box manufacturer, and the Department should attend this meeting. The precast box manufacturer representative shall be on site during installation.

2.0 PRECAST REINFORCED CONCRETE BOX SECTIONS

A. Types

Precast reinforced concrete box sections manufactured in accordance with this Special Provision are designated by span, rise, and design earth cover.

B. Design

1. Design – The box section dimensions and reinforcement details are subject to the provisions of Section F.
2. Placement of Reinforcement – Provide a 1 inch (25 mm) concrete cover over the circumferential reinforcement subject to the provisions of Section F. Extend the inside circumferential reinforcement into the male portion of the joint and the outside circumferential reinforcement into the female portion of the joint. Detail the clear distance of the end circumferential wires so it is not less than 1/2 inch (13 mm) nor more than 2 inches (51 mm) from the ends of the box section. Assemble reinforcement per the requirements of AASHTO M259, Section 7.3. The exposure of the ends of the wires used to position the reinforcement is not a cause for rejection.
3. Laps and Spacing – Use lap splices for the circumferential reinforcement. Detail the circumferential wires so that the center to center spacing is not less than 2 inches (50 mm) nor more than 4 inches (100 mm). Do not detail the longitudinal wires with a center to center spacing of more than 8 inches (200 mm).
4. The design earth cover is reported on the plans as the elevation difference between the point of maximum fill and the top of the top slab.

C. Joints

1. Produce the precast reinforced concrete box section with male and female ends. Design and form these ends of the box section so, when the sections are laid

together, they make a continuous line of box sections with a smooth interior free of appreciable irregularities in the flowline, all compatible with the permissible variations given in Section F. The internal joint formed at the male and female ends of the precast units shall be sealed with either bitumen/butyl sealant or closed-cell neoprene material. The internal joint material shall be installed in accordance with the manufacturer's recommendations. The material shall be shown on the shop drawings when they are submitted for review.

2. Seal the external joint with an outside sealer wrap that is at least 12 inches (300 mm) wide and covers the joint on both the sides and the top of the box section. Use ConWrap CS-212 from Concrete Sealants, Inc., EZ-Wrap from Press-Seal Gasket Corporation, Seal Wrap from Mar-Mac Manufacturing Co., Inc., Cadilloc External Pipe Joint from Cadilloc, or an approved equal for the outside sealer wrap. If the outside sealer wrap is not applied in a continuous strip along the entire joint, a 12 inch (300 mm) minimum lap of the outside sealer wrap is permitted. Before placing the outside sealer wrap, clean and prime the area receiving the outside sealer wrap in accordance with the sealer wrap manufacturer recommendations. The joint wrap manufacturer installation recommendations shall be included with shop drawings submitted for review. The external joint wrap shall be installed in three pieces, as indicated on Figure 1 below:




Figure 1

Cover the external joint sealer with a 3 foot (900 mm) strip of filter fabric conforming to Type 4 requirements in Section 1056 of the Standard Specifications. Place multiple lines of a precast reinforced concrete box culvert such that the longitudinal joint between the sections has a minimum width of 3 inches (75 mm). Fill the joint between multiple lines of precast box sections with Class A concrete. Use Class A concrete that meets the requirements listed in the Standard Specifications except that Field Compressive Strength Specimens are not required.

D. Manufacture

Precast box culverts may be manufactured by either the wet cast method or dry cast method.

1. Mixture – In addition to the requirements of Section 1077 of the Standard Specifications, do not proportion the mix with less than 564 lb/yd³ (335 kg/m³) of portland cement.
2. Strength – Make sure that all concrete develops a minimum 28-day compressive strength of 5000 psi (34.5 MPa). Movement of the precast sections should be minimized during the initial curing period. Any damage caused by moving or handling during the initial curing phase will be grounds for rejection of that precast section.
3. Air Entrainment – Air entrain the concrete in accordance with Section 1077 - 5(A) of the Standard Specifications. For dry cast manufacturing, air entrainment is not required.
4. Testing – Test the concrete in accordance with the requirements of Section 1077 - 5(B).
5. Handling – Handling devices or holes are permitted in each box section for the purpose of handling and laying. Submit details of handling devices or holes for approval and do not cast any concrete until approval is granted. Remove all handling devices flush with concrete surfaces as directed. Fill holes in a neat and workmanlike manner with an approved non-metallic non-shrink grout, concrete, or hole plug.

E. Physical Requirements

Acceptability of precast culvert sections is based on concrete cylinders made and tested in accordance with AASHTO T22 and AASHTO T23.

F. Permissible Variations

1. Flatness – All external surfaces shall be flat, true, and plumb. Irregularities, depressions, or high spots on all external surfaces shall not exceed 1/2 inch (12 mm) in 8 feet (2.5 meters).

2. Internal Dimensions – Produce sections so that the internal and haunch dimensions do not vary more than 1/4 inch (6 mm) from the plan dimensions.
3. Adjacent Sections - Internal, external, and haunch dimensions for connecting sections shall not vary more than 1/2 inch (12 mm).
4. Length of Tongue and Groove – The minimum length of the tongue shall be 4 inches (100 mm). The minimum length of the groove shall be 4 inches (100 mm). The dimensions of the tongue and groove shall not vary more than 1/4 inch (6 mm) from the plan dimensions.
5. Slab and Wall Thickness – Produce sections so that the slab and wall thickness are not less than that shown on the plans by more than 5% or 3/16 inch (5 mm), whichever is greater. A thickness more than that required on the plans is not a cause for rejection.
6. Length of Opposite Surfaces – Produce sections so that variations in laying lengths of two opposite surfaces of the box section meet the requirements of AASHTO M259, Section 11.3.
7. Length of Section – Produce sections so that the underrun in length of a section is not more than 1/2 inch (13 mm) in any box section.
8. Position of Reinforcement – Produce sections so that the maximum variation in the position of the reinforcement is $\pm 3/8$ " (± 10 mm) for slab and wall thicknesses of 5 inches (125 mm) or less and $\pm 1/2$ " (± 13 mm) for slab and wall thicknesses greater than 5 inches (125 mm). Produce sections so that the concrete cover is never less than 5/8 inch (16 mm) as measured to the internal surface or the external surface. The preceding minimum cover limitations do not apply at the mating surfaces of the joint.
9. Area of Reinforcement – Use the design steel shown on the plans for the steel reinforcement. Steel areas greater than those required are not cause for rejection. The permissible variation in diameter of any wire in finished fabric is prescribed for the wire before fabrication by either AASHTO M32 or M225.

G. Marking

1. Each section shall be match-marked in order of intended installation as indicated on the approved shop drawings. Ensure that pieces fit together neatly and in a workmanlike manner. In order to ensure a good, neat field fit, assemble adjacent sections at the producer's facility and match-mark the pieces. This will require that a minimum of three adjacent sections of the culvert be fitted at the production yard at a time and then match-marked. Once three sections have been match-marked, the first section may be removed for shipment and a fourth section set for marking. Continue in a progressive manner until all sections have been properly match-marked. Each section shall be marked to insure an alternating pattern of high and low sills as shown on the plans.

2. Clearly mark each section of the box culvert in accordance with AASHTO M259, Section 15.

H. Construction

1. Foundation – Foundation for precast box culvert shall meet the requirements of Section 414 of the Standard Specifications. In addition, Type VI foundation material shall be encapsulated in filter fabric conforming to Type 4 requirements in Section 1056 of the Standard Specifications. The filter fabric shall be placed perpendicular to the culvert barrel. Provide sufficient overhang beyond the excavation to allow a minimum lap of 3 feet (900 mm) when the foundation material is placed and fabric wrapped on top. Perpendicular sections of fabric shall be continuous. A minimum lap of 2 feet (600 mm) shall be provided between sections of fabric.
2. Installation – Sections shall be placed at the beginning of the outlet end of the culvert with the groove end being laid upgrade. Tongue sections shall be laid into the groove sections. Positive means shall be provided to pull each section firmly into the previously placed section so that the joints are tightly homed. Use a "come-along", box pullers or other approved methods to create a positive means of joining box sections. Construction equipment shall not have direct contact with the box section. The load of the box shall be suspended by lifting device during joining procedure.
3. Backfill – Complete backfill in accordance with Section 414 of the Standard Specifications.
4. Bed Material – Placed between sills to provide a continuous low flow channel between the lower sills. The material shall be natural stone with a gradation size similar to that of Class B Rip Rap.

3.0 BASIS OF PAYMENT

The Precast Reinforced Concrete Box Culvert as described on the plans and in this Special Provision will be paid for at the contract lump sum price for "Precast Reinforced Concrete Box Culvert at Station _____". Such price and payment will be full compensation for all work covered by this Special Provision, the plans and applicable parts of the Standard Specifications and will include, but not be limited to, furnishing all labor, materials (including all filter fabric), equipment and other incidentals necessary to complete this work. Such price and payment will also be full compensation for concrete, reinforcing steel, labor, equipment and all other related materials necessary for the completion of the barrel section, sills, and the construction of the headwalls, end curtain walls, wings and wing footings. Culvert Excavation and Foundation Conditioning Material will be paid for in accordance with the Standard Specifications and will not be a part of this pay item.

Payment will be made under:

Precast Reinforced Concrete
Box Culvert at Station 86+21.00-L-Lump Sum

CAST-IN-PLACE SIMULATED ROCK FORM LINER FINISH (SPECIAL)

1.0 DESCRIPTION

This work shall consist of constructing textured surfaces on formed concrete surfaces of the soldier pile retaining wall, in accordance with the Special Provisions, plans, and as approved by the Engineer.

2.0 QUALITY ASSURANCE

Quality Standards

The standards named herein are specified to establish standards of quality, performance, and compliance with the design concept, which is to duplicate the appearance of natural stone. Use of all form liners, stains, etc. shall be in accordance with the manufacturer’s recommendations.

3.0 MATERIALS

Form Liner

Form liners are to be a high-quality reusable product manufactured of high-strength urethane that attaches easily to the forming system and shall not compress more than ¼ inch when the wall is poured at 10 vertical feet per hour. The form liner is to be comparable in stone size, scale and orientation, as in Pattern No. 1208 as supplied by:

Hunt Valley Distributors, LLC
3705 Crondall Lane
Owings Mills, MD 21117
410.356.9677

In addition, the Contractor has the option of supplying alternative Simulated Stone Form Liners, from one of the manufactures listed below, as long as the patterns selected are approved, by the Engineer and NCDOT architectural historian, as an equal or approved alternative.

Custom Rock International
1156 Homer Street
St. Paul, Minnesota 55116
800.637.2447

Fitzgerald Prime Form and Construction Supply Company
1341 East Pomona Street
Santa Ana, California 92705
714.547.6710
Fax 714.547.7958

Greenstreak Plastics
3400 Tree Court Industrial Boulevard
St. Louis, Missouri 63112
314.225.9400 / 800.325.9504
Fax 800.551.5145

Symons Corporation
200 East Touhy Avenue
Des Plaines, Illinois 60018
847.296.3200
Fax 847.635.9287

Color Stain

Color stains shall be a special penetrating stain mix as provided by the manufacturer and shall be medium to dark gray to achieve a full, natural color in the finished surface. The stain shall create a surface finish that is breathable (allowing water vapor transmission), and that resists deterioration from water, acid, alkali, fungi, sunlight, or weathering. Stain mix shall meet the requirements for mildew resistance of Federal Test Method Standard 144, Method 6271, and requirements for weathering resistance of 1,000 hours accelerated exposure measures by Weatherometer in accordance with ASTM G 26. Color samples must be submitted for approval. Concrete stains shall be supplied by one of the following or as approved by the Engineer.

Sherwin Williams
H & C Shield Plus
101 Prospect Ave., NW
Cleveland, OH 44115

Canyon Tone Stain
United Coatings
E 1901 Cataldo
Green Acres, Washington 90016

Cementrate Acrylic Stain
Fosroc, Inc.
55 Skyline Drive
Plainview, New York 11803

Hydroshield Stain
Robson-Downes Associates, Inc.
Oxford, Maryland 21654

Form Release Agent

Form release agent shall be a nonstaining petroleum distillate free from water, asphaltic, and other insoluble residue, or an equivalent product. Form release agents shall be compatible with the color system applied and any special surface finish.

Form Ties

Form ties shall be set back a minimum of 2" (51 mm) from the finished concrete surface. The ties shall be designed so that all material in the device to a depth of at least 2" (51mm) back of the concrete face (bottom of simulated mortar groove) can be disengaged and removed without spalling or damaging the concrete. The Contractor shall submit the type of form ties to the Engineer for approval.

3.0 CONSTRUCTION

Simulated Stone Form Liner System and Surface Finish

The simulated stone form liner is to be capable of withstanding anticipated concrete pour pressures without leakage or without causing physical or visual defects. The simulated stone form liner is to be removable without causing concrete surface deterioration or weakness in the substrate. Form release agents, form stripping methods, patching materials, as well as related construction are to be in accordance with the manufacturer's recommendations or as directed by the Engineer.

Linear butt joints shall be carefully blended into the approved pattern and finished off the final concrete surface. No visible vertical or horizontal seams or conspicuous form marks created by butt joining will be permitted.

The Contractor shall submit the type of form ties to be used in this construction to the Engineer for approval prior to use. Form tie holes shall be finished in accordance with standard concreting practices and shall be acceptable to the Engineer. All patching material shall exactly match the color and appearance of the poured concrete surface.

Patterned concrete surfaces are to extend a minimum of 12 inches below finished grade, unless otherwise directed by the Engineer. Final surface shall be free of blemishes, discolorations, surface voids, and other irregularities. All patterns should be continuous without visual disruption.

The concrete surfaces shall be clean, free of laitance, dirt, dust, grease, efflorescence, paint, or other foreign material, following manufacturer's specifications for surface preparation prior to application of color stain. The surface area shall also be free of blemishes, discolorations, surface voids, and unnatural form marks. Cleaning of surfaces to be accomplished by pressure

washing with water set at 3000 psi (20.7 MPa). The fan nozzle shall be held perpendicular to the surface at a distance of 1 to 2 feet (300 to 600 mm). Sandblasting will not be permitted.

To avoid contaminating or damaging the wall surfaces, color stain application shall be scheduled when all concrete work is completed, the concrete has cured a minimum of 28 days, the surface has been determined to be acceptable for coloring, and after adjacent earthwork is complete. The Contractor is to coordinate coloring applications without interference from other work. The Contractor is required to apply coloring to an appropriate test area of 50 square feet and as designated by the Engineer, which will serve as a quality standard for the remaining surface to be colored. Upon approval of the test area by the Engineer, the remaining surfaces may be colored. Stains shall be applied when ambient air temperatures are in accordance with manufacturer's specifications or as directed by the Engineer. The number of coats of stain applied shall be in accordance with manufacturer's specifications or as directed by the Engineer. Treated surfaces located adjacent to exposed soil or pavement shall be temporarily covered to prevent dirt or soil splatter from rain.

Following the completion of all work, repairs of any damage made by other construction operations shall be made to the form lined and stained surfaces as directed by the Engineer.

4.0 MEASUREMENT AND PAYMENT

This work will not be measured for payment, but shall be included in the per square foot bid price for the soldier pile retaining wall, as shown on plans. Payment will include the furnishing and use of all form liners, coloring stains, the construction, finishing, and removal of all equipment, materials, labor, and incidentals necessary to complete the work in conformance with the Contract Documents.