
PROJ. REFERENCE NO. SHEET NO. WBS Elements: 10CR.20131.8, 10CR.20131.9, 10CR.20131.10, 10CR.20131.11, 10CR.20131.12, See to the Left TCP-3 10CR.20131.13 & 10CR.301340.1

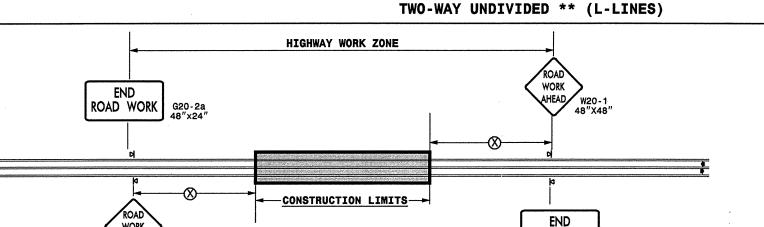


NORTH CAROLINA RECOMMENDED MINIMUM SIGN SPACING POSTED SPEED LIMIT (8) (M.P.H.) ≤ 50 500' ≥ 55 1000'

ROADWAYS INTERSECTING ALONG 2 WAY UNDIVIDED WORK ZONE (Y-LINES)

ROAD WORK

G20-2a 48"X24"

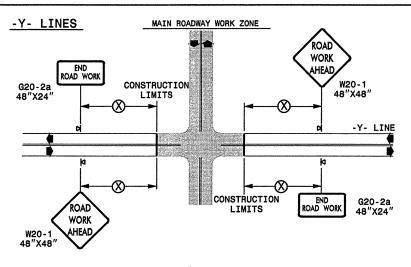

GENERAL NOTES

- USE FLUORESCENT ORANGE SHEETING (TYPE VII OR HIGHER) ON ALL ADVANCED WORK ZONE SIGNS.
- DO NOT INSTALL ADVANCE WARNING SIGNS MORE THAN 3 DAYS PRIOR TO BEGINNING OF WORK.
- ALL SIGN SPACING DIMENSIONS ARE APPROXIMATE, FIELD ADJUST AS NECESSARY OR AS DIRECTED.
- USE PORTABLE WORK ZONE SIGNS ONLY WITH PORTABLE WORK ZONE SIGN STANDS SPECIFICALLY DESIGNED FOR ONE ANOTHER. PORTABLE WORK ZONE SIGNS MAY BE ROLL UP OR APPROVED COMPOSITE.
- PROVIDE PORTABLE WORK ZONE SIGN STANDS, PORTABLE SIGNS AND SIGN SHEETING WHICH ARE LISTED ON THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION'S APPROVED PRODUCT LIST OR ACCEPTED AS TRAFFIC QUALIFIED BY THE TRAFFIC CONTROL UNIT.
- ** TWO-WAY UNDIVIDED ADVANCE WARNING SIGN CONFIGURATION MAY BE USED ON URBAN MULTI-LANE FACILITIES WHERE CONDITIONS LIMIT THE USE OF DUAL MOUNTED SIGNS AS DETERMINED BY THE ENGINEER.

LEGEND PORTABLE SIGN DIRECTION OF TRAFFIC FLOW

NONE

SHEET 1 OF 1

TRANSPORTATION

P

DEPT.

IDED

VIDNU

-WAY

OM L

FOR

DRAWING

DETAIL

S

WARNIN

O

PF

STATE

HIGHWAYS


P

DIVISION

ပ

ż

RALEIGH,



 		•••
. 0,40	NE so "	,
4	The sales	22
كر الله		
		# "
77.	TO A THE POST	84°

DETAIL DRAWING TWO-WAY UNDIVIDED

ADVANCED WORK ZONE WARNING SIGNS REVISIONS 7-98 10/01 10-98 03/04 01/01 11/04