

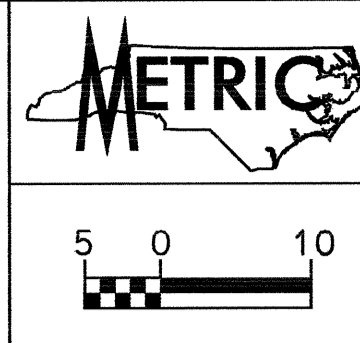


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 26

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

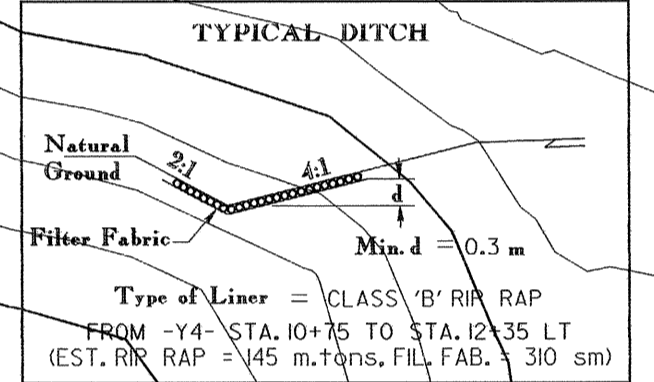

PROJECT REFERENCE NO.	R-977A	SHEET NO.	EC-28/CONST.26
HIGHWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	
CONST. REV.		R/W REV.	

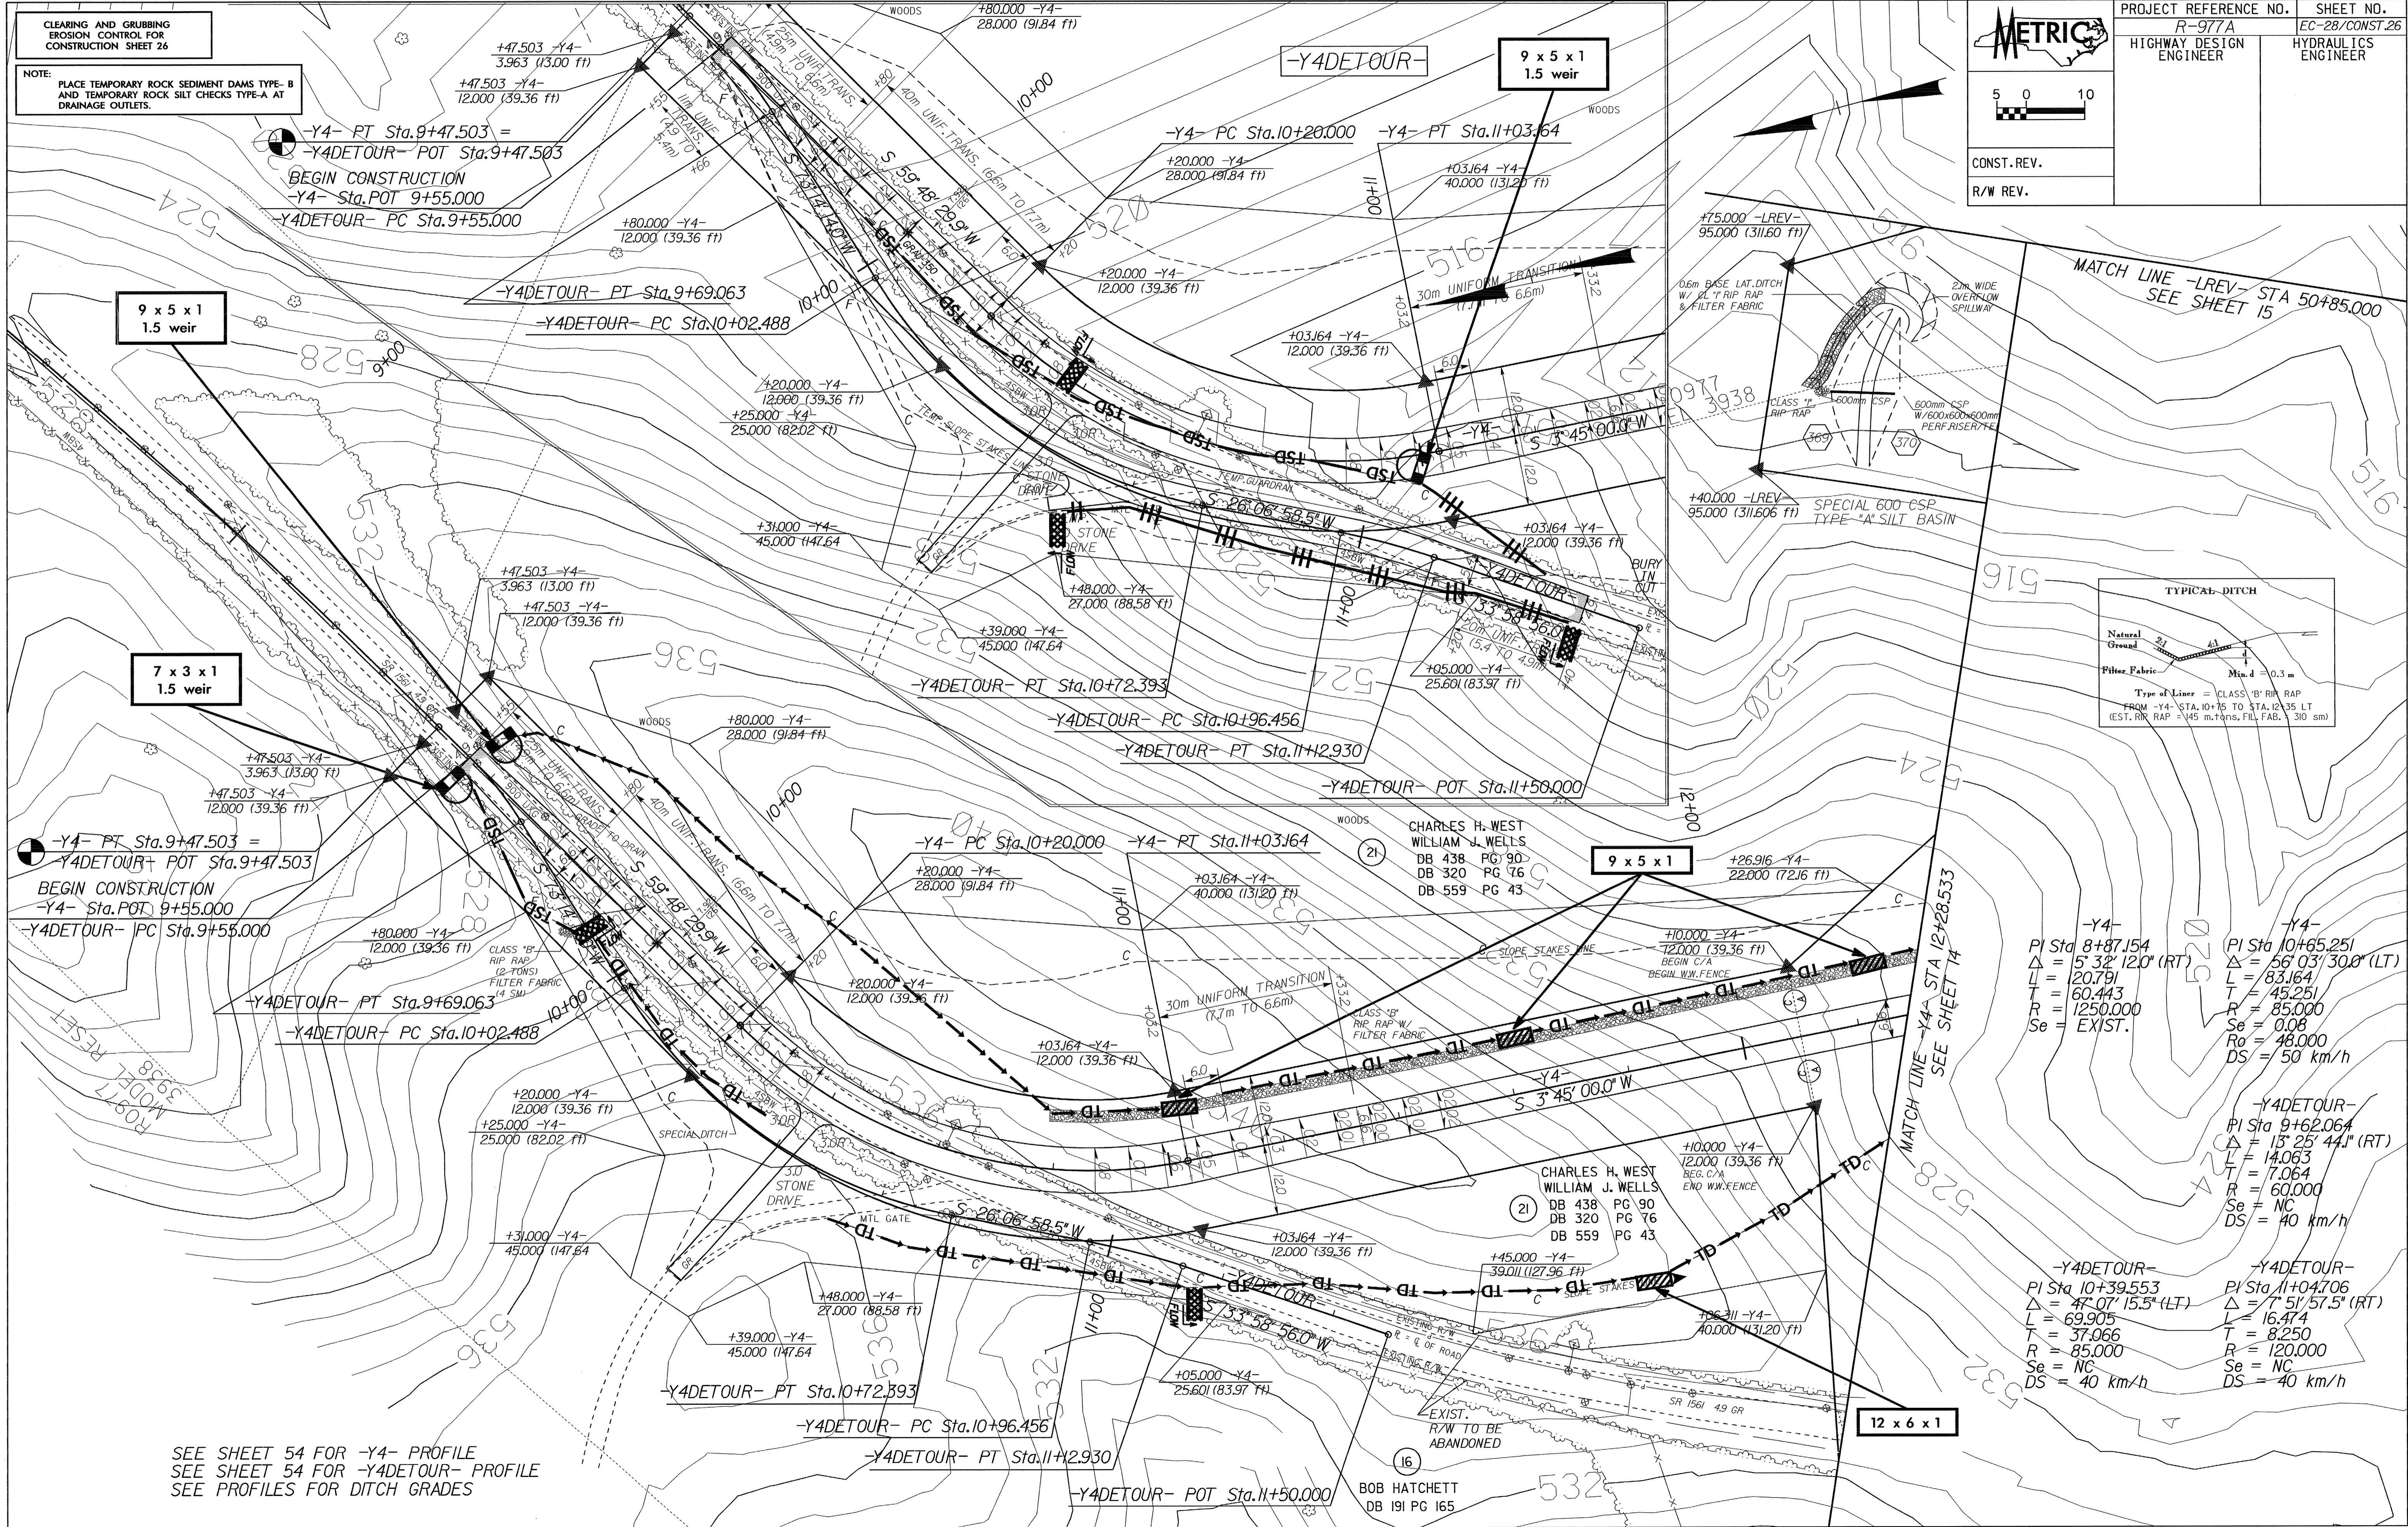

-Y4-
PI Sta 8+87.154
 $\Delta = 5^{\circ} 32' 12.0''$ (RT)
L = 20.791
T = 60.443
R = 1250.000
Se = EXIST.

-Y4-
PI Sta 10+65.251
 $\Delta = 56^{\circ} 03' 30.0''$ (LT)
L = 83.164
T = 45.251
R = 85.000
Se = 0.08
Ro = 48.000
DS = 50 km/h

-Y4DETOUR-
PI Sta 9+62.064
 $\Delta = 13^{\circ} 25' 44.1''$ (RT)
L = 14.063
T = 7.064
R = 60.000
Se = NC
DS = 40 km/h

-Y4DETOUR-
PI Sta 10+39.553
 $\Delta = 47^{\circ} 07' 15.5''$ (LT)
L = 69.905
T = 37.966
R = 85.000
Se = NC
DS = 40 km/h

-Y4DETOUR-
PI Sta 11+04.706
 $\Delta = 7^{\circ} 51' 57.5''$ (RT)
L = 16.474
T = 8.250
R = 120.000
Se = NC
DS = 40 km/h

SEE SHEET 54 FOR -Y4- PROFILE
SEE SHEET 54 FOR -Y4DETOUR- PROFILE
SEE PROFILES FOR DITCH GRADES

BOB HATCHETT
DB 191 PG 165