



PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1½" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.
J	8" INCIDENTAL STONE BASE
R	SHOULDER BERM GUTTER
U	EXISTING PAVEMENT.
T	EARTH MATERIAL.
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

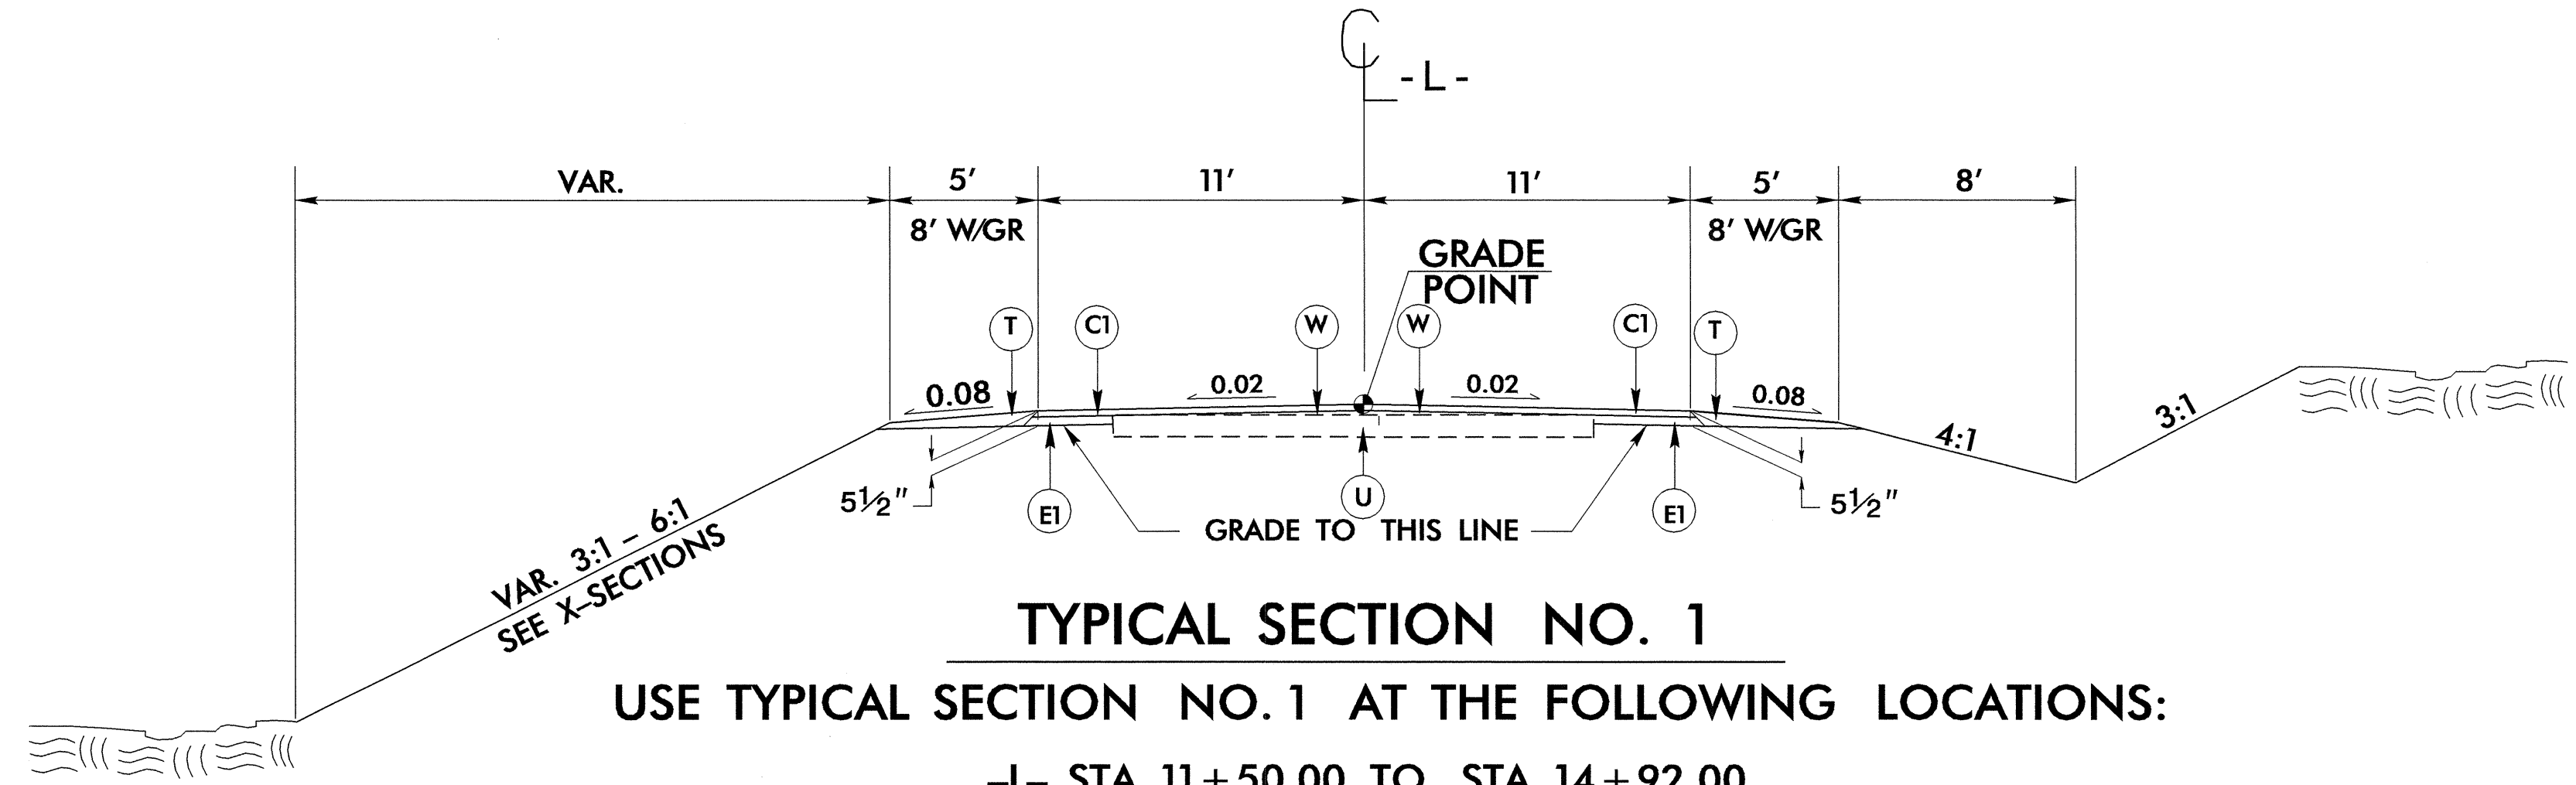


**TYPICAL SECTION NO. 1**  
USE TYPICAL SECTION NO. 1 AT THE FOLLOWING LOCATIONS:

- L- STA. 11+50.00 TO STA. 14+92.00
- L- STA. 19+97.00 TO STA. 23+50.00
- TRANSITION FROM EXISTING @ -L- STA. 11+50.00 TO TYPICAL SECTION NO. 1 @ -L- STA. 12+50.00
- TRANSITION FROM TYPICAL SECTION NO. 1 @ -L- STA. 22+50.00 TO EXISTING @ -L- STA. 23+50.00

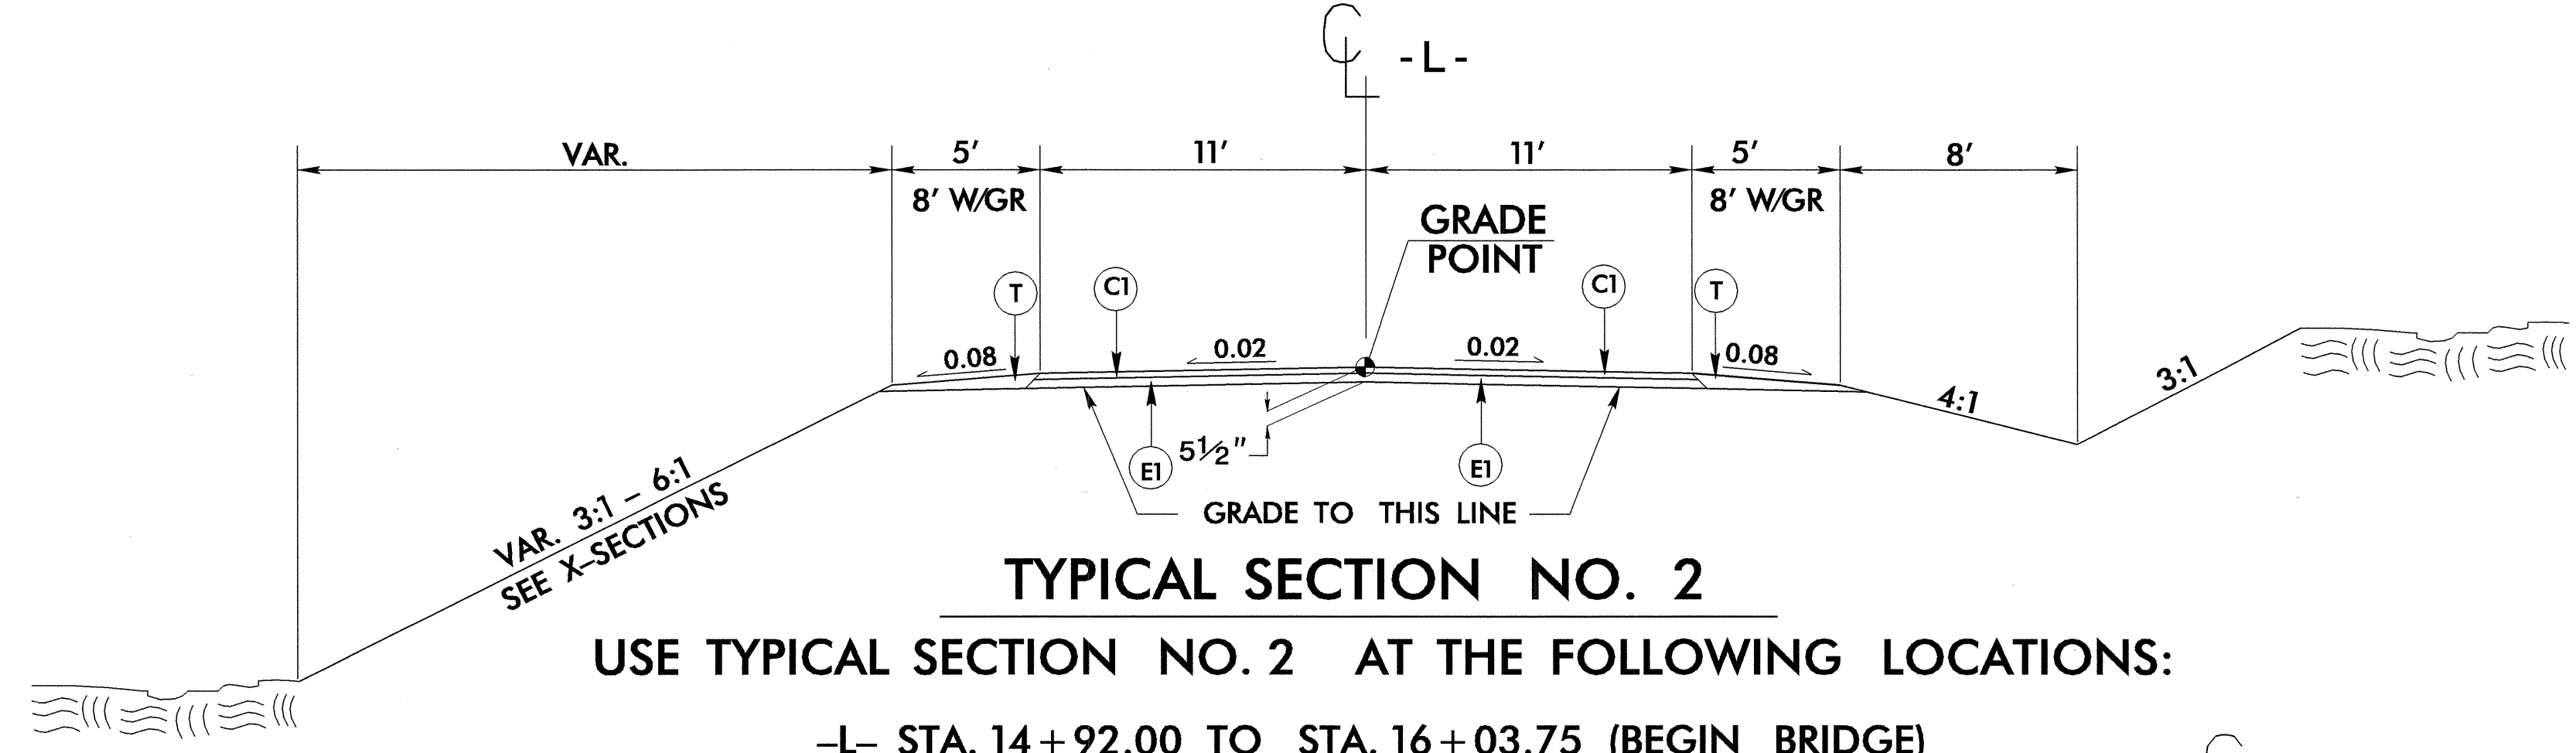


**TYPICAL SECTION NO. 2**  
USE TYPICAL SECTION NO. 2 AT THE FOLLOWING LOCATIONS:


- L- STA. 14+92.00 TO STA. 16+03.75 (BEGIN BRIDGE)
- L- STA. 17+31.25 (END BRIDGE) TO STA. 19+97.00

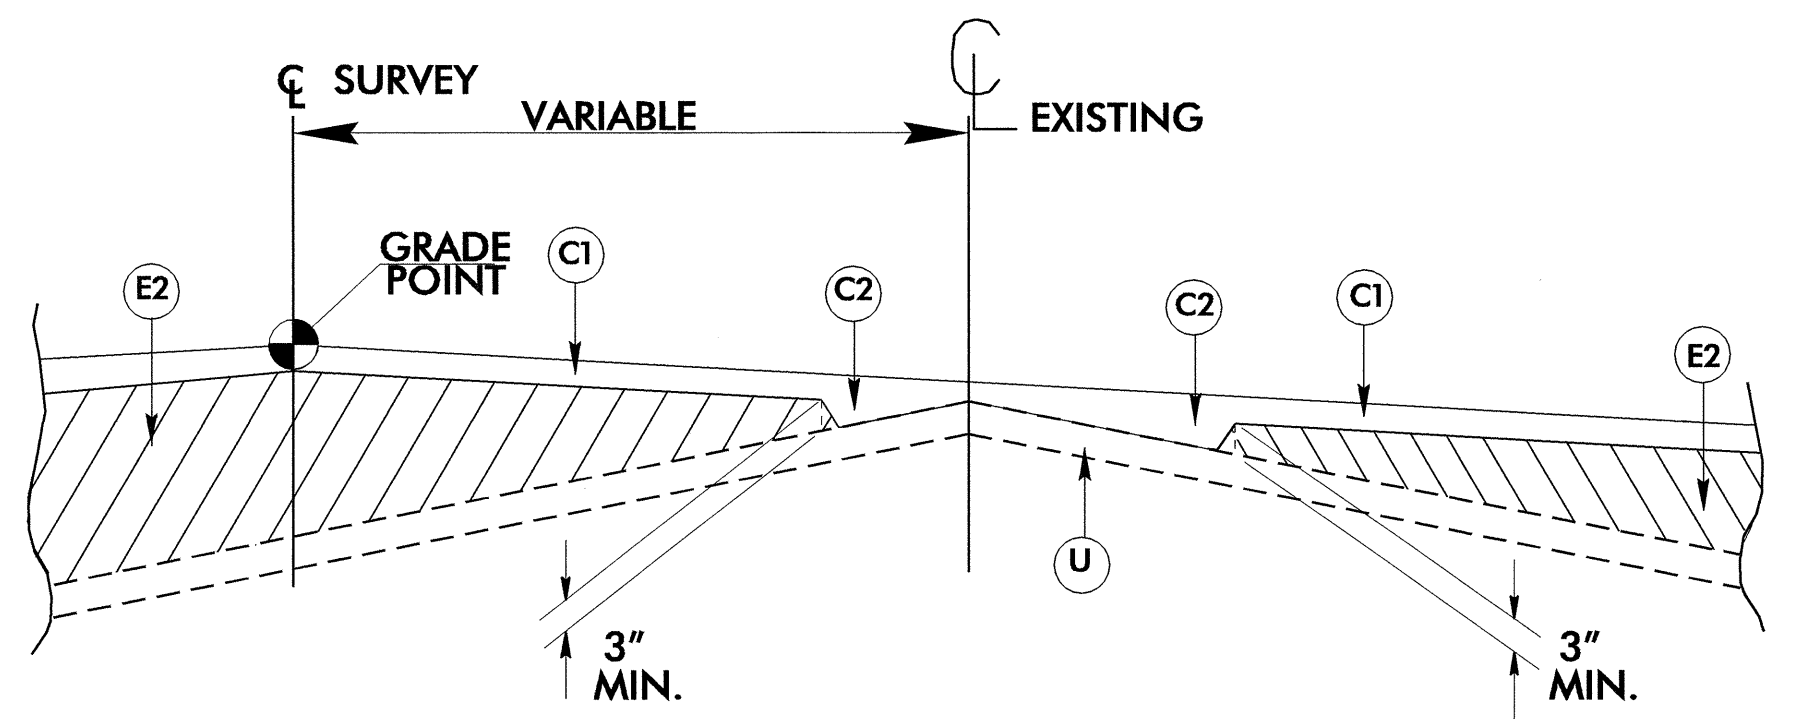

**DETAIL SHOWING METHOD OF WEDGING**  
USE IN CONJUNCTION WITH TYPICAL SECTION NO. 1

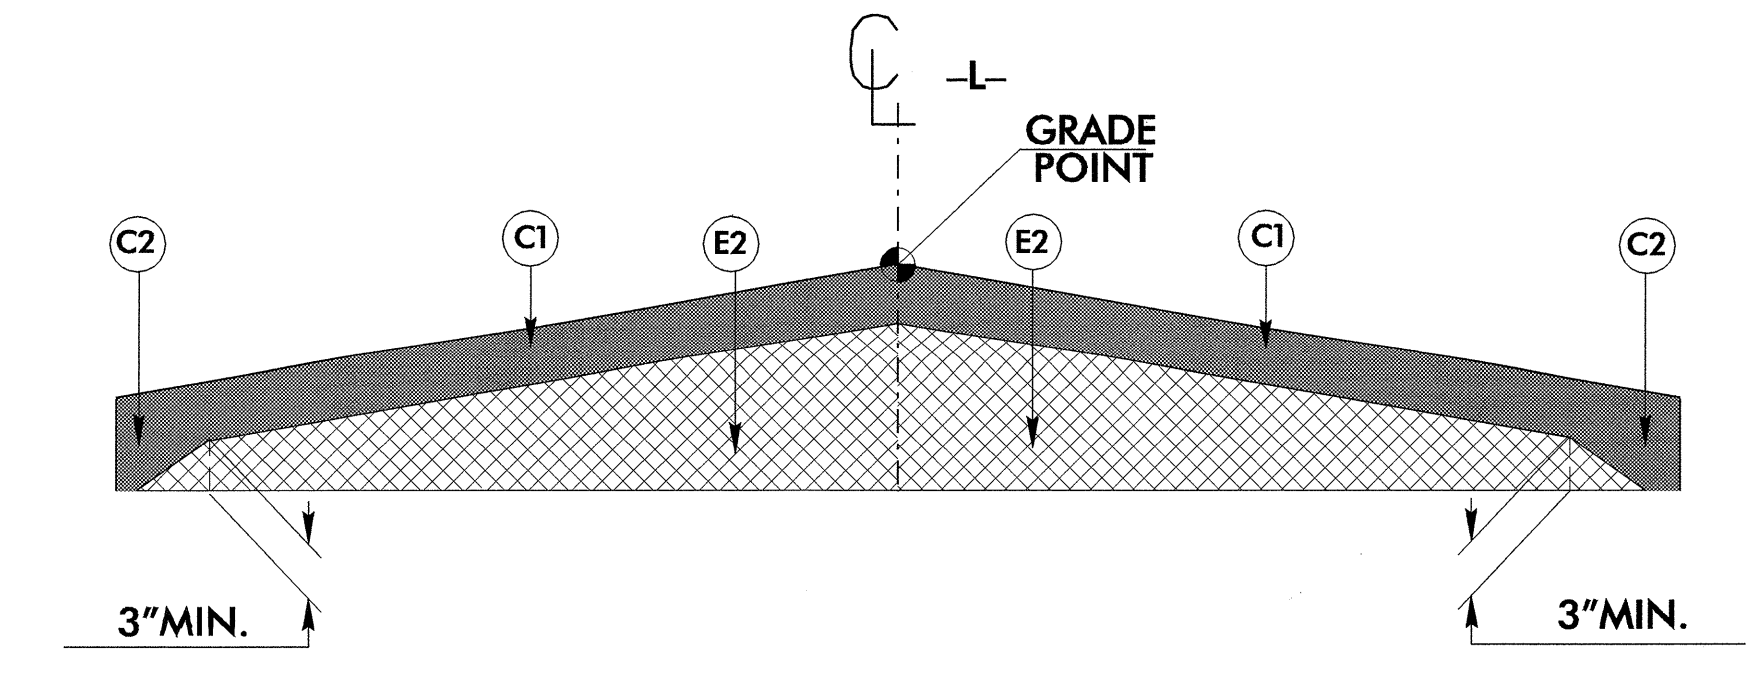


**DETAIL SHOWING METHOD OF WEDGING ON BRIDGE**  
USE IN CONJUNCTION WITH TYPICAL SECTION NO. 3

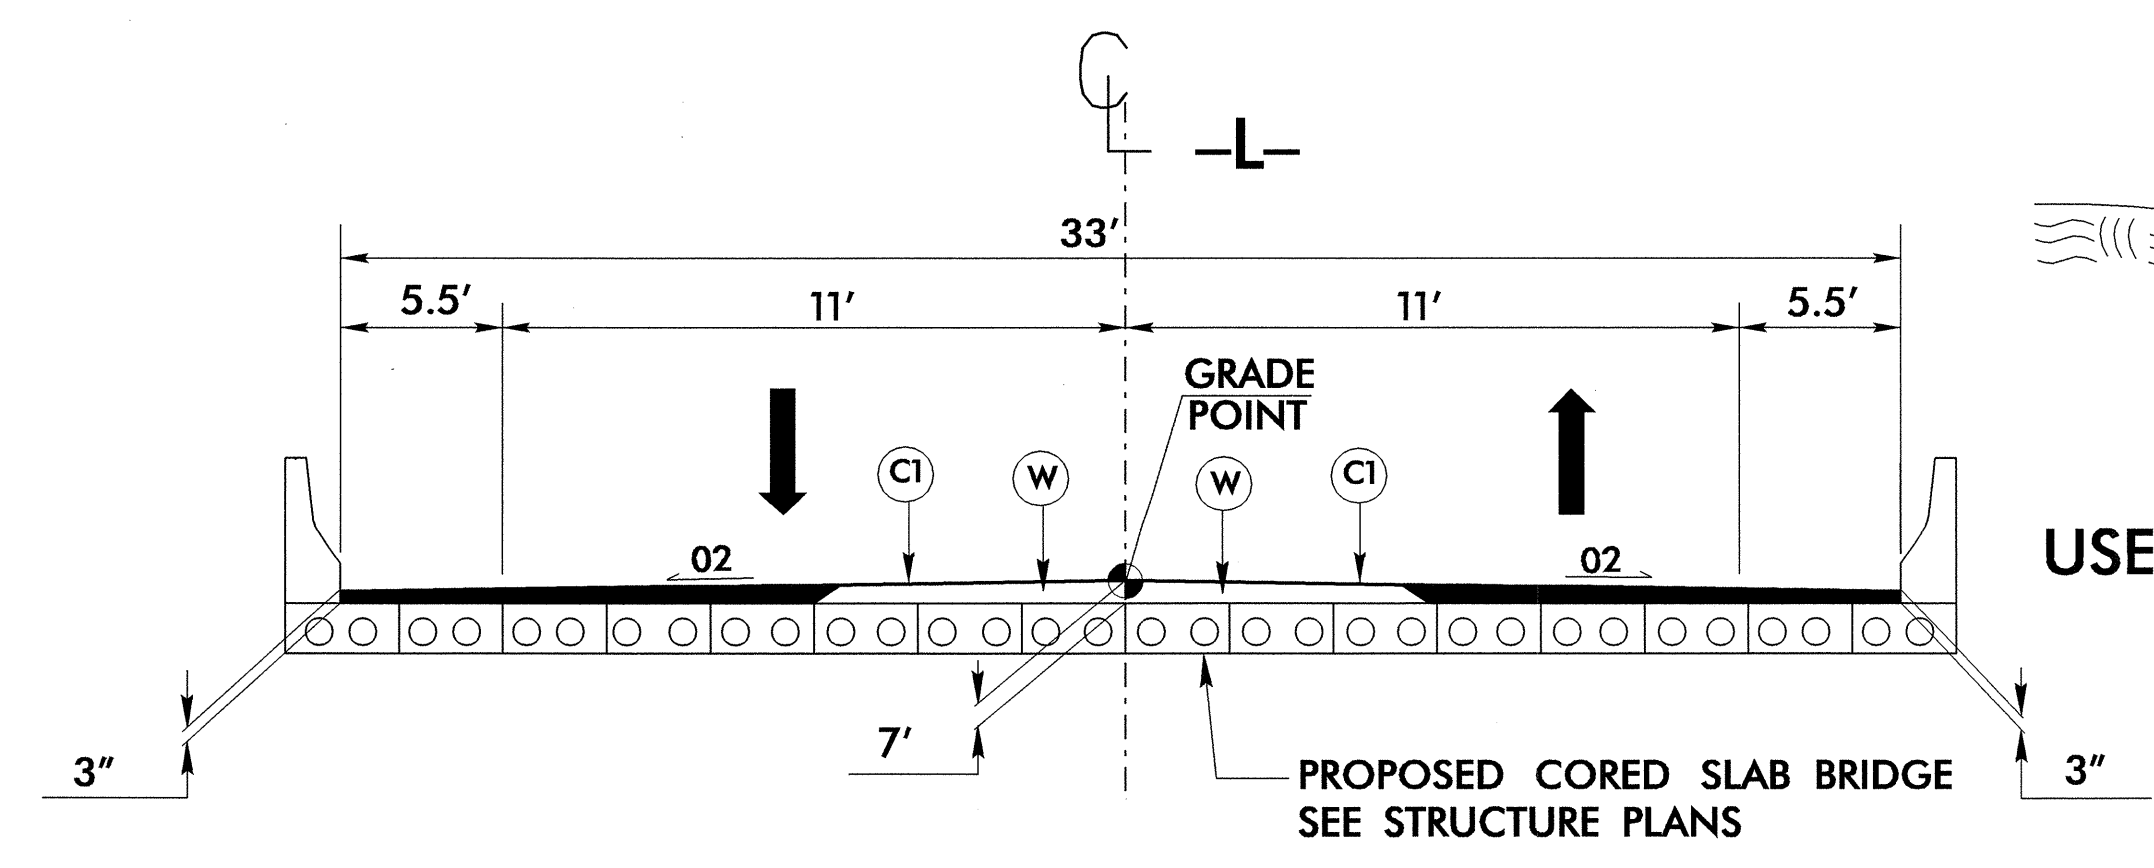

**TYPICAL SECTION NO. 3**  
USE TYPICAL SECTION NO. 3 AT THE FOLLOWING LOCATION:

- L- STA. 16+03.75 (BEGIN BRIDGE) TO STA. 17+31.25 (END BRIDGE)

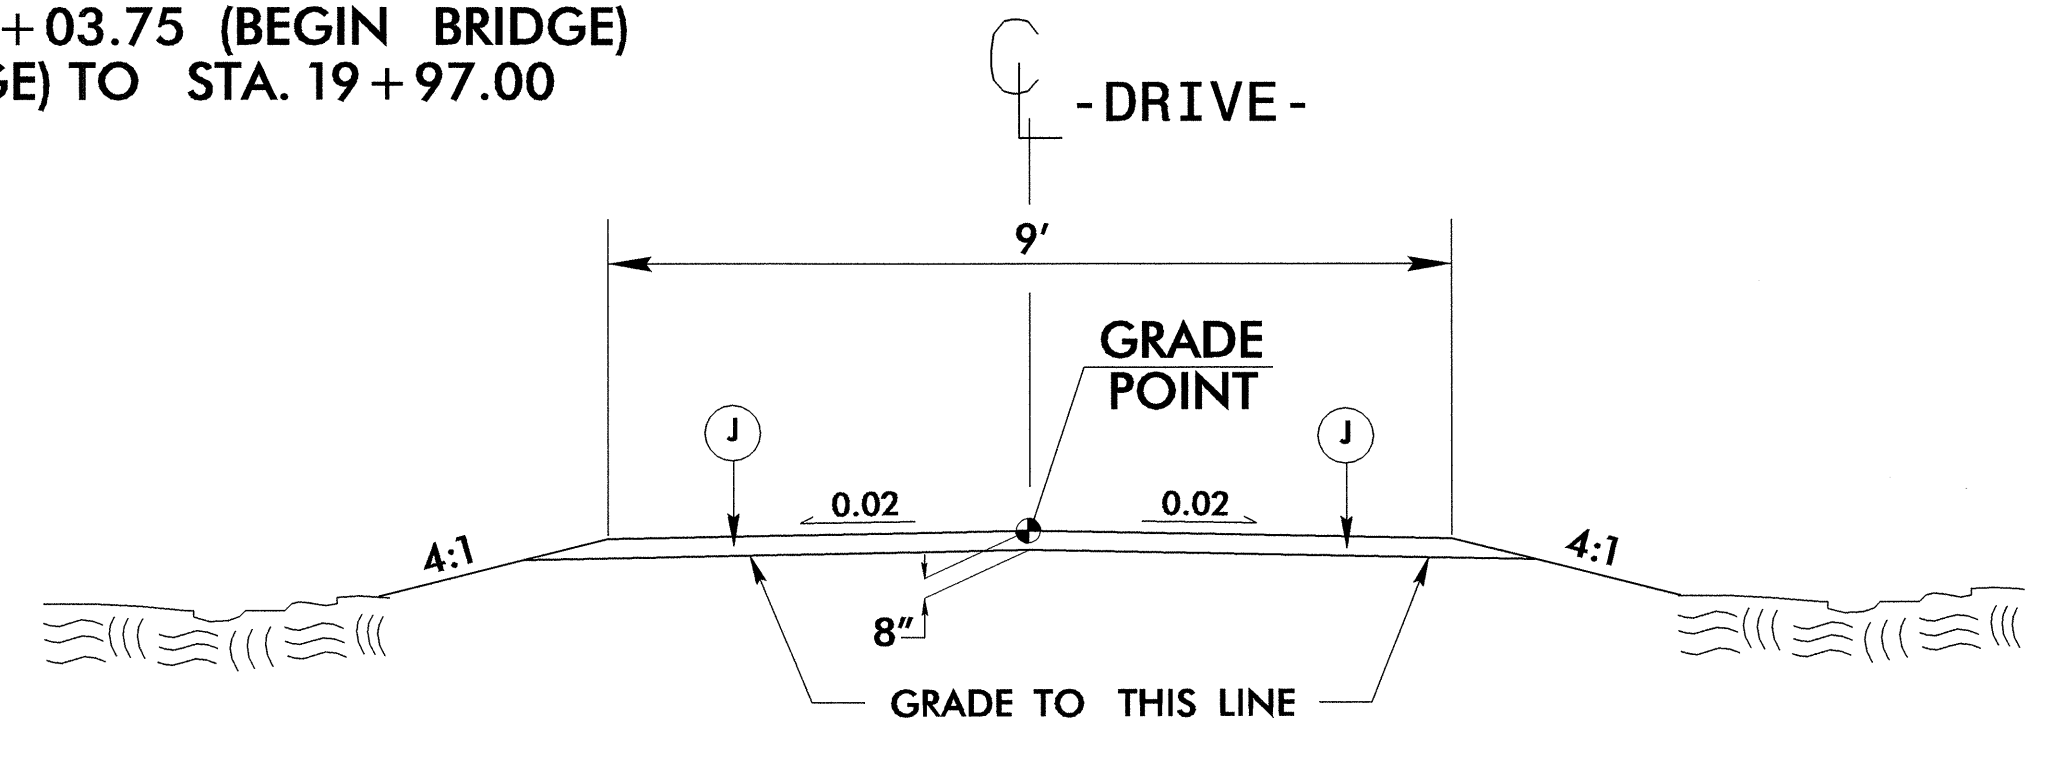

**TYPICAL SECTION NO. 4**  
USE TYPICAL SECTION NO. 4 AT THE FOLLOWING LOCATION:

- DRIVE- STA. 10+11.50 TO STA. 11+17.00

14-MN-2005 (R65)  
K:\Roadway\B-4248\_r.dwg\_tjg.dgn  
11/18/05