

**TYPICAL SECTION NO. 1**


**NOTE:**  
 TRANSITION FROM EXISTING TO TYPICAL SECTION 1 STA. 17+71 TO 18+71  
 TRANSITION FROM TYPICAL SECTION 1 TO EXISTING STA. 32+01.86 TO 33+01.86

**USE TYPICAL SECTION NO. 1**


- L- STA. 18+71.00 TO STA. 21+70.00 (BEGIN BRIDGE)
- L- STA. 22+60.00 (END BRIDGE) TO STA. 28+00.00 (BEGIN BRIDGE)
- L- STA. 29+05.00 (END BRIDGE) TO STA. 32+01.86

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH TO PLACED IN LAYERS NOT TO EXCEED 3" IN DEPTH.
E1	PROP. APPROX. 6.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT

**NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.**

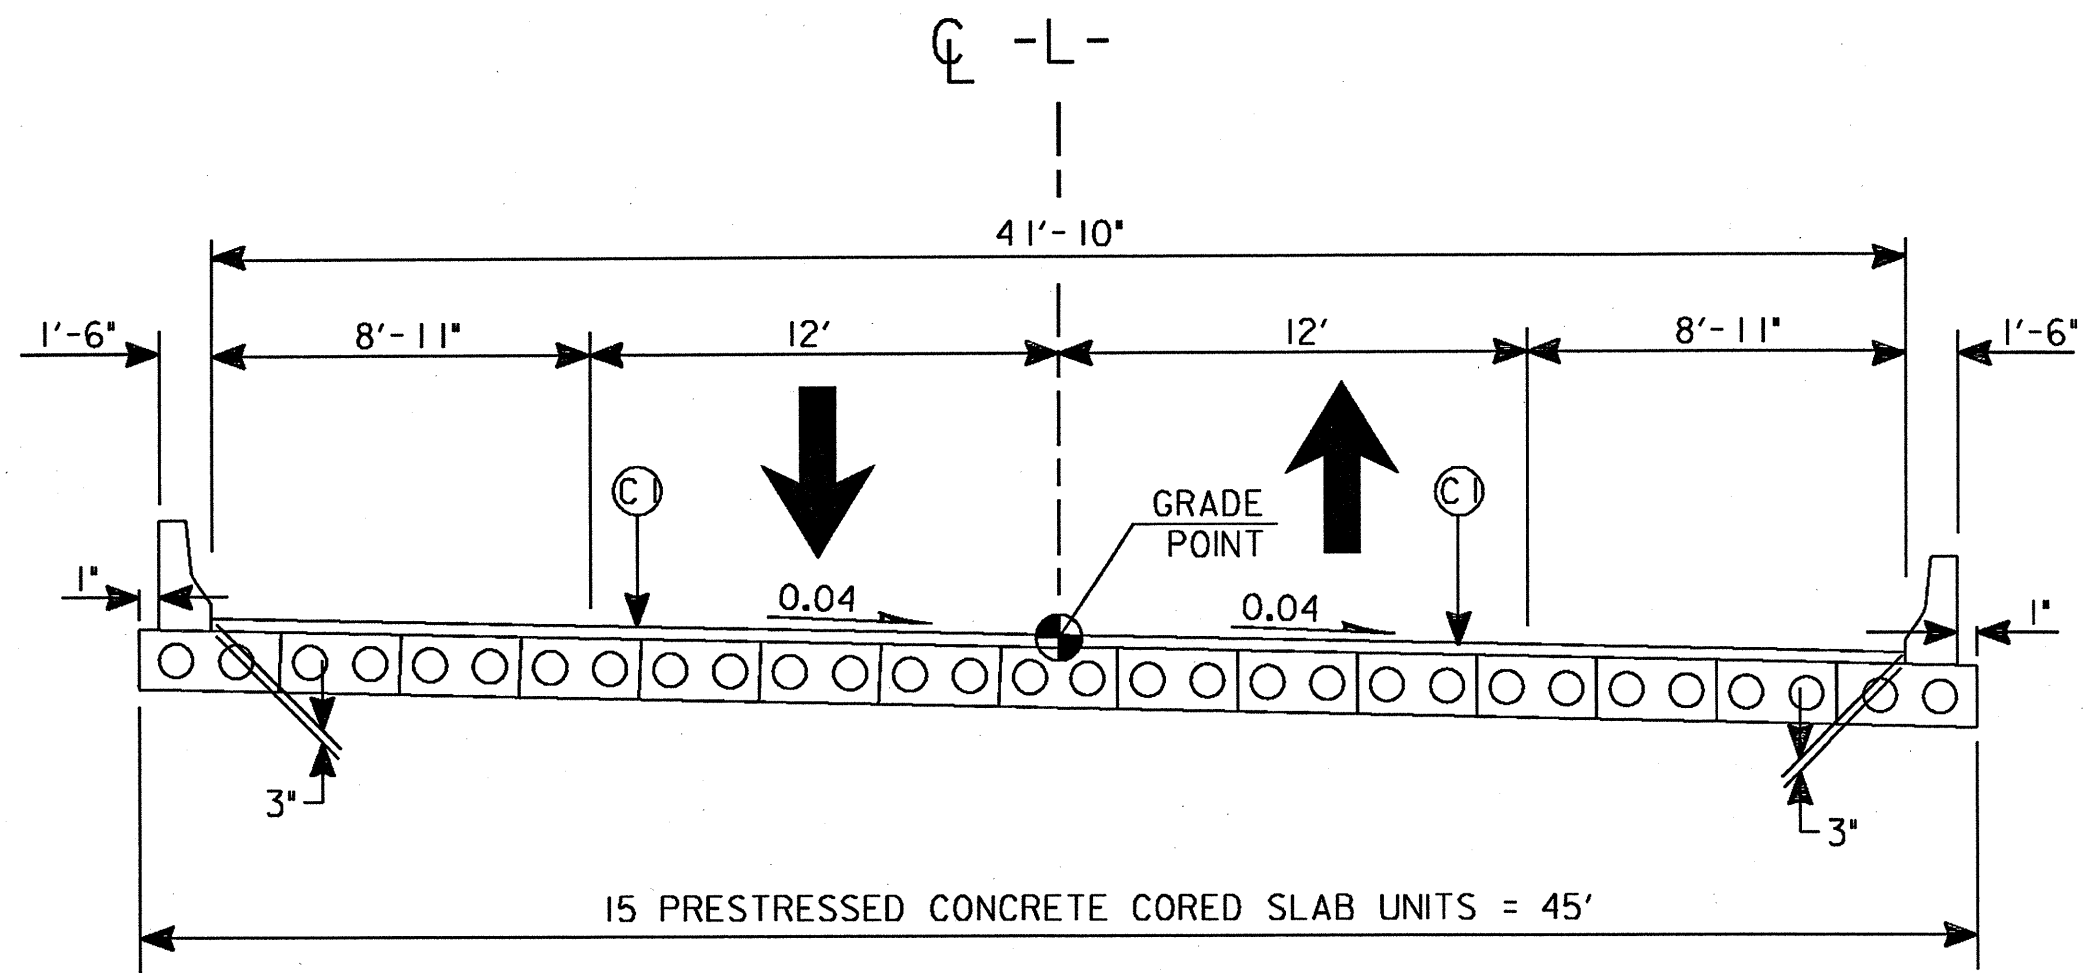

**CORED SLAB DETAIL  
BRIDGE NO. 35**

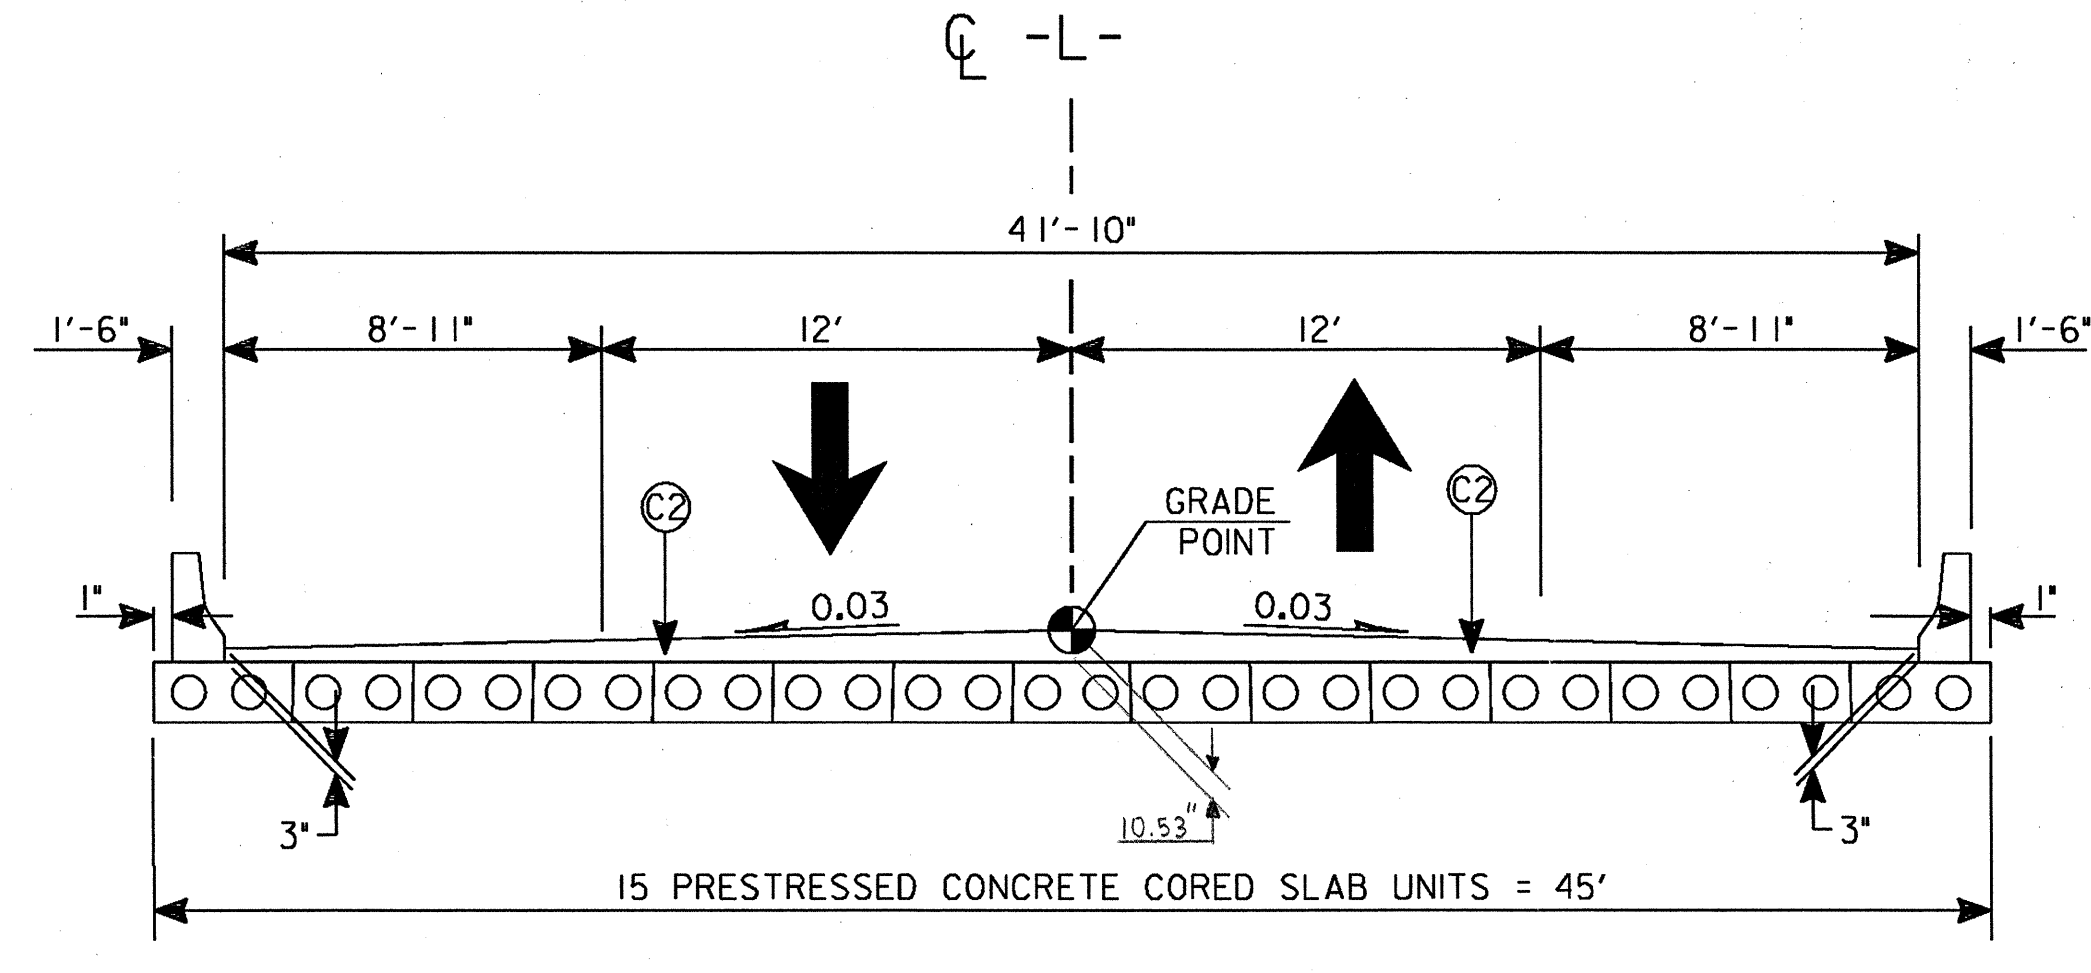

**CORED SLAB DETAIL  
BRIDGE NO. 44**