

GENERAL NOTES

A) ADAPT THE TRAFFIC CONTROL PLANS, WHEN DIRECTED BY THE ENGINEER, TO MEET FIELD CONDITIONS TO PROVIDE SAFE AND EFFICIENT TRAFFIC MOVEMENT. CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS AND ROADWAY DETAILS ARE NOT ATTAINABLE, OR RESULT IN DUPLICATE, OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING OR REMOVAL OF DEVICES.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

TRAFFIC PATTERN ALTERATIONS

B) NOTIFY THE ENGINEER TWENTY ONE (21) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

SIGNING

- C) PROVIDE PERMANENT SIGNING.
- D) PROVIDE DETOUR SIGNING WITHIN AND OFF THE PROJECT LIMITS.
- E) COVER OR REMOVE ALL DETOUR SIGNS WITHIN AND OFF THE PROJECT LIMITS WHEN A DETOUR IS NOT IN OPERATION.
- F) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.

TRAFFIC CONTROL DEVICES

G) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY. STAGGER OR OVERLAP BARRICADES TO ALLOW FOR INGRESS OR EGRESS.

PAVEMENT MARKINGS AND MARKERS

H) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

<u>ROAD NAME</u>	<u>MARKING</u>	<u>MARKER</u>
SR 1131 NEW SANDY HILL CHURCH RD.	PAINT	PERMANENT RAISED

I) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

PHASING

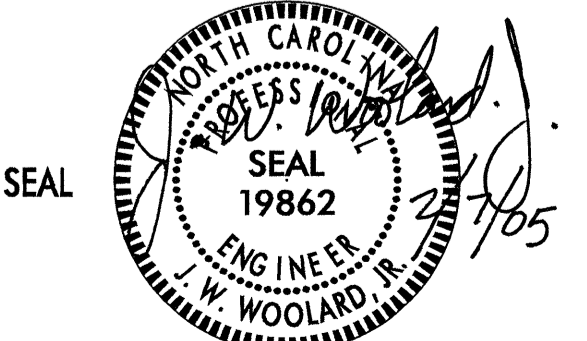

- STEP 1: INSTALL DETOUR SIGNING AS SHOWN ON SHEET TCP-3.
- STEP 2: USING ROADWAY STANDARD DRAWING NO. 1101.03 SHEET 1 OF 9 AND SHEET TCP-3, CLOSE SR 1131 (-L-) AND PLACE TRAFFIC ON THE DETOUR.
- STEP 3: AWAY FROM TRAFFIC, REMOVE EXISTING STRUCTURE AND CONSTRUCT PROPOSED STRUCTURE AND ROADWAY UP TO AND INCLUDING THE FINAL LAYER OF SURFACE COURSE.

PLACE PERMANENT PAVEMENT MARKINGS (PAINT) AND PERMANENT RAISED PAVEMENT MARKERS ON SR 1131 (-L-) AND TIE INTO EXISTING MARKINGS.
- STEP 4: REMOVE ALL TRAFFIC CONTROL DEVICES AND ALL DETOUR SIGNING AND OPEN SR 1131 (-L-) TO TRAFFIC.

PAVEMENT MARKING SCHEDULE

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>QUANTITY BREAKDOWN</u>	<u>PAY ITEM</u>	<u>TOTAL QUANTITY</u>
<u>PAVEMENT MARKING LINES</u>				
PA	WHITE EDGELINE	5,000 LF	PAINT (4")	10,000 LF
PI	YELLOW DOUBLE CENTERLINE	5,000 LF		
<u>PAVEMENT MARKERS</u>				
MA	YELLOW & YELLOW	17 EA	PERMANENT RAISED	17 EA

07-FEB-2005 11:45
 \\nets-ccf50\1643278\TOP\B-4327-TCP-TCP3.dgn
 kbrodwell AT TETC201913

APPROVED:	DATE:	GENERAL NOTES, PHASING & PAVEMENT MARKING SCHEDULE			
	SCALE: NONE				
	DATE: 2/05			REVISIONS	
	DWG. BY: KPB				
	DESIGN BY: KPB				
REVIEWED BY: JWW					