

## GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) ADAPT THE TRAFFIC CONTROL PLANS, WHEN DIRECTED BY THE ENGINEER, TO MEET FIELD CONDITIONS TO PROVIDE SAFE AND EFFICIENT TRAFFIC MOVEMENT. CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS AND ROADWAY DETAILS ARE NOT ATTAINABLE, OR RESULT IN DUPLICATE, OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING OR REMOVAL OF DEVICES.

**TRAFFIC PATTERN ALTERATIONS**

- B) NOTIFY THE ENGINEER TWENTY ONE (21) CALENDAR DAYS PRIOR TO ANY TRAFFIC PATTERN ALTERATION.

**SIGNING**

- C) INSTALL ADVANCE WORK ZONE WARNING SIGNS WHEN WORK IS WITHIN 100 FT (31m) FROM THE EDGE OF TRAVEL LANE AND NO MORE THAN THREE (3) DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION.

WHEN NO WORK IS BEING CONDUCTED FOR A PERIOD LONGER THAN ONE WEEK, REMOVE OR COVER ALL ADVANCE WORK ZONE WARNING SIGNS, AS DIRECTED BY THE ENGINEER, AT NO COST TO THE DEPARTMENT.

- D) STATE FORCES WILL BE RESPONSIBLE FOR PERMANENT SIGNING.  
 E) PROVIDE DETOUR SIGNING WITHIN AND OFF THE PROJECT LIMITS.  
 F) COVER OR REMOVE ALL DETOUR SIGNS WITHIN AND OFF THE PROJECT LIMITS WHEN A DETOUR IS NOT IN OPERATION.  
 G) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.

**TRAFFIC CONTROL DEVICES**

- H) WHEN USING ROADWAY STANDARD NO. 1101.02, DRUMS MAY BE USED IN LIEU OF CONES ON SR 1179.  
 I) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY. STAGGER OR OVERLAP BARRICADES TO ALLOW FOR INGRESS OR EGRESS.

**PAVEMENT MARKINGS AND MARKERS**

- J) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
1. SR 1179	POLYUREA	NONE

- K) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

SIGN NUMR: TYPE: D Ground  
 QUANTITY: 1  
 SIGN WIDTH: 3'-6"  
 HEIGHT: 2'-6"  
 TOTAL AREA: 8.8 Sq.Ft.  
 MAT'L: 0.080 in. ALUMINUM  
 BORDER TYPE: RECESSED  
 RECESS: 0.5"  
 WIDTH: 0.75"  
 RADII: 1.88"  
 NO. Z BARS:  
 LENGTH: in.

BACKG. COLOR: Orange  
 COPY COLOR: Black

DESIGN BY: DME  
 PROJECT ID: B-2905

CHK BY:  
 DIV: 11

STD #:  
 DATE: Apr 13, 2004


N. C. DEPARTMENT OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
 TRAFFIC ENGINEERING BRANCH  
 SIGNING DEPARTMENT



SYMBOL	X	Y	WID	HT

**USE NOTES: 1,4**

- Legend and border shall be direct applied non-reflective sheeting.
- Legend and border shall be direct applied Type I reflective sheeting.
- Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
- Background shall be Type VII or higher reflective sheeting.
- Background shall be Type I reflective sheeting.
- Center arrow(s) vertically on sign.

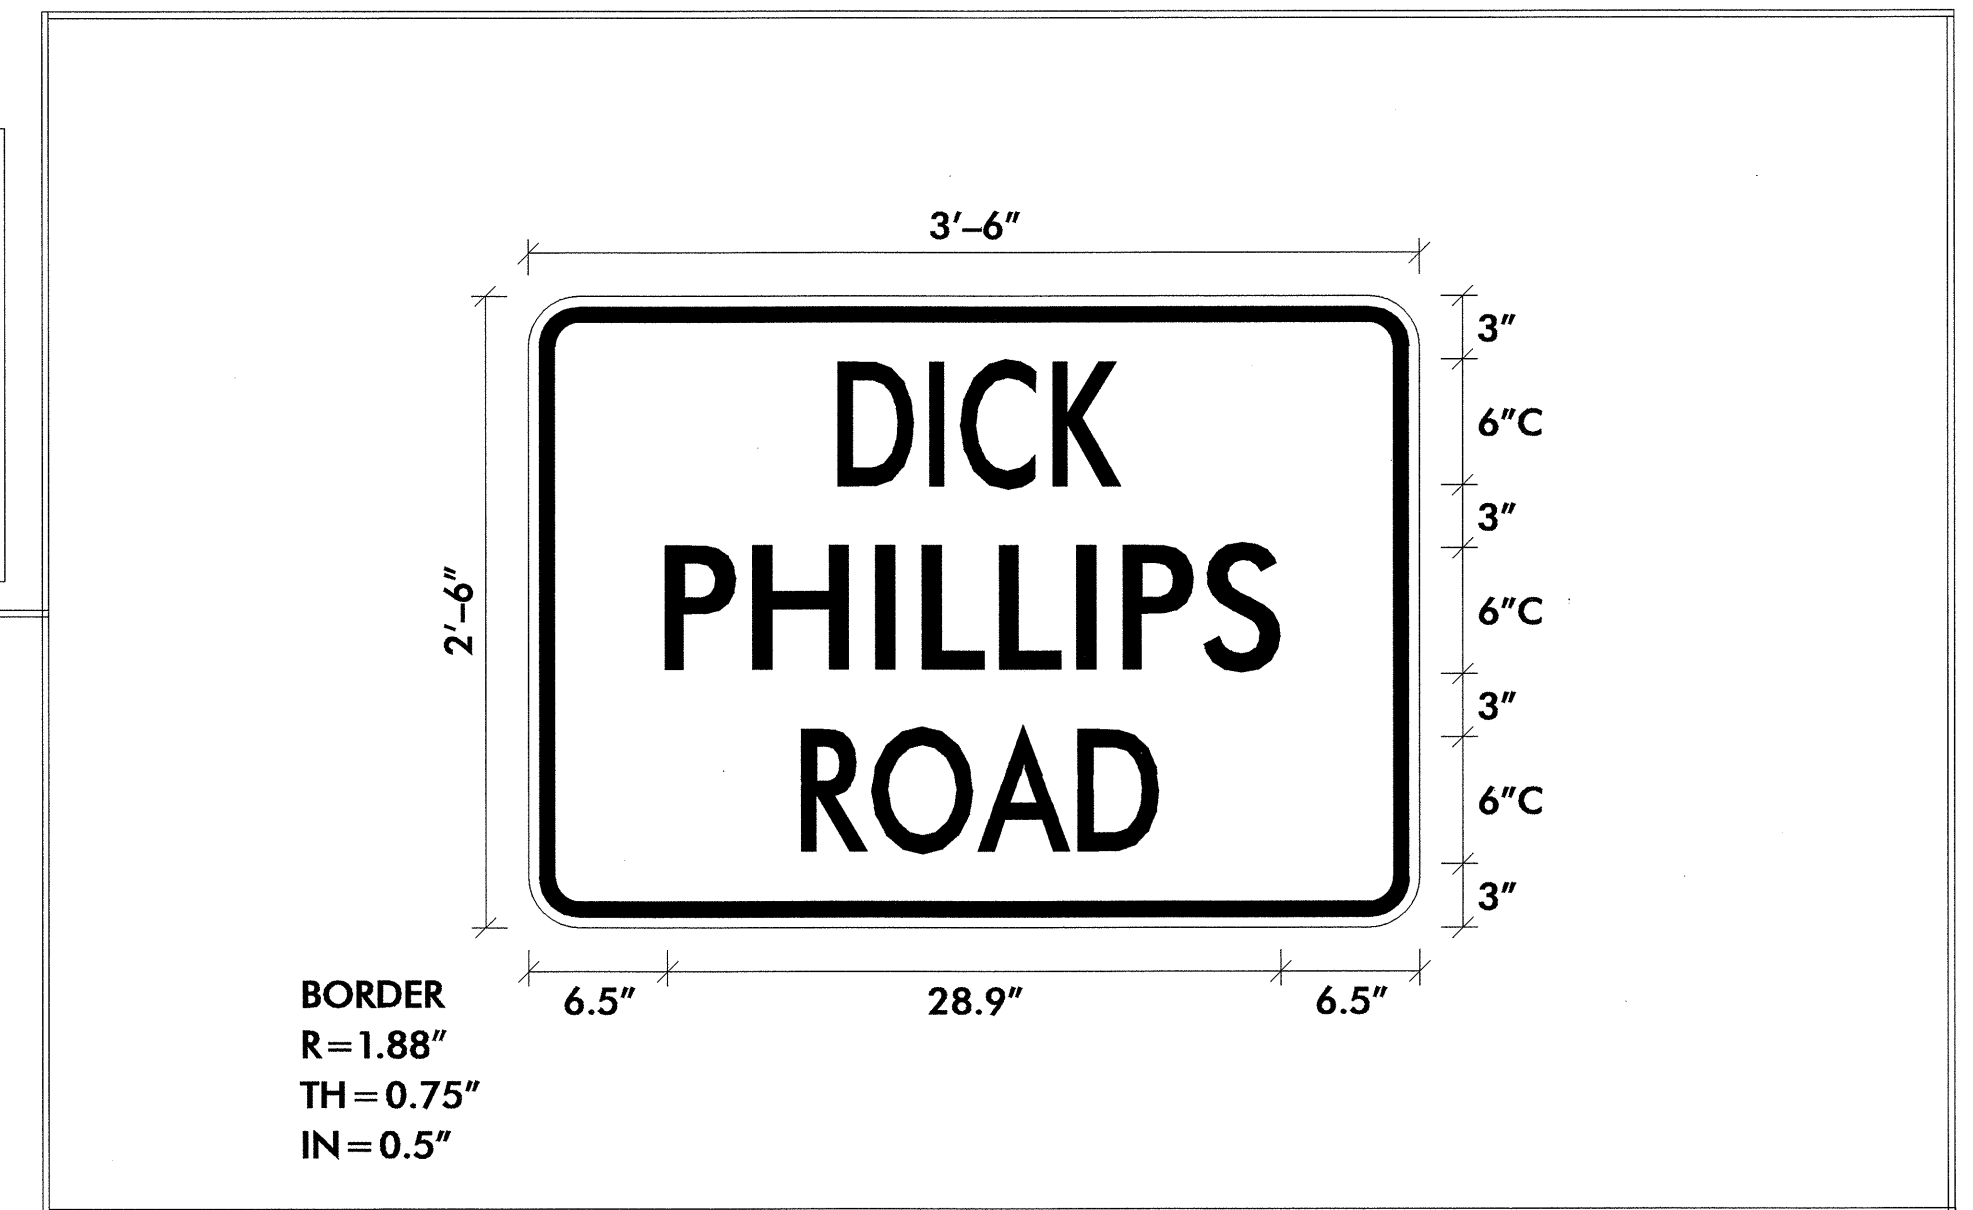


BORDER  
 R=1.88"  
 TH=0.75"  
 IN=0.5"

**Letter spacings are to start of next letter**

	D	I	C	K																	Series/Size Text Length	
	13.9	4.6	2.1	4.3	3.3	13.9															C6	
																						14.2
																						C6
	6.5	4.6	4.5	2.1	4	4	2.1	4.3	3.3	6.5												28.9
																						C6
	12.6	4.3	4.5	4.8	3.3	12.6																16.8

Spacing Factor is 1 unless specified otherwise  
 FILENAME: GS40\_ENGL


APPROVED: *Jessica Kuy* DATE: *7/13/04*



SEAL

**GENERAL NOTES AND SIGN DESIGN**

SCALE: NONE  
 DATE: 7/2004  
 DWG. BY: MLM  
 DESIGN BY: MLM  
 REVIEWED BY: JDK



REVISIONS	