


SIGN DETAIL

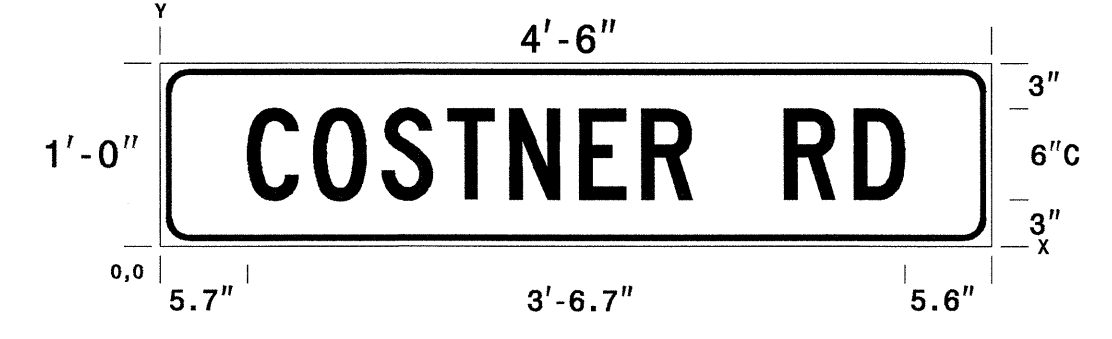

DIMENSIONS IN INCHES

SPACINGS ARE TO START OF NEXT LETTER


Y FONT	LETTER SPACINGS												HT LEN			
3.0	C	O	S	T	N	E	R	D								6.0
C	5.7	4.3	4.5	4.3	4.0	4.6	4.0	3.3	6.0	4.6	3.3	5.6				42.7

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH

SIGN NUMBER: SPO3004 DESIGN BY: MB ALLEN DATE: 1/6/03
TYPE: D CHECKED BY: STD. #: 0
QUANTITY: PROJECT ID: B-3828 DIV: T/C
WIDTH x HEIGHT: 54" x 12" BACKGROUND COLOR: ORANGE
SIGN AREA: 4.50 SQ. FT. COPY COLOR: BLACK
BORDER TYPE: RECESS MAJ COPY SERIES: G
BORDER WIDTH: 0.375" MAT'L: TO BE DETERMINED
RADIUS: 1.5" TO BE MOUNTED WITH DETOUR SIGNING

NOTES:
- Legend and border shall be direct applied non-reflective sheeting.
- Background shall be Type III reflective sheeting.

SIGN DETAIL

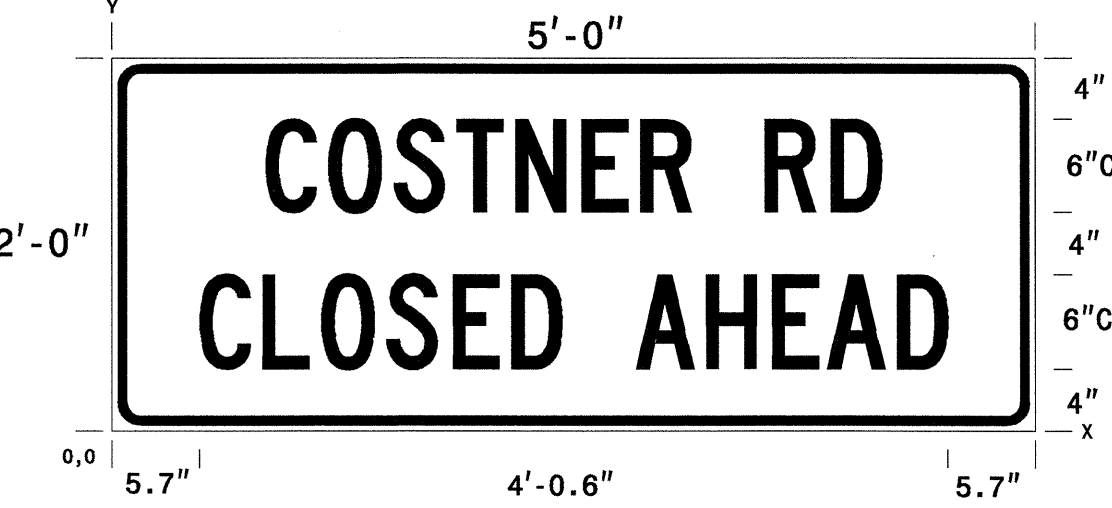

DIMENSIONS IN INCHES

SPACINGS ARE TO START OF NEXT LETTER

Y FONT	LETTER SPACINGS															HT LEN
14.0	C	O	S	T	N	E	R	D								6.0
C	10.0	4.1	4.3	4.1	3.8	4.3	3.8	3.3	4.8	4.3	3.3	10.0				40.0
4.0	C	L	O	S	E	D	A	H	E	A	D					6.0
C	5.7	4.1	3.8	4.3	4.3	3.8	3.3	4.8	4.6	4.3	3.6	4.6	3.3	5.7		48.6

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH

SIGN NUMBER: SPO3003 DESIGN BY: MB ALLEN DATE: 1/3/03
TYPE: D CHECKED BY: STD. #: 0
QUANTITY: PROJECT ID: B-3828 DIV: T/C
WIDTH x HEIGHT: 60" x 24" BACKGROUND COLOR: ORANGE
SIGN AREA: 10.00 SQ. FT. COPY COLOR: BLACK
BORDER TYPE: RECESS MAJ COPY SERIES: C
BORDER WIDTH: 0.375" MAT'L: TO BE DETERMINED
RADIUS: 1.5" TO BE MOUNTED WITH DETOUR SIGNING

NOTES:
- Legend and border shall be direct applied non-reflective sheeting.
- Background shall be Type III reflective sheeting.

PHASING

- STEP 1: - USING ROADWAY STANDARD DRAWING NO. 1101.03, SHEET 1 OF 9, CLOSE SR 1906 (COSTNER RD.) (-L-) AT STA. 10+95 +/- (-L-) AND STA. 18+00 +/- (-L-).
- INSTALL DETOUR ROUTE SIGN ASSEMBLIES.
- STEP 2: - REMOVE THE EXISTING STRUCTURE AND CONSTRUCT THE PROPOSED STRUCTURE AND APPROACHES UP TO AND INCLUDING THE FINAL LAYER OF SURFACE COURSE (SEE THE CONSTRUCTION PLANS).
- PLACE THE FINAL PAVEMENT MARKINGS (PAINT ON ROAD AND STRUCTURE) ON SR 1906 (COSTNER RD.) (-L-).
- STEP 3: - REMOVE ALL TRAFFIC CONTROL DEVICES AND DETOUR ROUTE SIGNING.
REOPEN SR 1906 (COSTNER RD.) (-L-) TO THE FINAL TRAFFIC PATTERN.

NOTES

- ALL DETOUR SIGNS ARE BLACK ON ORANGE.
- ALL DETOUR SIGN LOCATIONS ARE APPROXIMATE.
- SEE ROADWAY STANDARD DRAWING NO. 1101.03 SHT. 1 OF 9 FOR WORK ZONE SIGNS ON SR 1906 (COSTNER RD.).

APPROVED: [Signature] DATE: 1/28/03

SEAL
NORTH CAROLINA PROFESSIONAL ENGINEER
1973
C. L. GETTNER

OFF-SITE DETOUR PHASING

SCALE: NONE	REVISIONS
DATE: 1/28/03	
DWG. BY: KPB	
DESIGN BY: KPB	
REVIEWED BY: JWG	CADD FILE

07-SEP-2004 09:19
HAN TCP-NB-3828-TCP-2.dwg
tiger miller AT 11/16/02 2:33