
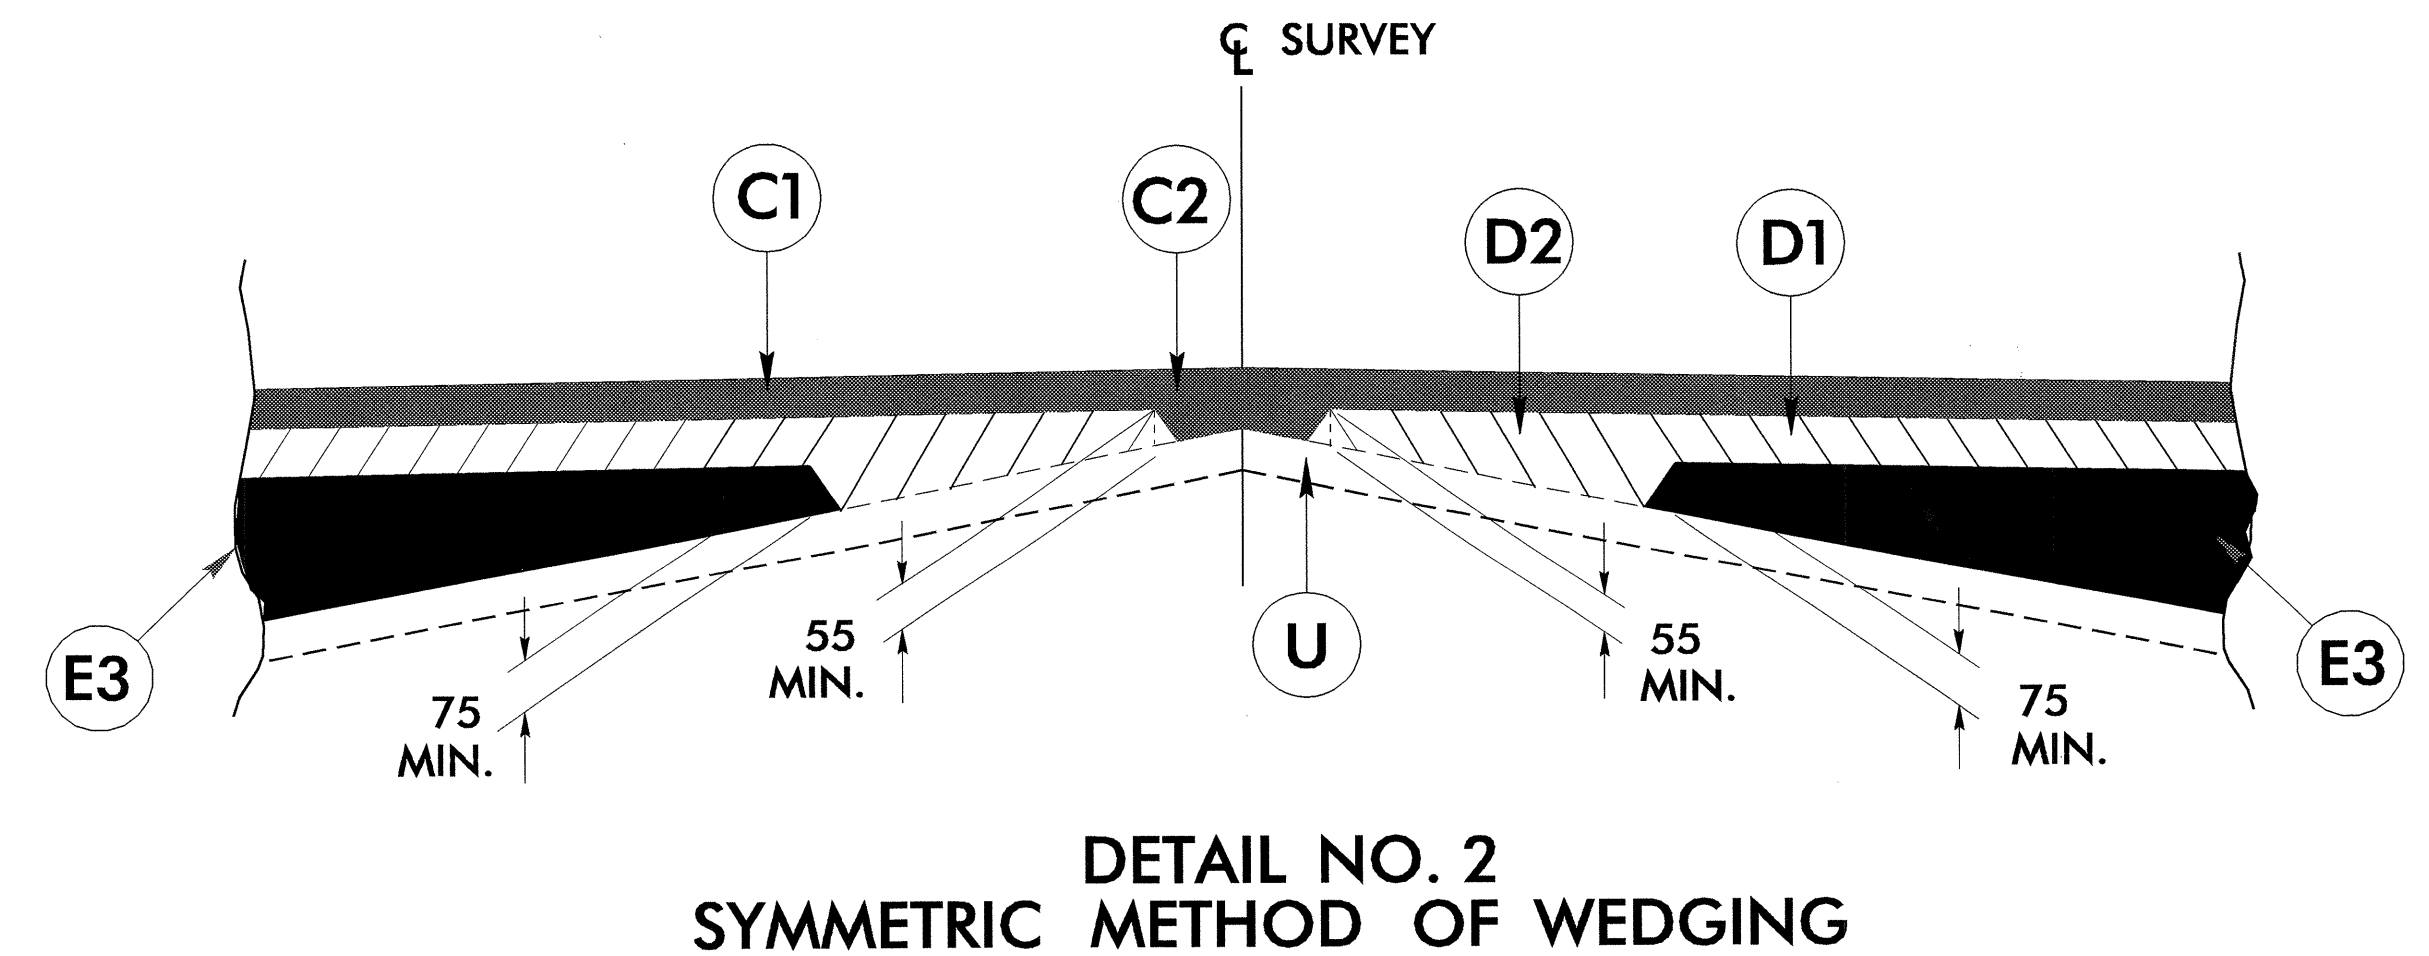


# PAVEMENT SCHEDULE

C1	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS	E5	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75mm OR GREATER THAN 140mm IN DEPTH
C2	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 25 mm OR GREATER THAN 40 mm IN DEPTH.	J1	PROP. 150 mm AGGREGATE BASE COURSE.
C3	PROP. APPROX. 100 mm ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 120 kg PER SQ. METER IN EACH OF TWO LAYERS	J2	PROP. 200 mm AGGREGATE BASE COURSE.
D1	PROP. APPROX. 65mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 160 kg PER SQ. METER	J3	PROP. 250 mm AGGREGATE BASE COURSE.
D2	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55mm OR GREATER THAN 110mm IN DEPTH	K	SUBGRADE TO BE STABILIZED WITH LIME STABILIZATION FOR TOP 200mm DEPTH AT A RATE OF 11 kg/m <sup>2</sup> AT LOCATIONS DIRECTED BY THE ENGINEER OR SUBGRADE TO BE STABILIZED WITH CEMENT STABILIZATION FOR TOP 180mm DEPTH AT A RATE OF 30 kg/m <sup>2</sup> AT LOCATIONS DIRECTED BY THE ENGINEER OR SUBGRADE TO BE TREATED WITH AGGREGATE AT A RATE OF 135 kg/m <sup>2</sup> AND CEMENT AT A RATE OF 30 kg/m <sup>2</sup> TO A DEPTH OF 180mm AS DIRECTED BY THE ENGINEER
D3	PROP. APPROX. 65mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 160 kg PER SQ. METER		
D4	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55mm OR GREATER THAN 110mm IN DEPTH	R1	125 mm MONOLITHIC CONCRETE ISLAND.
E1	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 184 kg PER SQ. METER	T	EARTH MATERIAL.
E2	PROP. APPROX. 90 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 221 kg PER SQ. METER	U	EXISTING PAVEMENT.
E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 75mm OR GREATER THAN 140mm IN DEPTH	V	MILLED RUMBLE STRIPS. (SEE DETAIL SHEET 2-II)
E4	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 184 kg PER SQ. METER	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE STANDARD WEDGING DETAIL BELOW)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

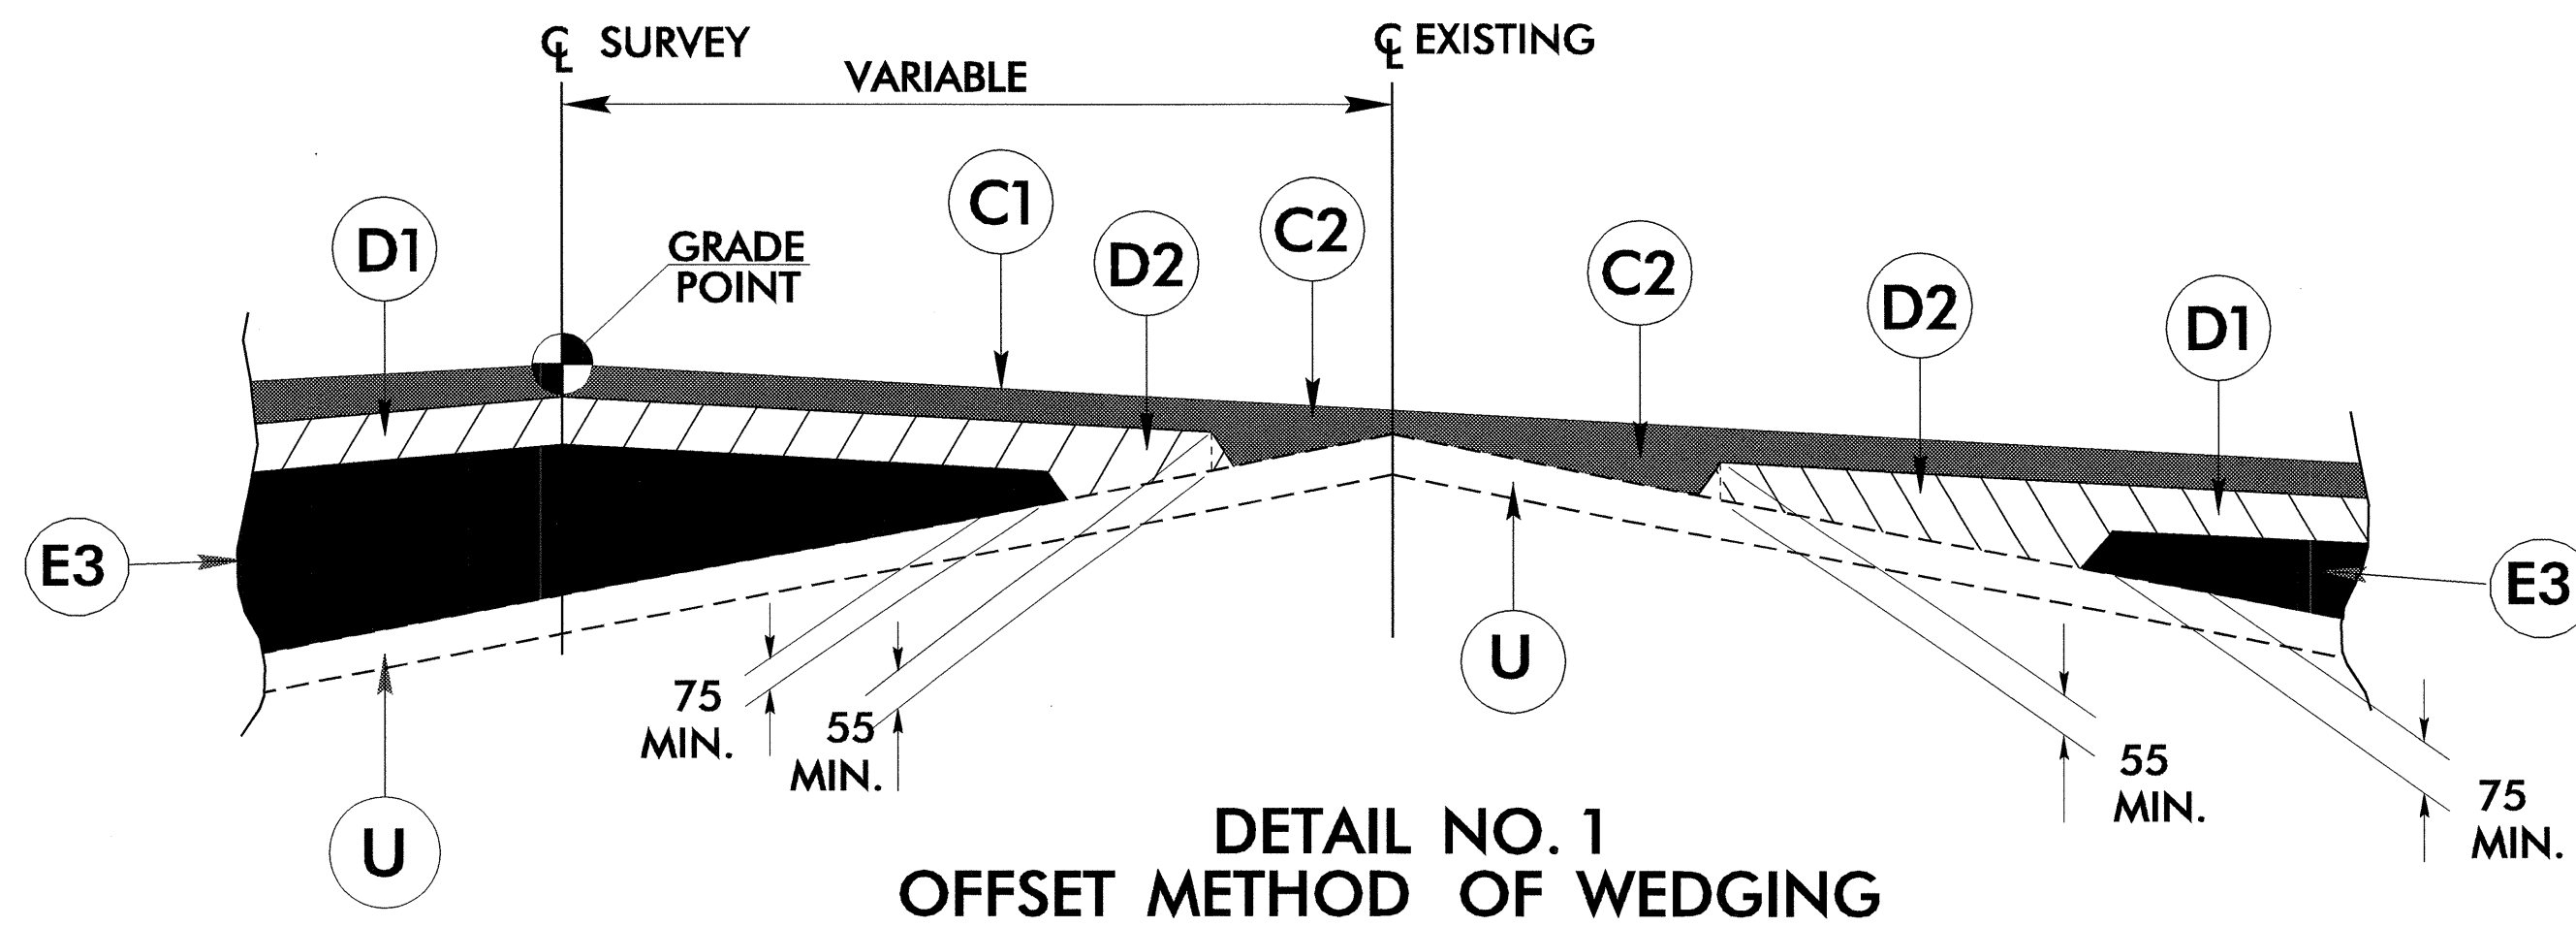

10-MAR-2005 10:03 AM RD206435-1.rvt  
MBLetchworth