


9/17/99

NOTE:
TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM
OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS




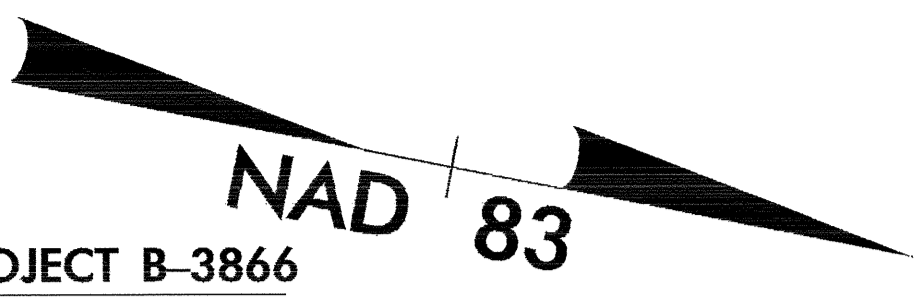


BRIDGE IS BST OVER CONCRETE W/STEEL
I-BEAMS.
GUARDRAILS ARE CONCRETE, CONCRETE
HEADWALLS BURIED UNDER ROCK RIP-RAP.

NOTE: HIGH WATER MARK APPROX. 6.62'
IN 1999 PER VARIOUS RESIDENTS.

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

PROJECT REFERENCE NO. B-3866	SHEET NO. EC-3/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

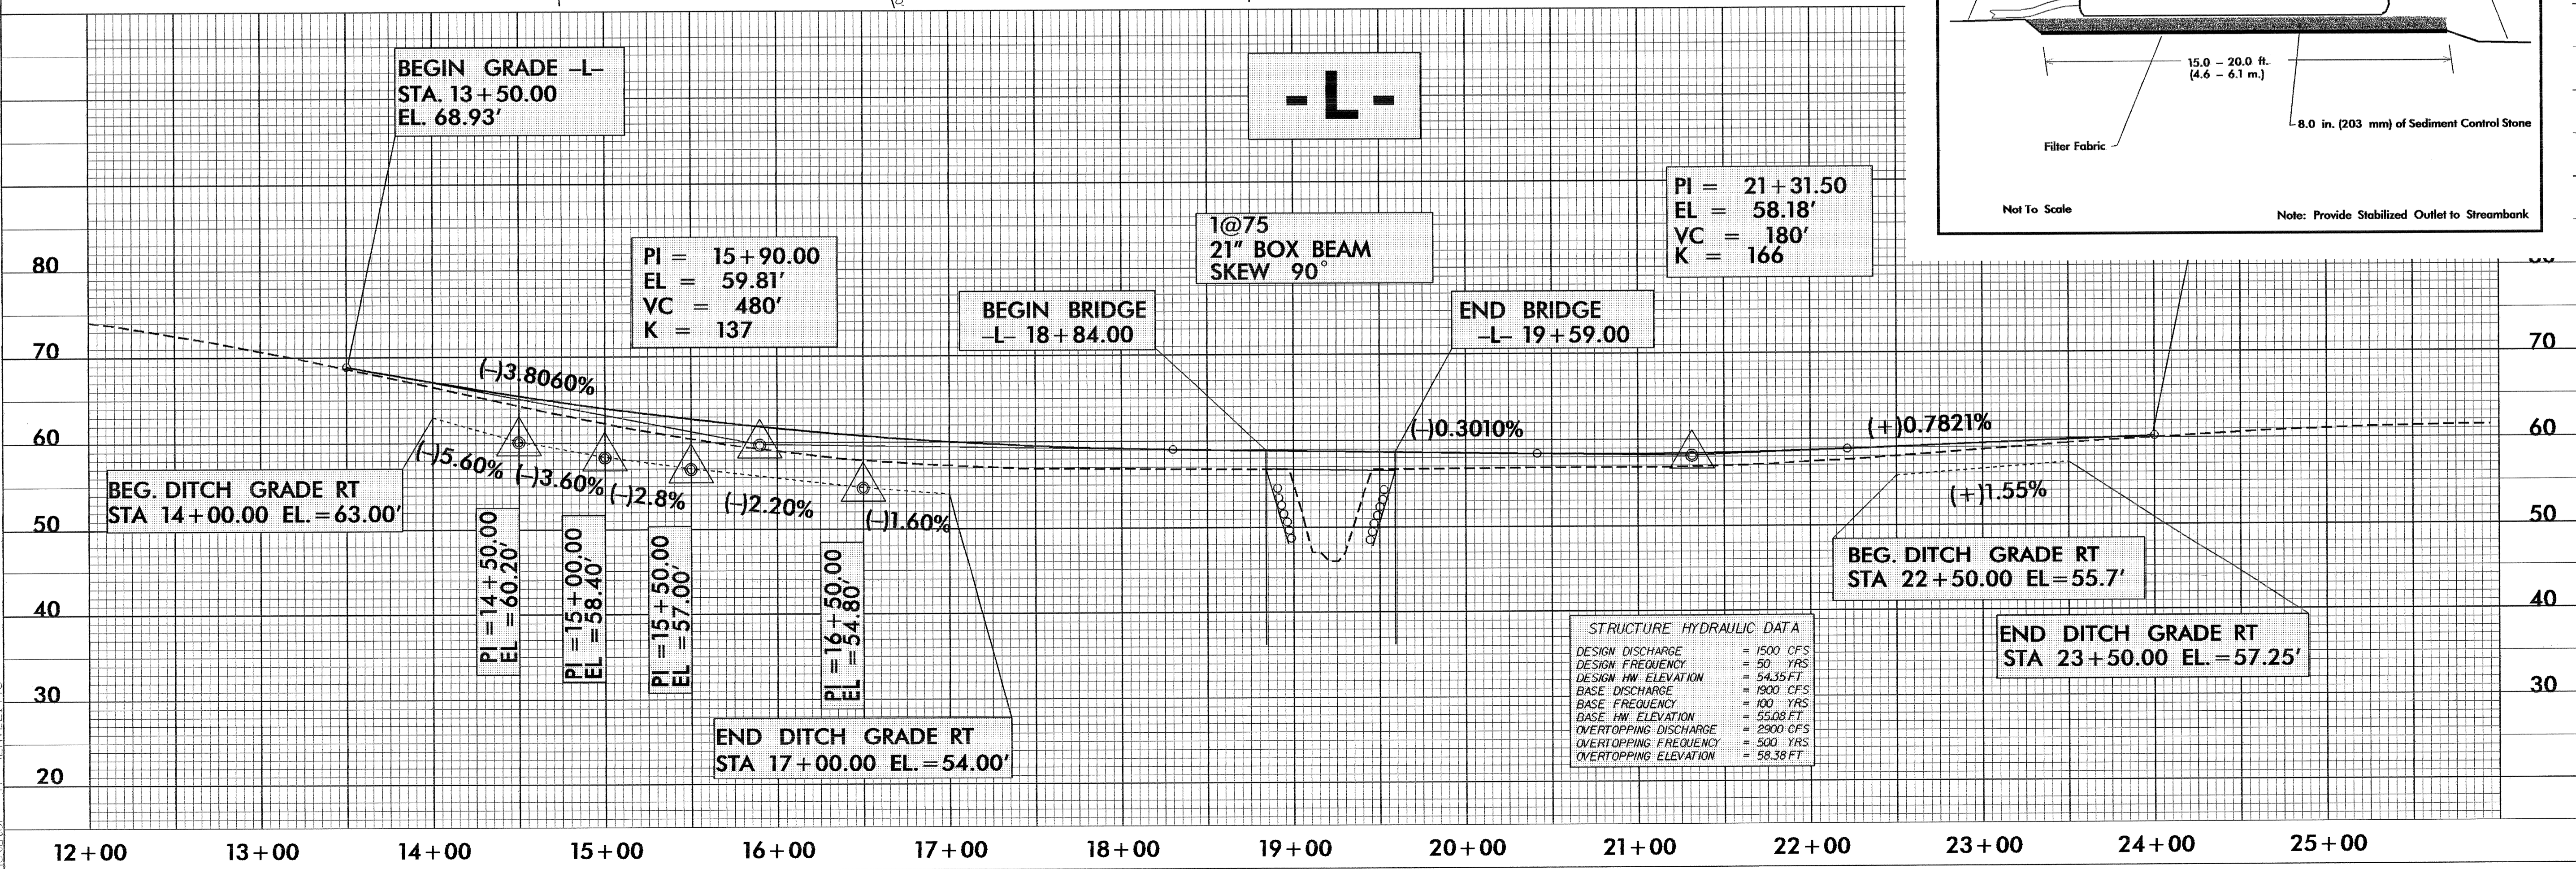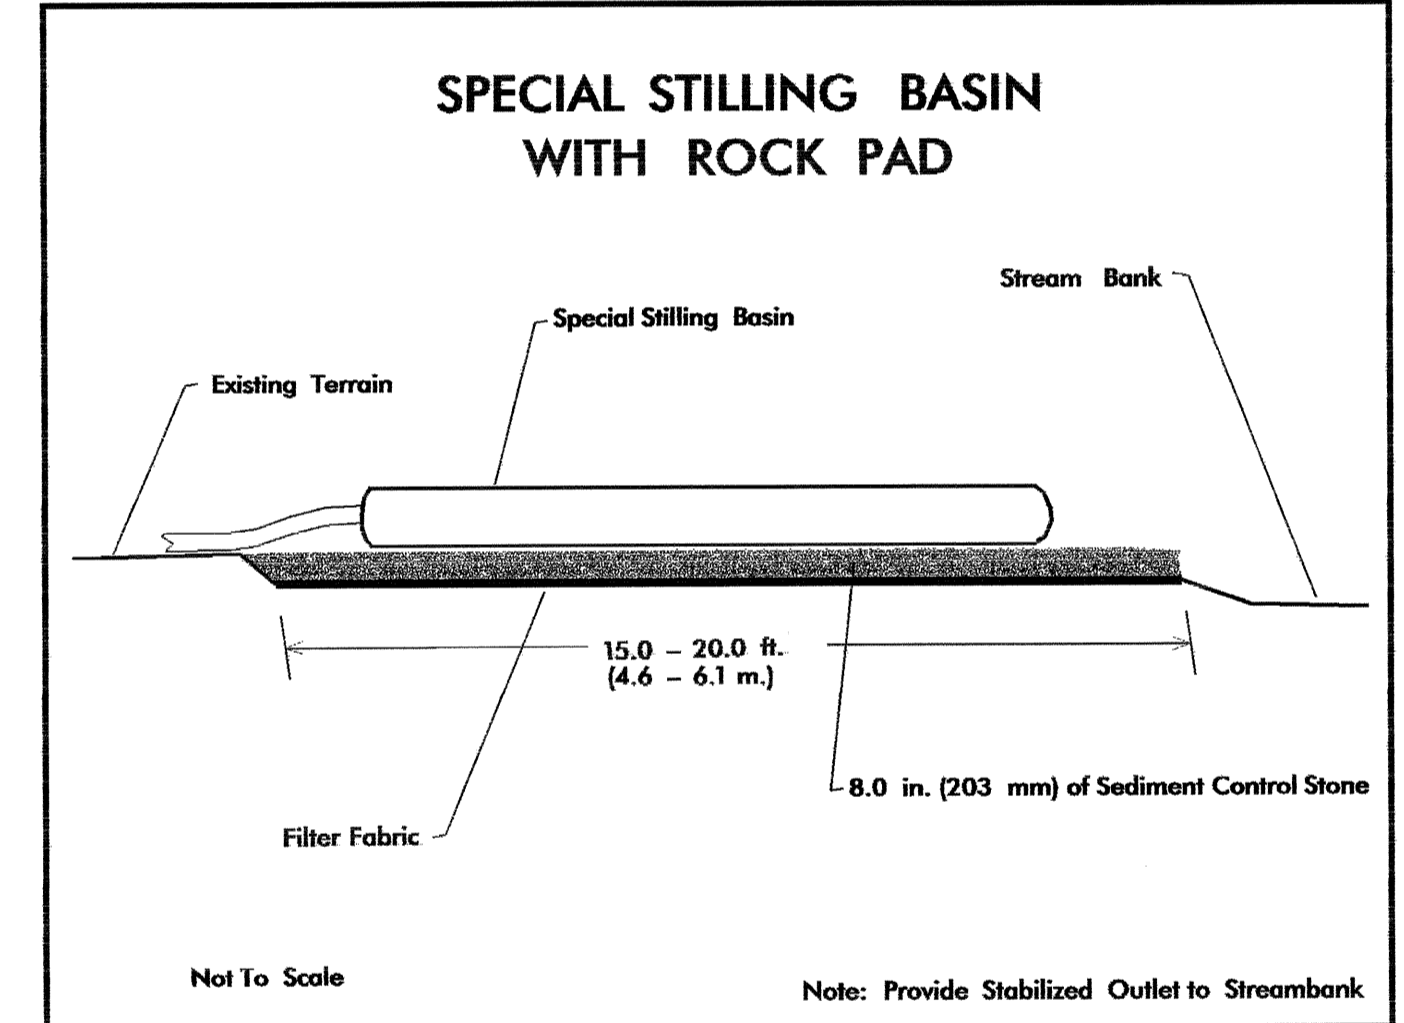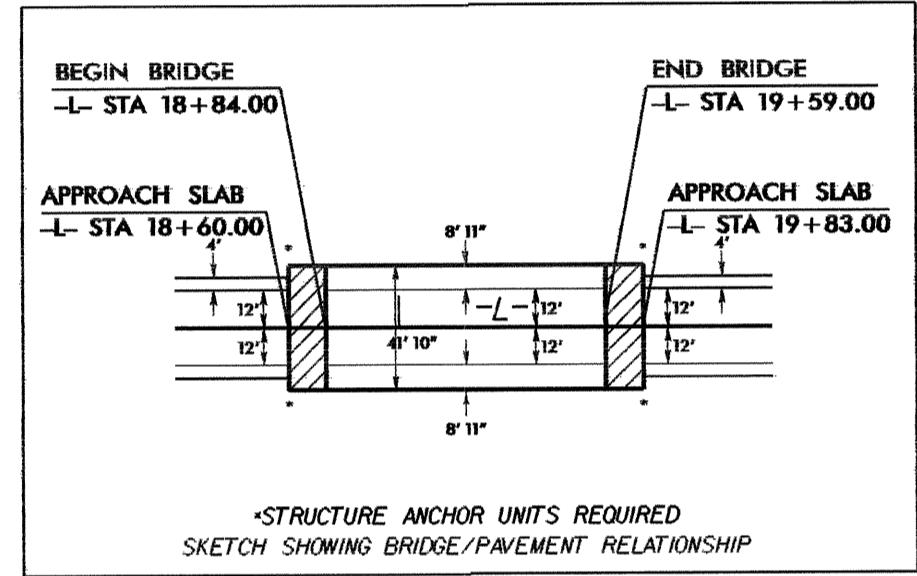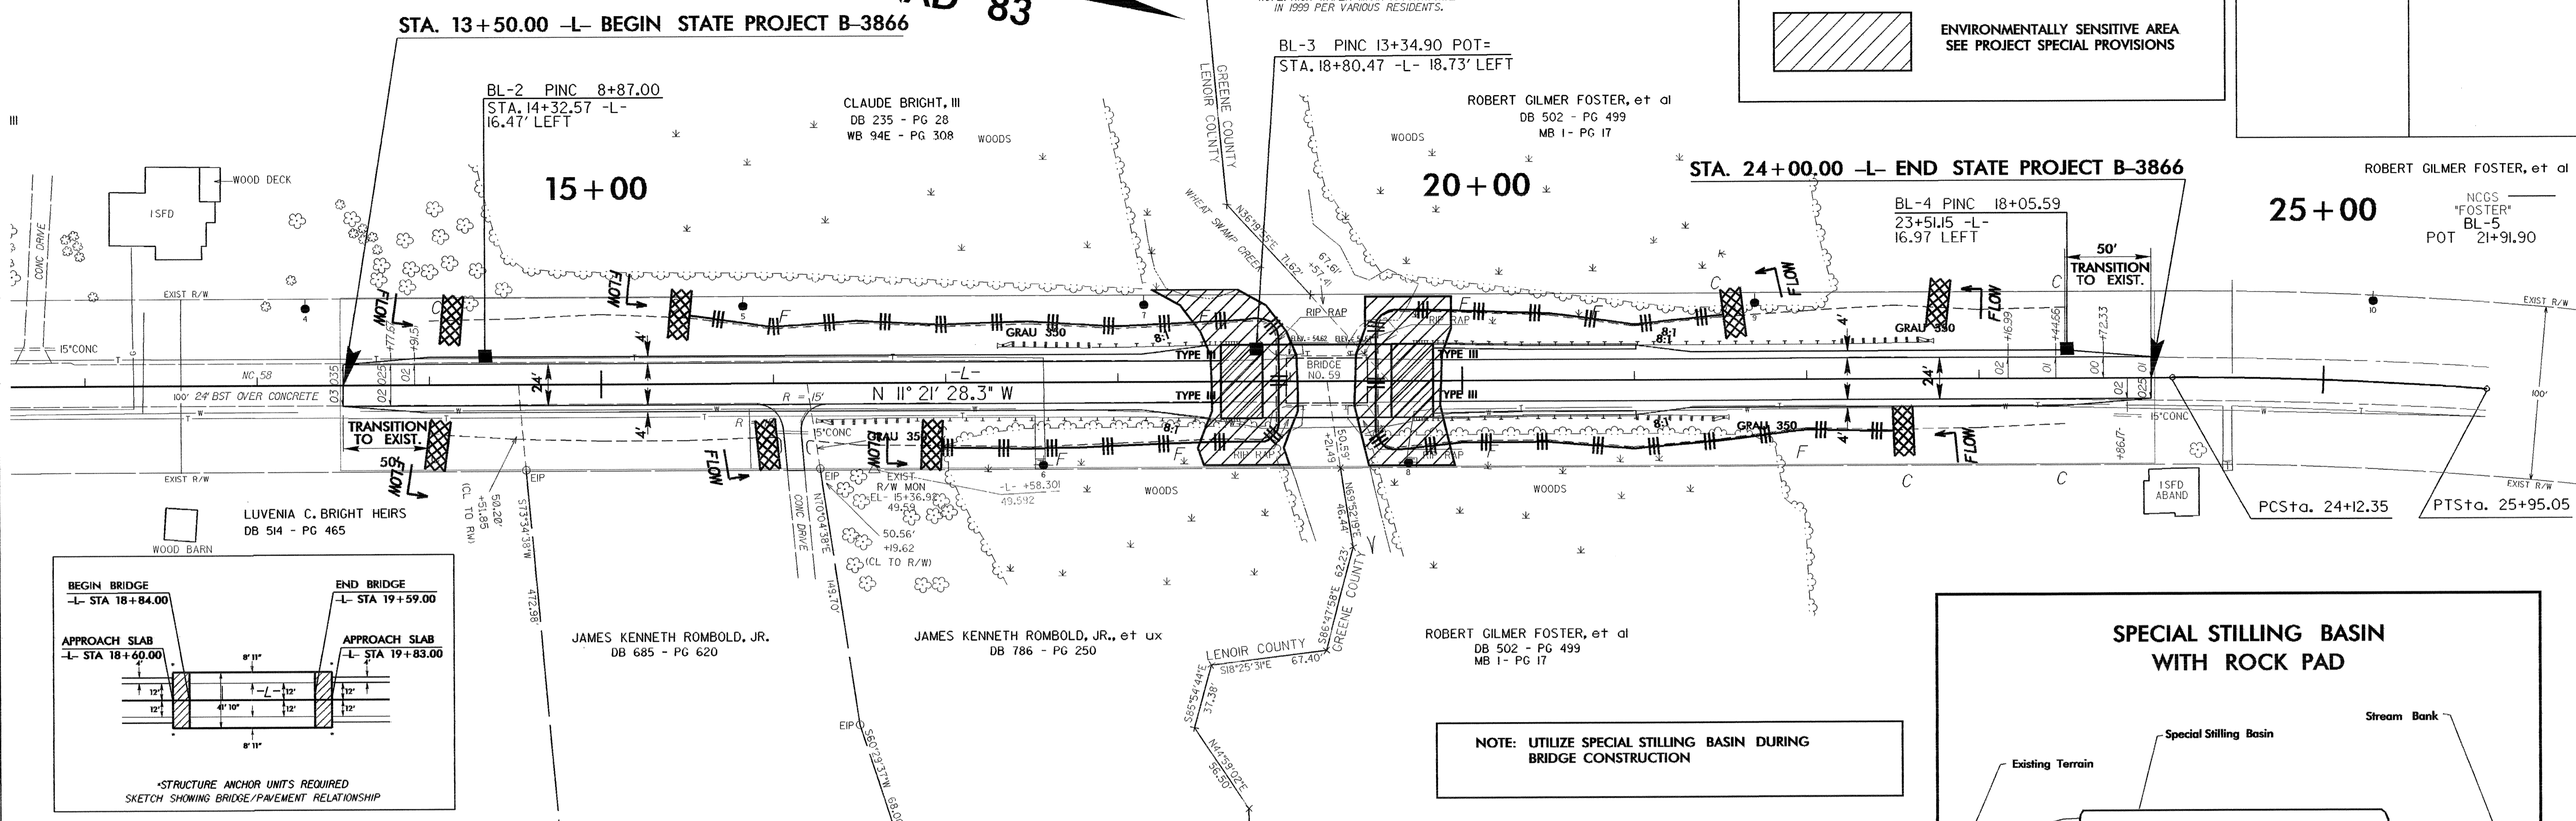

STRUCTURE HYDRAULIC DATA

DESIGN DISCHARGE	= 1500 CFS
DESIGN FREQUENCY	= 50 YRS
DESIGN HW ELEVATION	= 54.35 FT
BASE DISCHARGE	= 1900 CFS
BASE FREQUENCY	= 100 YRS
BASE HW ELEVATION	= 55.08 FT
OVERTOPPING DISCHARGE	= 2900 CFS
OVERTOPPING FREQUENCY	= 500 YRS
OVERTOPPING ELEVATION	= 58.38 FT

08-FBR-2005 09.37
d:\v\br\c\ge\3866\pco\3866.rdy.psh.dgn
12/14/05 10:21:46