


PROJECT REFERENCE NO.	R-2552AB	SHEET NO.	EC-6/CONST.7
R/W SHEET NO.	R-2552AA *21 & *22		
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	
CONST.REV.		R/W REV.	

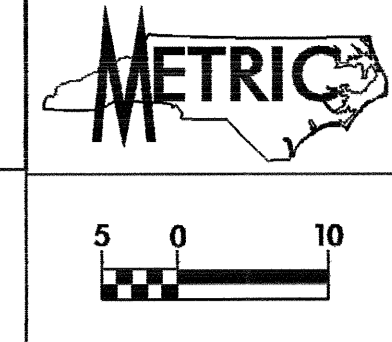

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 7


-L-

PI = 38+81.623
 $\Delta = 20^\circ 44' 47.5''$ (RT)
L = 905.237
T = 457.630
R = 2,500.000
SE = .03
Vdes. = 110 km/hr

NOTE:
TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 1 METER FROM TOE OF FILL IN WETLAND AREAS

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

- MITIGATABLE IMPACTS ZONE 1
- DENOTES MECHANIZED CLEARING
- MITIGATABLE IMPACTS ZONE 2
- DENOTES FILL IN WETLAND
- DENOTES FILL IN SURFACE WATER
- DENOTES EXISTING CHANNEL IMPACTS (TEMP)
- DENOTES EXISTING CHANNEL IMPACTS (PERM)

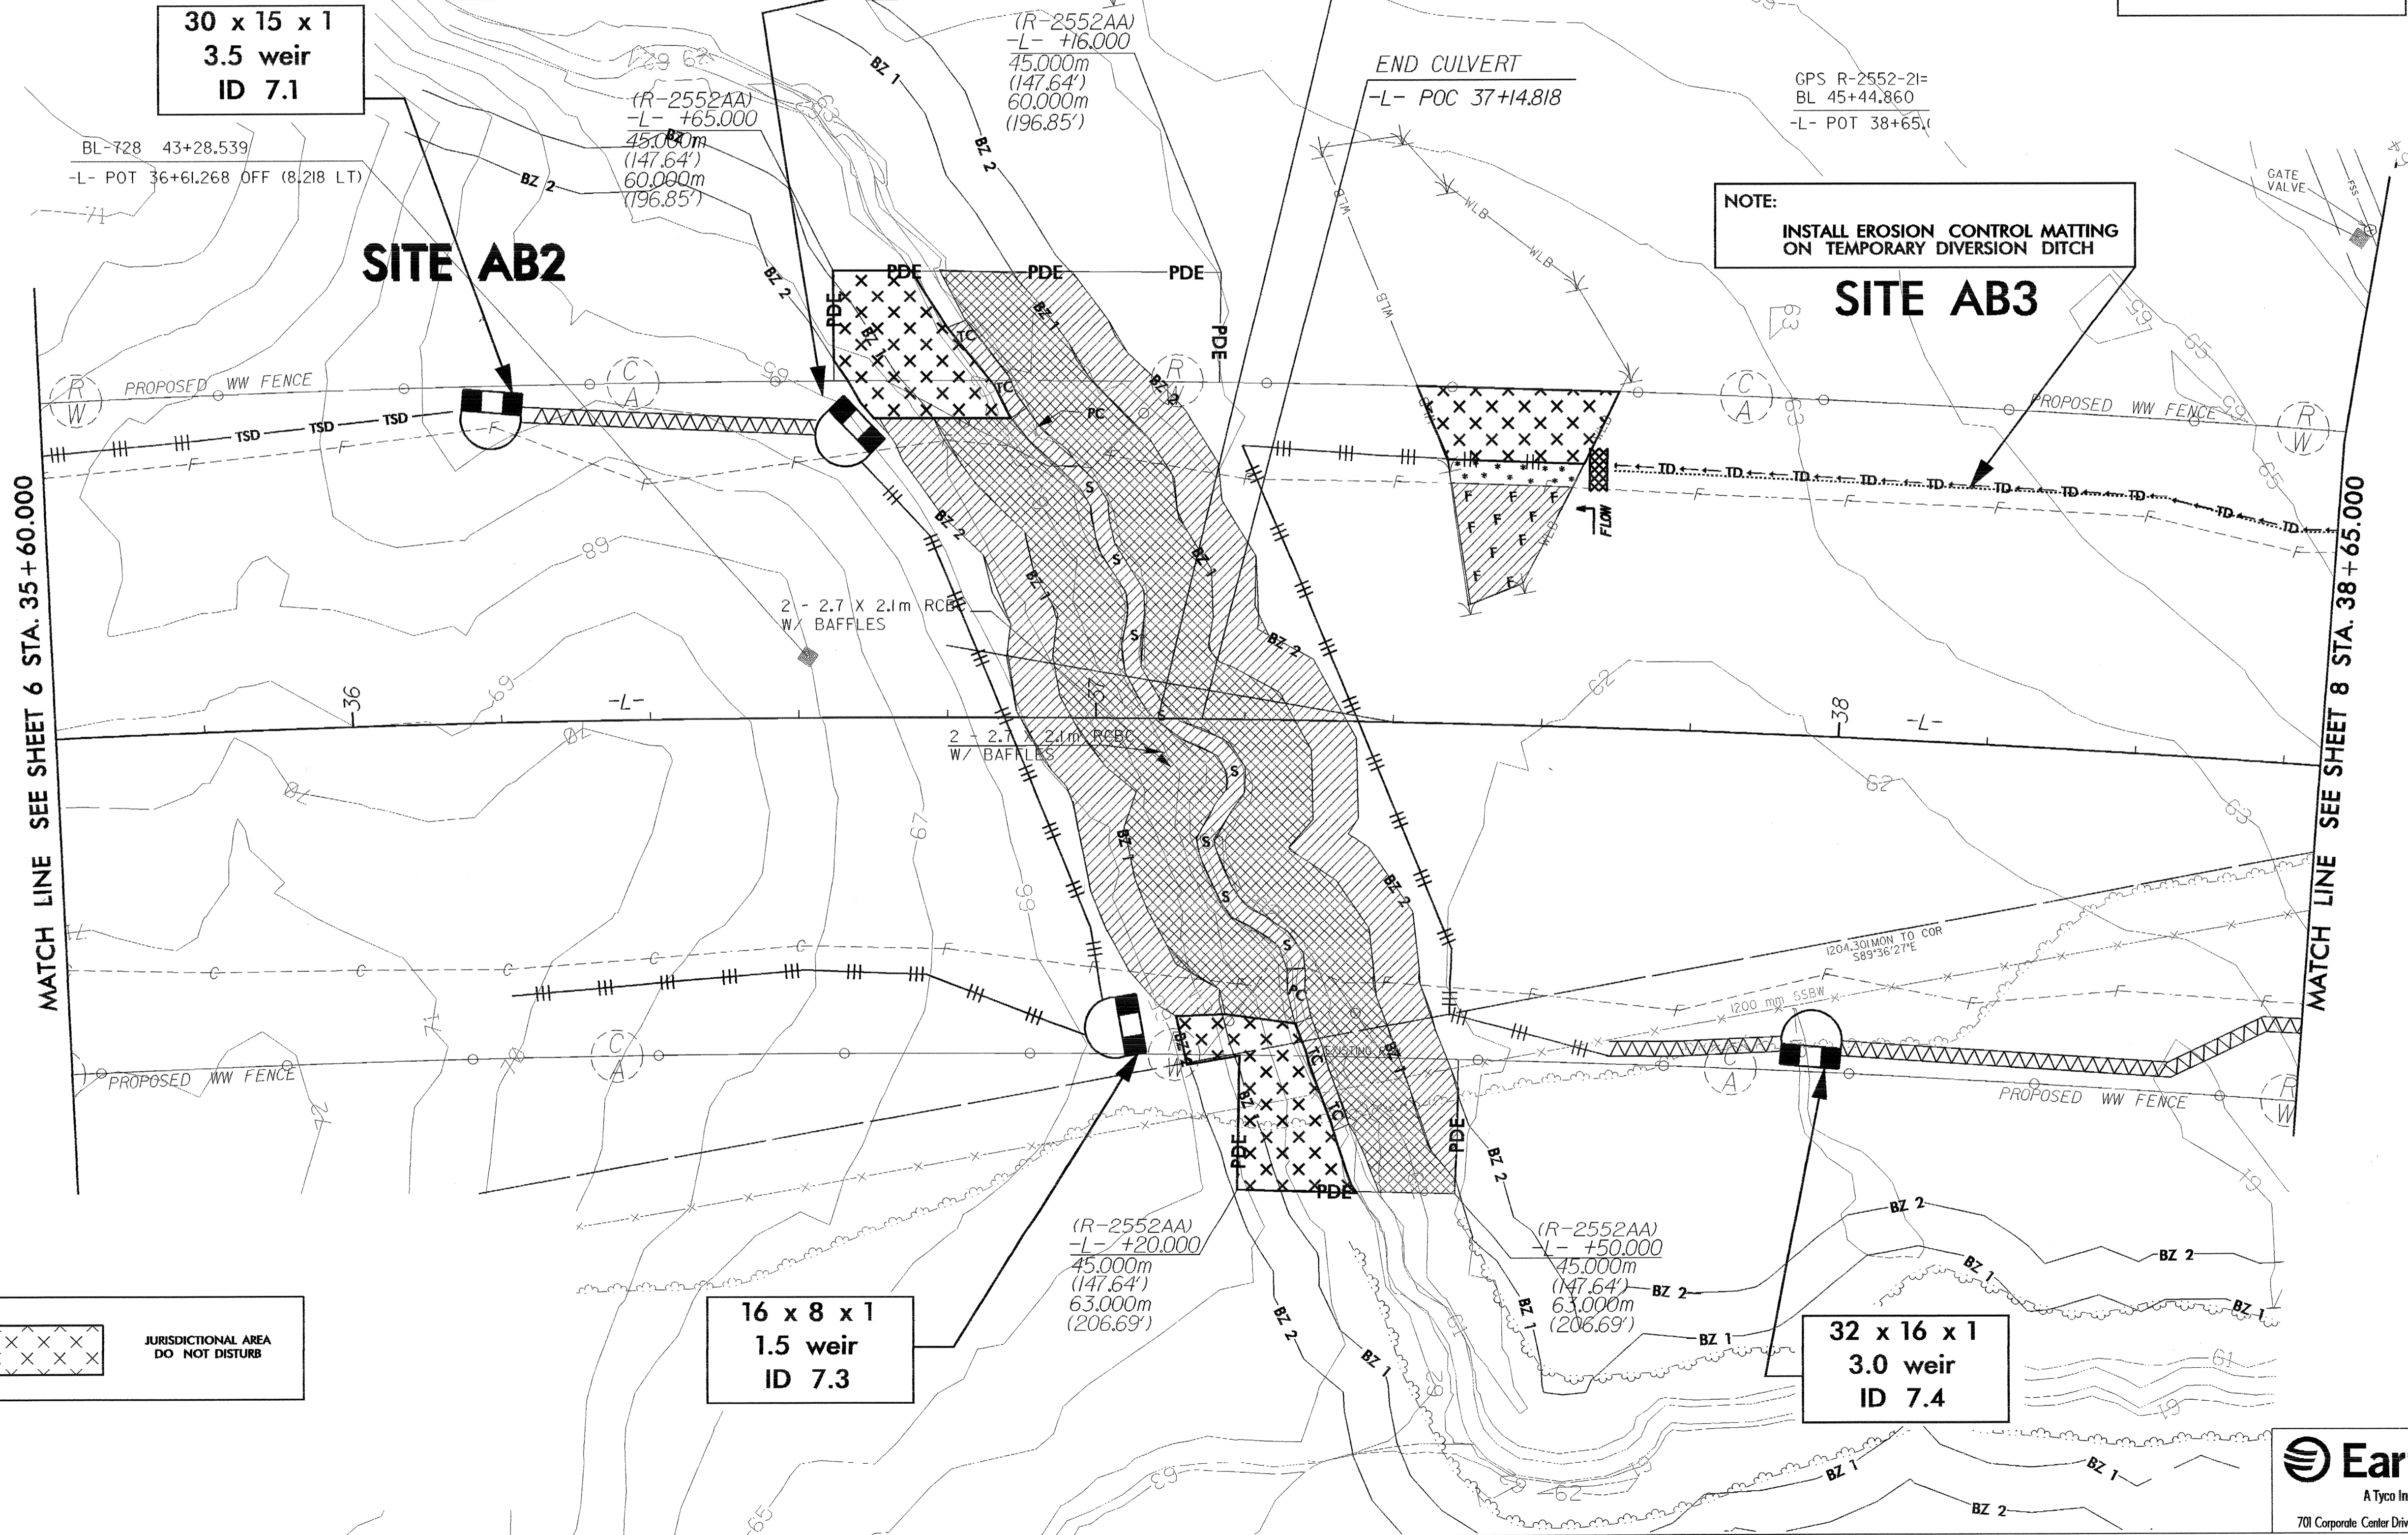

NOTE:
INSTALL EROSION CONTROL MATTING ON TEMPORARY DIVERSION DITCH

ENVIRONMENTALLY SENSITIVE AREA APPLIES TO BUFFER ZONE 1 AND 2. SEE PROJECT SPECIAL PROVISIONS.