


6/16/09

PAVEMENT SCHEDULE

C1	PROP. APPROX. 70 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 84 kg PER SQ. METER IN EACH OF TWO LAYERS.	E4	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	J1	PROP. 200 mm AGGREGATE BASE COURSE.
C3	PROP. APPROX. 100 mm ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 120 kg PER SQ. METER IN EACH OF TWO LAYERS.	J2	PROP. 250 mm AGGREGATE BASE COURSE.
C4	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.4 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 30 mm IN DEPTH OR GREATER THAN 40 mm IN DEPTH.	J3	PROP. VAR. DEPTH AGGREGATE BASE COURSE.
C5	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.	L	SUBBASE TO BE TREATED WITH LIME TO A DEPTH OF 200mm, AT A RATE OF 11 KG. PER SQ. METER, AS DIRECTED BY THE ENGINEER OR SUBBASE TO BE TREATED WITH CEMENT TO A DEPTH OF 180mm, AT A RATE OF 30 KG. PER SQ. METER, AS DIRECTED BY THE ENGINEER. OR SUBBASE TO BE TREATED WITH AGGREGATE AT A RATE OF 135 KG. PER SQ. METER AND CEMENT AT A RATE OF 30 KG. PER SQ. METER TO A DEPTH OF 180mm, AS DIRECTED BY THE ENGINEER.
D1	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.		
D2	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.		
D3	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 196.00 kg PER SQ. METER.	P	PRIME COAT AT THE RATE OF 1.6 L PER SQ. METER.
D4	PROP. APPROX. 100 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 245.00 kg PER SQ. METER.	R	125 mm MONOLITHIC CONCRETE ISLAND.
D5	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH.	T	EARTH MATERIAL.
E1	PROP. APPROX. 90 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 220.50 kg PER SQ. METER.	U	EXISTING PAVEMENT.
E2	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 245.00 kg PER SQ. METER.	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE WEDGING DETAIL)
E3	PROP. APPROX. 180 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 220.50 kg PER SQ. METER, IN EACH OF TWO LAYERS		

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

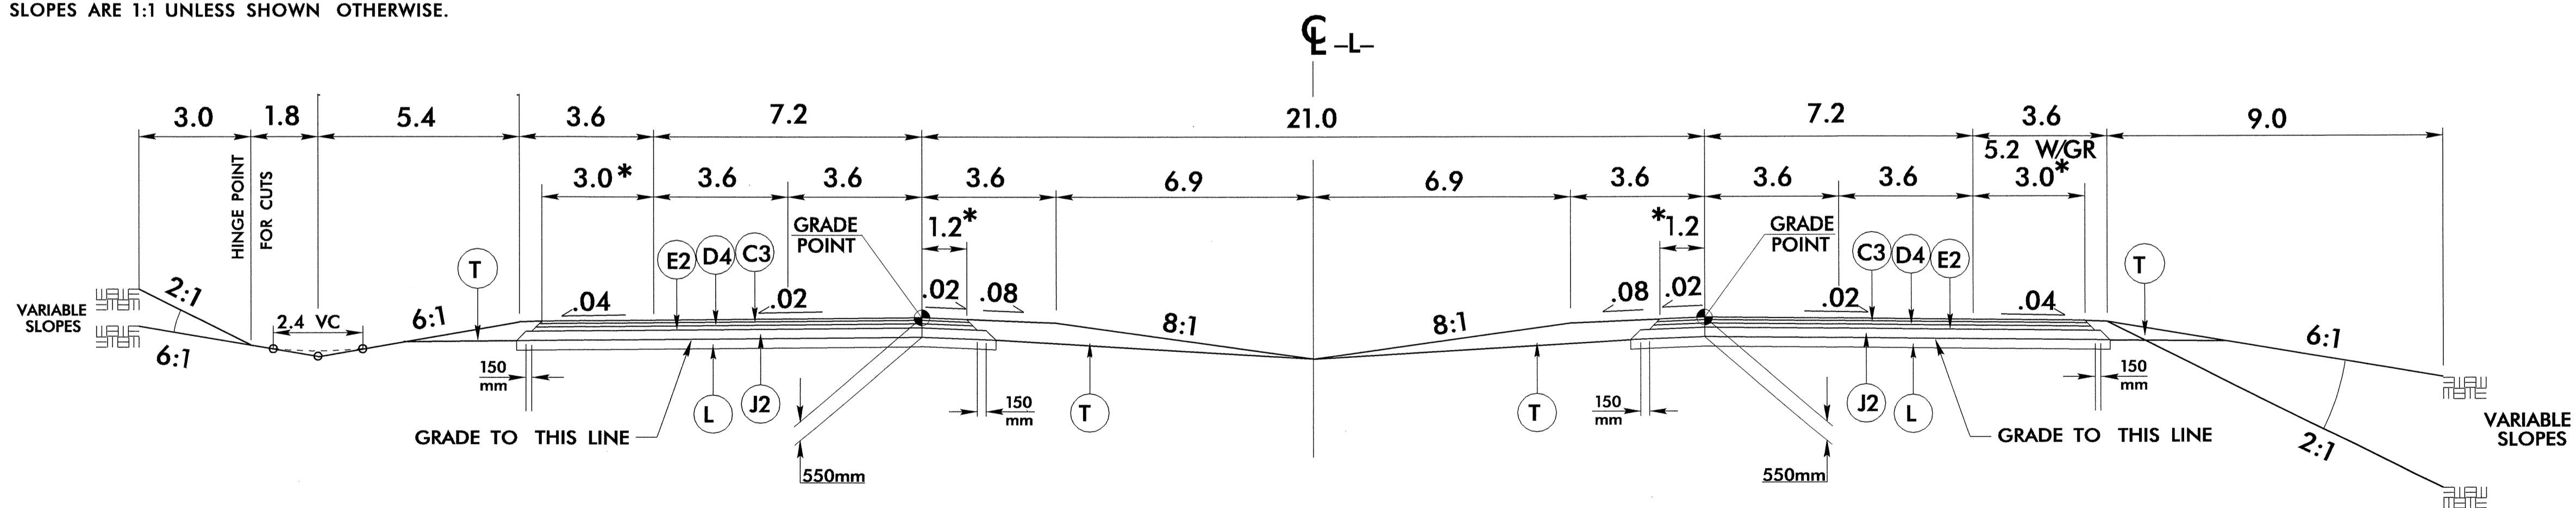


USE TYPICAL SECTION NO. 1 AS FOLLOWS:


- L- 28+00.000 TO 34+22.173 LB
- L- 34+23.993 LA TO 39+75.925 (BEGIN BRIDGE RT.)
- L- 34+23.993 LA TO 39+47.475 (BEGIN BRIDGE LT.)
- L- 42+07.090 (END BRIDGE RT.) TO 59+00.000
- L- 42+01.603 (END BRIDGE LT.) TO 59+00.000

TYPICAL SECTION NO. 1

*FULL DEPTH PAVED SHOULDER

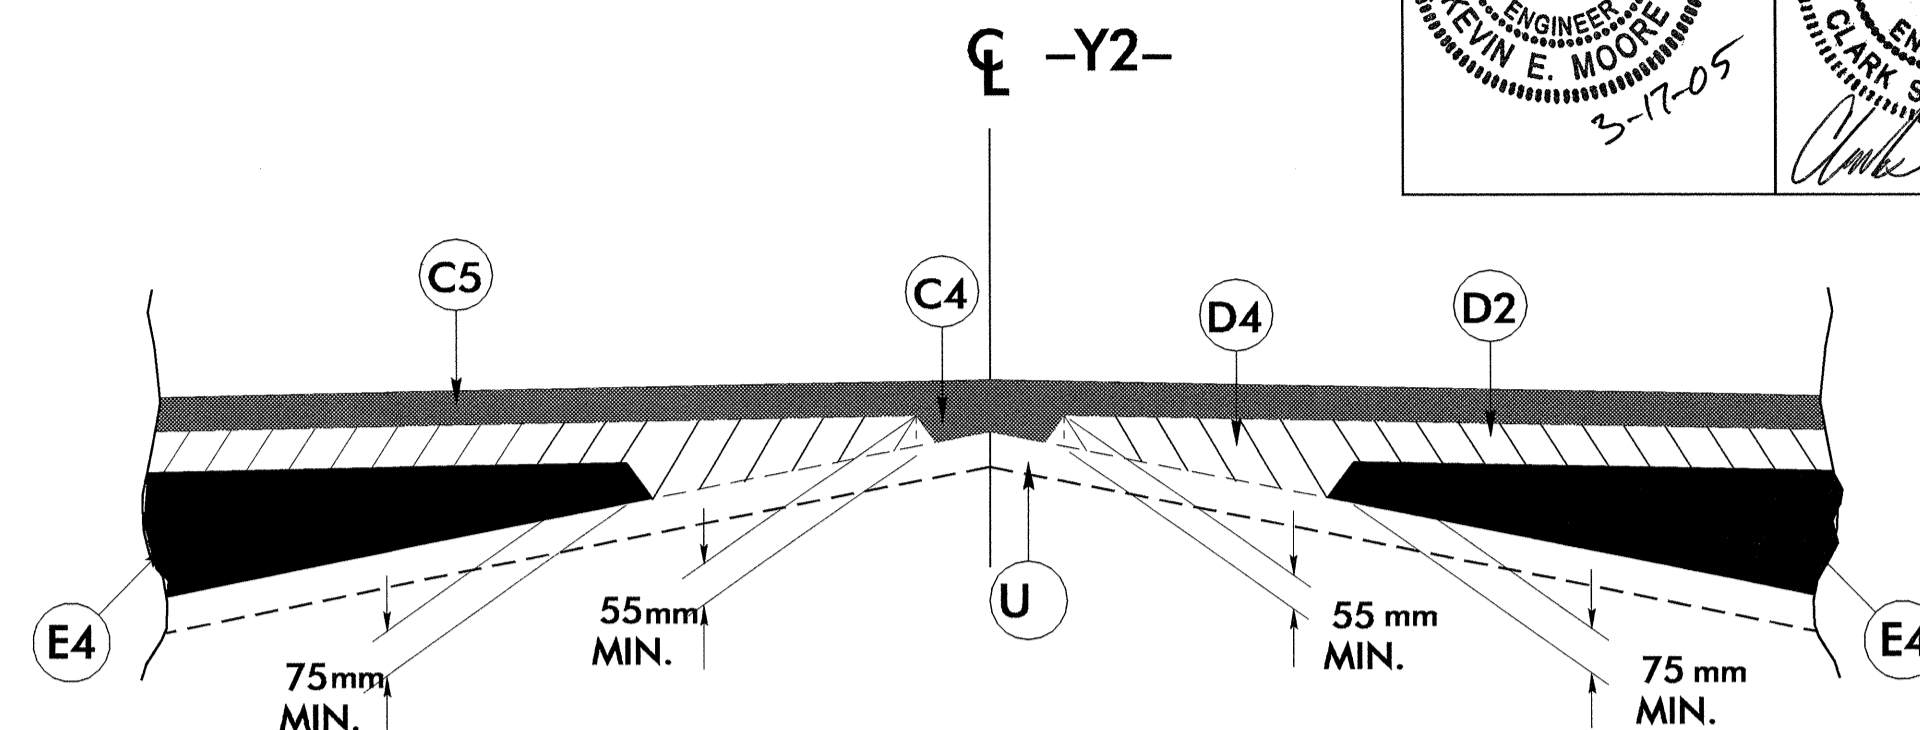

DETAIL OF WEDGING

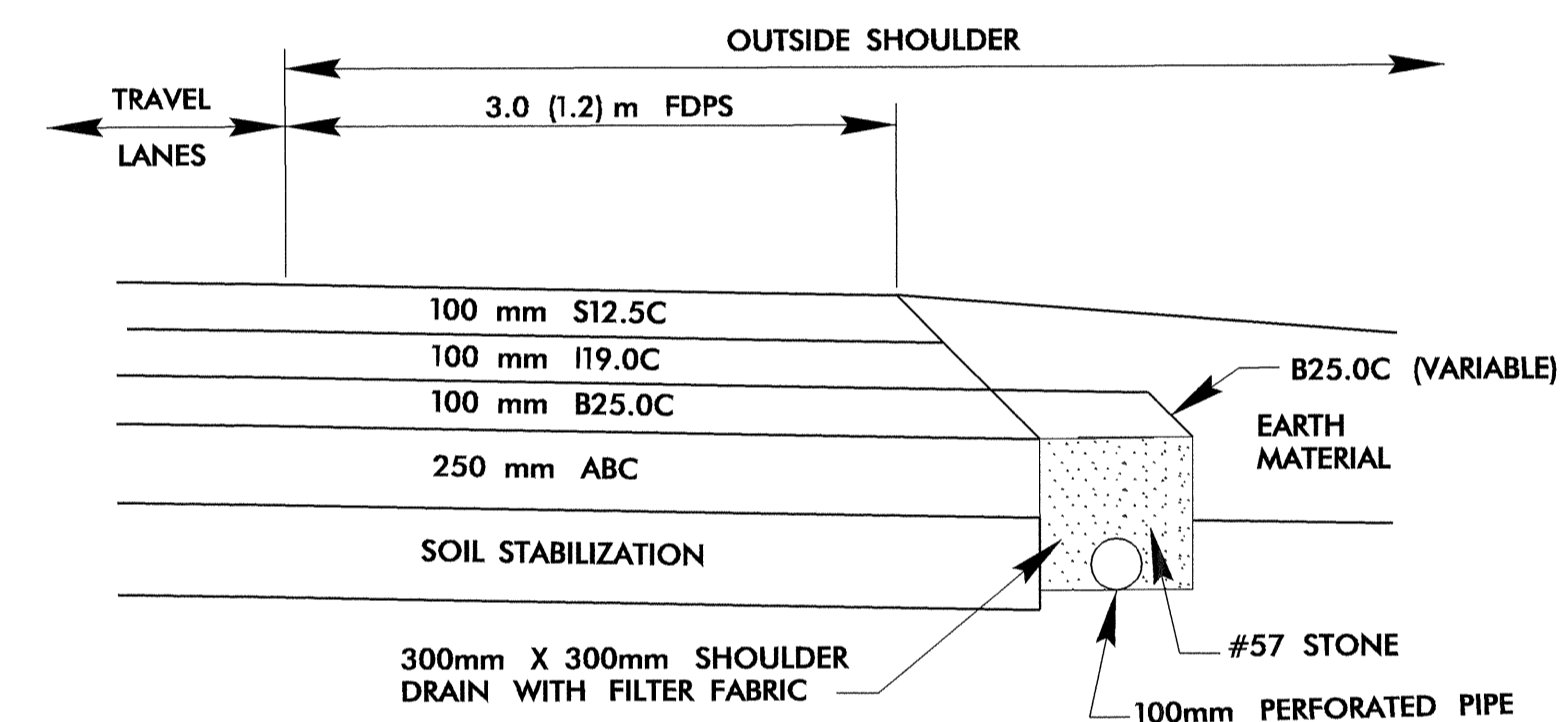

SHOULDER DRAIN DETAIL

NOTE: ALL OUTLET PIPES SHALL USE A 1% GRADE
USE IN CONJUNCTION WITH TYPICAL SECTION NO.s 1 & 2

NOTE: USE DITCH DETAIL U IN CONJUNCTION WITH TS NO 1
-L- 46+00 TO 47+00
SEE CROSS-SECTION AND ROADWAY STANDARD DRAWING
STD. 225.08 FOR SPECIAL MEDIAN GRADING -L- 28+00
TO 29+00



PROJECT REFERENCE NO. R-2552AB	SHEET NO. 2
ROADWAY DESIGN ENGINEER W. E. MOORE SEAL 24812 3-17-05	PAVEMENT DESIGN ENGINEER CLARK S. MORRISON SEAL 22896 3/17/05

15-MAR-2005 10:01
HEchards AT 10:21:55 R2552ab.dwg