
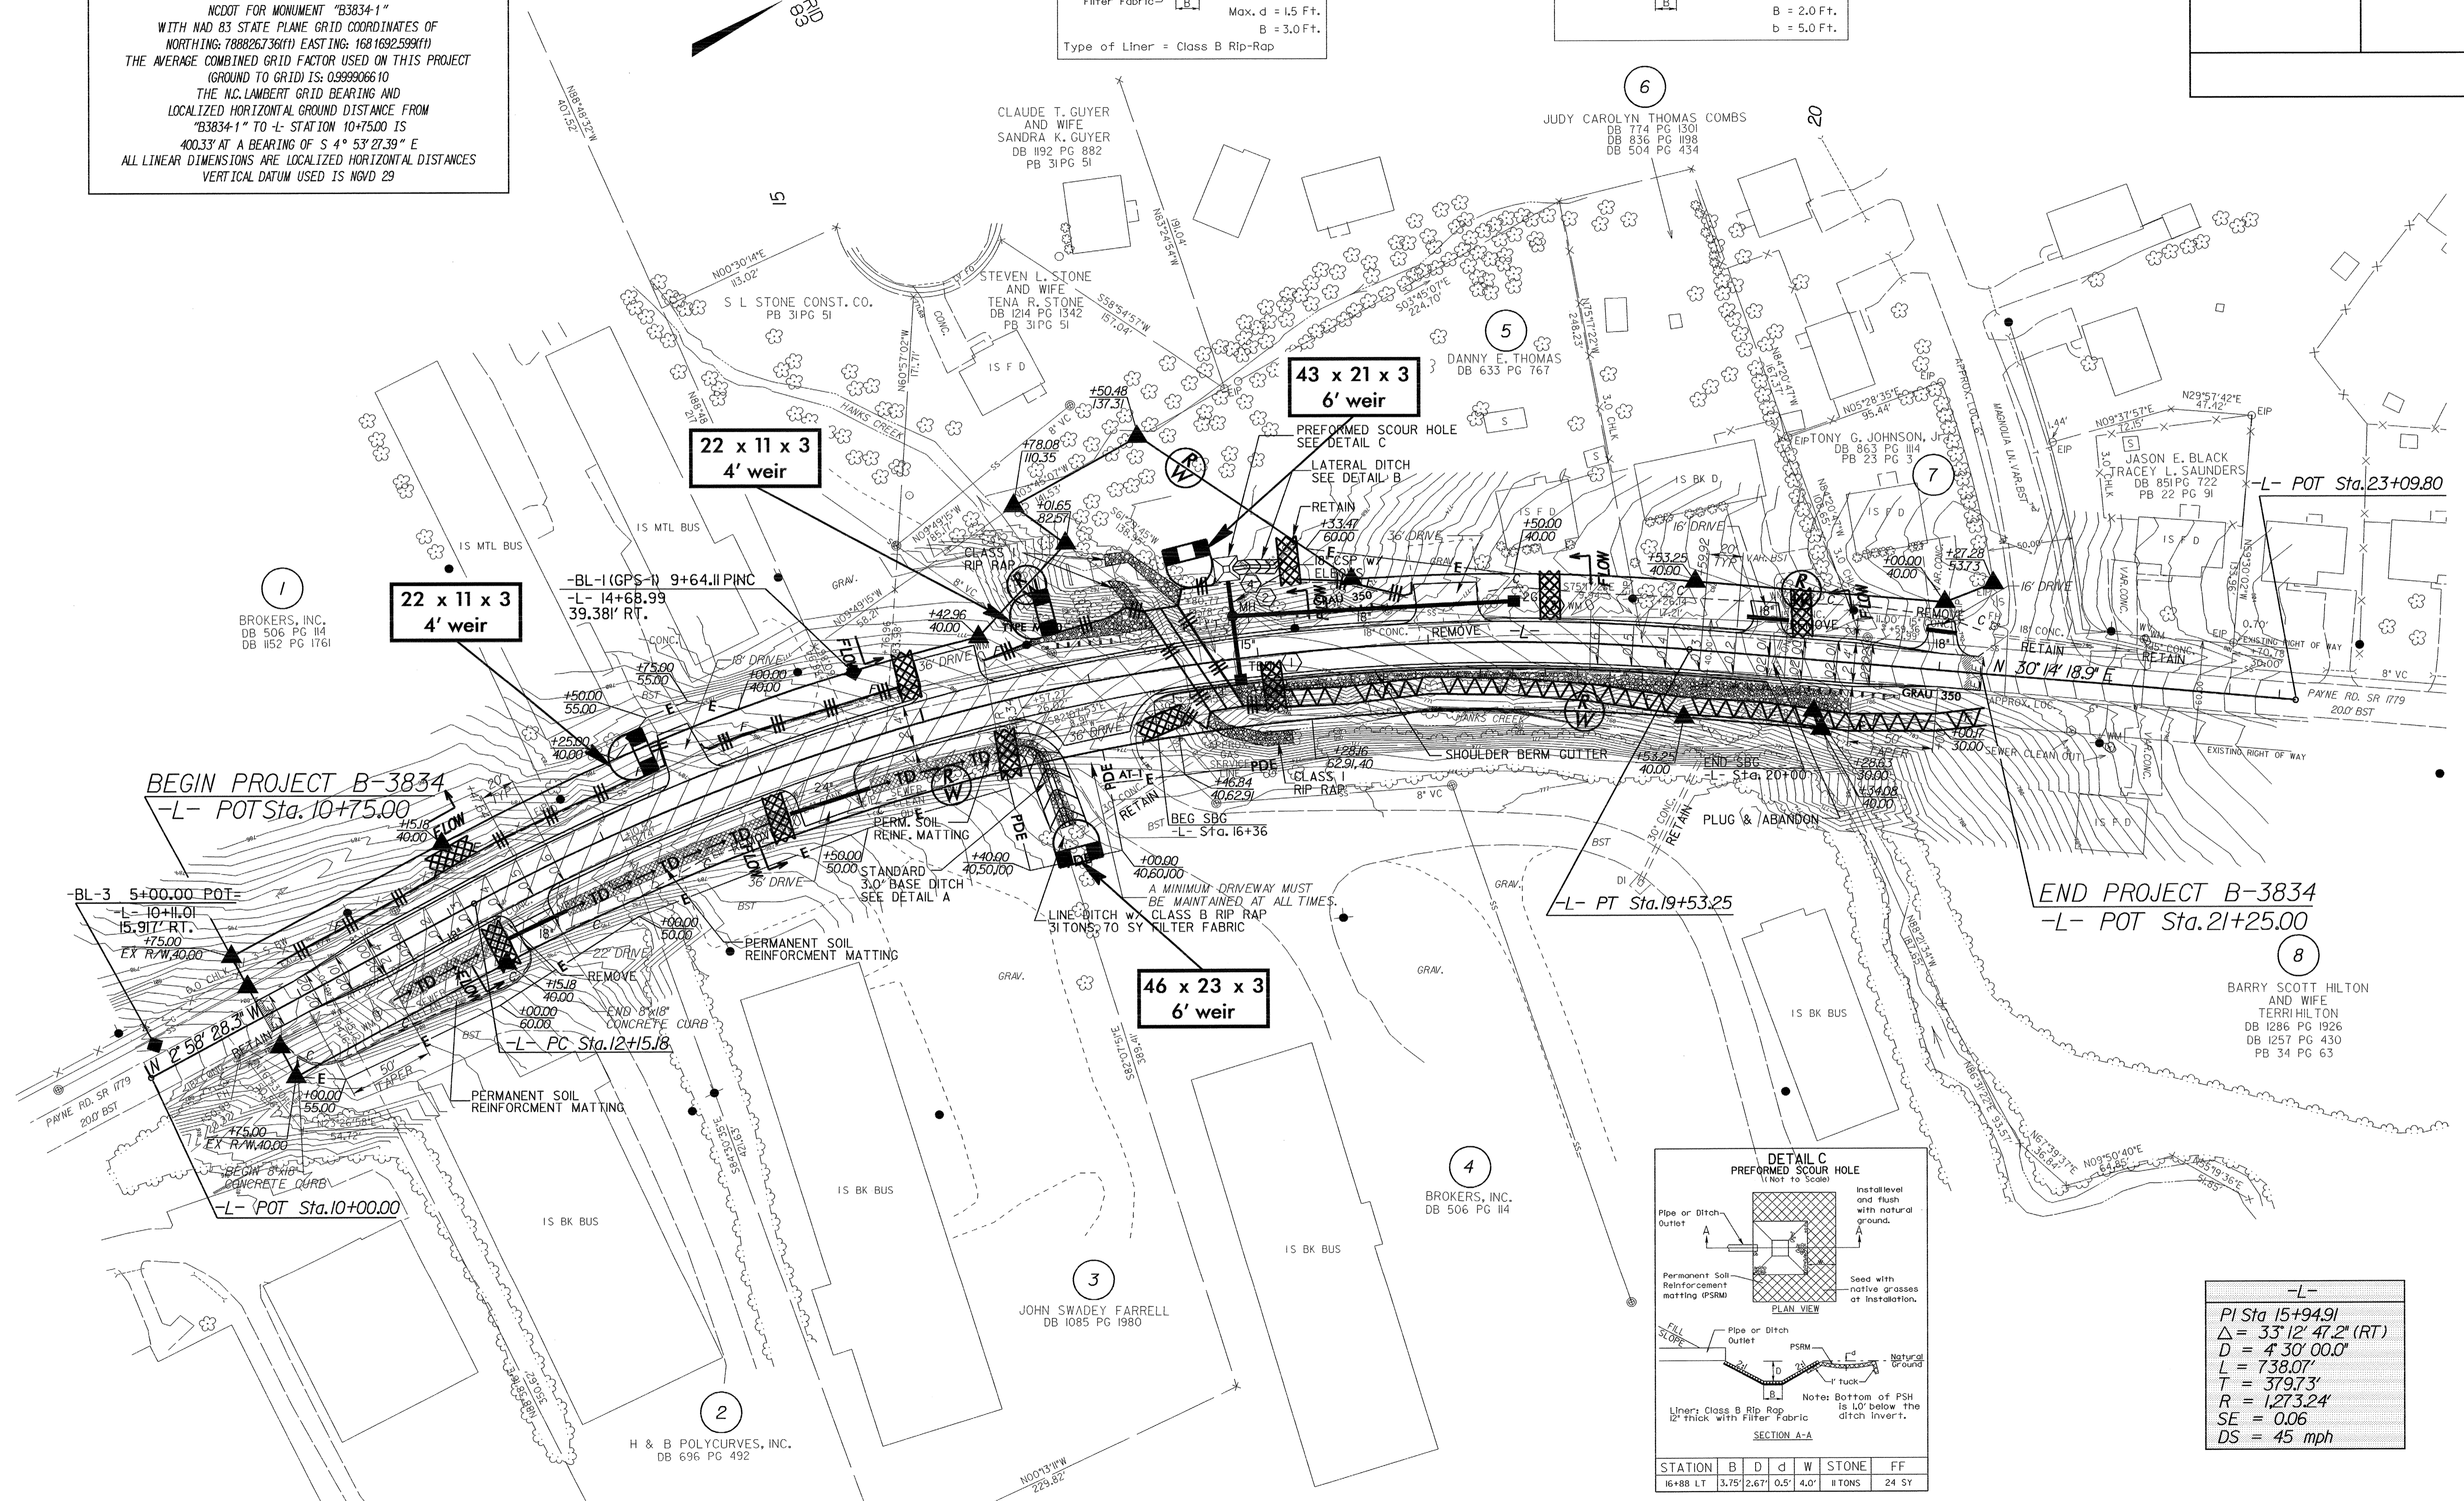
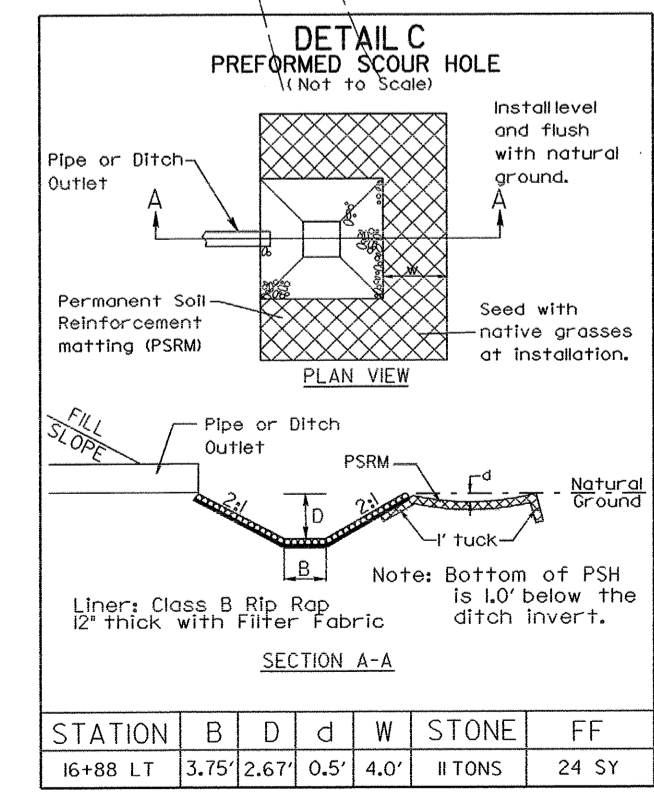
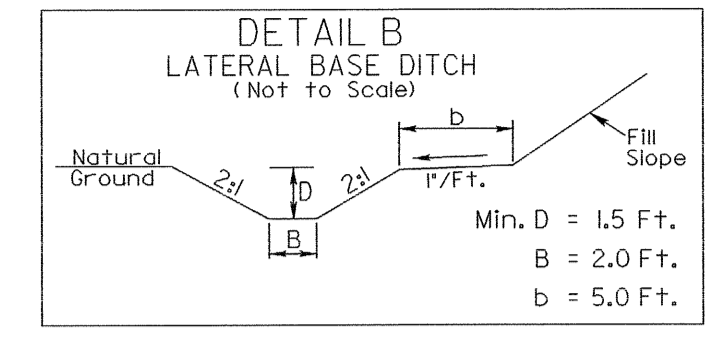


PROJECT REFERENCE NO.	SHEET NO.
B-3834	EC-3/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

DATUM DESCRIPTION
 THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCDOT FOR MONUMENT "B3834-1" WITH NAD 83 STATE PLANE GRID COORDINATES OF NORTHING: 7888267.36(11) EASTING: 1681692.599(11) THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 0.999906610 THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM "B3834-1" TO L- STATION 10+75.00 IS 400.33' AT A BEARING OF S 4° 53' 27.39" E ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES VERTICAL DATUM USED IS NGVD 29

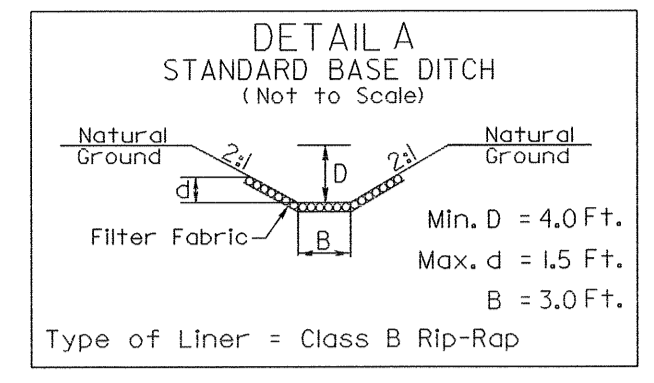

DESIGN EXCEPTION REQUIRED FOR SHOULDER WIDTH

NOTE: SEE SHEET 5 FOR -L- PROFILE

20-APR-2005 14:28
 d:\re\br\pco\3834\pco\3834_rdy_psh04.dgn
 ictor AT BENV21445