


STATE OF NORTH CAROLINA  
 DEPT. OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
 RALEIGH, N.C.


ENGLISH DETAIL DRAWING FOR  
**TYPE III - SHOP CURVED  
 STRUCTURE ANCHOR UNIT**

SHEET 1 OF 1  
**TYPE III SC**

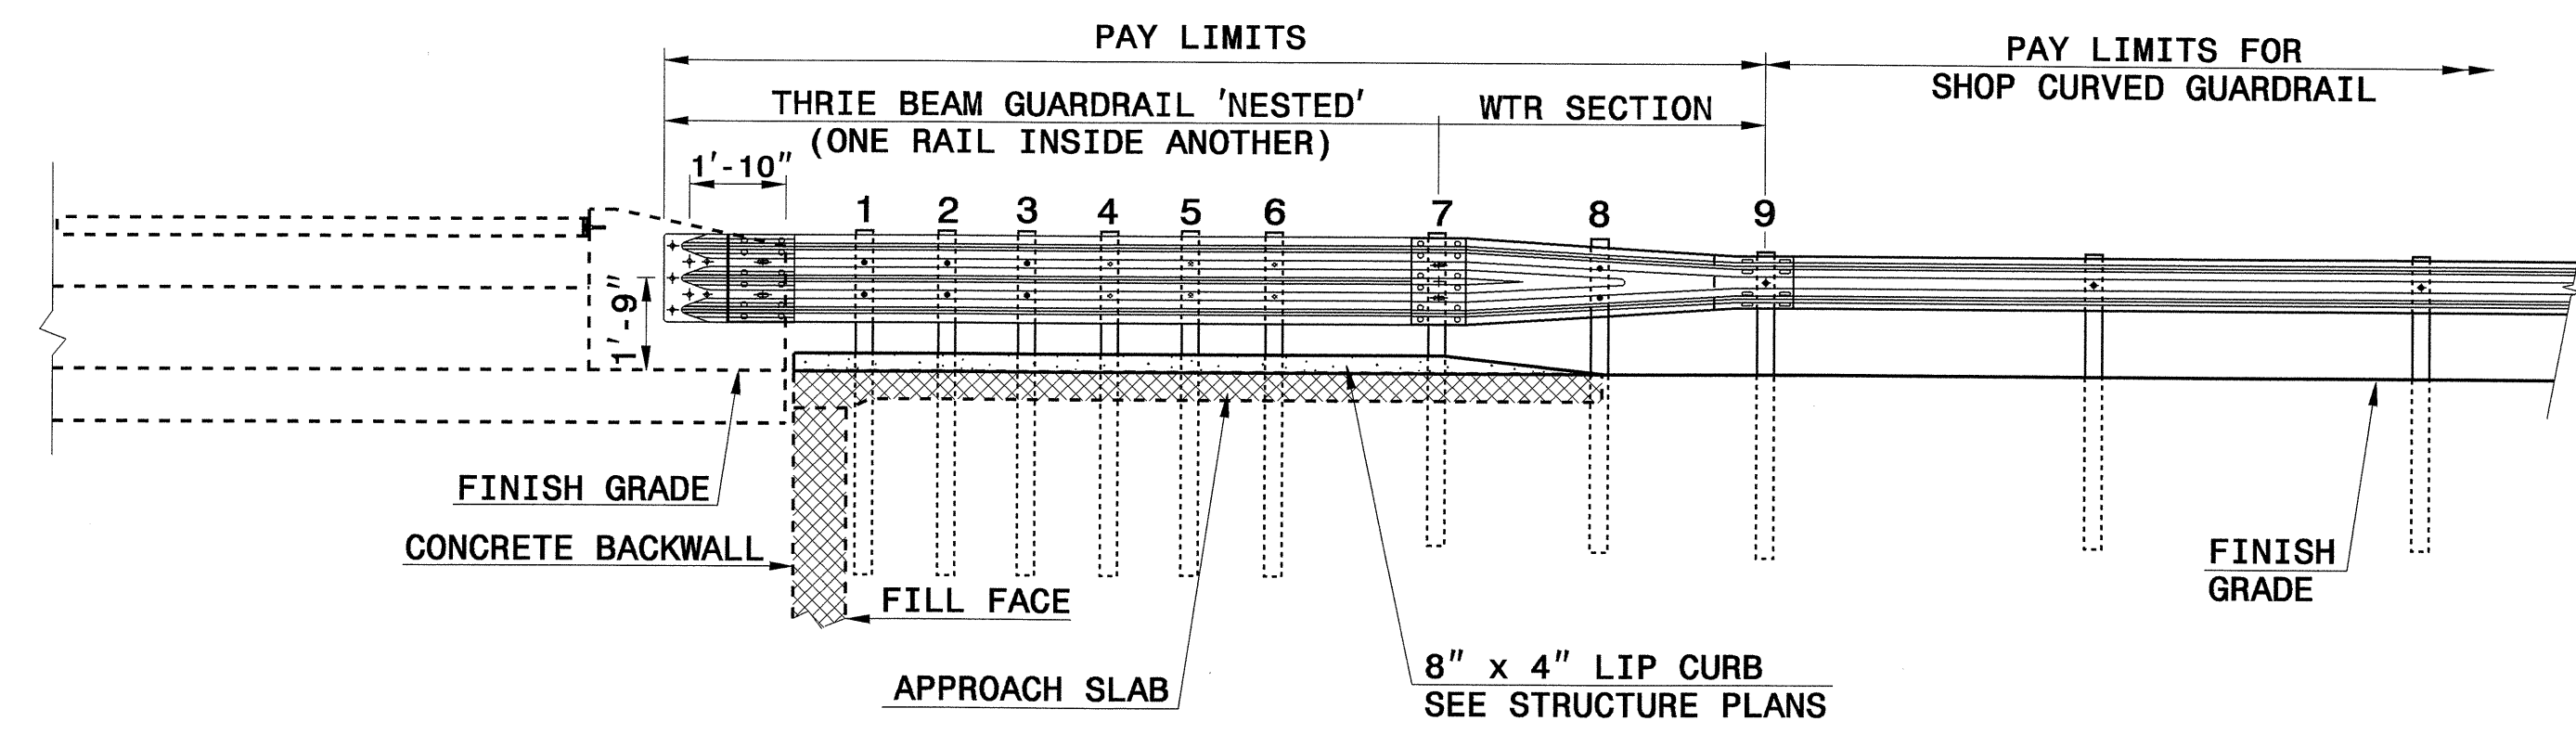

NOTE:

- \*\*POST NOT REQUIRED FOR SKEW ANGLES GREATER THAN 150° OR LESS THAN 30° UNLESS OTHERWISE DIRECTED BY THE ENGINEER.
- \*THE DISTANCE FROM END OF BRIDGE RAIL TO CENTER LINE OF THE FIRST POST SHOULD BE 11½" IF CONCRETE BACKWALL IS NOT PRESENT.
- SHOULDER BERM GUTTER MUST BE INSTALLED TO THE LIMITS 8" x 4" LIP CURB IS SHOWN IF ANCHOR UNIT IS NOT ADJACENT TO AN APPROACH SLAB.
- MEASURE GUARDRAIL HEIGHT FROM THE TOP OF ADJACENT SURFACE (SHOULDER, BERM, OR GUTTER).
- USE NO STEEL POSTS WITHIN THE GUARDRAIL ANCHOR UNIT LIMITS.
- LAP JOINTS IN THE DIRECTION OF TRAFFIC FLOW.
- SEE STANDARD 862.03 SHEET 4 FOR POST SECTIONS 1 THRU 9.

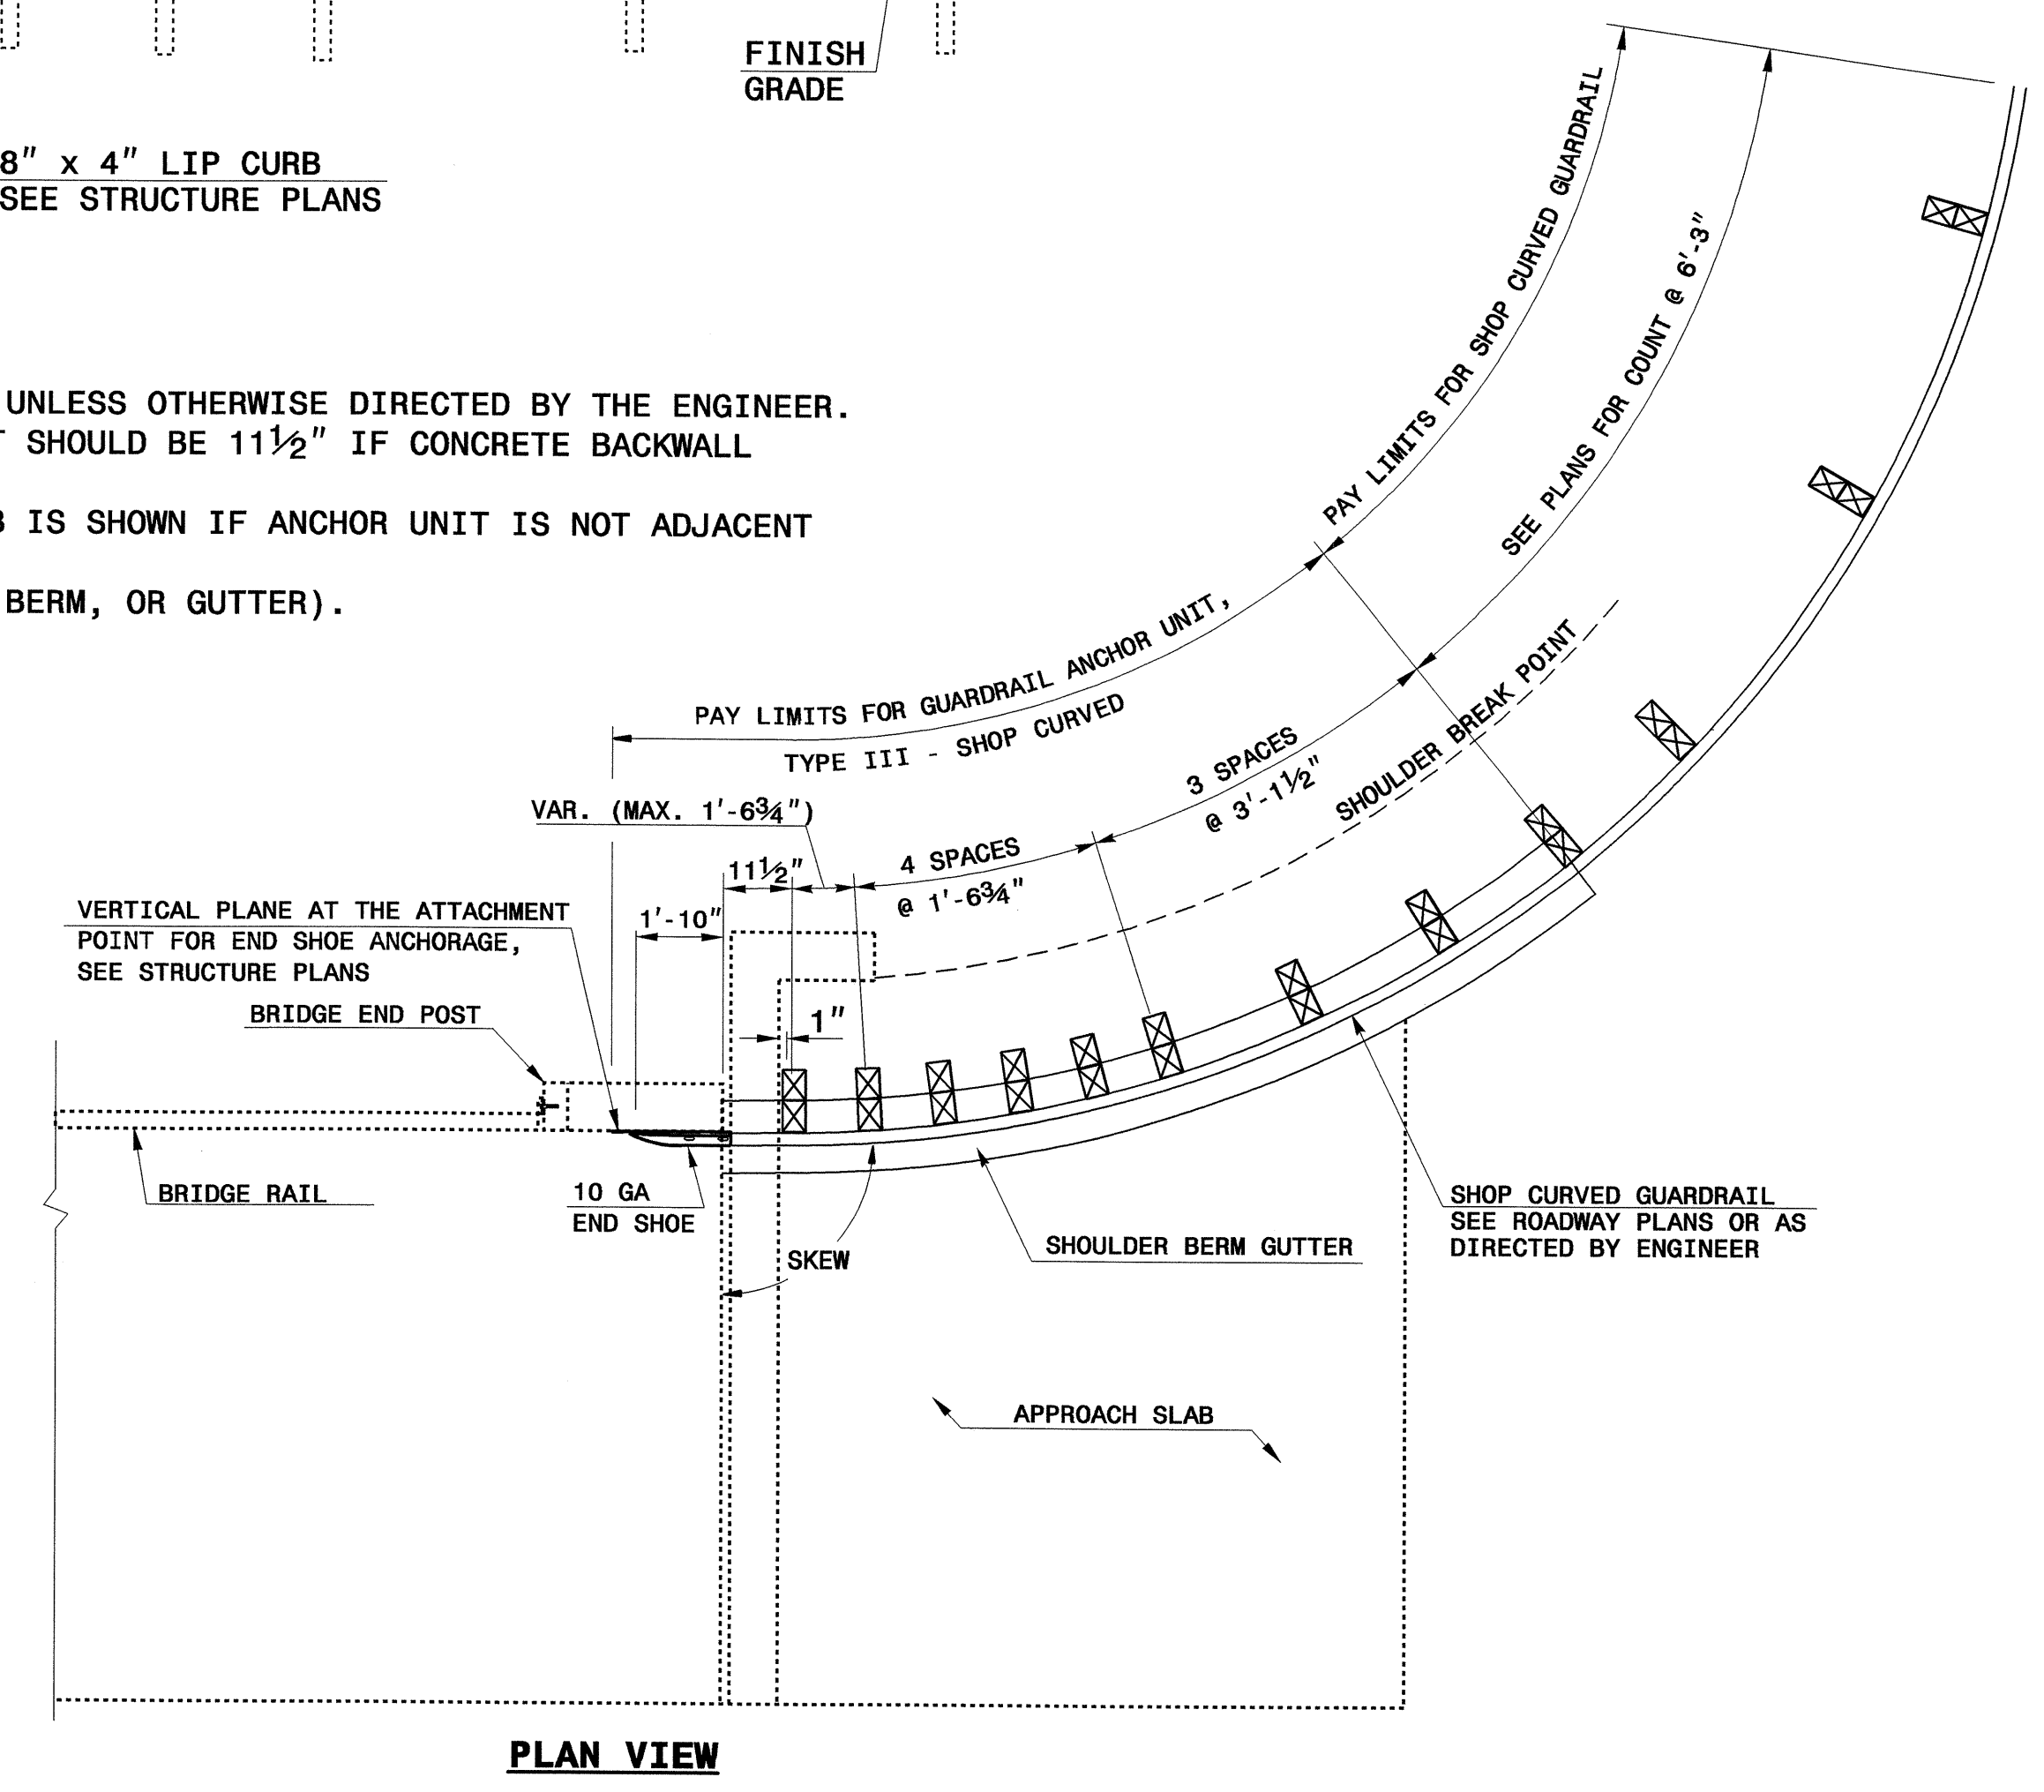


**GUARDRAIL ANCHOR UNIT, TYPE III - SHOP CURVED  
 FOR ATTACHMENT TO RAIL ON BRIDGE**

STATE OF NORTH CAROLINA  
 DEPT. OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
 RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR  
**TYPE III - SHOP CURVED  
 STRUCTURE ANCHOR UNIT**

SHEET 1 OF 1  
**TYPE III SC**

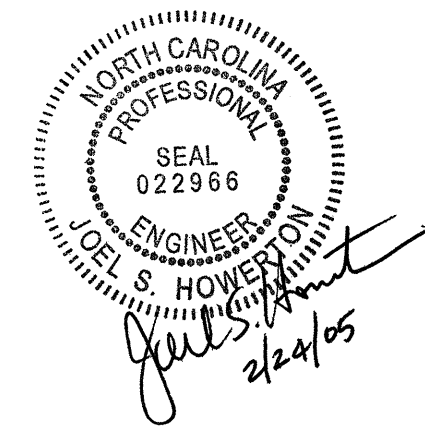

**DESIGN SERVICES UNIT  
 STANDARDS AND SPECIAL DESIGN**  
 Office 919-250-4128 FAX 919-250-4119

**SEE PLATE FOR TITLE**

ORIGINAL BY: \_\_\_\_\_ DATE: \_\_\_\_\_  
 MODIFIED BY: *mbritt* DATE: 1-31-05  
 CHECKED BY: *Paul Smith* DATE: 2/3/05  
 FILE SPEC.: *@details/nbritt/eng1ish/bridge/b3666typeIIIs.dgn*

31-JAN-2005 15:23  
 C:\Specs\Details\nbritt\english\bridge\b3666\_type III sc.dgn  
 mbritt