
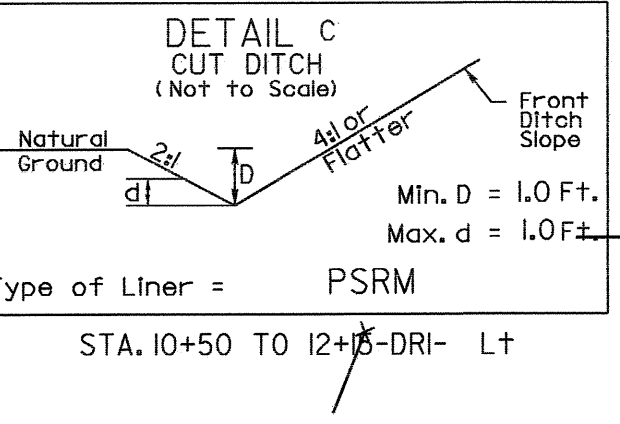
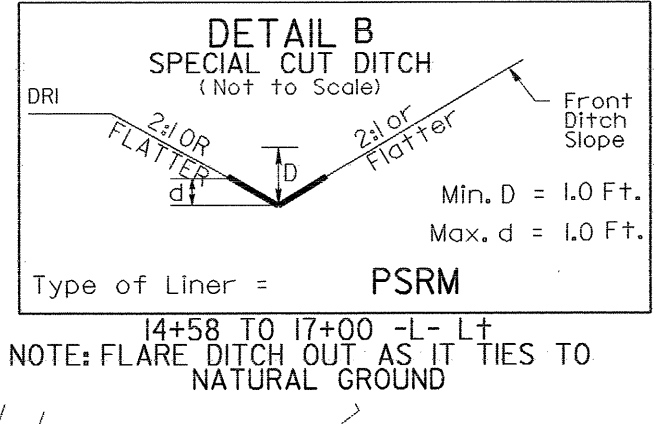
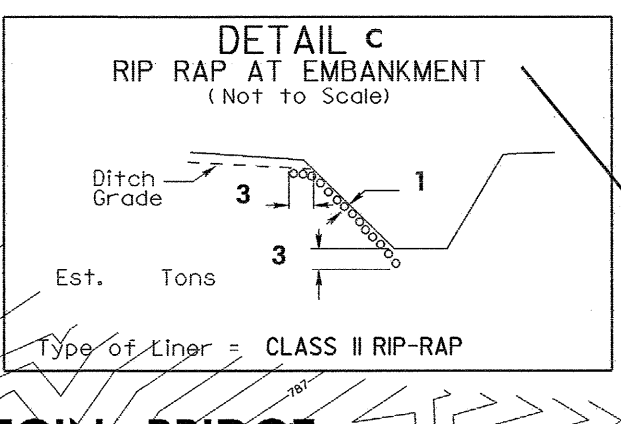
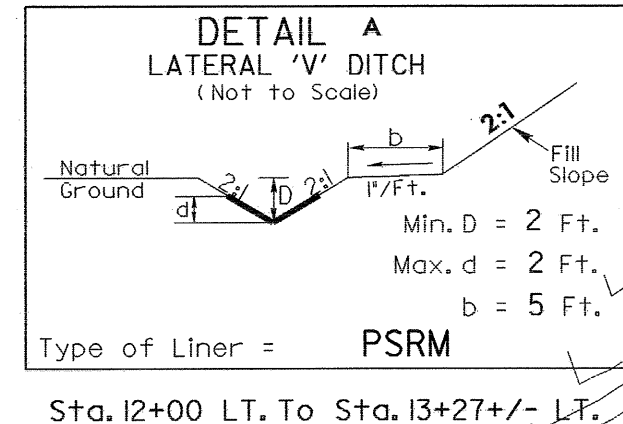



PROJECT REFERENCE NO. B-4266	SHEET NO. EC-4/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

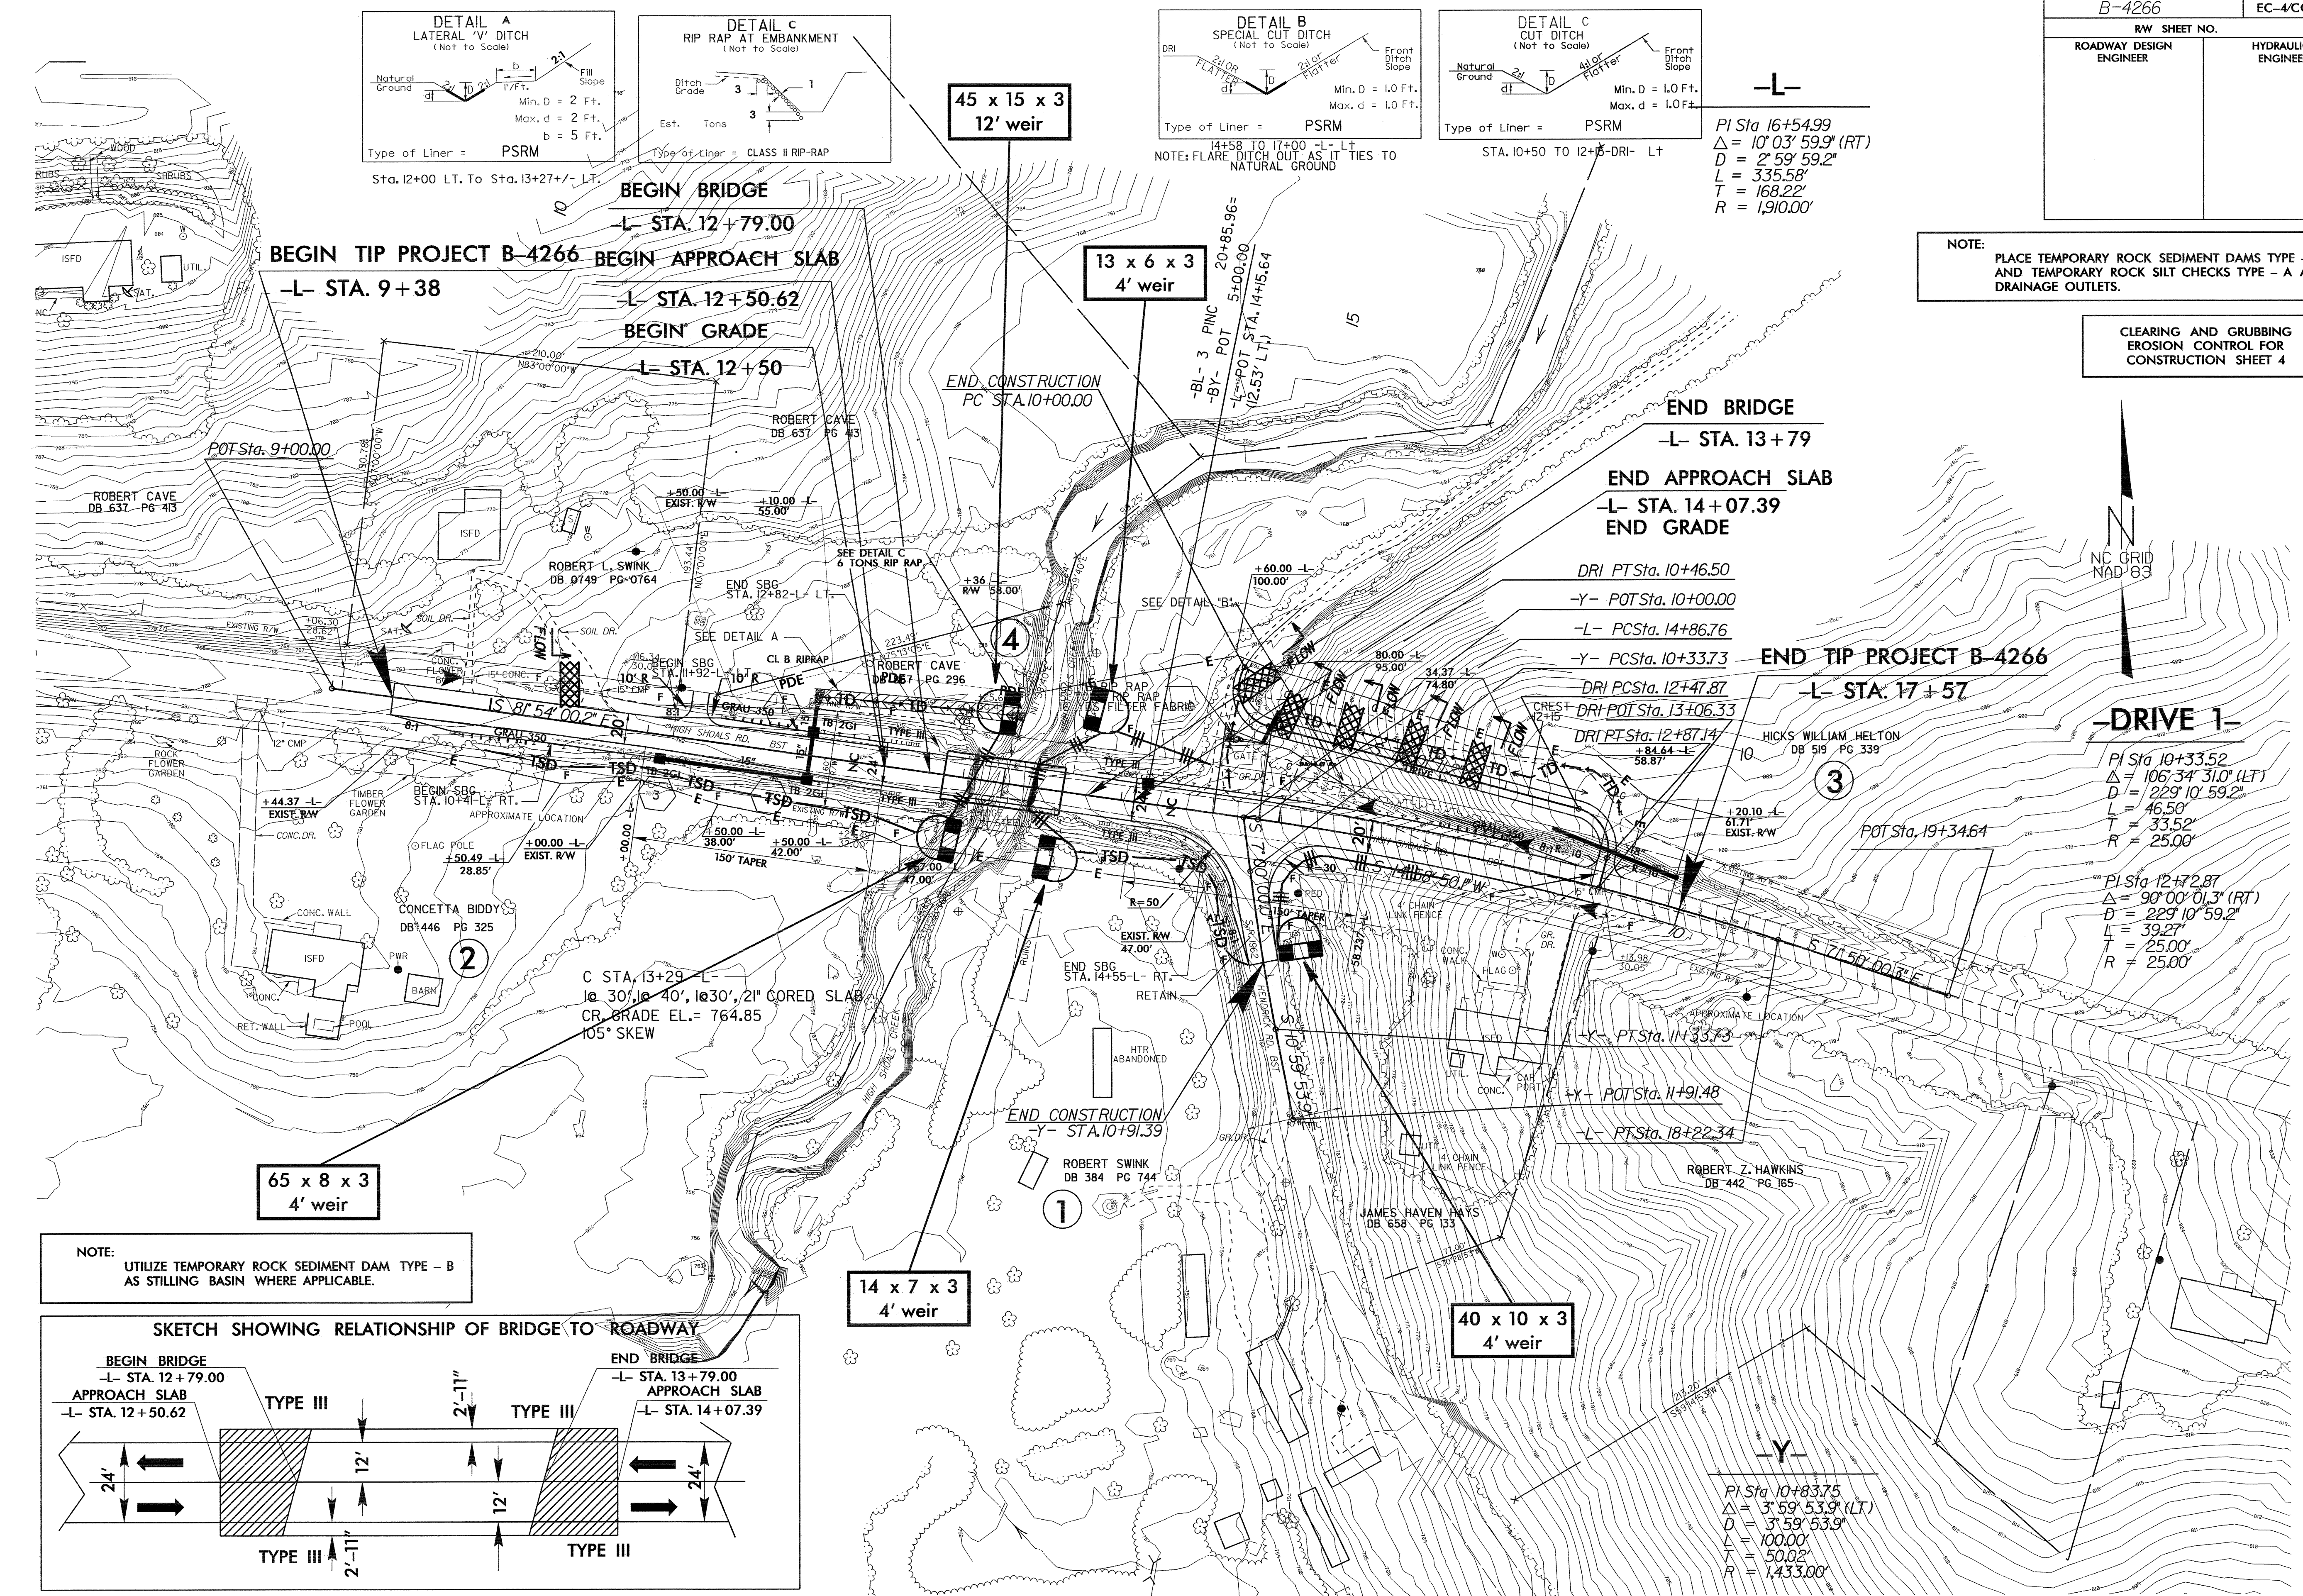


PI Sta 16+54.99
Δ = 10° 03' 59.9" (RT)
D = 2° 59' 59.2"
L = 335.58'
T = 168.22'
R = 1,910.00'

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

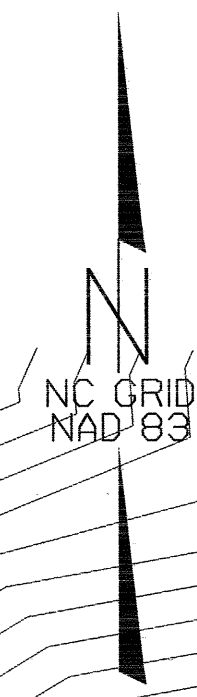

NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN WHERE APPLICABLE.

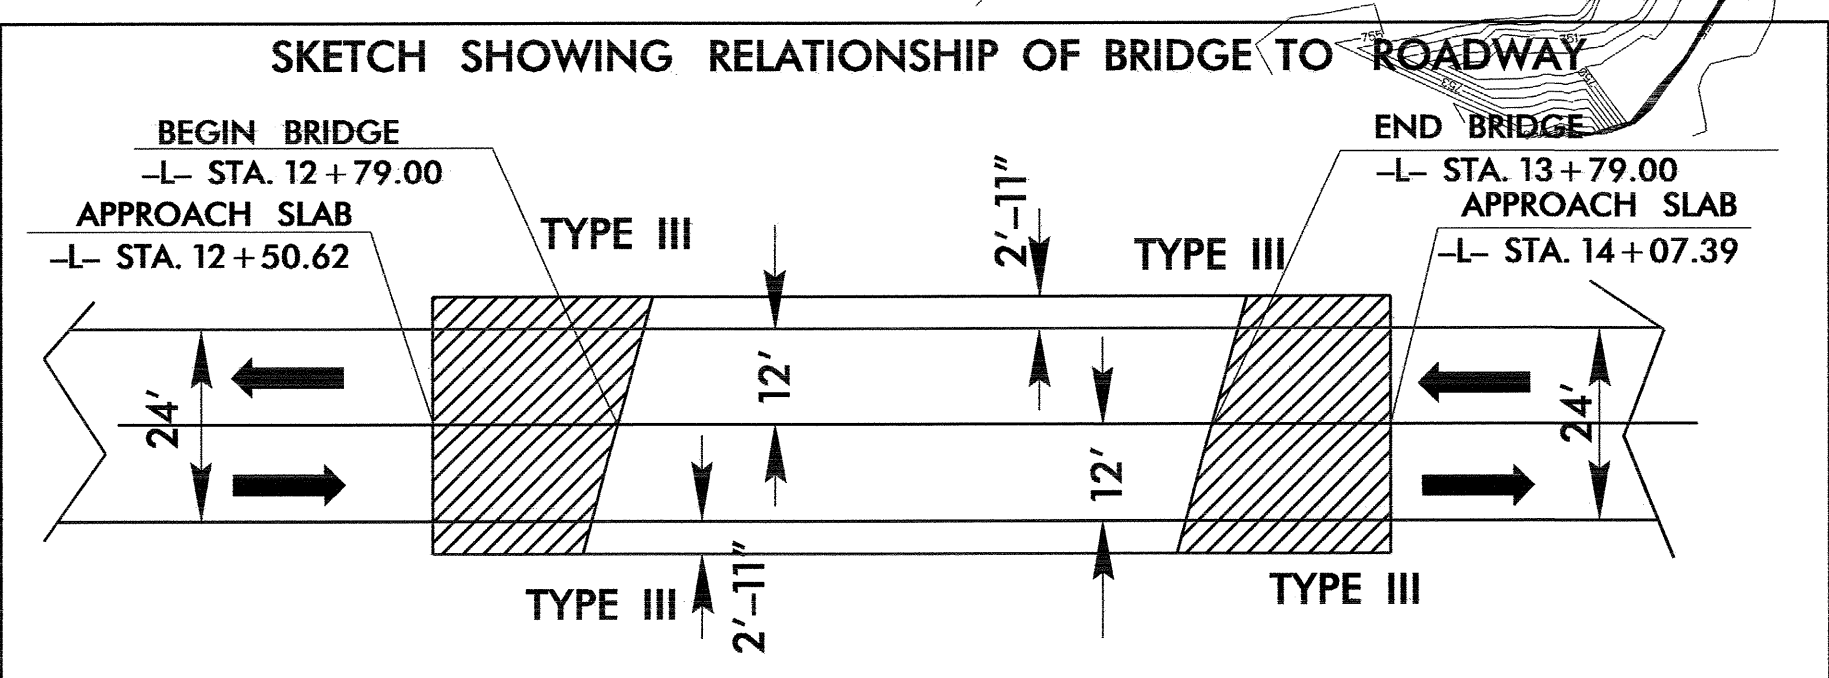

-DRIVE 1-

PI Sta 10+33.52
Δ = 106° 34' 31.0" (LT)
D = 229° 10' 59.2"
L = 46.50'
T = 33.52'
R = 25.00'

PI Sta 12+72.87
Δ = 90° 00' 01.3" (RT)
D = 229° 10' 59.2"
L = 39.27'
T = 25.00'
R = 25.00'

PI Sta 10+83.75
Δ = 3° 59' 53.9" (LT)
D = 3° 59' 53.9"
L = 100.00'
T = 50.02'
R = 1,433.00'