



DATUM DESCRIPTION
 THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCOS FOR MONUMENT "BEACHUM"
 WITH NAD 1983/86 STATE PLANE GRID COORDINATES OF NORTHING: 457,905,280(11) EASTING: 163,624,150(11)
 THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 0.999972462
 THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM "BEACHUM" TO -L- POC Sta. 22+81.56 IS N 89°50'40.44" E 7246.99'
 ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES VERTICAL DATUM USED IS NGVD 29

RECYCLERS ACQUISITIONCO, LLC
 P.I.N. 6445-06-38-636L.00
 DB. 639, PG. 175

NOTE:
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

PROJECT REFERENCE NO.	SHEET NO.
B-4009	EC-5/CONST.-4
R/W SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	

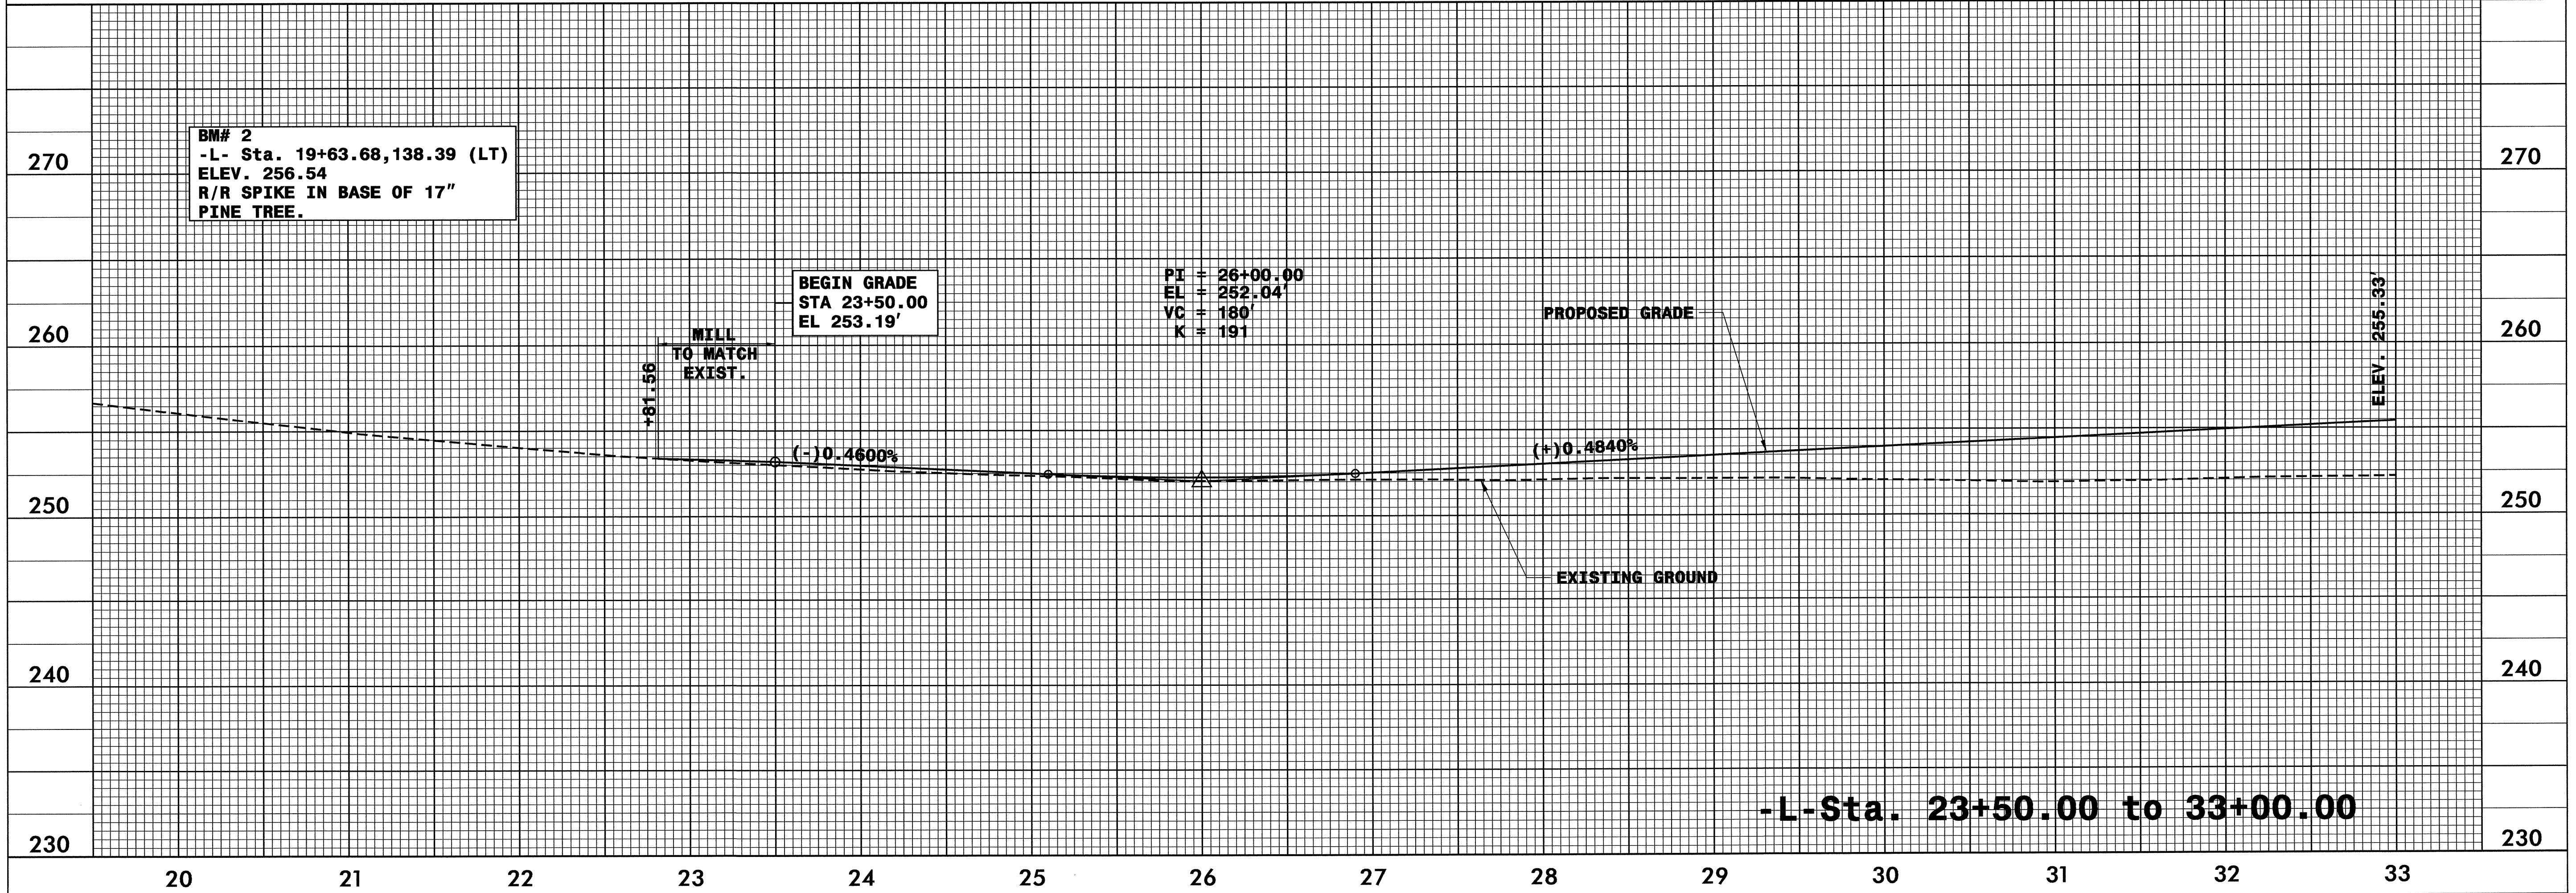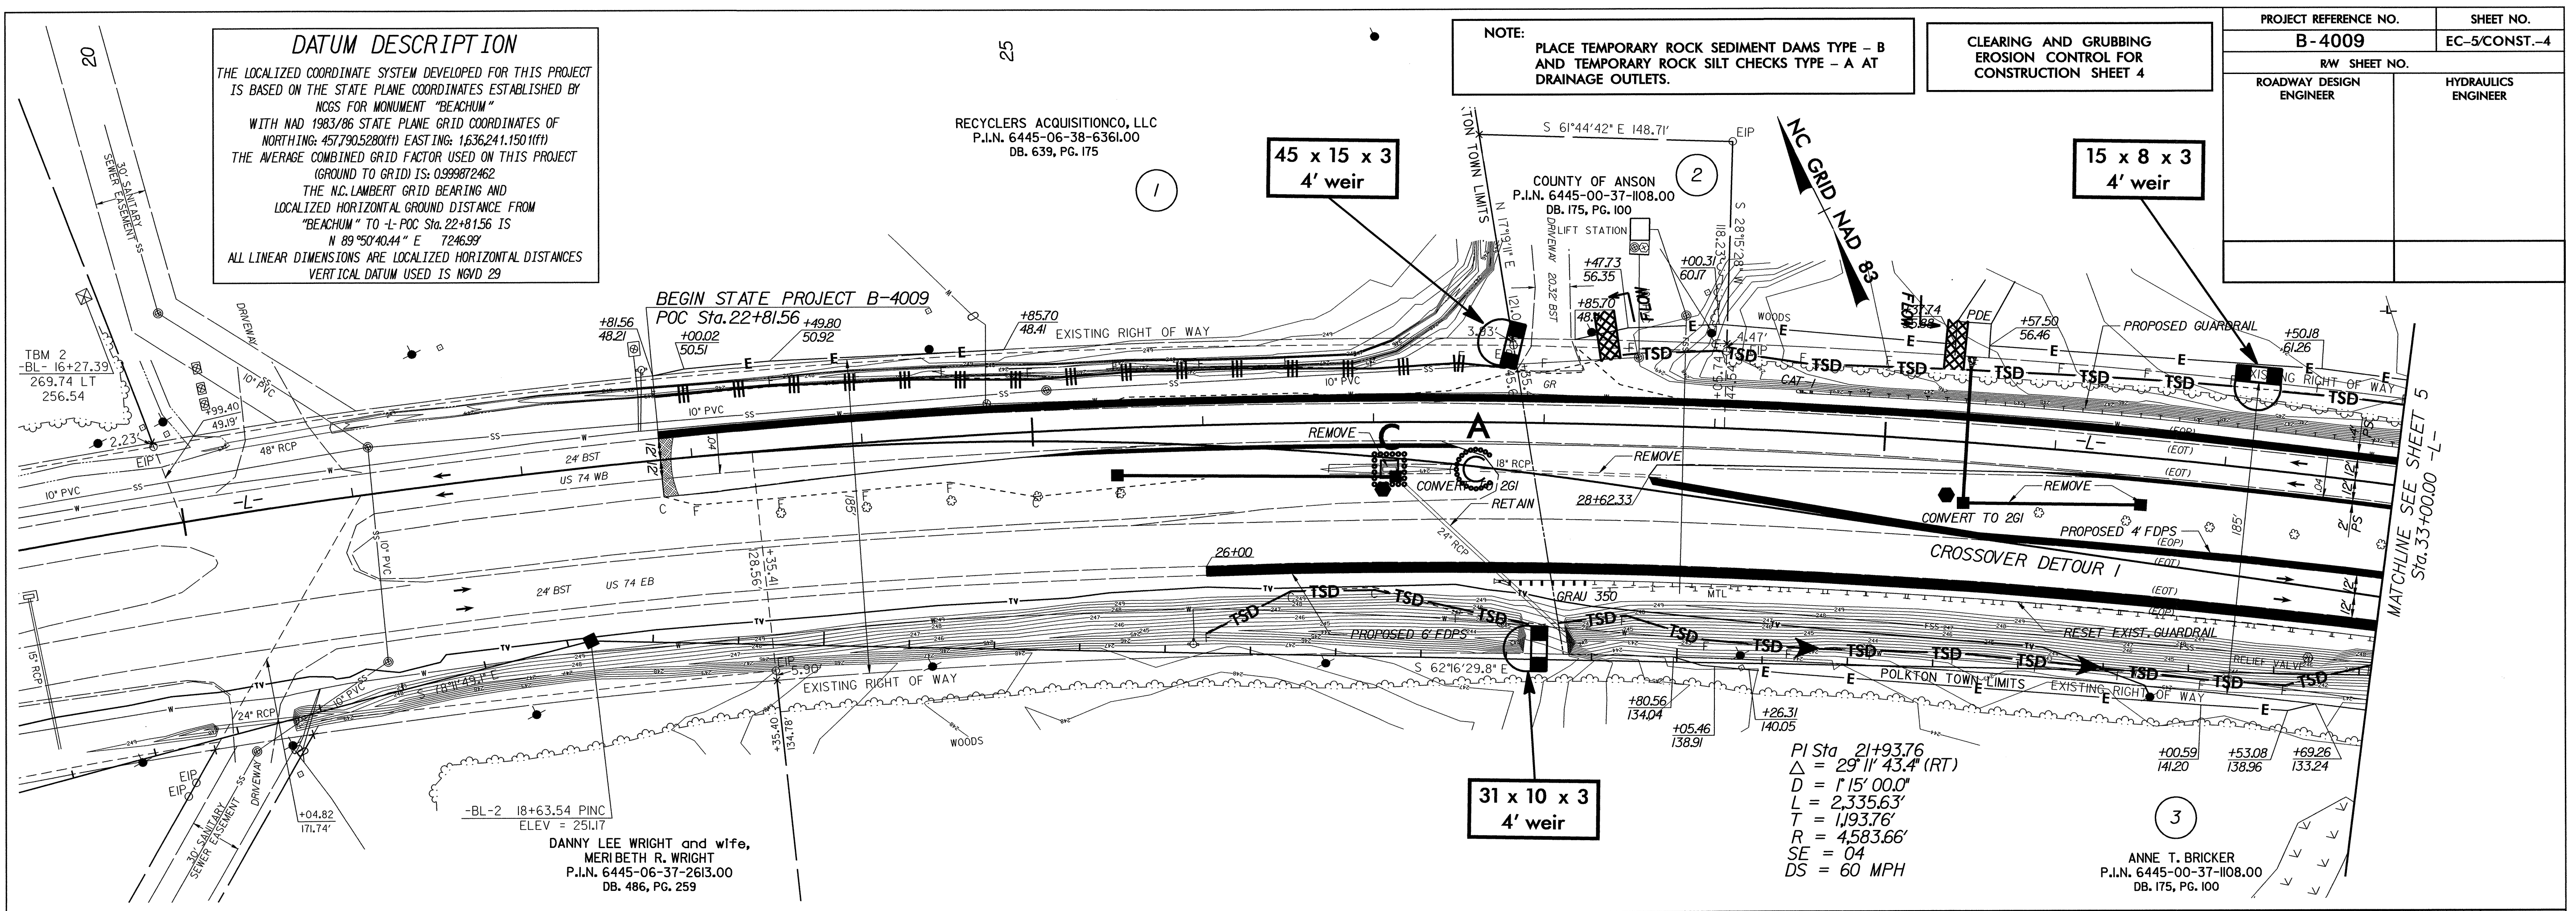

BM# 2
 -L- Sta. 19+63.68, 138.39 (LT)
 ELEV. 256.54
 R/R SPIKE IN BASE OF 17"
 PINE TREE.

BEGIN GRADE
 STA 23+50.00
 EL 253.19'

PI = 26+00.00
 EL = 252.04'
 VC = 180'
 K = 191

-L- Sta. 23+50.00 to 33+00.00