


6/2/99

PAVEMENT SCHEDULE

ITEM	DESCRIPTION	ITEM	DESCRIPTION
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5 1/2" IN DEPTH OR LESS THAN 3" IN DEPTH.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.	T	EARTH MATERIAL
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT GREATER THAN 4" IN DEPTH OR LESS THAN 2 1/2" IN DEPTH.	W	WEDGING (SEE DETAIL)
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.		



NOTE: All Pavement Edge Slopes Are To Be 1:1.

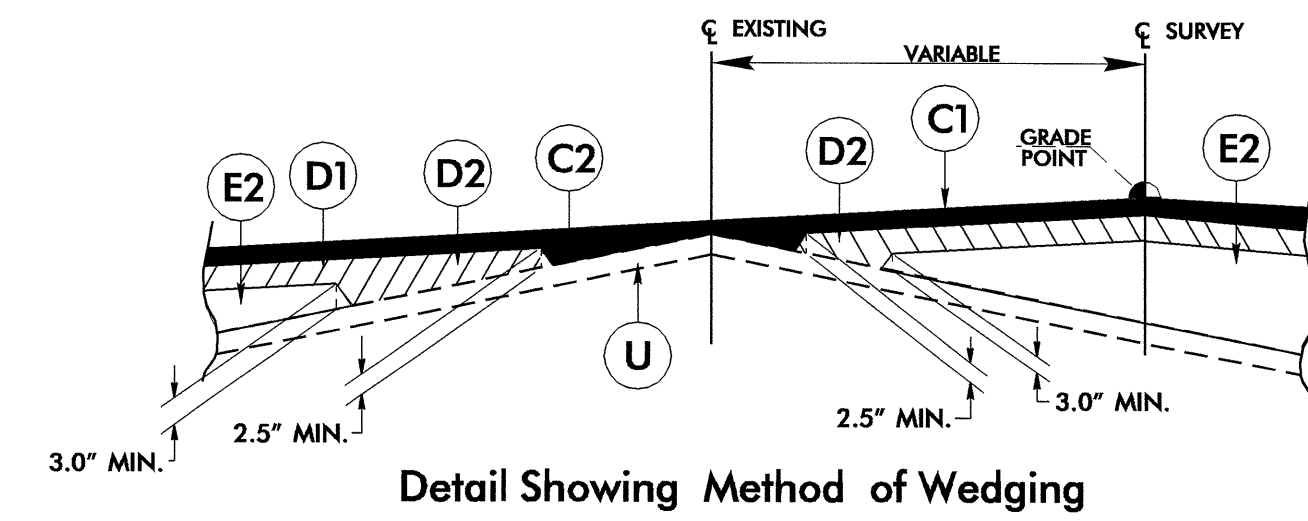


PROJECT REFERENCE NO. B-3847 SHEET NO. 2

ROADWAY DESIGN ENGINEER: MICHAEL J. MERRITT (Professional Engineer Seal 2122)

PAVEMENT DESIGN ENGINEER: CHI CHEN (Professional Engineer Seal 13388)

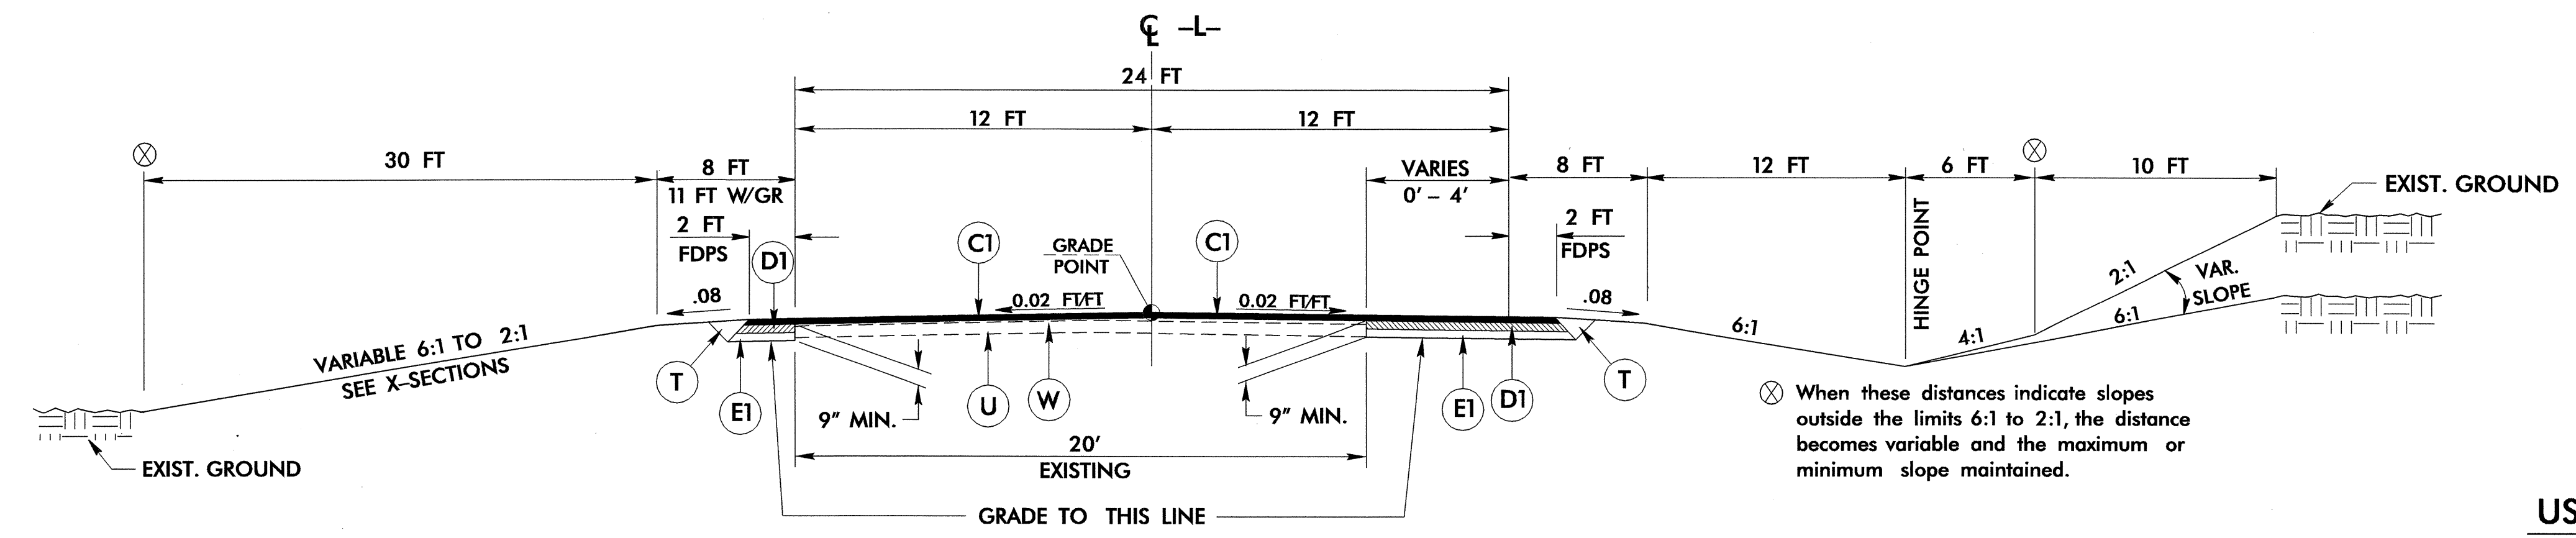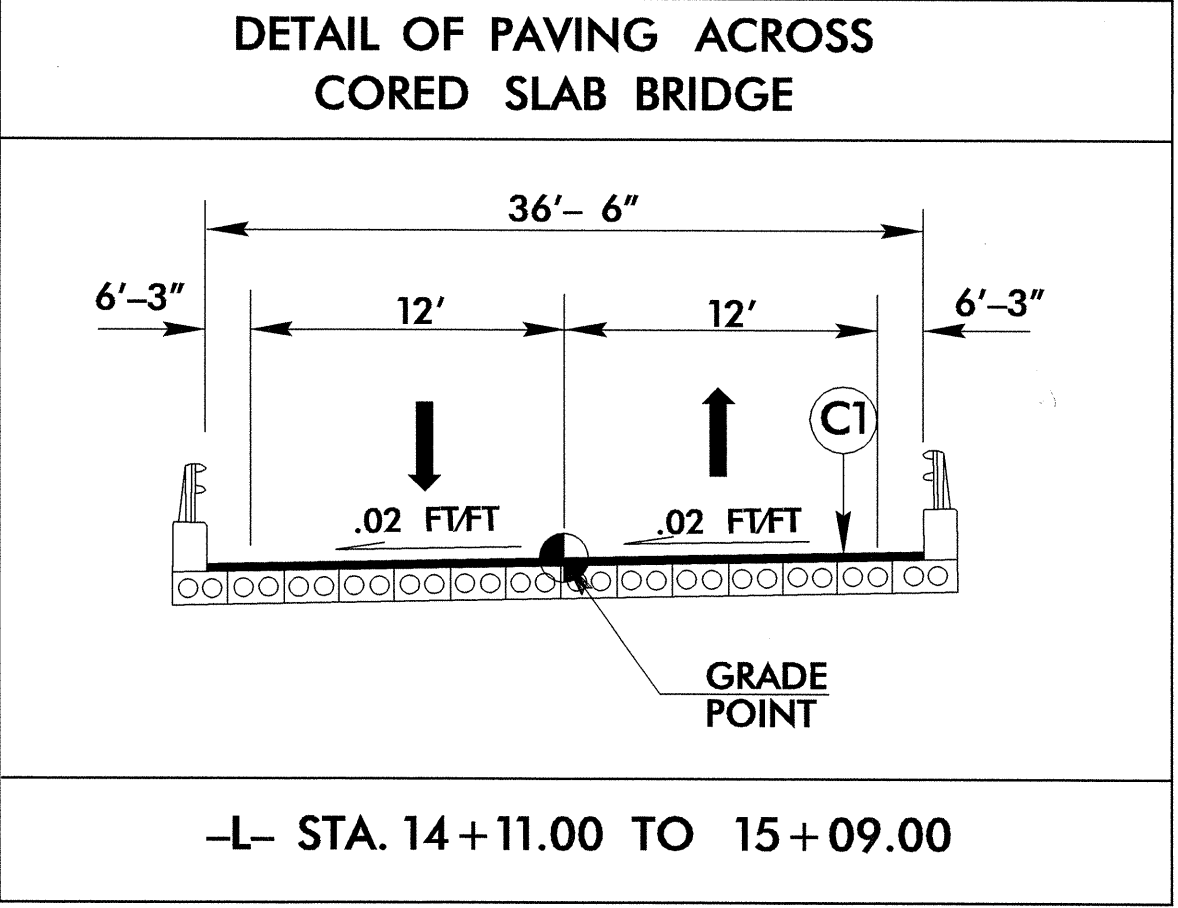

USE TYPICAL SECTION NO. 1
 -L- STA. 11+70.00 TO 13+75.00
 -L- STA. 15+45.00 TO 18+30.00

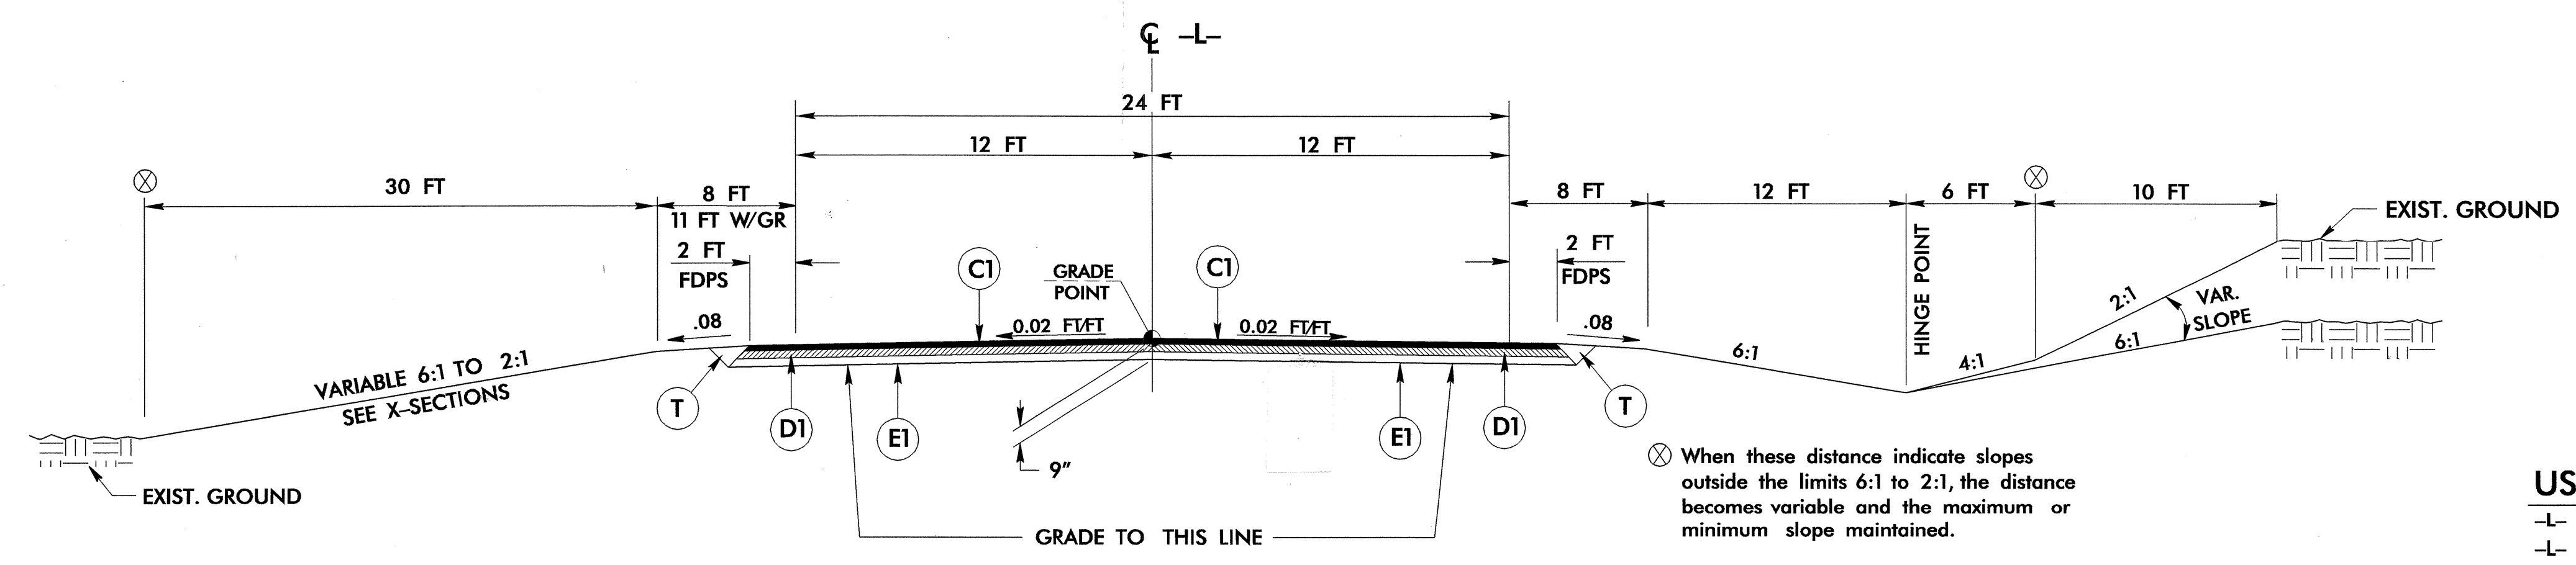

USE TYPICAL SECTION NO. 2
 -L- STA. 13+75.00 TO 14+11.00 (BEGIN BRIDGE)
 -L- STA. 15+09.00 (END BRIDGE) TO 15+45.00

07-OCT-2005 11:33
r:\coodw\pco\l3847_rdy_typ.dgn
\$\$\$\$USERNAME\$\$\$\$

PLANS PREPARED BY :
RUMMEL KLEPPER & KAHL, LLP
consulting engineers
 5800 FARINGDON PLACE SUITE 105
 RALEIGH, NORTH CAROLINA 27609-3960
 (919)-878-9560

FOR
STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS