



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	7CR.10411.10, ETC	16	24


7CR.10411.10, 7CR.20411.10, 7CR.304108.10, 7CR.304110.10, 7CR.304112.10,

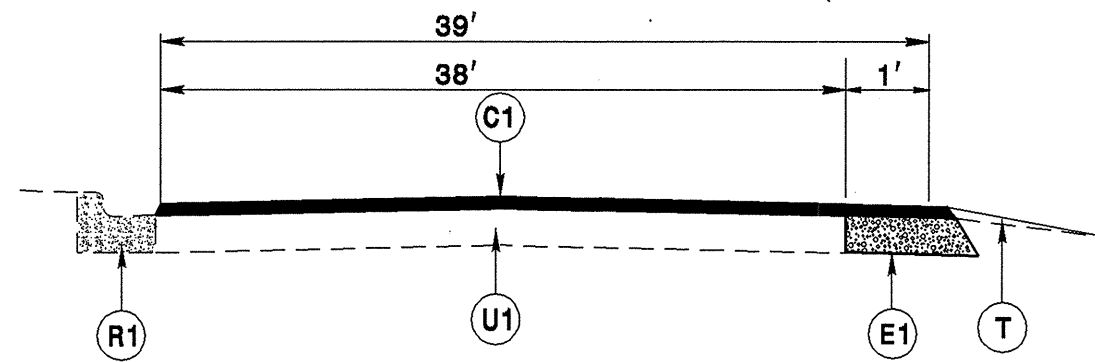


TYPICAL SECTION NO. 17

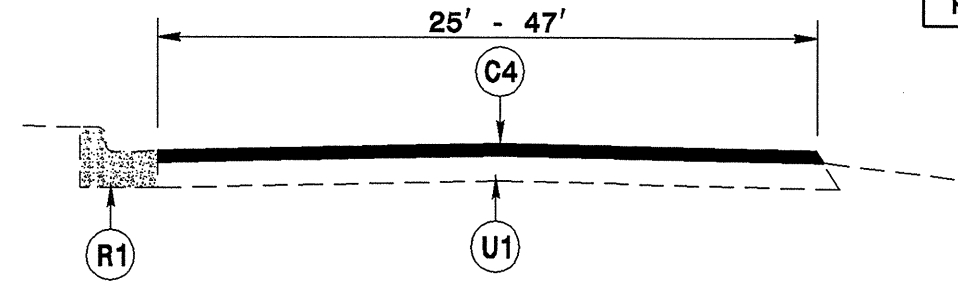


TYPICAL SECTION NO. 22

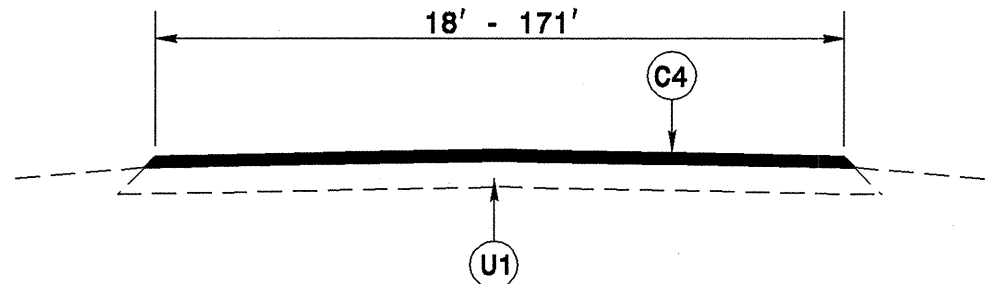


TYPICAL SECTION NO. 18

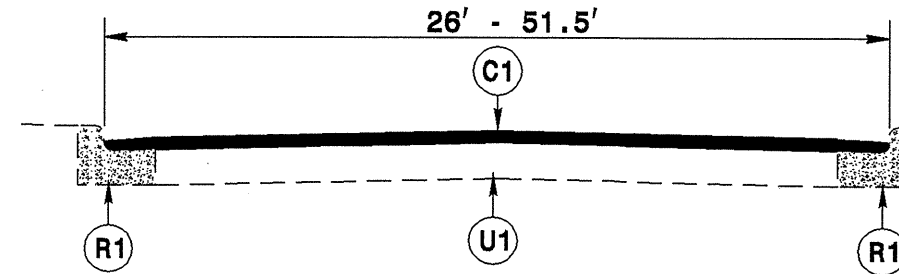


TYPICAL SECTION NO. 23

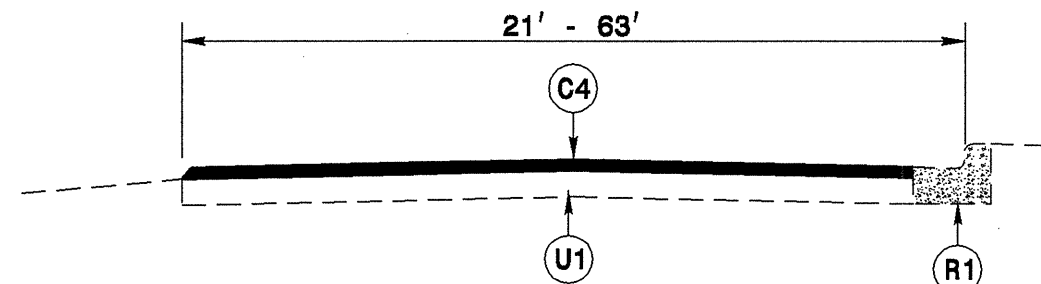


TYPICAL SECTION NO. 19

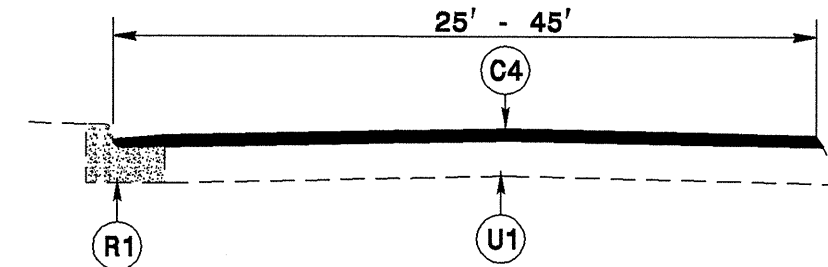


TYPICAL SECTION NO. 24

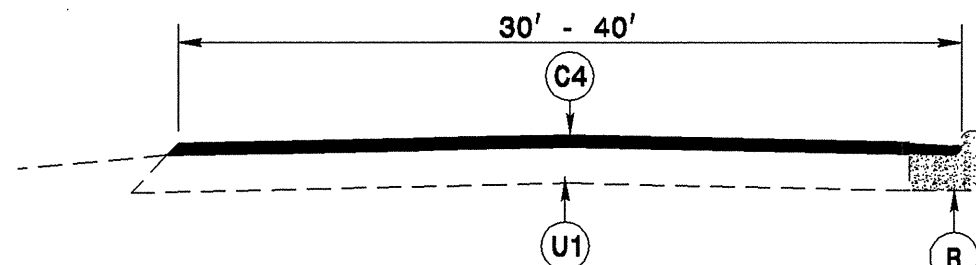

TYPICAL SECTION NO. 20

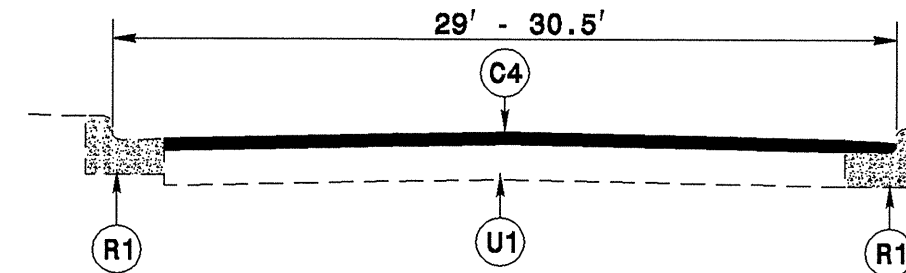

TYPICAL SECTION NO. 25

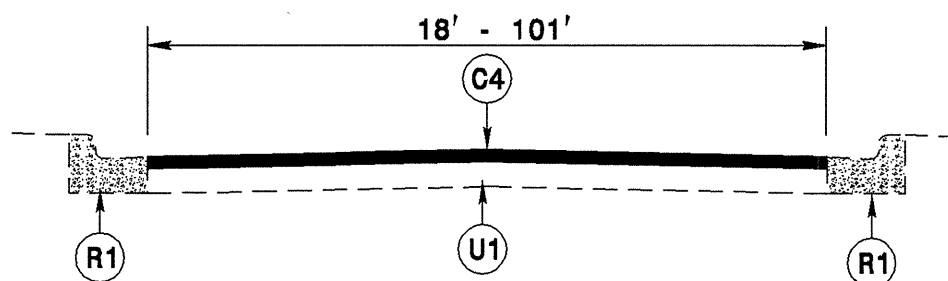

TYPICAL SECTION NO. 21

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E1	PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 912 LBS. PER SQ. YD.	R2	EXISTING CONCRETE ISLAND.
C2	PROP. APPROX. 5/8" ULTRATHIN HOT MIX ASPHALT CONCRETE SURFACE, TYPE B, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.	E2	PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 912 LBS. PER SQ. YD.	T	SHOULDER RECONSTRUCTION.
C3	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD.	E3	PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	U1	EXISTING PAVEMENT.
C4	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	E4	PROP. APPROX. 8" ASPHALT CONCRETE BASE COURSE TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	U2	EXISTING PAVED SHOULDER.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	F	ASPHALT SURFACE TREATMENT, NO. 78M STONE		
D2	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	R1	EXISTING CONCRETE 2'-8" CURB AND GUTTER.		