

	STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
	N.C.	MAIOI99R	3	6
- 1			6,000	

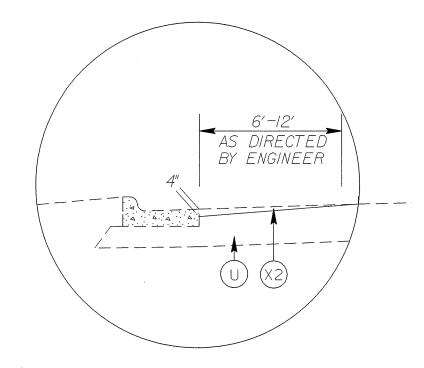

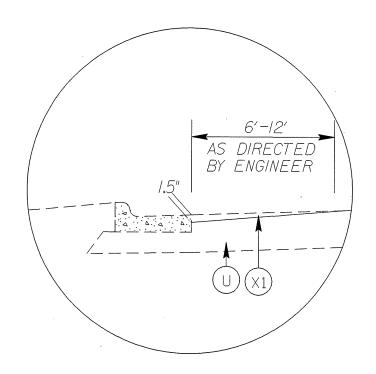


DETAIL FOR PROFILE MILLING (O" TO 4")

WHERE INTERMEDIATE COURSE IS REQUIRED

DETAIL FOR PROFILE MILLING (O" TO 1.5")

WHERE NO INTERMEDIATE COURSE IS REQUIRED

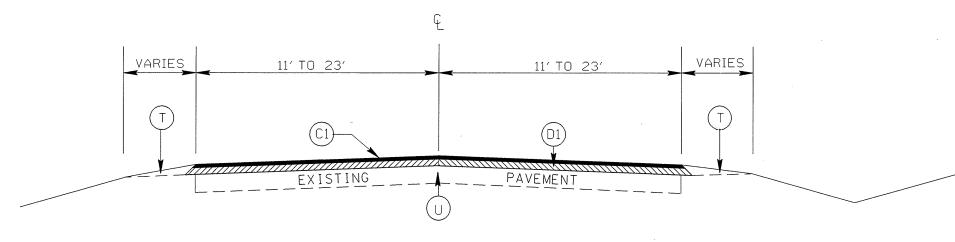

TYPICAL SECTION NO. 1 BEATTIES FORD RD. INCLUDING TURN LANE AREAS

PAVEMENT SCHEDULE

	(C1)	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
	(D1)	PROP. APPROX. 2.50" ASPHALT CONC. INTERMEDIATE COURSE, I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
_	(X1)	PROFILE MILLING 0"-1.5"
	(X2)	PROFILE MILLING 0"-4"
	(<u>†</u>	EARTH MATERIAL
		EXISTING PAVEMENT

BEATTIES FORD ROAD RESURFACING

SCALE	l*=50°
DATE	1-25-05
DWG. BY	RWB
DESIGN BY	RWB
APPROVED	MPM



REVISIONS		