

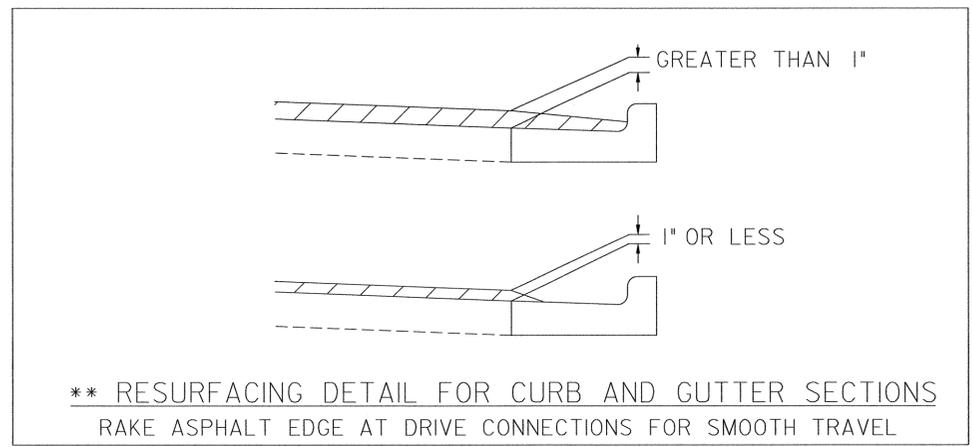


PAVEMENT SCHEDULE	
(C) I	PROP. APPROX. 1-1/2" ASPH. CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(V) I	MILL 1-1/2" DEPTH
(U)	EXISTING PAVEMENT

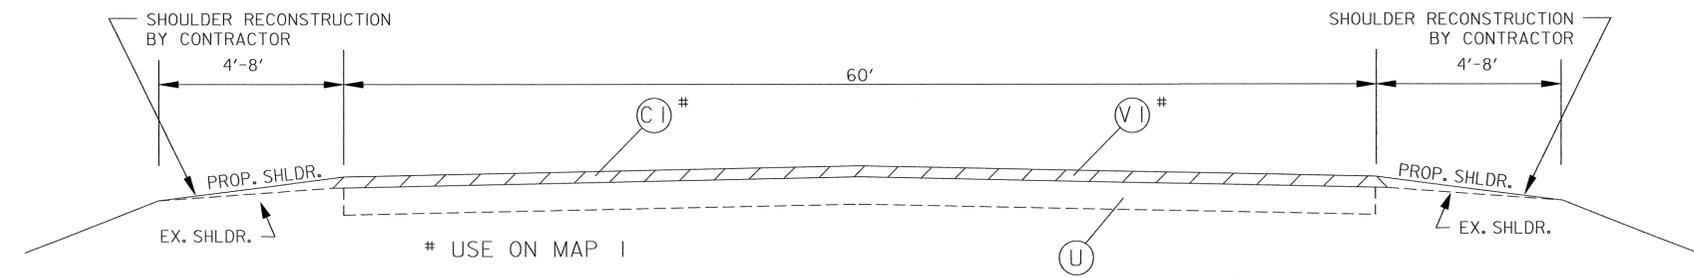



NOTES:

ALL UNPAVED S.R. ROADS TO BE RESURFACED 50' FROM EDGE OF PAVEMENT OF MAIN PROJECT
 ALL PAVED S.R. ROADS TO BE RESURFACED TO THE ENDS OF THE RADII, OR AS DIRECTED BY THE ENGINEER.
 EDGES, PAVEMENT WIDENING, INTERSECTIONS AND BRIDGE FLARES ARE INCLUDED IN THE TABLE OF QUANTITIES.
 BRIDGES TO BE RESURFACED AT LOCATIONS AND TO DEPTH AS DIRECTED BY THE ENGINEER.

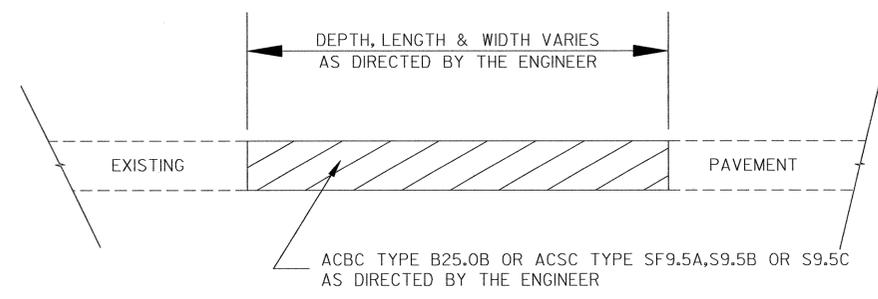


NOTE: THE CONTRACTOR SHALL STOP AT THE INTERSECTION OF GORMAN ST. (DO NOT INCLUDE INTERSECTION) AS DIRECTED BY THE ENGINEER

TYPICAL SECTION NO. 1

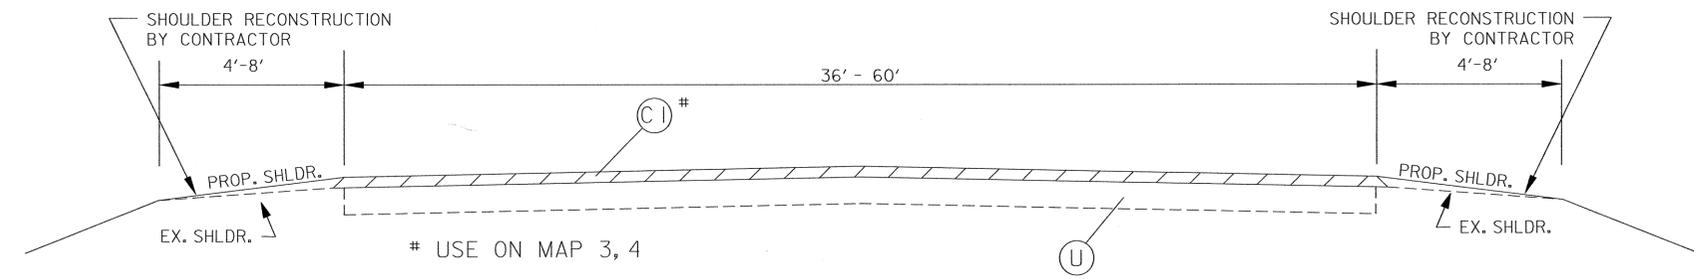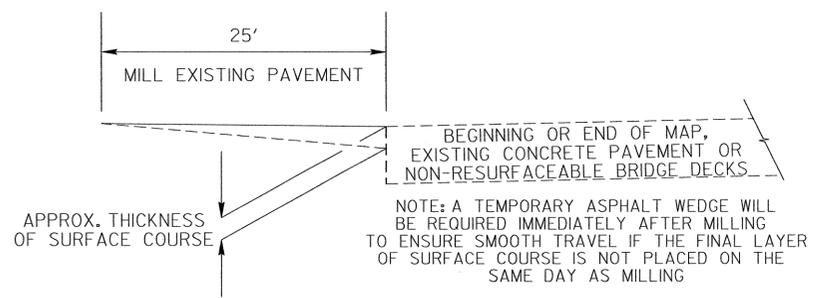


TYPICAL SECTION NO. 2

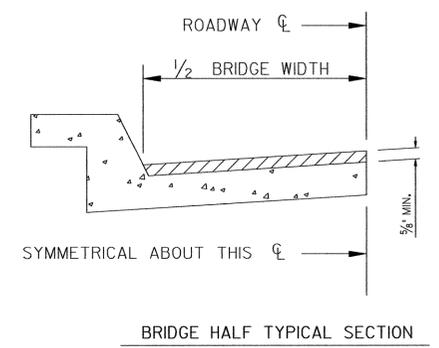

FOR BRIDGES WITH FLOOR DRAINS, CARE SHALL BE EXERCISED IN PLACING THE WEARING SURFACE AROUND FLOOR DRAINS SO AS NOT TO HINDER EFFECTIVE DRAINAGE. ALL DRAINS SHALL BE LEFT OPEN.

THE PROPOSED WEARING SURFACE SHALL VARY IN THICKNESS AS NECESSARY TO PROVIDE A SMOOTH RIDING SURFACE. A THICKNESS OF NOT LESS THAN 5/8" SHALL BE PROVIDED. THE MAXIMUM THICKNESS SHALL PREFERABLY BE 1 1/2" UNLESS IT IS IMPRACTICAL TO PROVIDE A SMOOTH RIDING SURFACE OTHERWISE.

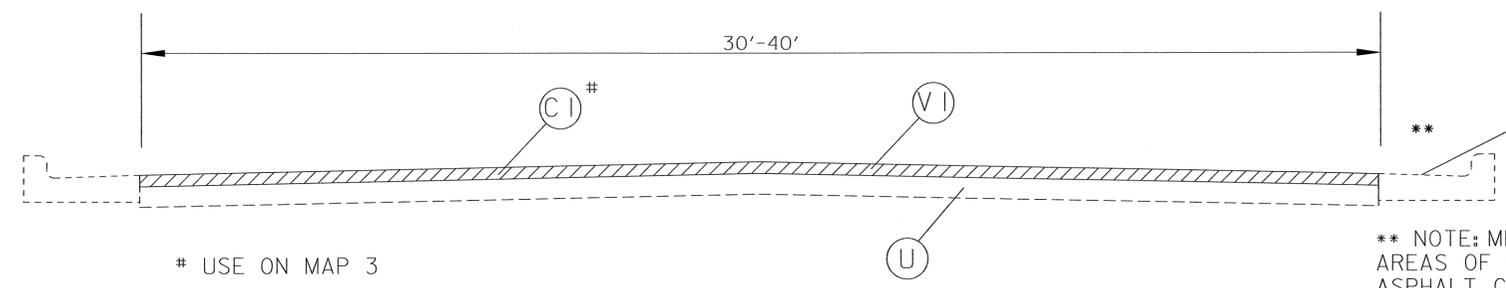


TYPICAL SECTION NO. 3

** NOTE: MILLING SHOULD INCLUDE THE AREAS OF CURB AND GUTTER THAT HAVE ASPHALT CONC. SURFACE COURSE WITHIN THEM, AS DIRECTED BY THE ENGINEER


PAVEMENT SCHEDULE

(C I)	PROP. APPROX. 1-1/2" ASPH. CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(V I)	MILL 1-1/2" DEPTH
(U)	EXISTING PAVEMENT

PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
5CR.2092 I.9	3	5

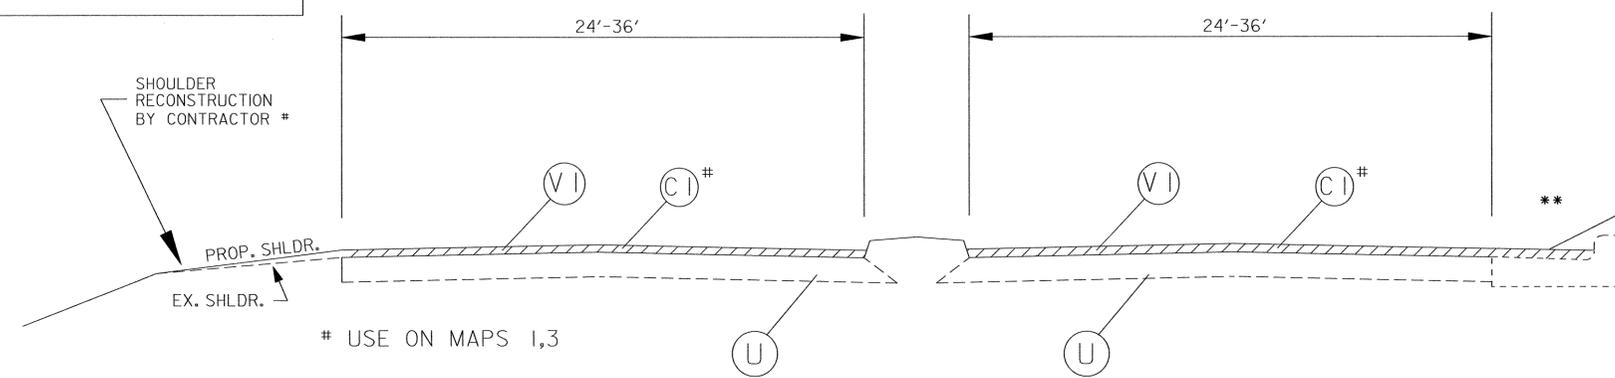


TYPICAL SECTION NO. 4

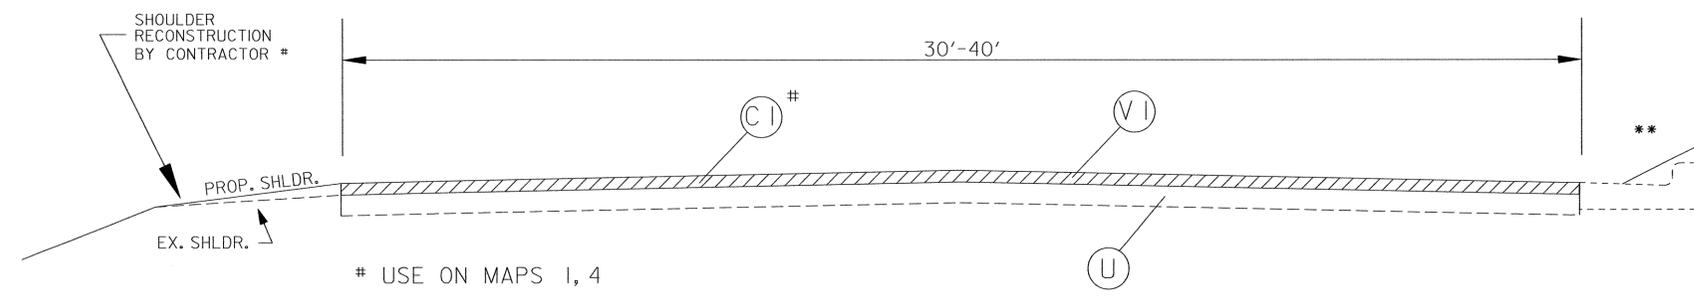

USE ON MAPS 1, 4

NOTE: ALL RAMPS AT I-440 SHALL BE PATCHED AND RESURFACED AS DIRECTED BY THE ENGINEER, MILLING WILL NOT BE REQUIRED ON THE RAMPS

TYPICAL SECTION NO. 5

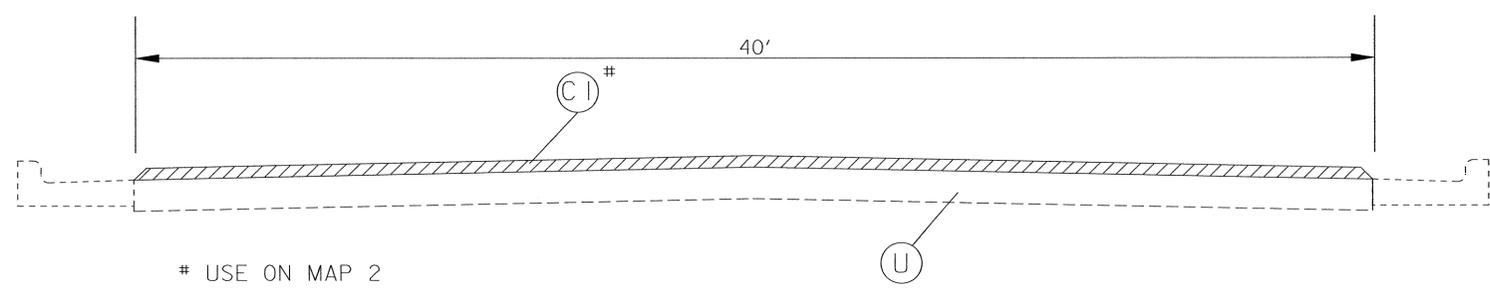


USE ON MAP 2

TYPICAL SECTION NO. 6

PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
5CR.2092 I.9	4	5

PAVEMENT SCHEDULE	
(C)	PROP. APPROX. 1-1/2" ASPH. CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
(V)	MILL 1-1/2" DEPTH
(U)	EXISTING PAVEMENT

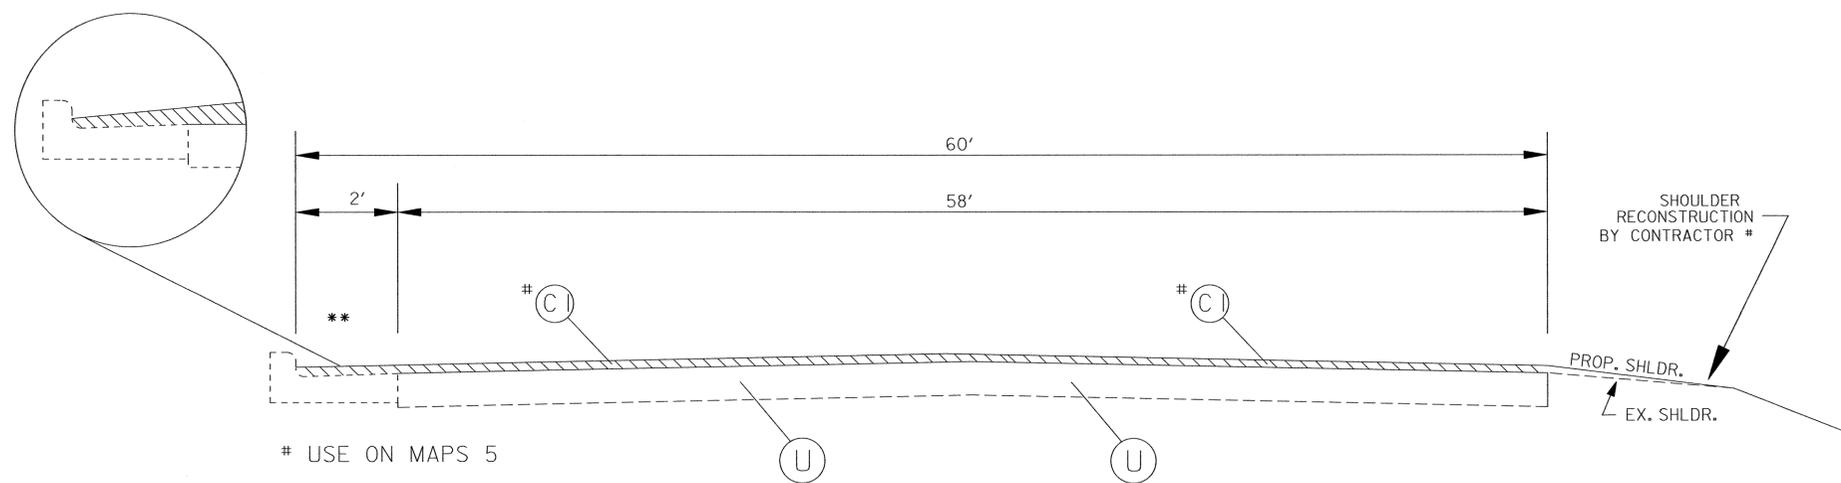

TYPICAL SECTION NO. 7