




PROJECT NO. 37671, 5CR.10351.5, 5CR.20351.5, ETC.	SHEET NO. 9	TOTAL SHEETS 15
---	-----------------------	---------------------------

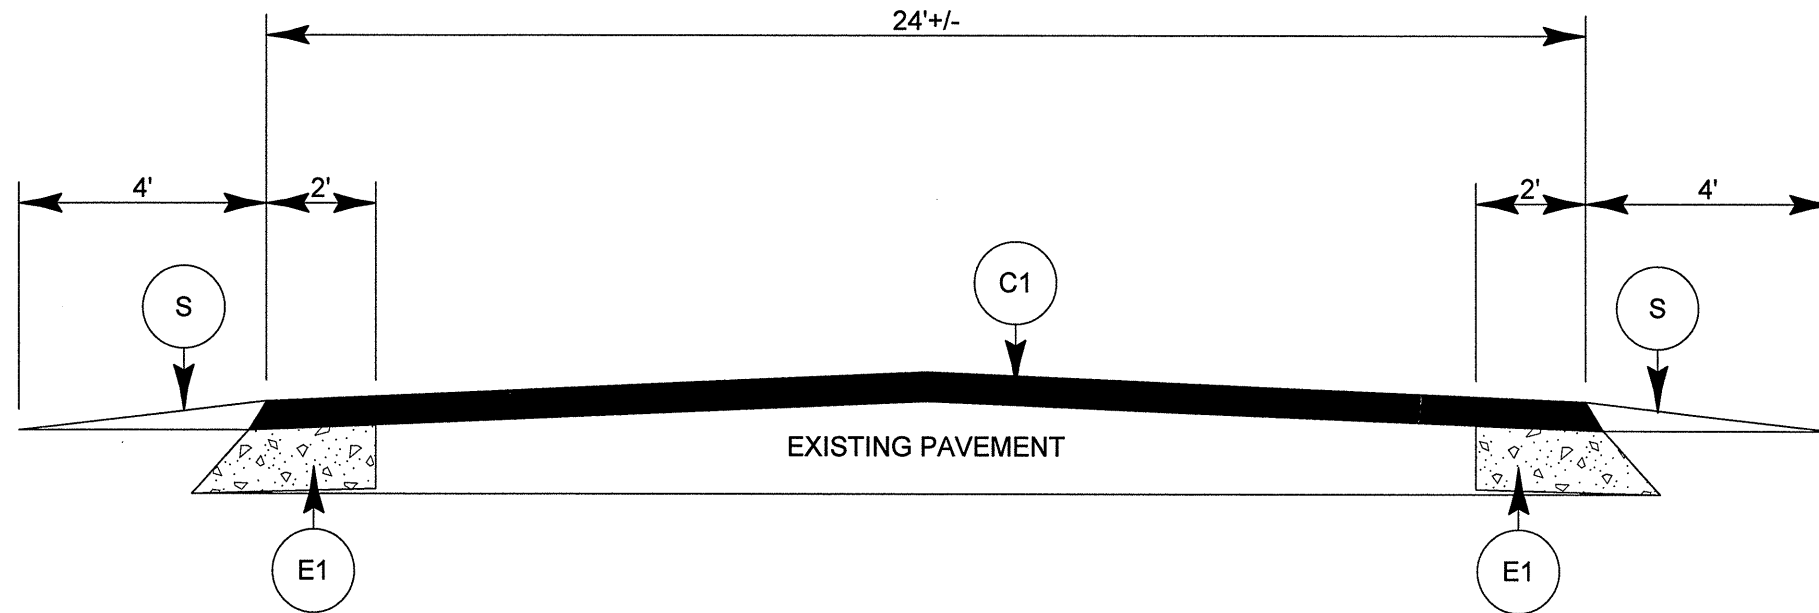

TYPICAL SECTION NO. 1

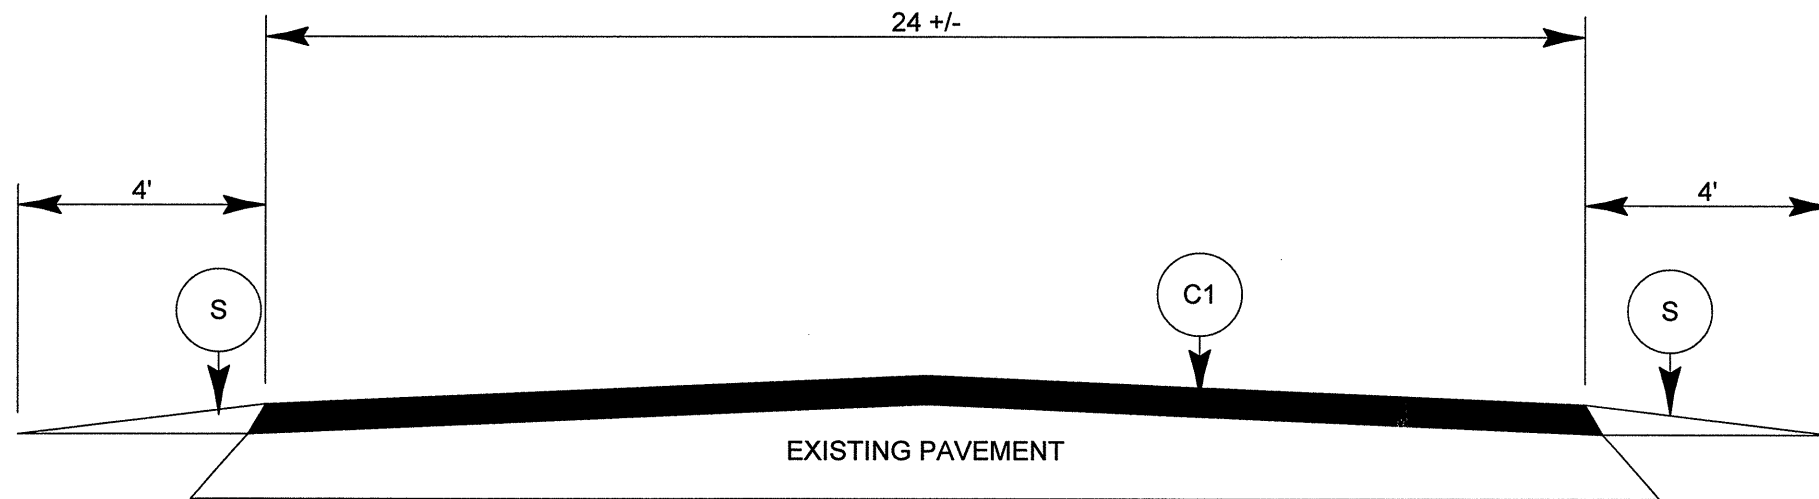

TYPICAL SECTION NO. 2

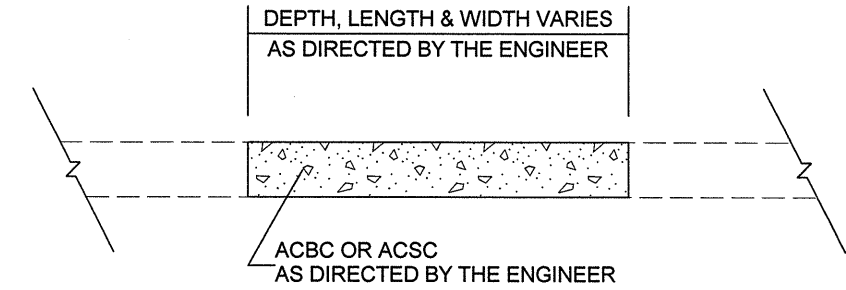

PATCHING EXISTING PAVEMENT

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.25" BITUMINOUS CONCRETE SURFACE COURSE, TYPE SF9.5A AT AN AVERAGE RATE OF 138 LBS. PER SQUARE YARD
C2	PROP. APPROX. 1.5" BITUMINOUS CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 168 LBS. PER SQUARE YARD
D1	PROP. APPROX. 2.5" BITUMINOUS CONCRETE INTERMEDIATE COURSE, TYPE I19.0B AT AN AVERAGE RATE OF 285 LBS. PER SQUARE YARD. USE ON MAP 1 TO REPLACE MILLED AREAS.
E1	PROP. APPROX. 6" BITUMINOUS CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 684 LBS. PER SQUARE YARD
E2	PROP. APPROX. 6" BITUMINOUS CONCRETE BASE COURSE, TYPE B25.0B AT AN AVERAGE RATE OF 684 LBS. PER SQUARE YARD AS DIRECTED BY THE ENGINEER
S	SHOULDER RECONSTRUCTION/ SEEDING AND MULCHING BY STATE FORCES
V1	1.5" MILLING
V2	2.5" MILLING, 4' WIDE, AS DIRECTED BY ENGINEER. USE ON MAP 1