

General Notes

Adapt the traffic control plans, when directed by the Engineer, to meet field conditions to provide safe and efficient traffic movement. Changes may be required when physical dimensions in the detail drawings, standard details and roadway details are not attainable, or result in duplicate, or undesired overlapping of devices. Modification may include: moving, supplementing, covering or removal of devices.

The following general notes apply at all times for the duration of the construction project, except when otherwise noted in the plan, or directed by the Engineer.

Time Restrictions

A) Do not close or narrow travel lanes as follows:

Road Name	Day and Time Restrictions
1. All Roads	7 a.m. - 9 a.m. and 4 p.m. - 6 p.m. Monday through Friday

B) Do not close or narrow travel lanes during holidays and special events as follows:

Road Name	Holiday
1. All Roads	
1.	For any event that creates unusually high traffic volumes, as directed by the Engineer.
2.	For New Year's, between the hours of 4 p.m. December 31st to 9 a.m. January 2nd. If New Year's Day is on a Saturday or a Sunday, then until 9 a.m. the following Tuesday.
3.	For Easter, between the hours of 4 p.m. Thursday and 9 a.m. Monday.
4.	For Memorial Day, between the hours of 4 p.m. Friday to 9 a.m. Tuesday.
5.	For Independence Day, between the hours of 4 p.m. the day before Independence Day and 9 a.m. the day after Independence Day. If Independence Day is on a Saturday or Sunday, then between the hours of 4 p.m. the Thursday before Independence Day and 9 a.m. the Tuesday after Independence Day.
6.	For Labor Day, between the hours of 4 p.m. Friday to 9 a.m. Tuesday.
7.	For Thanksgiving, between the hours of 4 p.m. Tuesday to 9 a.m. Monday.
8.	For Christmas, between the hours of 4 p.m. the Friday before the week of Christmas Day and 9 a.m. the following Monday after the week of Christmas.

C) Do not stop traffic or close roads as follows:

Road Name	Day and Time Restrictions
1. All Roads	7 a.m. - 9 a.m. and 4 p.m. - 6 p.m. Monday through Friday

D) Do not stop traffic for more than 15 minutes as follows:

Road Name	Operation
1. All Roads	Hanging overhead lines

Lane and Shoulder Closure Requirements

- E) Remove Lane Closure devices from the lane when work is not being performed behind the lane closure or when a lane closure is no longer needed, or as directed by the Engineer.
- F) When personnel and/or equipment are working within 40 ft (12m) of an open travel lane, close the nearest open shoulder using Roadway Standard Drawing no. 1101.04 unless the work area is protected by barrier or guardrail.
- G) When personnel and/or equipment are working on the shoulder adjacent to an undivided facility and within 5 ft (1.5m) of an open travel lane, close the nearest open travel lane using Roadway Standard Drawing no. 1101.02 unless the work area is protected by barrier or guardrail.

When personnel and/or equipment are working on the shoulder adjacent to a divided facility and within 10 ft (3m) of an open travel lane, close the nearest open travel lane using Roadway Standard Drawing no. 1101.02 unless the work area is protected by barrier or guardrail.
- H) When personnel and/or equipment are working within a lane of travel of an undivided or divided facility, close the lane according to the traffic control plans, roadway standard drawings or as directed by the Engineer. Conduct the work so that all personnel and/or equipment remain within the closed travel lane.
- I) Do not work simultaneously, on both sides of an open travelway, within the same location, on a two-lane, two-way road.
- J) Do not perform work involving heavy equipment within 15 ft (5m) of the edge of travelway when work is being performed behind a lane closure on the opposite side of the travelway.

Pavement Edge Drop Off Requirements

- K) Backfill at a 6:1 slope up to the edge and elevation of existing pavement in areas adjacent to an opened travel lane that has a drop-off as follows:

Backfill drop-offs that exceed 2 inches (50mm) on roadways with posted speed limits of 45 mph or greater.

Backfill drop-offs that exceed 3 inches (75mm) on roadways with posted speed limits less than 45 mph.

Backfill with suitable compacted material, as approved by the Engineer, at no expense to the department.

Traffic Pattern Alterations

- L) Notify the Engineer twenty one (21) calendar days prior to any traffic pattern alteration.

Signing

- M) Ensure all necessary signing is in place prior to altering any traffic pattern.

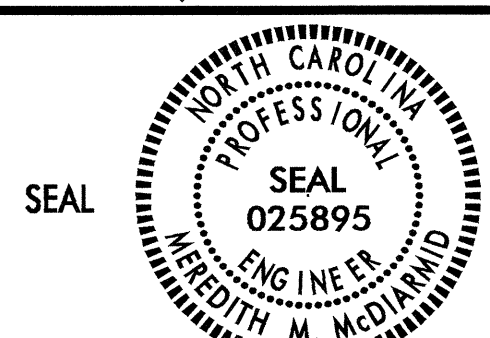

Traffic Control Devices

- N) When using Roadway Standard Drawing no. 1101.02 sheet 1 of 7, drums may be used in lieu of cones on all roads.
- O) Space channelizing devices in work areas no greater than twice the posted speed limit (mph), except 10 ft (3m) on-center in radii, and 3 ft (1m) off the edge of an open travelway, when lane closures are not in effect.
- P) Place sets of three drums perpendicular to the edge of the travelway on 500 ft (150m) centers when unopened lanes are closed to traffic. These drums shall be in addition to channelizing devices.

Miscellaneous

- Q) Police may be used to maintain traffic through intersections.

09-JUN-2005 10:26 \\nets-ccr\501\4736\4736.ctb\4736.ctb...tcp...tshRev.dgn
pseymore AT 1E1E2004ZT

APPROVED: <i>M. M. M.</i> DATE: 04/05		General Notes	
	SCALE: NONE		REVISIONS
	DATE: 04/05		
	DWG. BY: JPG		
	DESIGN BY: JPG		
	REVIEWED BY: MMM		