




TYPICAL SECTION NO. 1

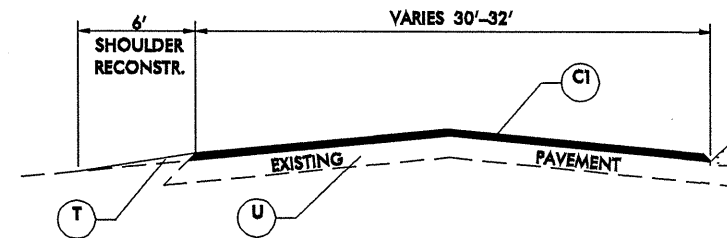


TYPICAL SECTION NO. 5

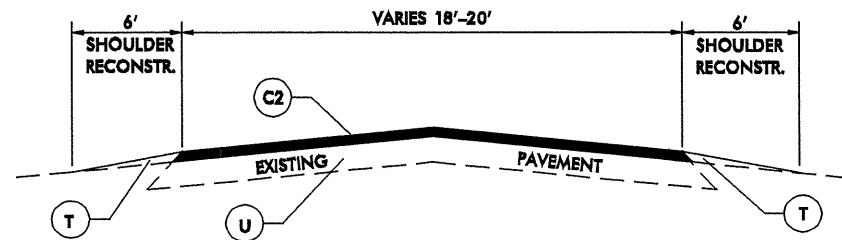


TYPICAL SECTION NO. 2

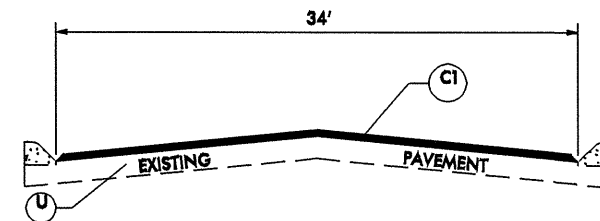


TYPICAL SECTION NO. 6

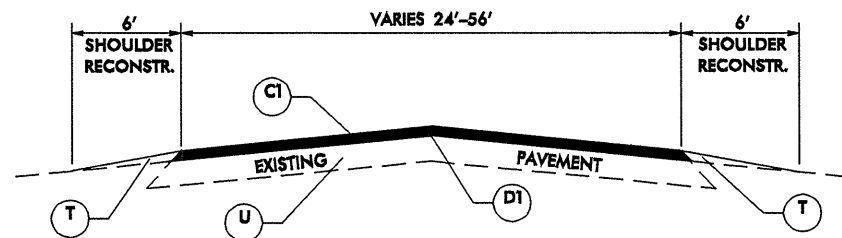


TYPICAL SECTION NO. 3

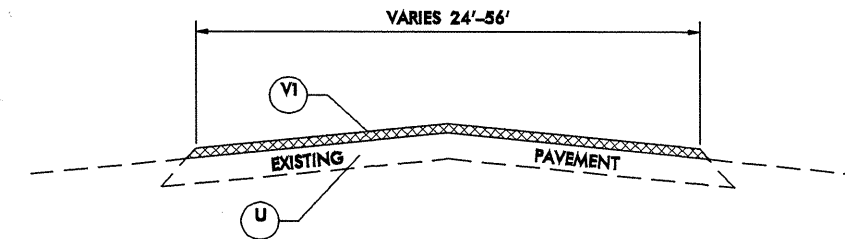

TYPICAL SECTION NO. 7

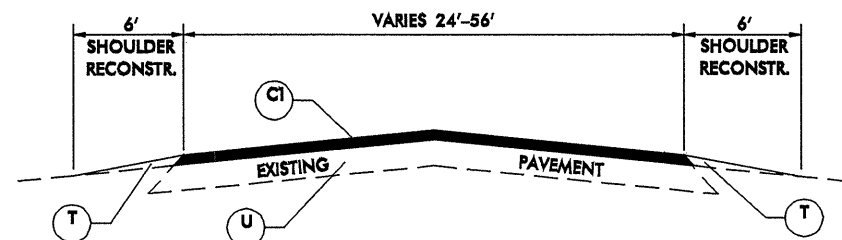

TYPICAL SECTION NO. 4

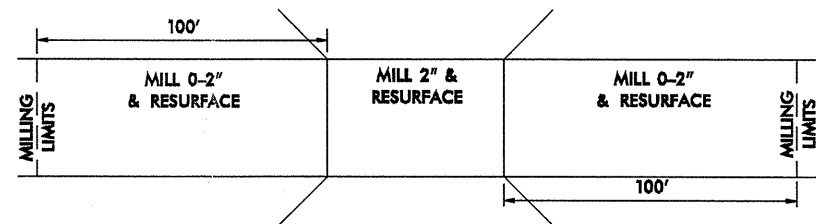

BRIDGE DRAWING FOR SR 1155

Use for Map No. 4

ALL MILLING IN THIS TYPICAL SHALL BE CONSIDERED INCIDENTAL MILLING.

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V1	4" MILLING