




ROBESON COUNTY
SHEET 7 OF 7

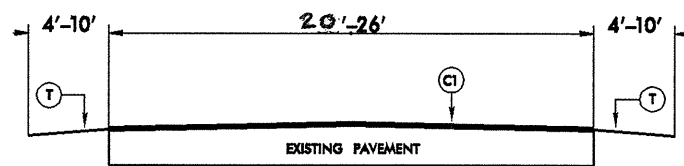


TYPICAL SECTION NO. 1

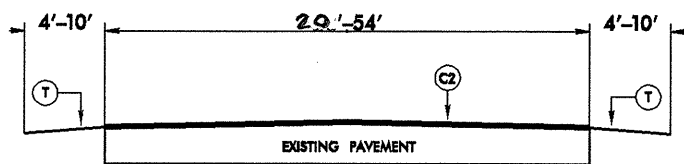


TYPICAL SECTION NO. 2

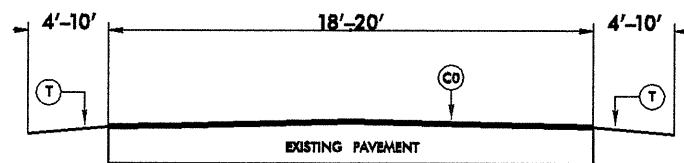


TYPICAL SECTION NO. 3

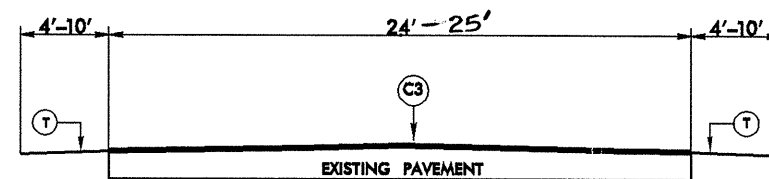

TYPICAL SECTION NO. 4

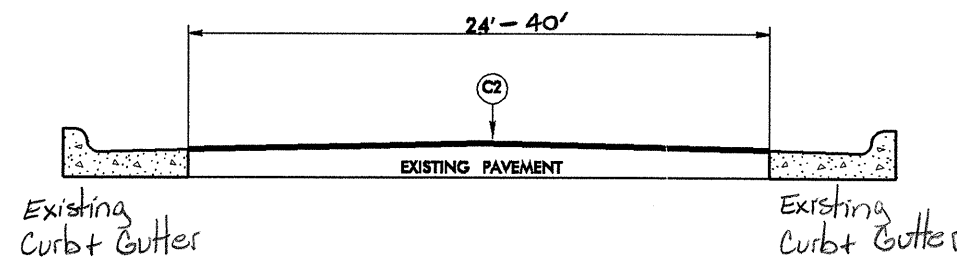

TYPICAL SECTION NO. 5

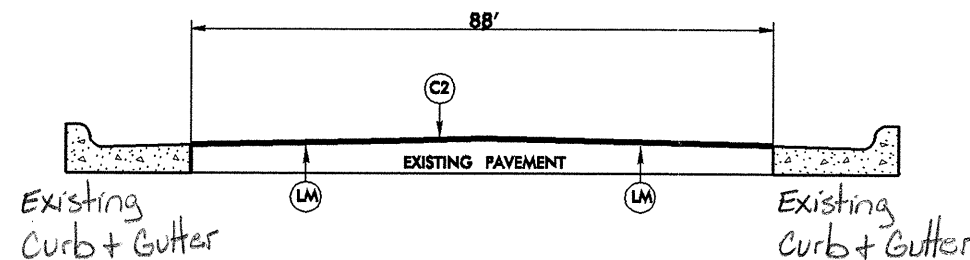

TYPICAL SECTION NO. 6

PAVEMENT SCHEDULE	
C0	PROP. APPROX. 3/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 75 LBS. PER SQ. YD.
C1	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 138 LBS. PER SQ. YD.
C2	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD.
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
LM	LATEX MODIFIED MICRO-SURFACING TYPE C @ 20-22 LBS/SQ YD IN WHEEL PATHS AS DIRECTED BY THE ENGINEER
T	SHOULDER RECONSTRUCTION WILL BE CONSTRUCTED AS DIRECTED BY THE ENGINEER.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

MILLING SHALL BE PERFORMED AT BRIDGES AND RAILROAD APPROACHES AS DIRECTED BY THE ENGINEER