
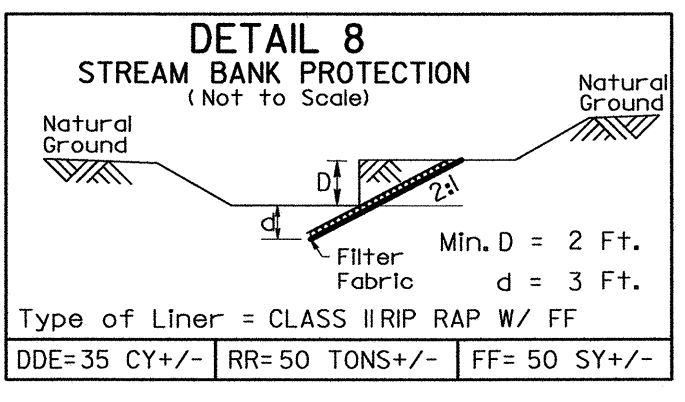
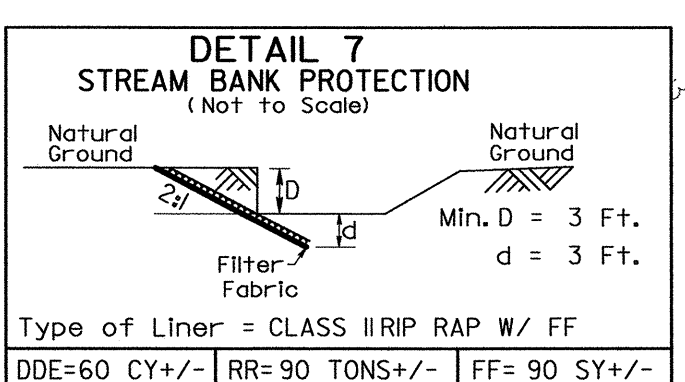
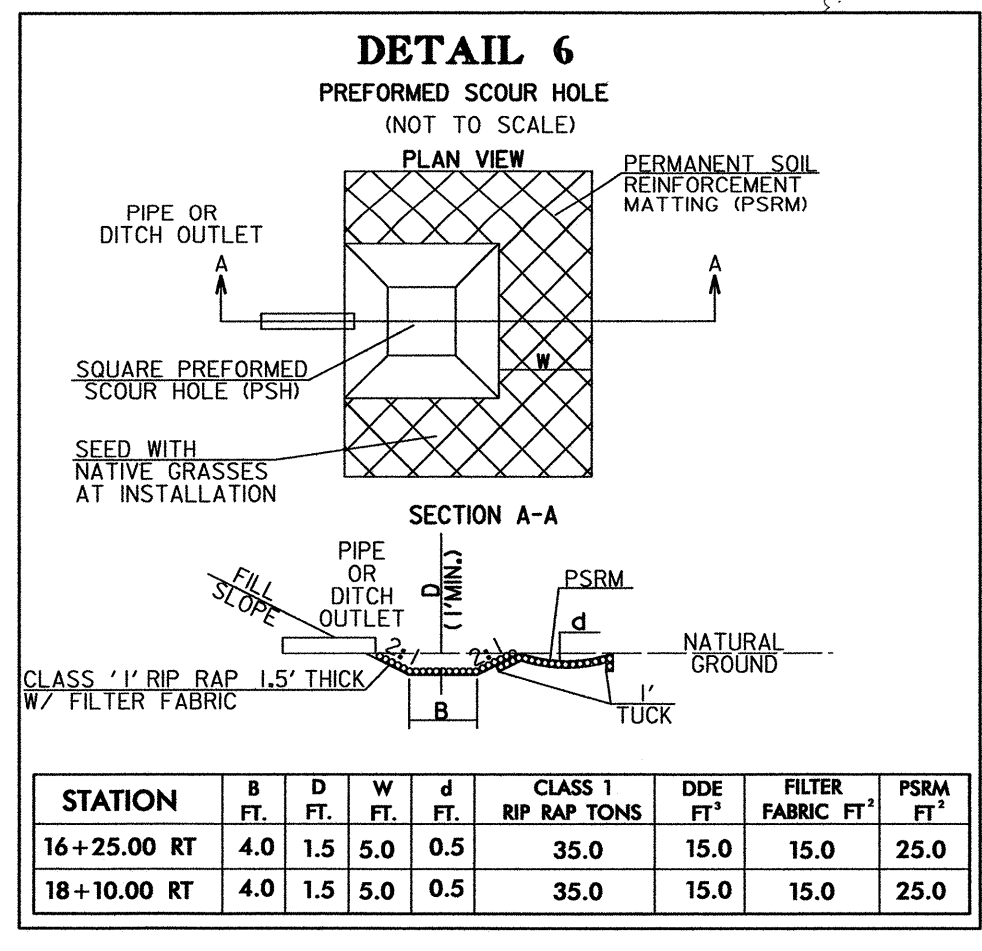
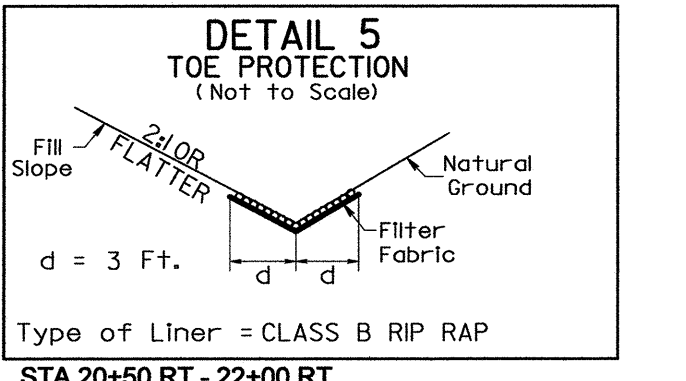
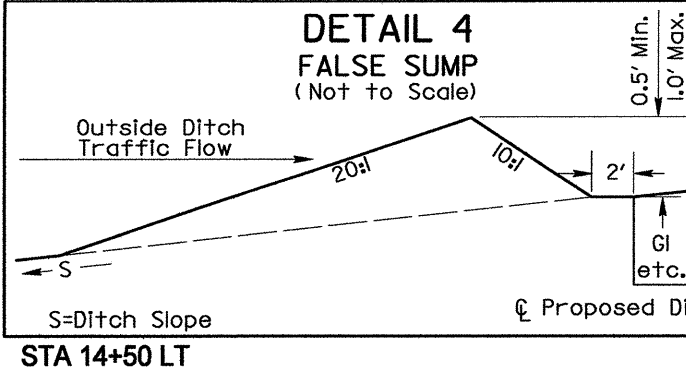
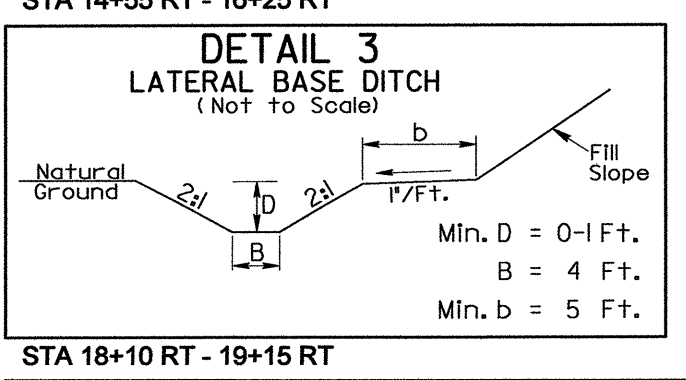
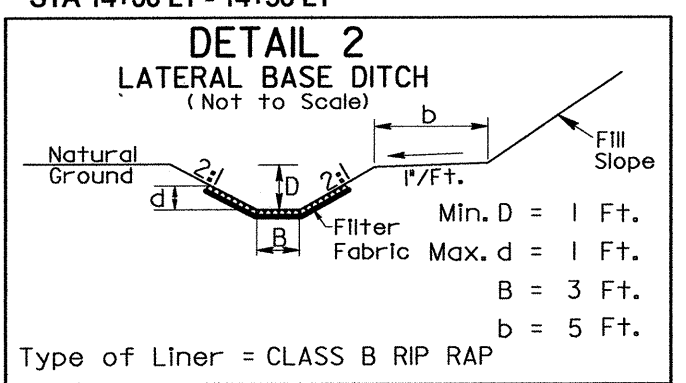
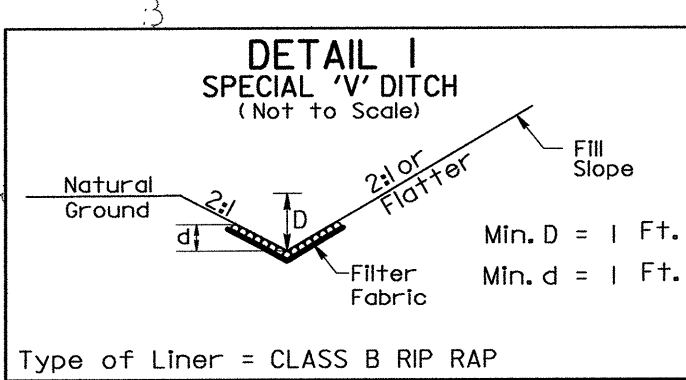


PI Sta 16+56.86 Δ = 25' 10" 53.2" (LT)
 D = 4' 58" 56.1" L = 505.42'
 T = 256.86' R = 1150.00' *SE = SEE PLANVIEW

PI Sta 21+01.26 Δ = 17' 31" 55.0" (RT)
 D = 4' 30" 41.3" L = 388.61'
 T = 195.83' R = 1270.00' *SE = SEE PLANVIEW

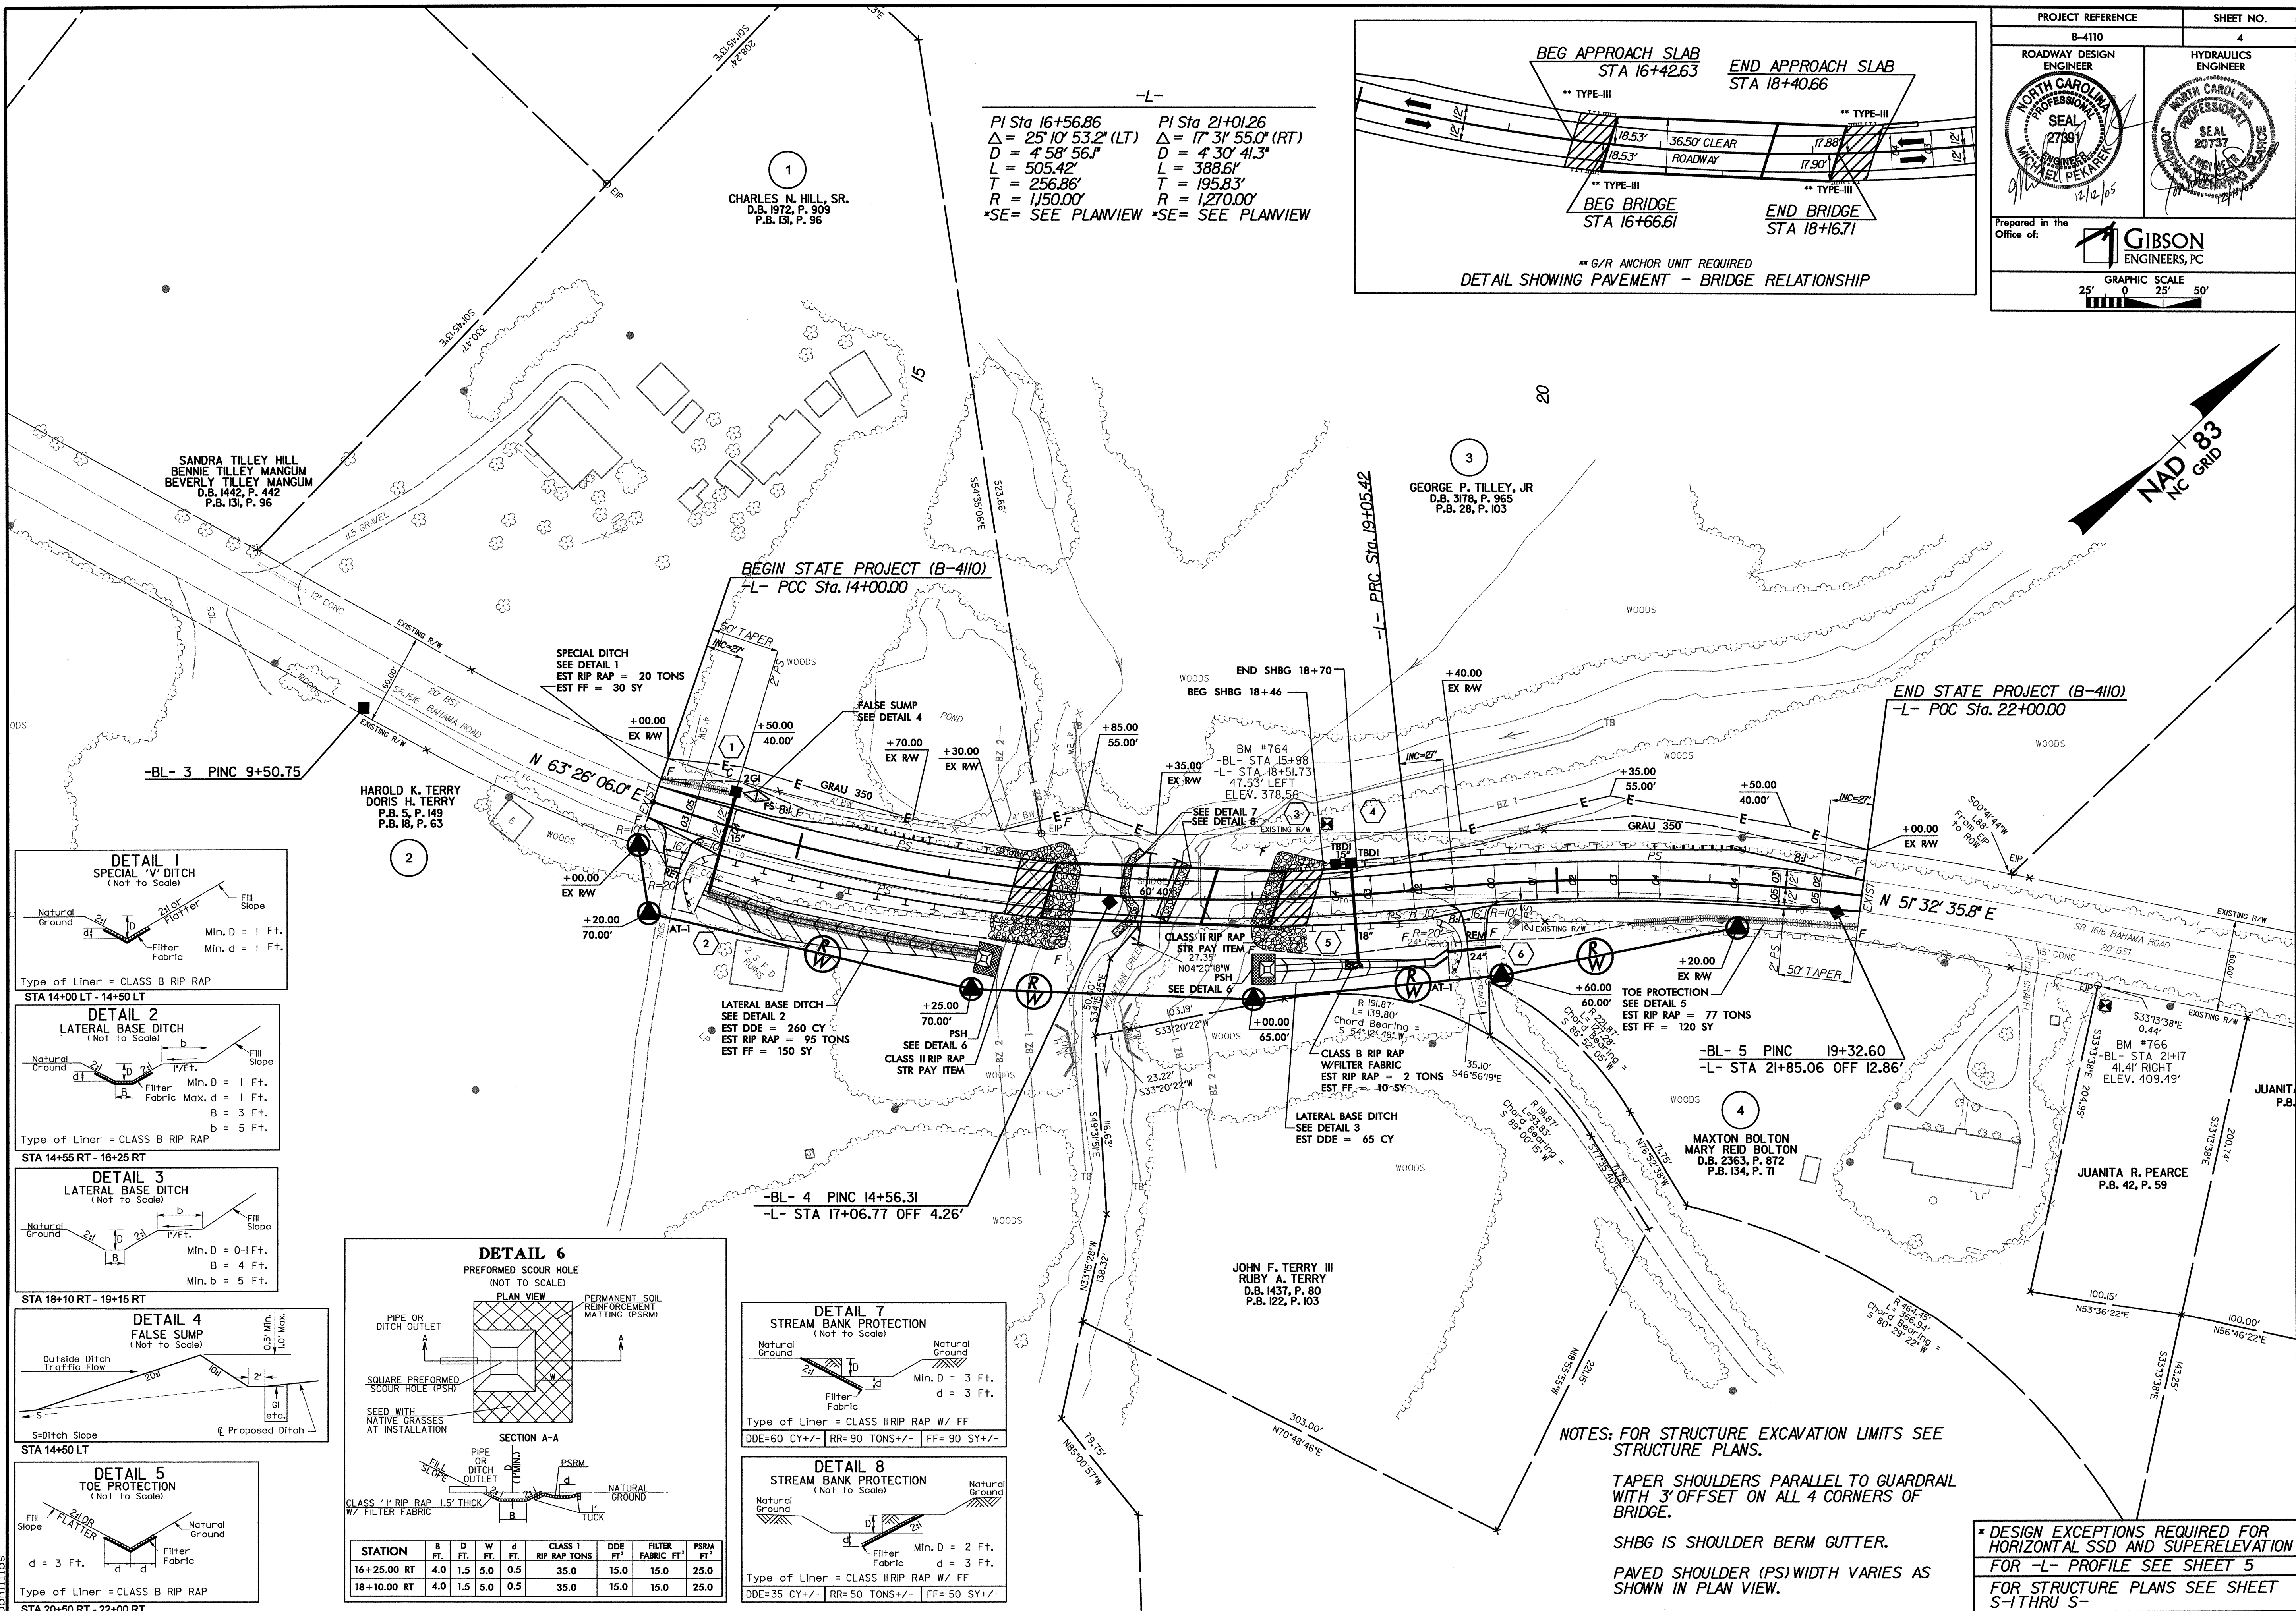

STATION	B	D	W	d	CLASS II RIP RAP TONS	DDE FT.	FILTER FABRIC FT.	PSRM FT.
16+25.00 RT	4.0	1.5	5.0	0.5	35.0	15.0	15.0	25.0
18+10.00 RT	4.0	1.5	5.0	0.5	35.0	15.0	15.0	25.0

NOTES: FOR STRUCTURE EXCAVATION LIMITS SEE STRUCTURE PLANS.
 TAPER SHOULDERS PARALLEL TO GUARDRAIL WITH 3' OFFSET ON ALL 4 CORNERS OF BRIDGE.
 SHBG IS SHOULDER BERM GUTTER.
 PAVED SHOULDER (PS) WIDTH VARIES AS SHOWN IN PLAN VIEW.

* DESIGN EXCEPTIONS REQUIRED FOR HORIZONTAL SSD AND SUPERELEVATION FOR -L- PROFILE SEE SHEET 5
 FOR STRUCTURE PLANS SEE SHEET S-1 THRU S-

12/12/2005 3:44:29 PM r:\roadway\proj\4110_r_dj_l_psh4.dgn