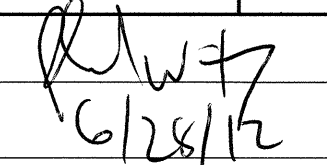



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

TIP NO. U-2579G	SHEET NO. SIGN-1
APPROVED: 	
DATE: 6/28/12	
SEAL 	

SIGNING PLAN
FORSYTH COUNTY

LOCATION: BRIDGE NO. 366 ON SR 2667 (HASTINGS HILL RD)
OVER I-40 BUS/US 421

GENERAL NOTES



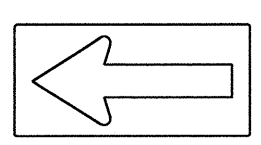
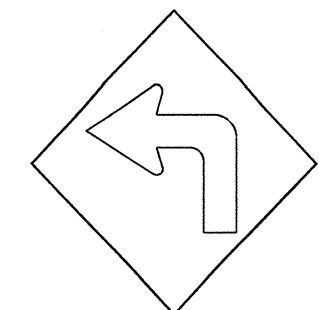
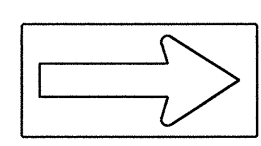
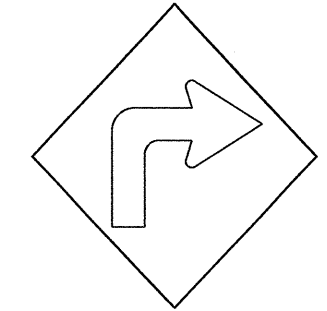

- SIGNS FURNISHED BY STATE
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING. SEE TRAFFIC CONTROL PLANS.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

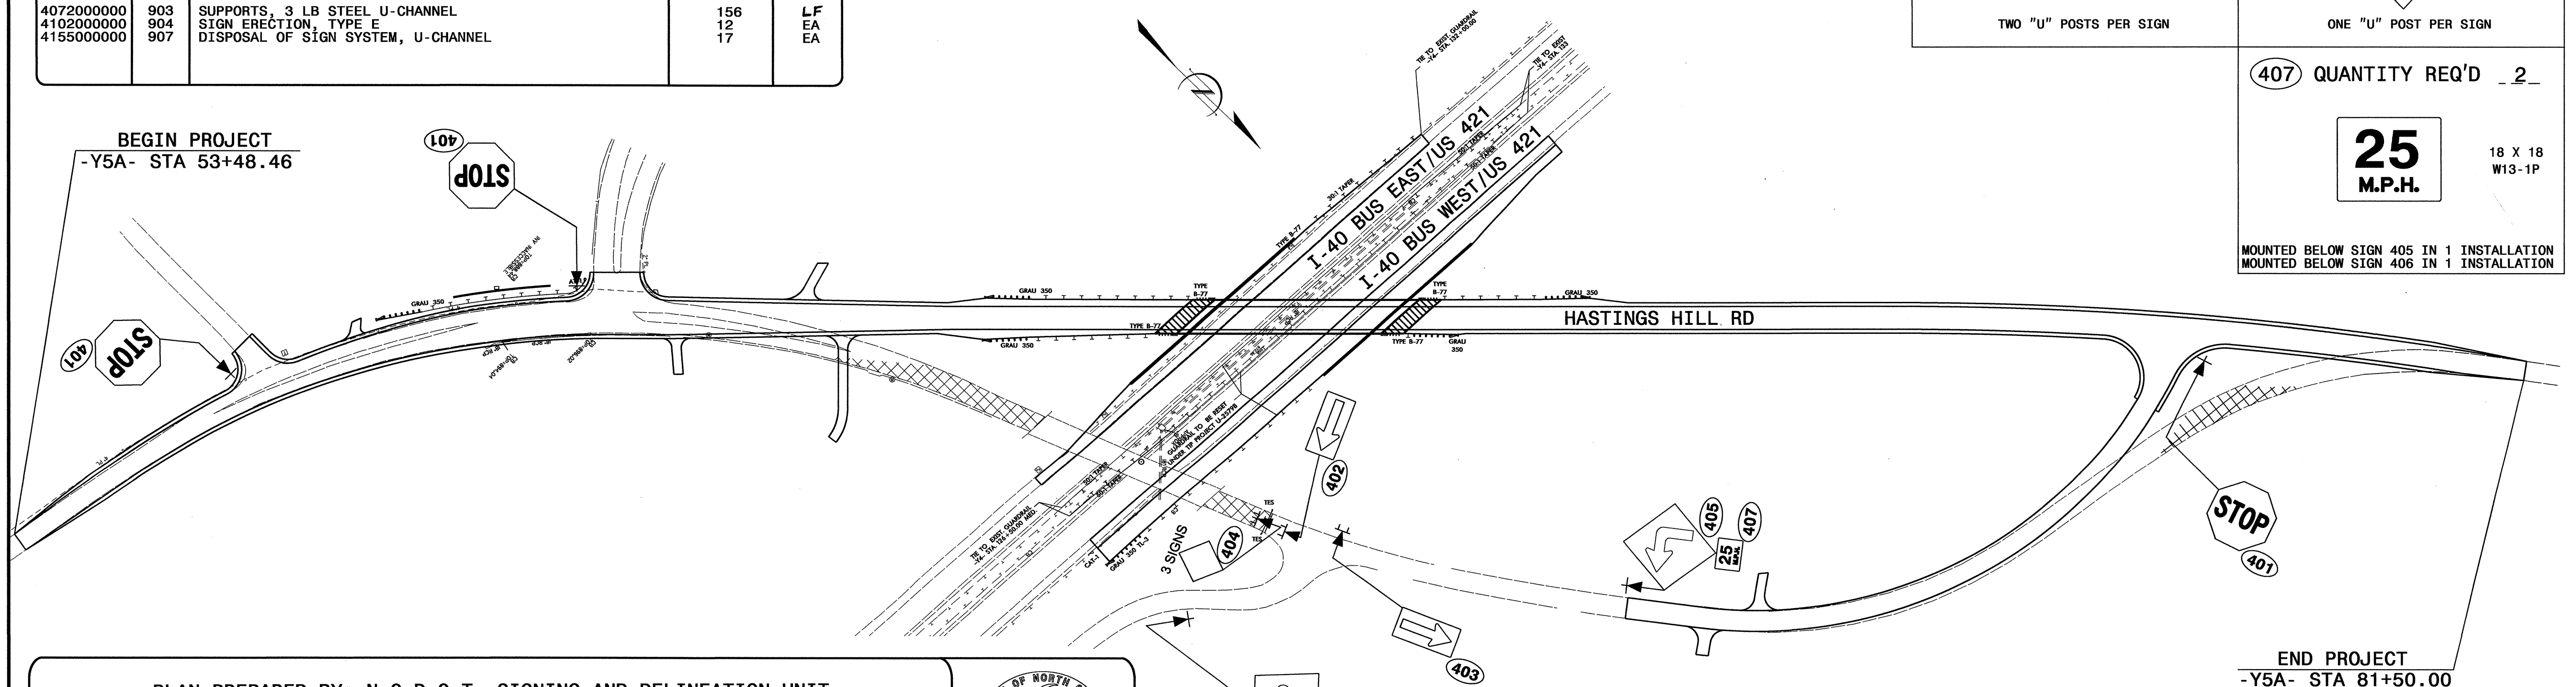
STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

E-SIGNS

<p>401 QUANTITY REQ'D <u>3</u></p>  <p>36 X 36 R1-1</p> <p>ONE "U" POST PER SIGN</p>	<p>404 QUANTITY REQ'D <u>3</u></p>  <p>18 X 18 OM4-3</p> <p>ONE "U" POST PER SIGN DIRECTLY BEHIND GUARDRAIL</p>
<p>402 QUANTITY REQ'D <u>1</u></p>  <p>48 X 24 W1-6</p> <p>TWO "U" POSTS PER SIGN</p>	<p>405 QUANTITY REQ'D <u>1</u></p>  <p>36 X 36 W1-1L</p> <p>ONE "U" POST PER SIGN</p>
<p>403 QUANTITY REQ'D <u>1</u></p>  <p>48 X 24 W1-6</p> <p>TWO "U" POSTS PER SIGN</p>	<p>406 QUANTITY REQ'D <u>1</u></p>  <p>36 X 36 W1-1R</p> <p>ONE "U" POST PER SIGN</p>
<p>407 QUANTITY REQ'D <u>2</u></p>  <p>18 X 18 W13-1P</p> <p>MOUNTED BELOW SIGN 405 IN 1 INSTALLATION MOUNTED BELOW SIGN 406 IN 1 INSTALLATION</p>	

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	156	LF
4102000000	904	SIGN ERECTION, TYPE E	12	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	17	EA



PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

SUSAN B. KUNZ SIGNING & DELINEATION REGIONAL ENGINEER

SAMUEL COLEMAN SIGNING & DELINEATION PROJECT DESIGN ENGINEER

