

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

TIP NO. B-4725	SHEET NO. SIGN-1
APPROVED: <i>[Signature]</i>	
DATE: 10-4-2012	
SEAL	

**SIGNING PLAN**  
**CASWELL COUNTY**

LOCATION: BRIDGE NO.12 OVER COUNTRY LINE CREEK  
ON SR 1554 YARBOROUGH MILL ROAD

T.I.P.: B-4725

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

**GENERAL NOTES**

- . SIGNS FURNISHED BY STATE
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING, SEE TRAFFIC CONTROL PLANS. SEE PAVEMENT MARKING PLAN FOR PAVEMENT MARKING DESIGN.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- . THE BACKGROUND FOR TYPE E SIGNS SHALL BE GRADE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**PAY ITEM NOTES**

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 DISPOSAL OF SIGN SYSTEM, U-CHANNEL

**SUMMARY OF QUANTITIES**

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT
4072000000	SUPPORTS, 3 LB STEEL U-CHANNEL	101	L.F.
4096000000	SIGN ERECTION, TYPE D	2	EA.
4102000000	SIGN ERECTION, TYPE E	2	EA.
4155000000	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	4	EA.

SIGN NUMBER: 301,302 TYPE: D QUANTITY: 2 SIGN WIDTH: 5'-0" HEIGHT: 2'-0" TOTAL AREA: 10.0 Sq.Ft. BORDER TYPE: FLUSH RECESS: 0" WIDTH: 0.75" RADIUS: 3"	BACKG COLOR: Green COPY COLOR: White SYMBOL X Y WID HT MAT'L: 0.125" ALUMINUM	DESIGN BY: ADK PROJECT ID: B-4725 CHECKED BY: EAH/CAJ DIV: 07 DATE: October 2012
---	---	--

**BORDER R=3" TH=0.75"**


Spacing Factor is 1 unless specified otherwise

Letter spacings are to start of next letter													Series/Size	Text Length	
	C	o	u	n	t	r	y	L	i	n	e			D 2000	47.7
6.2	5	4.6	4.7	4.1	3.1	2.5	4.5	4.5	2.2	4.4	3.5	6.1		D 2000	20.4
	C	r	e	e	k										
19.8	5.3	2.8	4.1	4.4	3.8	19.8									

CONTRACT:

CONTACTS: N.C.D.O.T. SIGNING AND DELINEATION UNIT

SUSAN B. KUNZ SIGNING & DELINEATION REGIONAL ENGINEER  
STACEY W. JOHNS SIGNING & DELINEATION PROJECT DESIGN ENGINEER

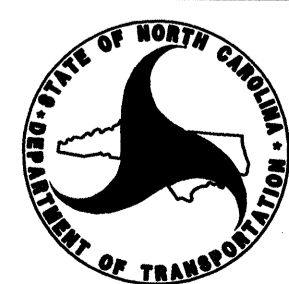


PLAN PREPARED BY:  
**HNTB** HNTB NORTH CAROLINA, P.C.  
343 E. Six Forks Road, Suite 200  
Raleigh, North Carolina 27609  
NC License No: C-1554  
C.A. JOHNSON, III, PE SIGNING PROJECT ENGINEER  
A.D. KLINKSIEK, E.I. SIGNING DESIGN ENGINEER  
T.R. TERRELL SIGNING DESIGN TECHNICIAN

TYPE "E" SIGNS

<p>(401) QUANTITY REQ'D 1</p> <p>36" X 36" W1-4L</p> <p>ONE "U" POST PER SIGN</p>	<p>(402) QUANTITY REQ'D 1</p> <p>36" X 36" W1-2 (R)</p> <p>ONE "U" POST PER SIGN</p>
---	--

**INDEX**

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET, SIGN DESIGN, TYPE "E" SIGNS
SIGN-2	SIGN DETAIL SHEET

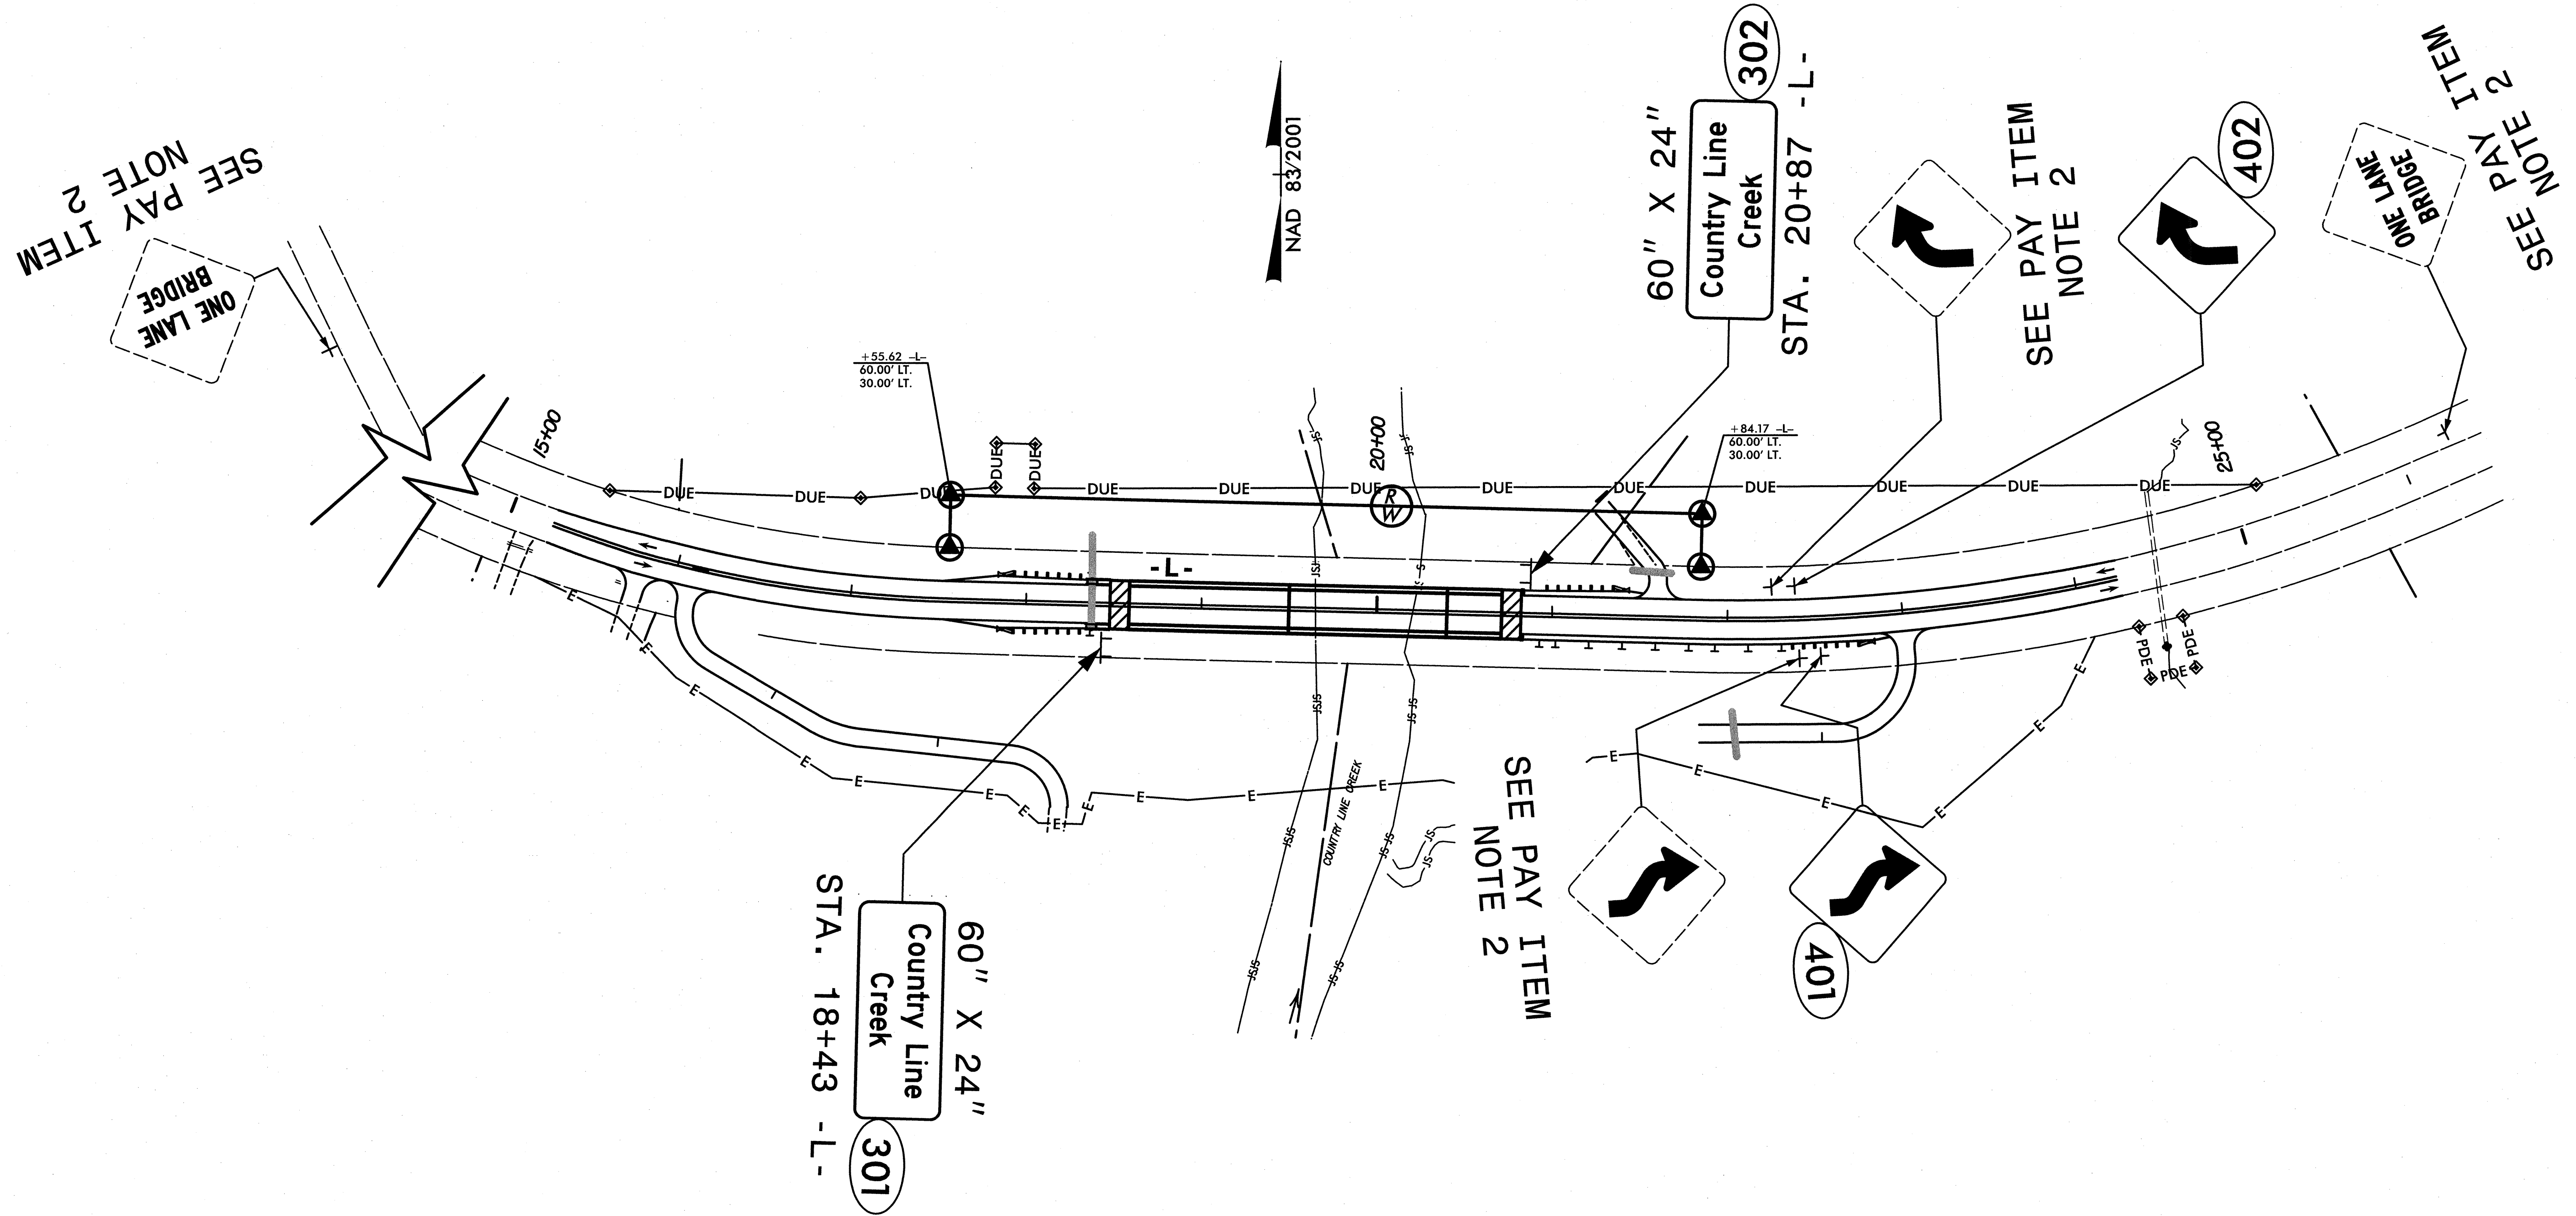

NOTES:  
 REMOVE AND DISPOSE OF EXISTING SIGNS WITHIN PROJECT LIMITS UNLESS OTHERWISE NOTED.  
 ALL PROPOSED SIGNS SEE NOTE 1 UNLESS OTHERWISE NOTED.

**HNTB** HNTB NORTH CAROLINA, P.C.  
 343 E. Six Forks Road, Suite 200  
 Raleigh, North Carolina 27609  
 NC License No: C-1554

**EXISTING AND PROPOSED SIGNS  
 STA. 15+00 TO 26+00**