




STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

CUMBERLAND COUNTY


LOCATION: FAYETTEVILLE OUTER LOOP - FROM WEST OF NC 24
TO 1.3 MILES EAST OF NC 87 - NC 210

TYPE OF WORK: TRAFFIC SIGNALS, COMMUNICATIONS CABLE ROUTING DETAILS

Project: U-2519E

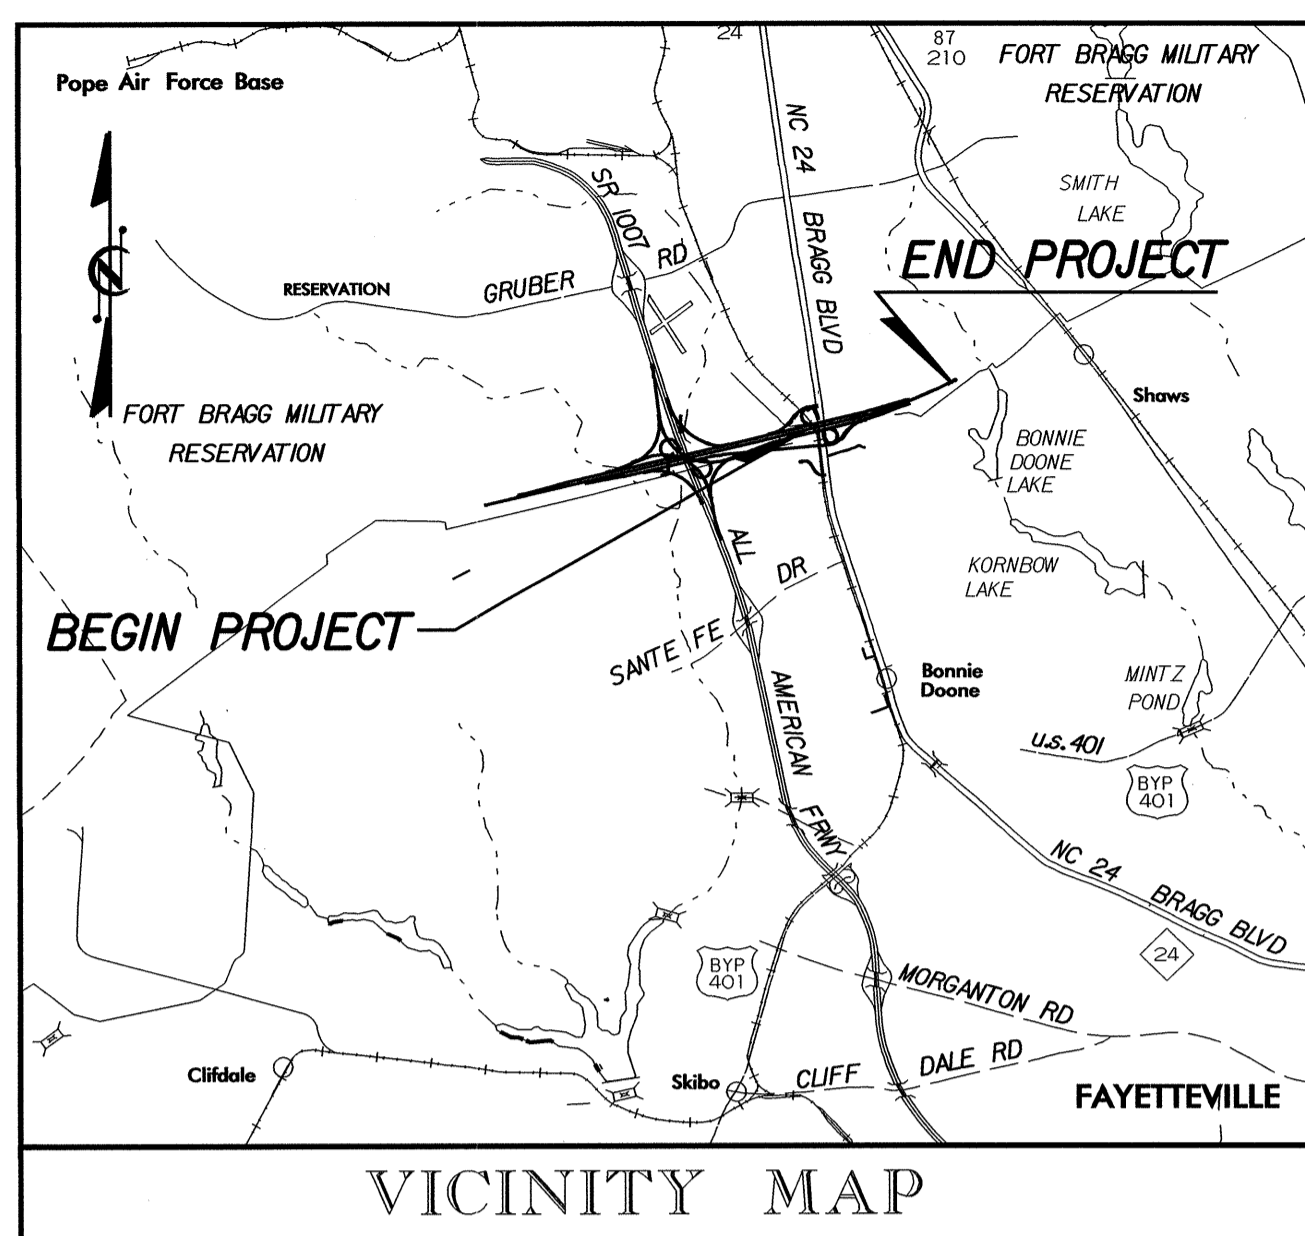

VICINITY MAP

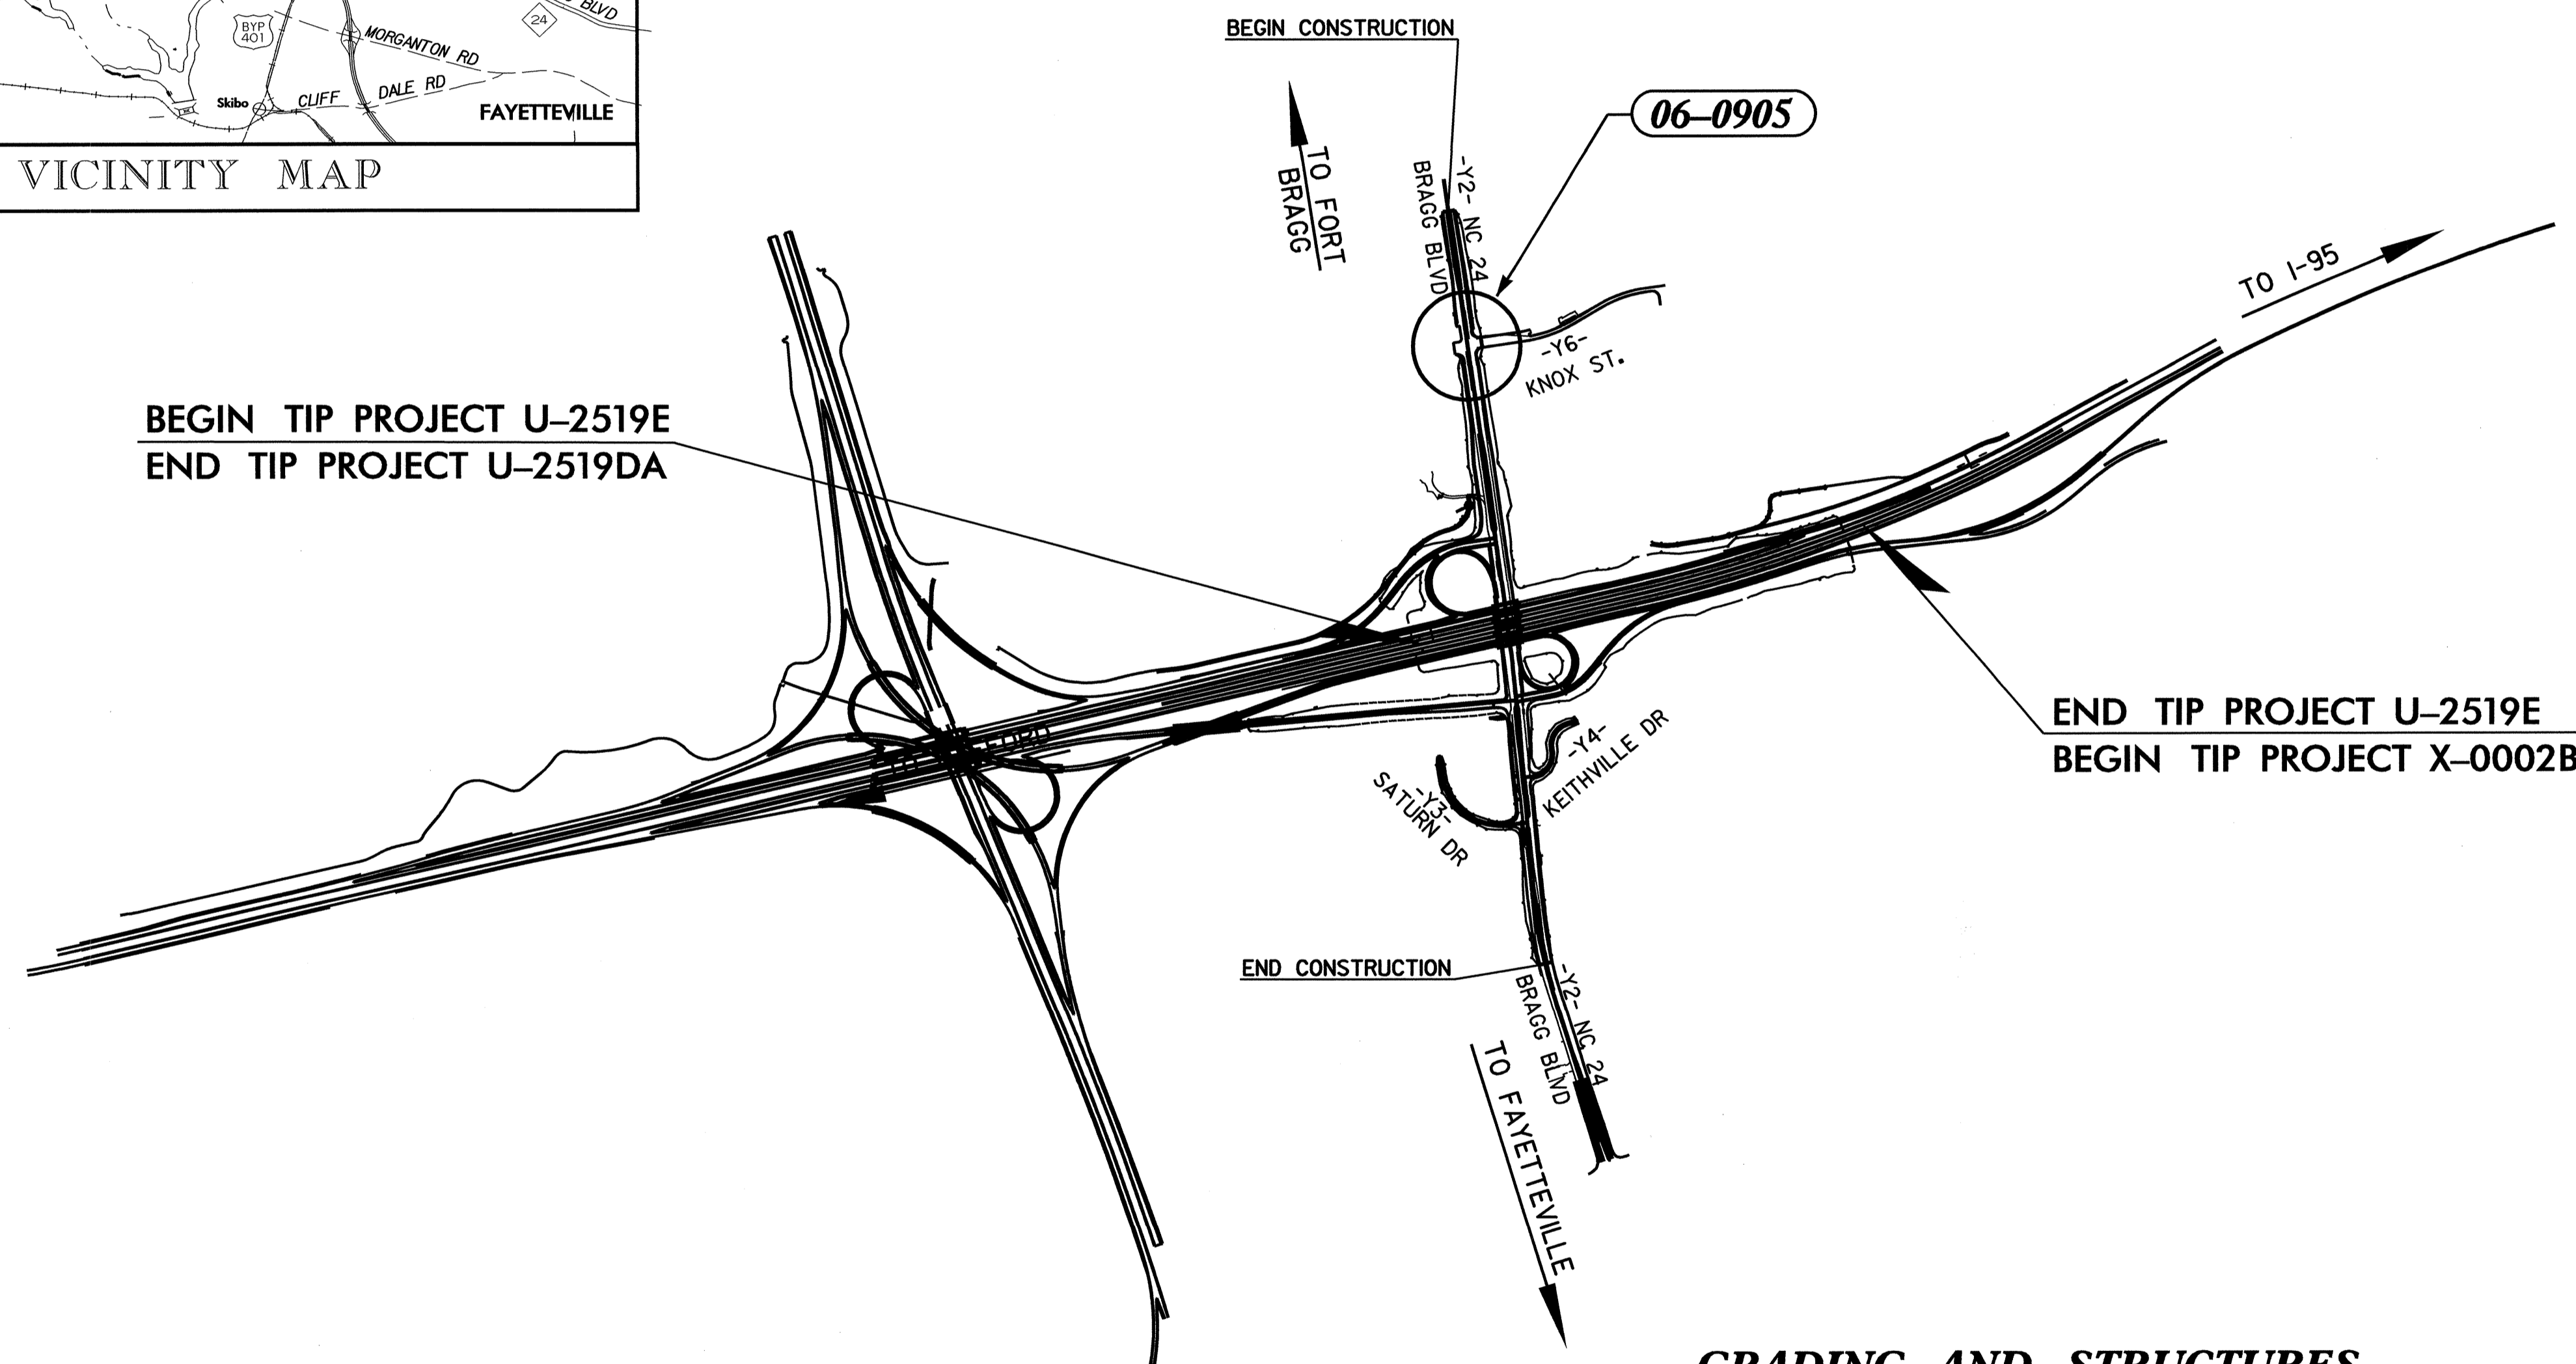

BEGIN TIP PROJECT U-2519E
END TIP PROJECT U-2519DA

END TIP PROJECT U-2519E
BEGIN TIP PROJECT X-0002B

GRADING AND STRUCTURES

Refer to "Roadway Standard Drawings NCDOT" dated July 2006 and "Standard Specifications for Roads and Structures" dated July 2006.

Sheet #	Reference #	Index of Plans	Location/Description
Sig. 1	-----	Title Sheet	
Sig. 2-3	06-0905	NC 24 (Bragg Boulevard) at Knox Street	
Sig. 4-9	N/A	Standard Drawings for Metal Poles	
Sig. 10-12	N/A	Wireless Communication Plans	
Sig. 13-15	N/A	Inductive Detection Loops Details	

INTELLIGENT TRANSPORTATION AND SIGNALS UNIT

Contacts:

Timothy J. Williams, PE - S&G Contracts Engineer
George C. Brown, PE - Signal Equipment Design Engineer
G. G. Murr, Jr., PE - Intelligent Transportation Systems Engineer


Prepared In the Office of:
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING AND SAFETY SYSTEMS
BRANCH

750 N. Greenfield Parkway, Garner, NC 27529

EDI MODEL 2010ECL CONFLICT MONITOR


PROGRAMMING DETAIL

WD ENABLE



(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS 1-5, 1-6, 1-11, 2-5, 2-6, 2-11, 3-7, 3-8, 4-7, 4-8, 4-11, 5-11, 7-11 and 8-11



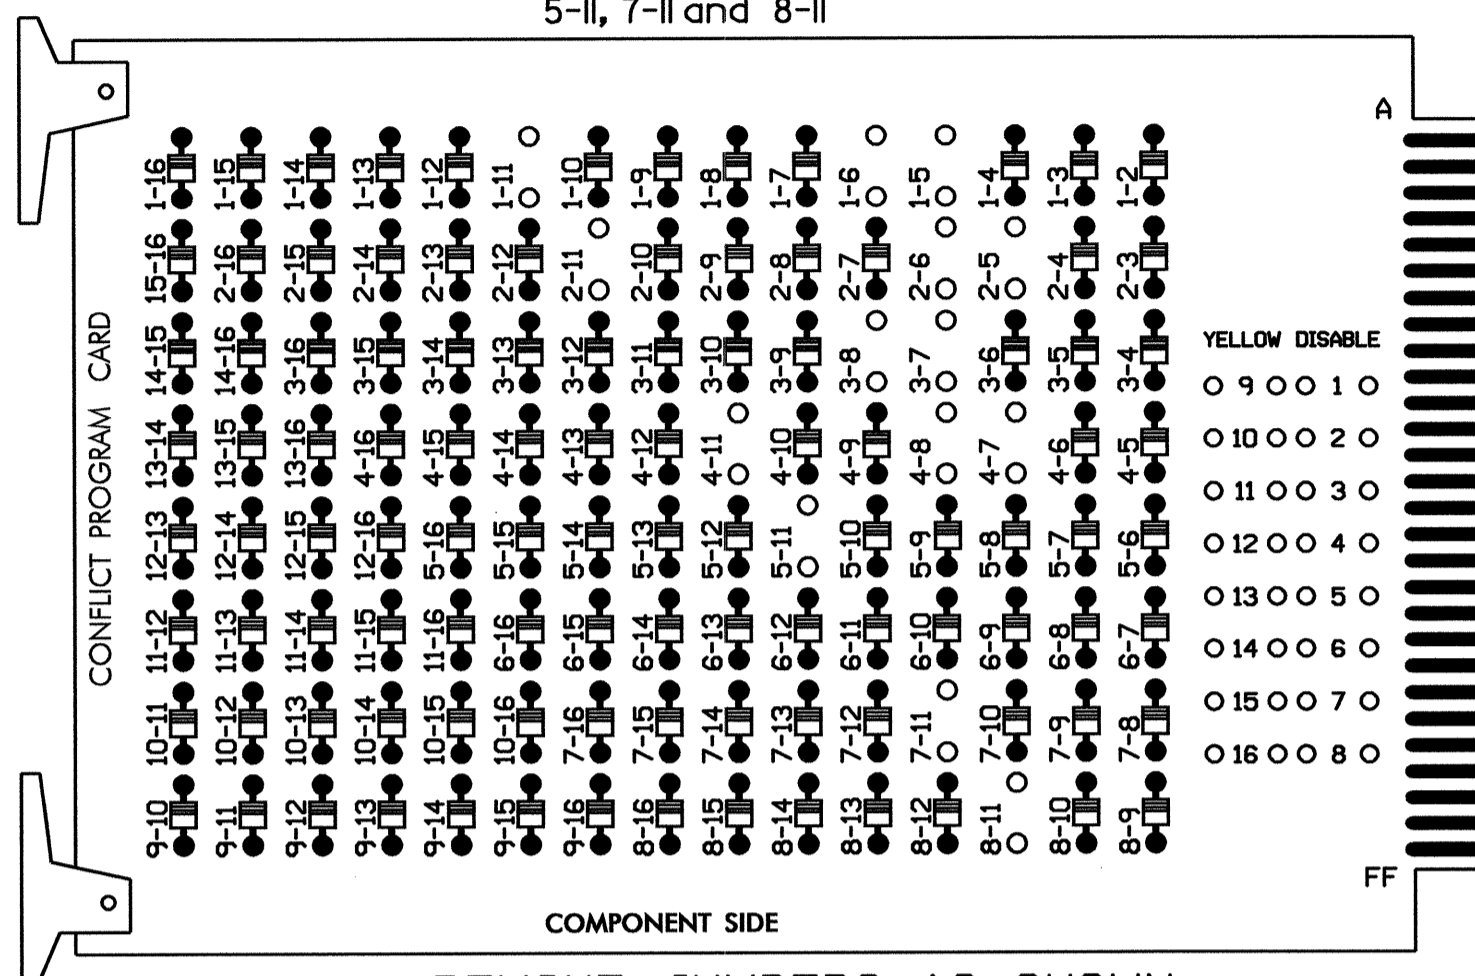


REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Make sure jumpers SEL2-SEL5 are present on the monitor board.

OPTIONS

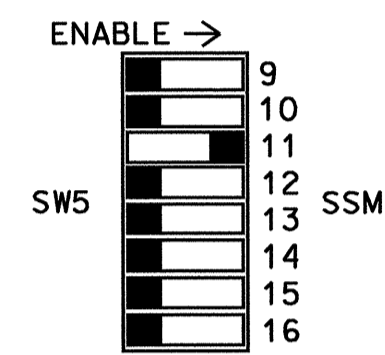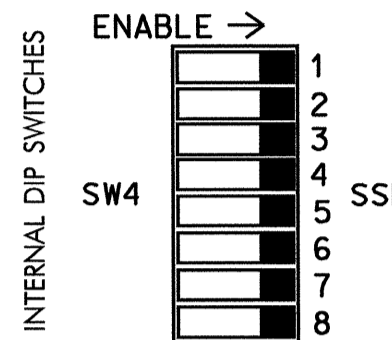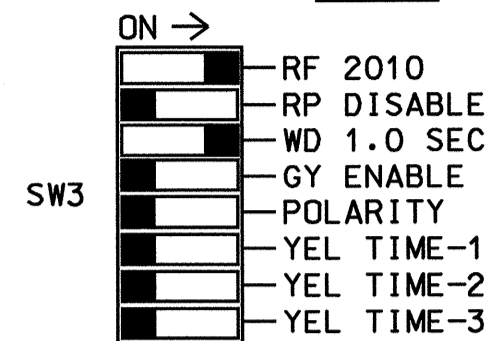

■ = DENOTES POSITION OF SWITCH

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Ensure that Red Enable is active at all times during normal operation. To prevent Red Failures on unused monitor channels, tie unused red monitor inputs 9,10,12,13,14,15 & 16 to load switch AC+ per the cabinet manufacturer's instructions.
- Program phases 2 and 6, on the controller unit, for Start Up In Green.
- Enable Simultaneous Gap-Out, on the controller unit, for all phases.
- Program phases 2 and 6, on the controller unit, for Variable Initial and Gap Reduction.
- The cabinet and controller are part of the Fayetteville Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....SAFETRAN 2070L
 CABINET.....SAFETRAN 332
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 (12-STD, 6 AUX)
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8,S12
 PHASES USED.....1,2,3,4,5,6,7,8
 OVERLAPS.....OLC:4+5

FIELD CONNECTION HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P	S9	S10	S11	S12	S13	S14
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	**OLC	OLD	SPARE
SIGNAL HEAD NO.	11	82	21,22	NU	31,32	41,42	NU	51,52	61,62	NU	71	81,82	NU	NU	NU	43,44	NU	NU
RED			128		101			134			107							
YELLOW			129		102			135			108							
GREEN			130		103			136			109							
RED ARROW	125				116			131			122							A114
YELLOW ARROW	126	126			117			132			123							A115
GREEN ARROW	127	127			118			133			124							A116
⚠																		
⚠																		

NU = NOT USED

** Flash Note: Wire Overlap "C" to flash on Flasher unit #2, Circuit #2.

INPUT FILE POSITION LAYOUT

(front view)

FILE "I"	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	∅1	∅2	∅2	∅2	∅3	∅4	∅3	∅4	∅3	∅4	∅3	∅4	∅3	∅4
L	1A	2A	2C	NOT USED	3A	4A	3B	4B	3C	4C	3D	4D	3E	4E
U	∅5	∅5	∅6	∅6	∅7	∅8	∅7	∅8	∅7	∅8	∅7	∅8	∅7	∅8
L	5A	5C	6A	NOT USED	7A	8A	7B	8B	7C	8C	7D	8D	7E	8E
U	∅5	∅5	∅6	∅6	∅7	∅8	∅7	∅8	∅7	∅8	∅7	∅8	∅7	∅8
L	5B	5D	6B	NOT USED	7B	8B	7C	8C	7D	8D	7E	8E	7F	8F


EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A	TB2-5,6	I2U	39	1	2	1	Y	Y			
1B	TB2-7,8	I2L	43	5	12	1	Y	Y			15
2A	TB2-9,10	I3U	63	25	32	2	Y	Y			
2B	TB2-11,12	I3L	76	38	42	2	Y	Y			
2C	TB4-1,2	I4U	47	9	22	2	Y	Y			
3A	TB4-9,10	I6U	41	3	4	3	Y	Y			3
3B	TB4-11,12	I6L	45	7	14	3	Y	Y			
4A	TB6-1,2	I7U	65	27	34	4	Y	Y			
4B	TB6-3,4	I7L	78	40	44	4	Y	Y			
5A	TB3-1,2	J1U	55	17	5	5	Y	Y			
5B	TB3-3,4	J1L	55	17	5	5	Y	Y			
5C	TB3-5,6	J2U	40	2	6	5	Y	Y			15
5D	TB3-7,8	J2L	44	6	16	5	Y	Y			15
6A	TB3-9,10	J3U	64	26	36	6	Y	Y			
6B	TB3-11,12	J3L	77	39	46	6	Y	Y			
7A	TB5-5,6	J5U	57	19	7	7	Y	Y			3
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			

INPUT FILE POSITION LEGEND: J2L



OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PRESS 'NEXT' TWICE

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
 PHASE: 12345678910111213141516
 VEH OVL PARENTS: XX
 VEH OVL NOT VEH: :
 VEH OVL NOT PED: :
 VEH OVL GRN EXT: :
 STARTUP COLOR: - RED - YELLOW - GREEN
 FLASH COLORS: - RED - YELLOW - GREEN
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
 FLASH YELLOW IN CONTROLLER FLASH?...N
 GREEN EXTENSION (0-255 SEC).....0
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
 OUTPUT AS PHASE # (0=NONE, 1-16)....0

OVERLAP PROGRAMMING COMPLETE

Signal Upgrade

ELECTRICAL AND PROGRAMMING DETAILS FOR: **NC 24-87 (Bragg Boulevard) at Knox Street**

Division 06 Cumberland County Fayetteville
 PLAN DATE: 8-8-08 REVIEWED BY: D.T. Joyce
 PREPARED BY: D.H. Spaulding REVIEWED BY:

Seal: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 022013 GEORGE C. BROWN

Signature: D.H. Spaulding DATE: 7/11/08

750 N. Greenfield Pkwy, Garner, NC 27529


SIG. INVENTORY NO. 06-0905

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 06-0905
 DESIGNED: June 2008
 SEALED: 7-10-08
 REVISED: N/A

STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

STATE	PROJECT NO.	SHEET NO.
N.C.	U-2519E	Sig. 4
F. A. PROJ. NO.	M 1	
PROJECT ID. NO.		

STANDARD DRAWINGS FOR METAL POLES

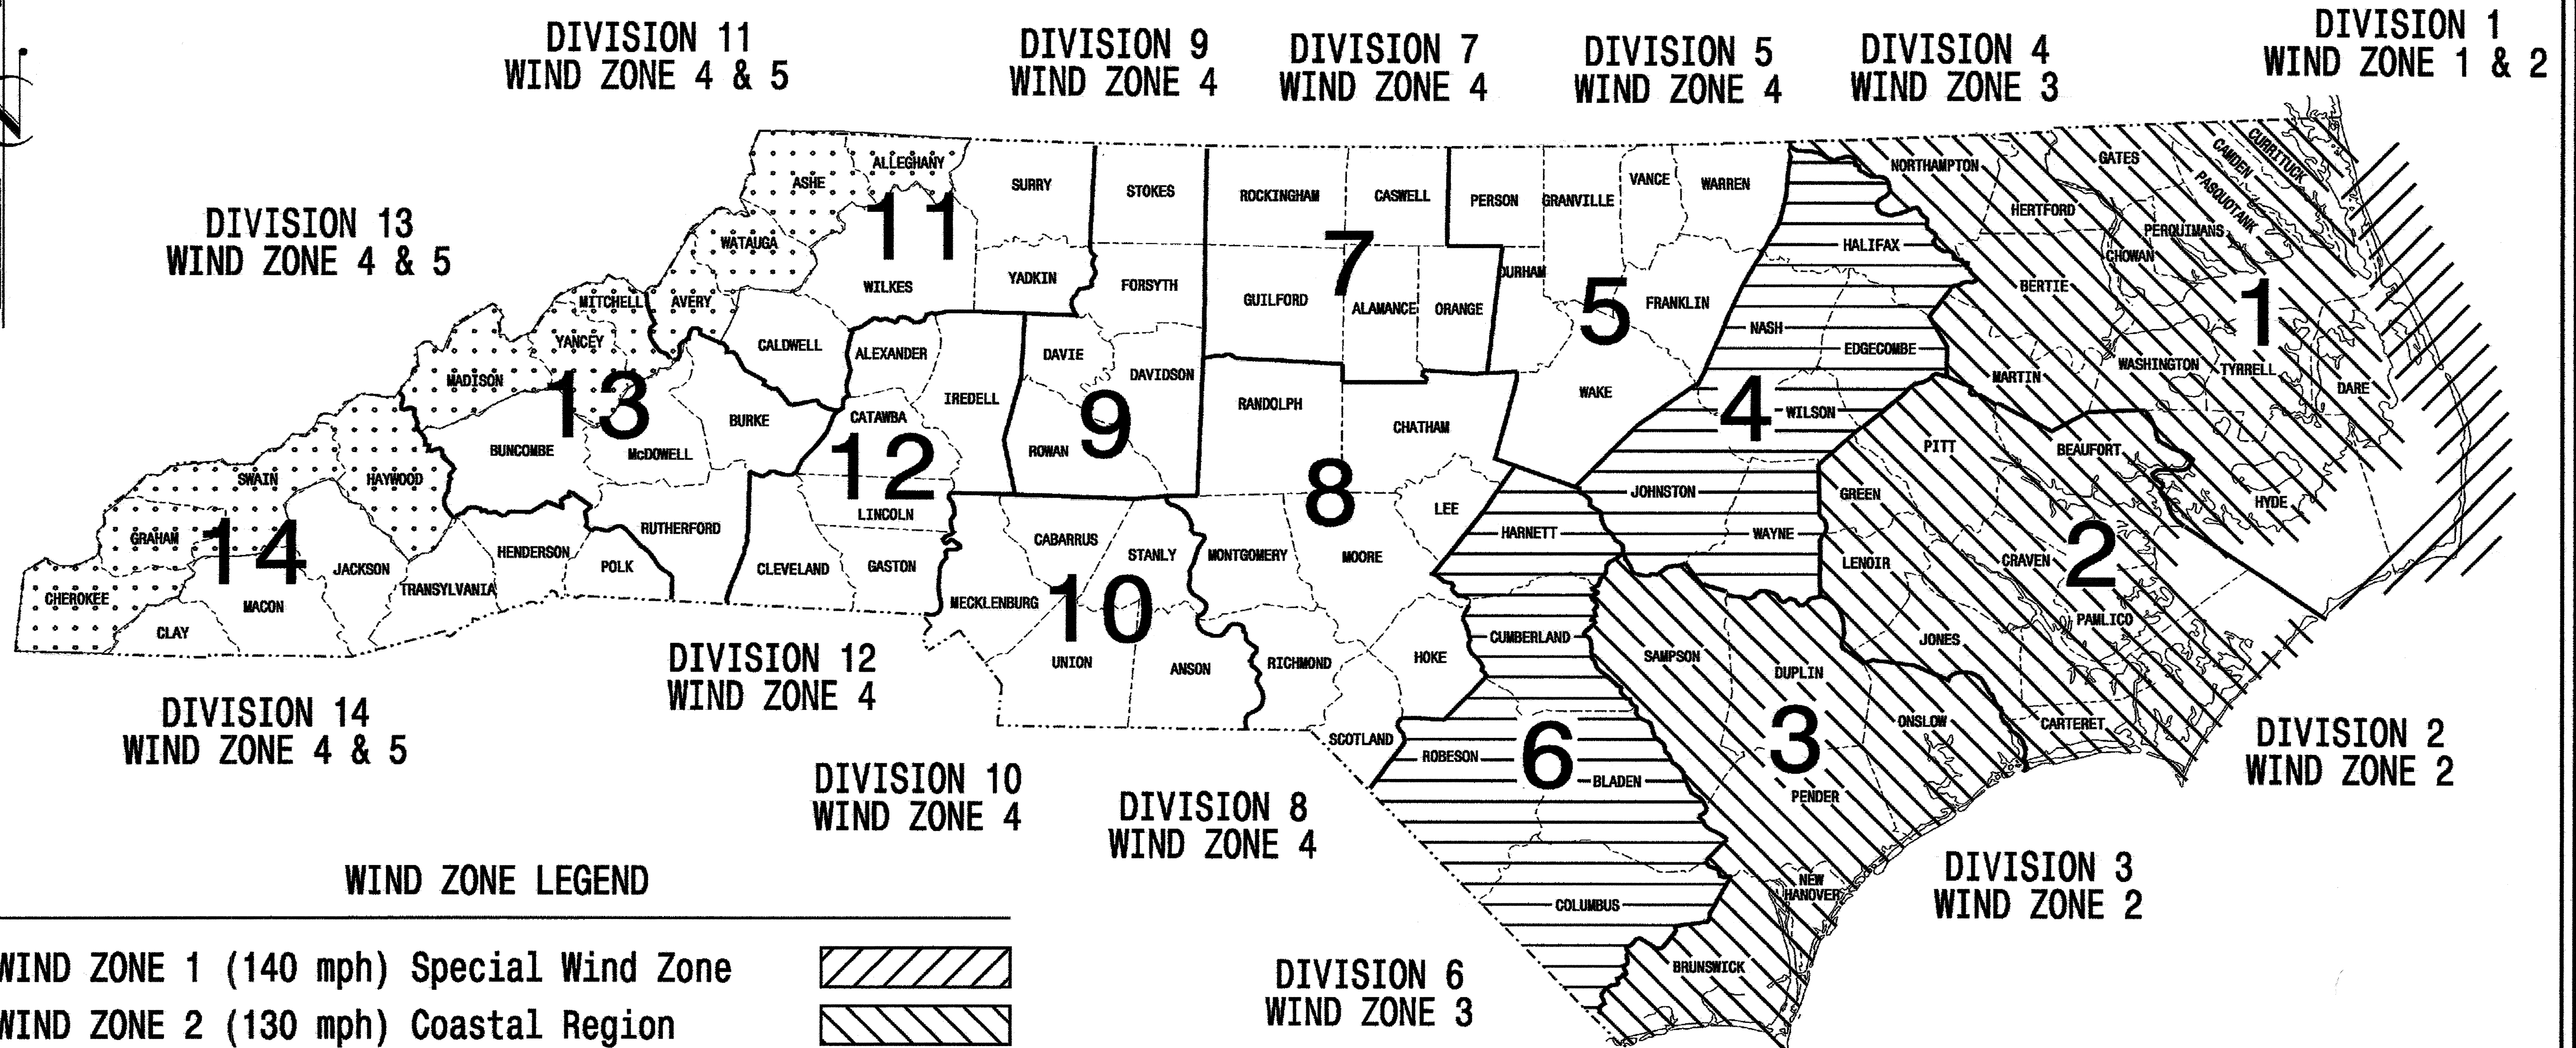


WIND ZONE LEGEND

WIND ZONE 1 (140 mph) Special Wind Zone	
WIND ZONE 2 (130 mph) Coastal Region	
WIND ZONE 3 (110 mph) Eastern Region	
WIND ZONE 4 (90 mph) Central & Mtn. Region	
WIND ZONE 5 (120 mph) Special Wind Zone	

<http://www.ncdot.org/doh/preconstruct/traffic/tmssu/ws/default.htm>

Prepared in the Offices of:

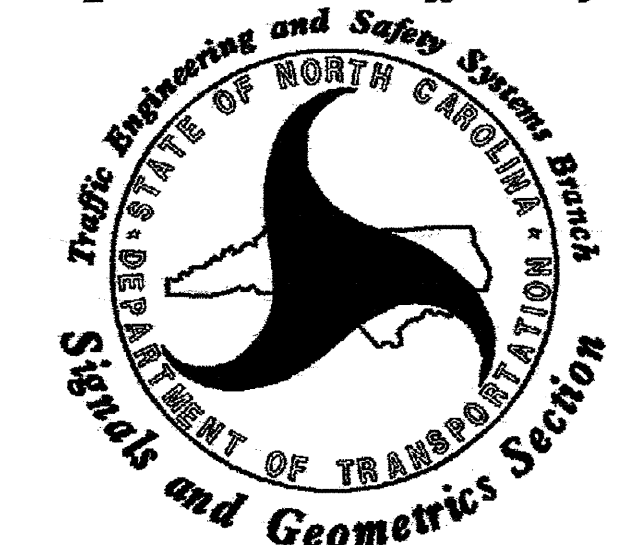

122 N. McDowell St., Raleigh, NC 27603

Designed in conformance with the 2002 Interim to the 4th Edition 2001

AASHTO

Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals

INDEX OF PLANS


DRAWING NUMBER	DESCRIPTION
M 1	Title Sheet
M 2	Fabrication Details - All Poles
M 3	Fabrication Details - Strain Poles
M 4,5	Fabrication Details - Mast Arm Poles
M 6	Construction Details - Strain Poles
M 7	Construction Details - Foundations
M 8	Standard Strain Poles

NCDOT CONTACTS:


TRAFFIC ENGINEERING AND SAFETY SYSTEMS BRANCH

- G. A. Fuller, P.E. - State ITS and Signals Engineer
- R. E. Mullinax, P.E. - Signals and Geometrics Engineer
- P. L. Alexander, P.E. - Signals and Geometrics Special Projects Engineer
- D. C. Sarkar, P.E. - Signals and Geometrics Structural Engineer
- A. M. Esposito, P.E. - Signals and Geometrics Project Engineer
- C. F. Andrews, Jr. - Signals and Geometrics Project Engineer

SEAL

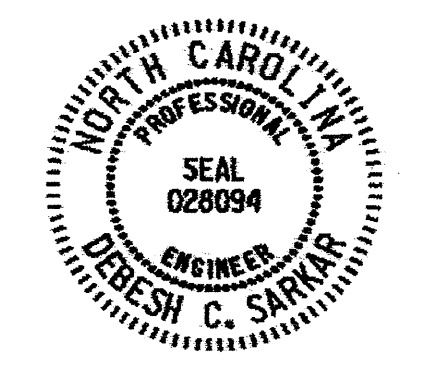


D. Sarkar 9.2.2005
SIGNATURE DATE

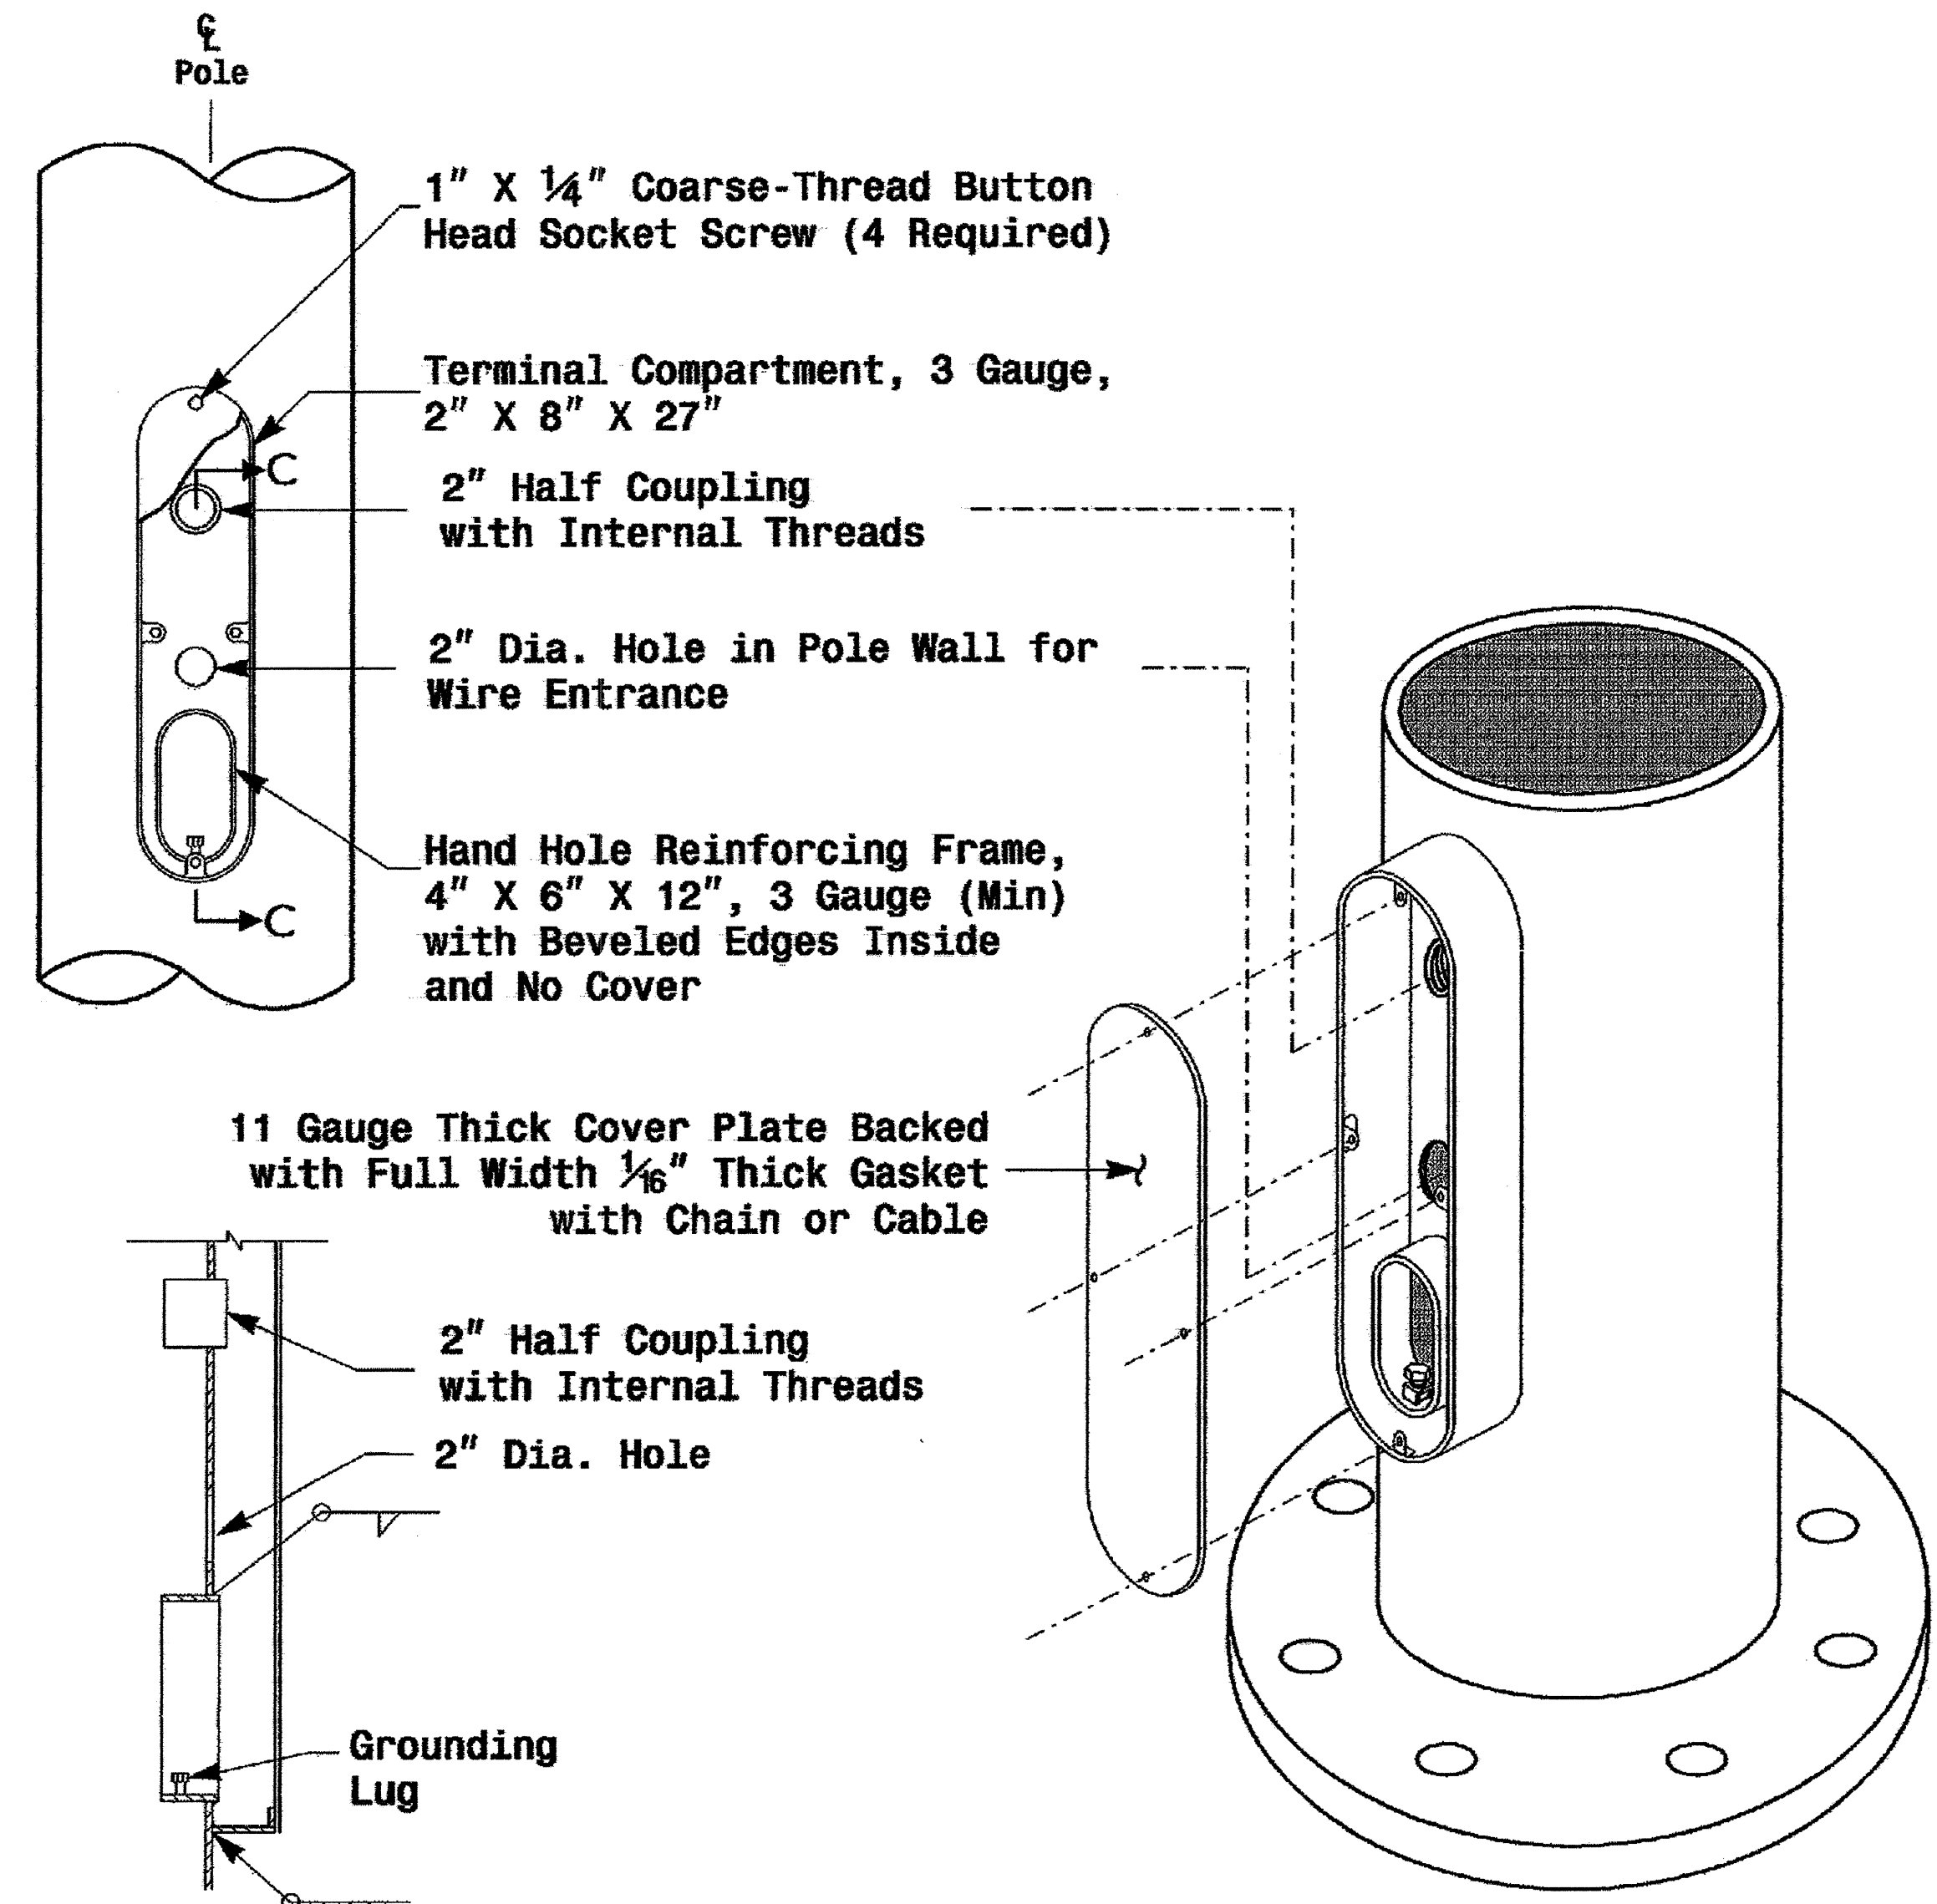

Note: Unless otherwise specified, locate Terminal Compartment 1 foot above the pole base plate at 180 degrees on the pole's radial index.

Terminal Compartment Detail

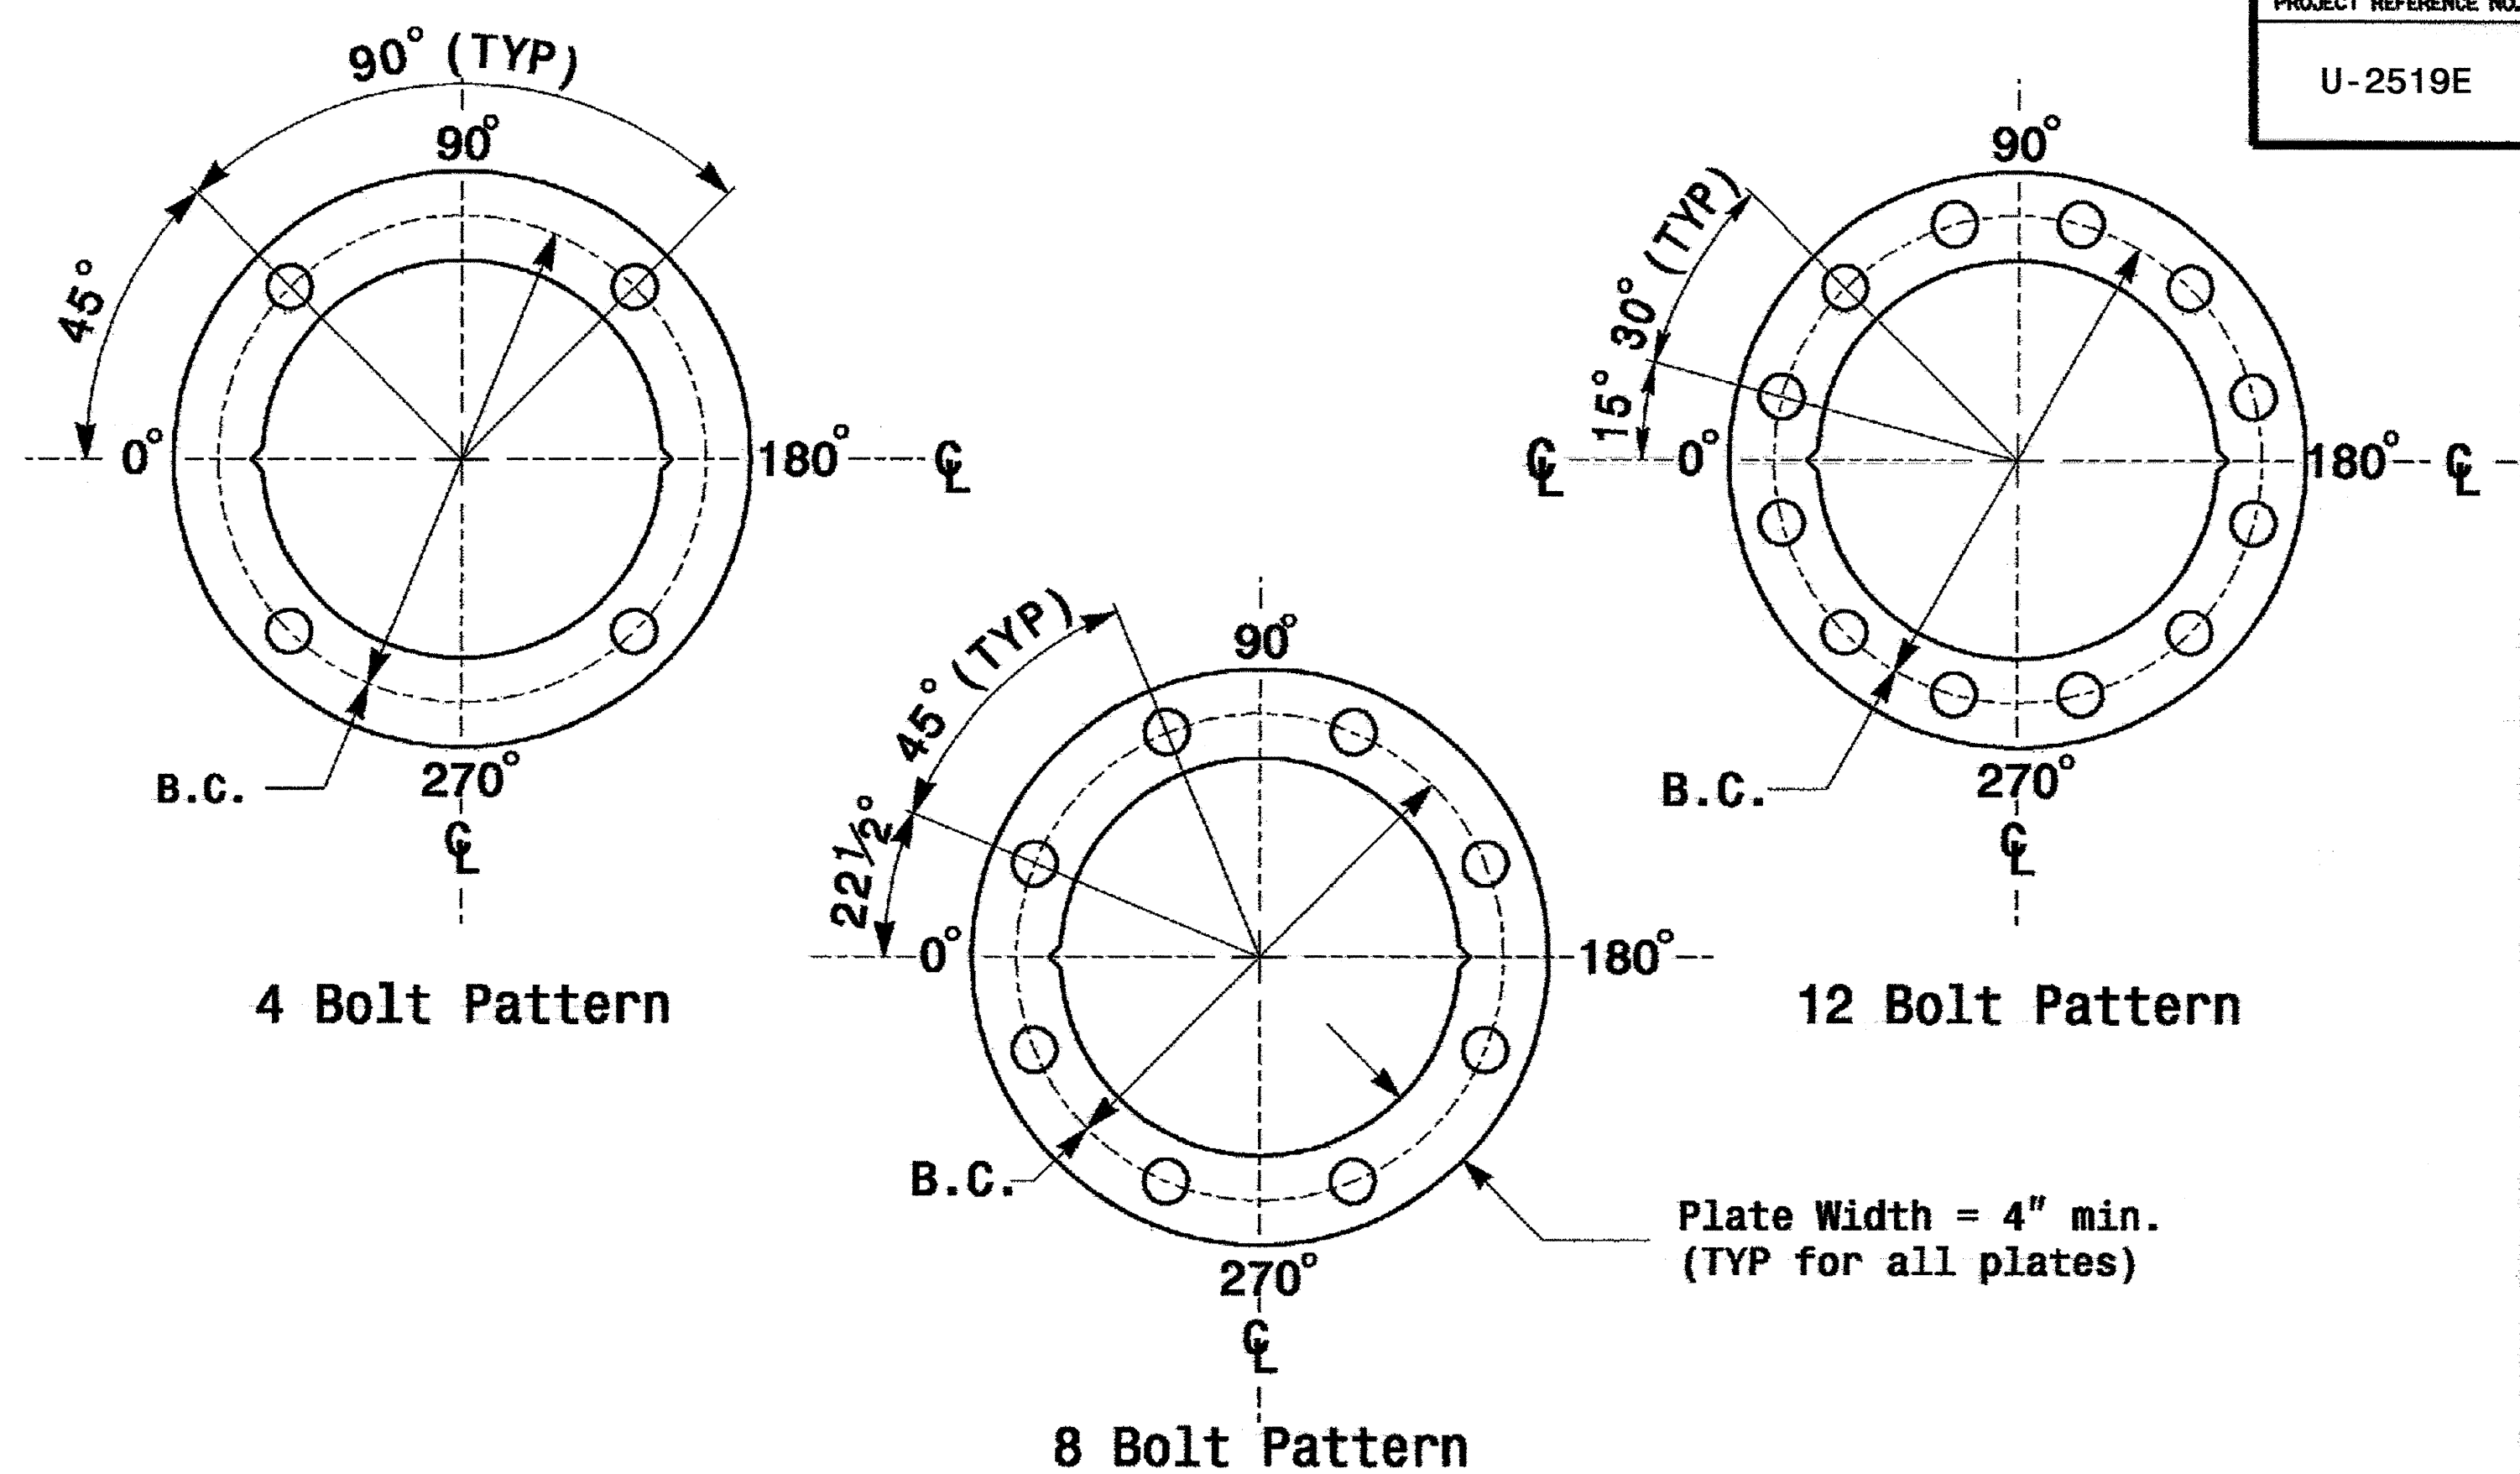

Construct Templates and Plates from 1/4" min. thick Steel. Galvanizing is not required.
Base Plate Template and Anchor Bolt Lock Plate Details

Shaft I.D. Tag
(Provide on Strain Poles and Mast Arm Poles)


MFG _____ MFG. DATE: MM/YY
SHAFT D/T/L/Y _____
ARM-A D/T/L/Y _____
ARM-B D/T/L/Y _____
A.B. DIA./B.C./L/Y _____
NCDOT STANDARD _____

Arm I.D. Tag
(Provide on each section of a multi-section mast arm)

MFG _____ MFG. DATE: MM/YY
SECTION D/T/L/Y _____
NCDOT STANDARD _____


- Notes:**
- 1) D= Diameter, T= Thickness, L= Length, Y= Yield Strength
 - 2) A.B. = Anchor Bolt
 - 3) B.C. = Bolt Circle of Anchor Bolts
 - 4) If Custom Design, use "NCDOT STANDARD" line for plan pole I.D.
 - 5) See drawing M4 for mounting positions of I.D. tags.

Identification Tag Details

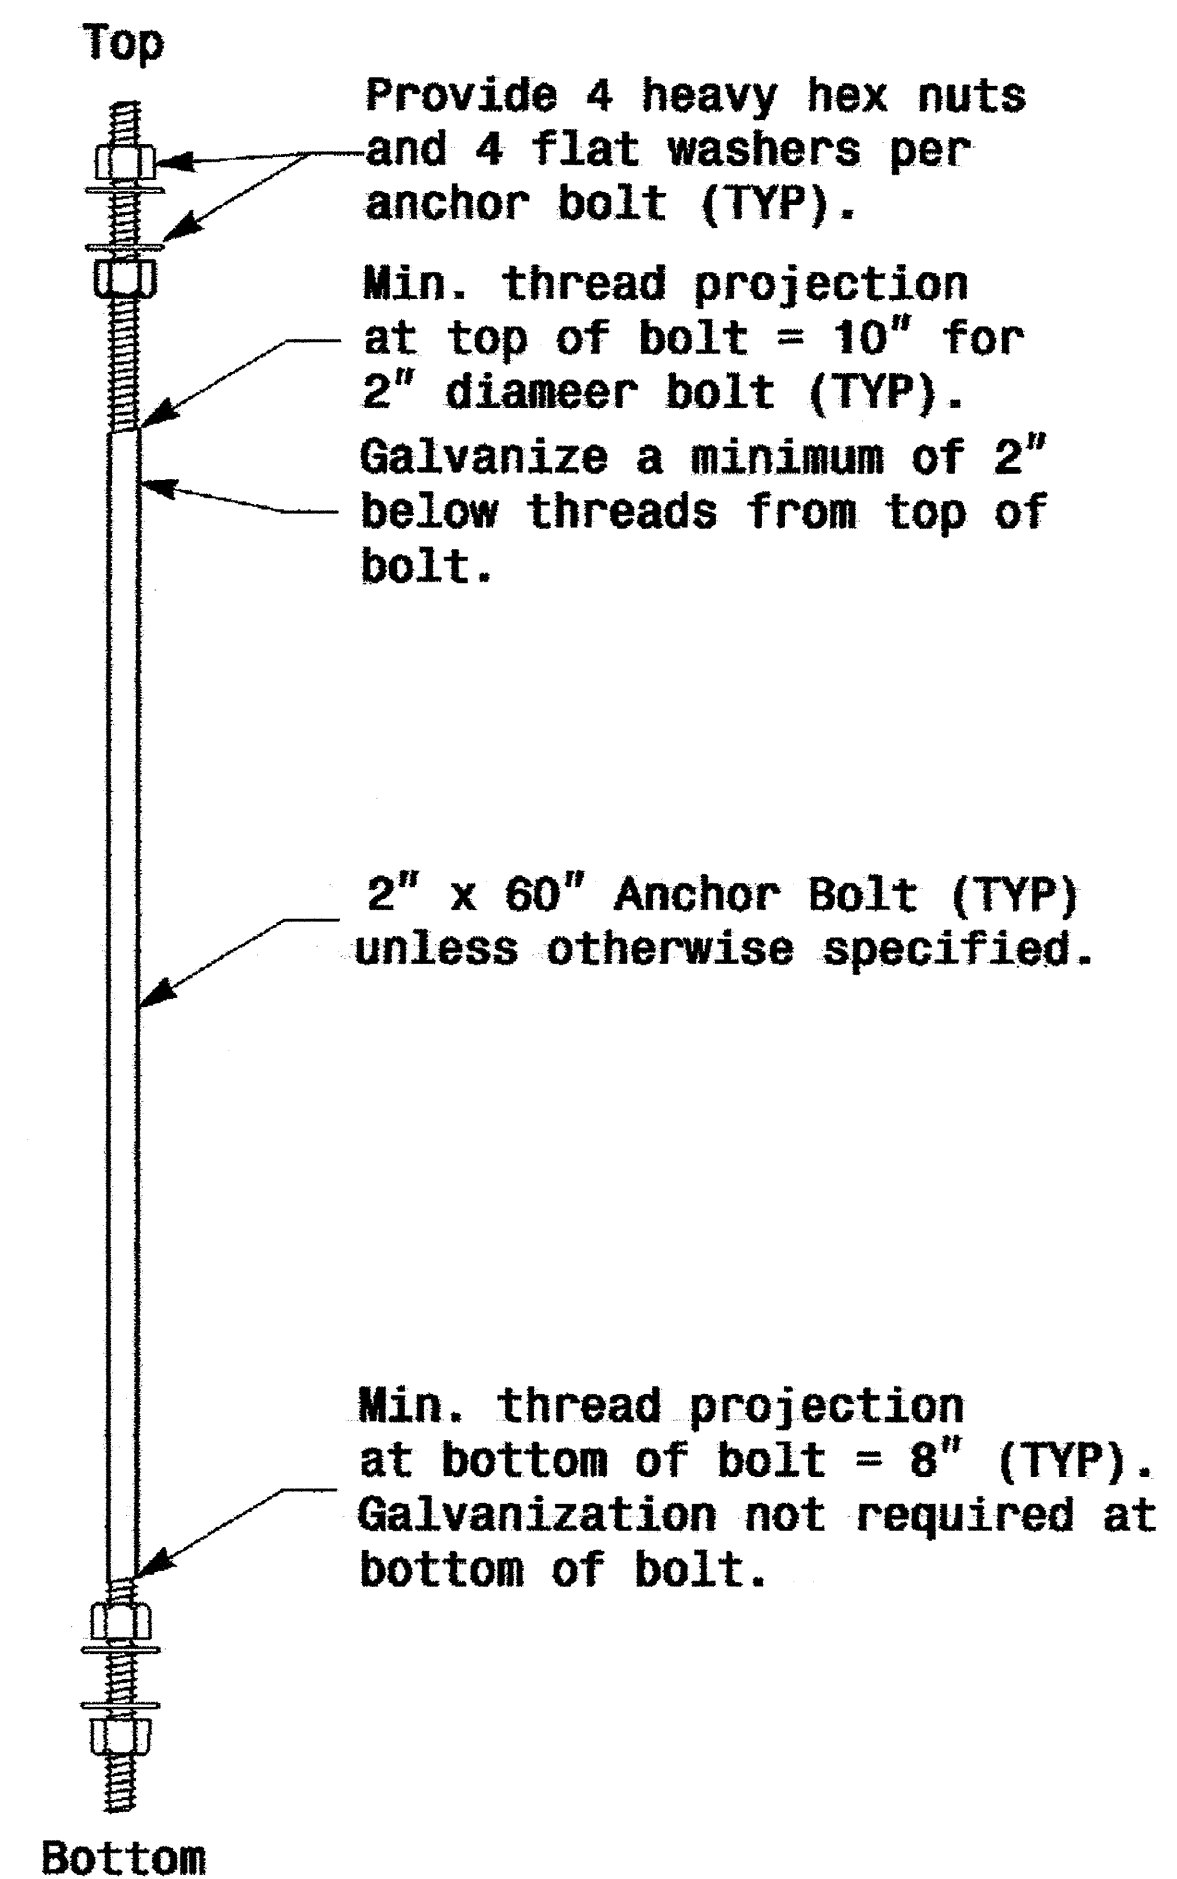

Anchor Bolt Detail

Note: See Strain Pole drawing M3 and Mast arm drawing M4 for base plate weld details.

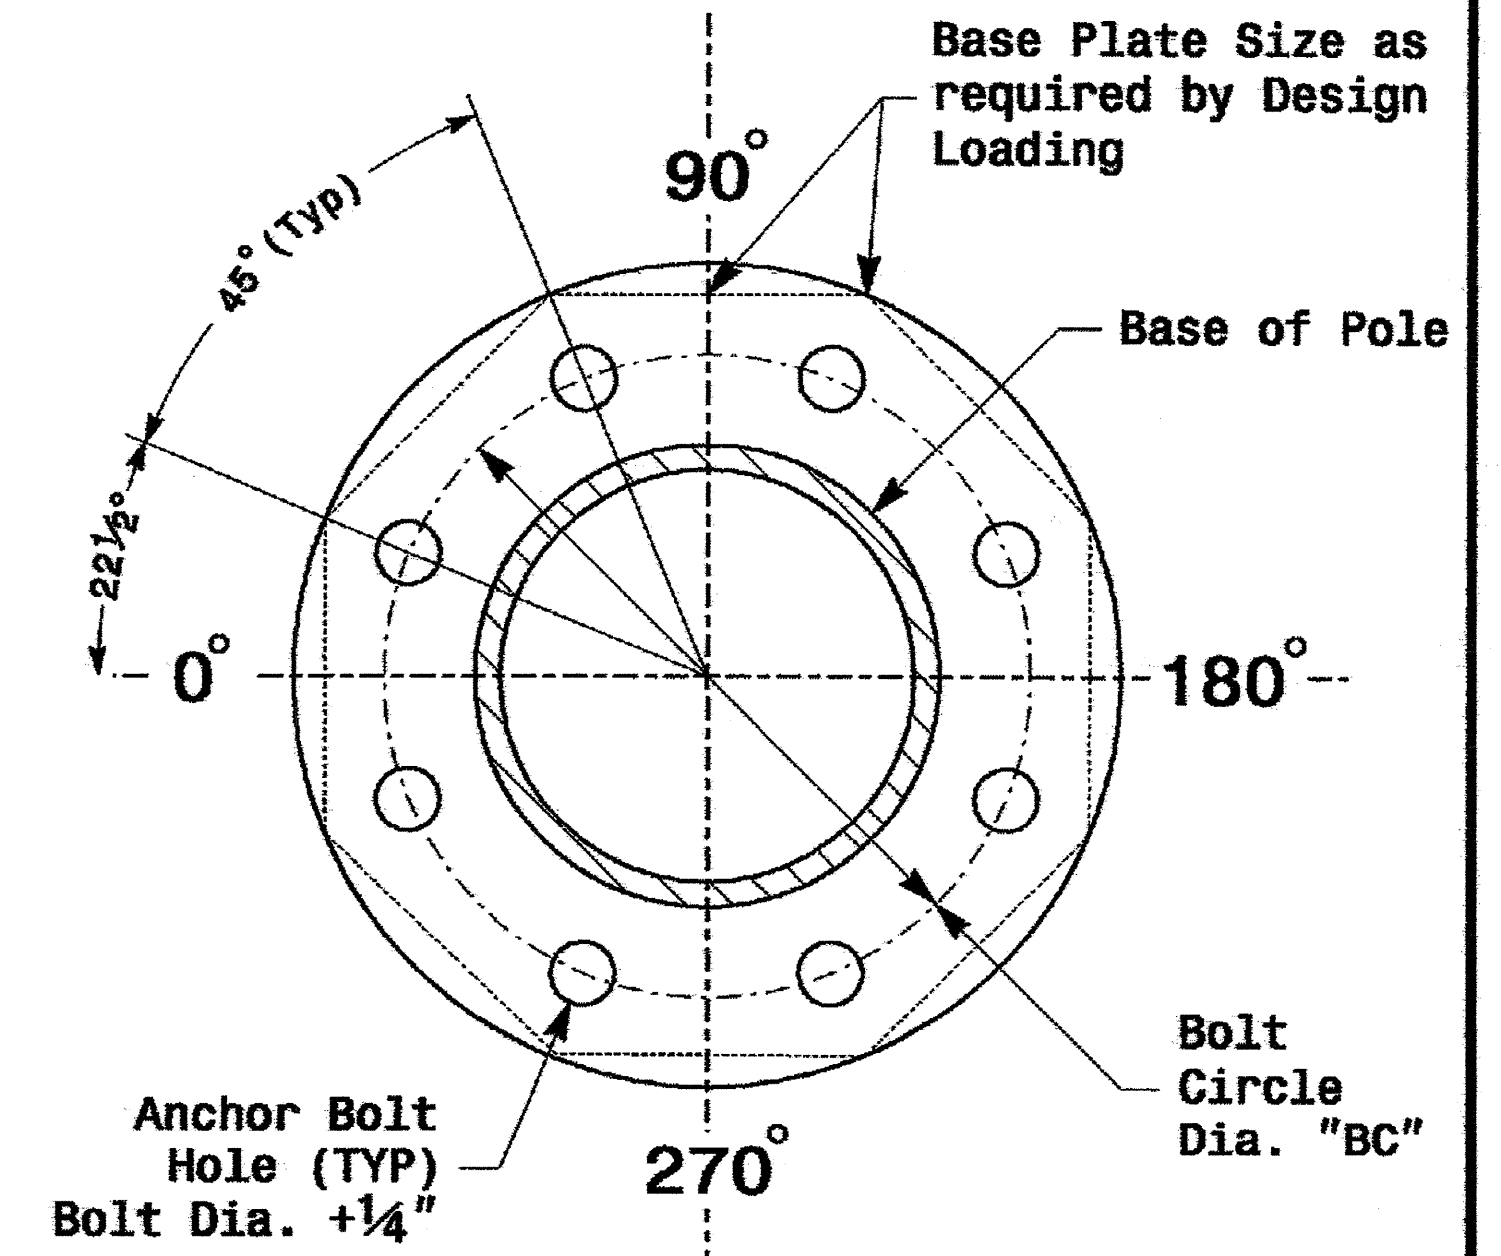

8 Bolt Base Plate Detail

Prepared in the Office of:

Typical Fabrication Details Common To All Metal Poles

PLAN DATE: May 2005 REVIEWED BY: C.F. Andrews
PREPARED BY: P.L. Alexander REVIEWED BY: A.M. Esposito

SCALE: NONE


SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 028094 ENGINEER JOSEPH C. SARKIS

SIGNATURE: J. Sarker 9.2.2005 DATE

SIG. INVENTORY NO.


Fabrication Details - All Poles

01-SEP-2005 18:22 01-2004 Metal Pole Standard.dwg/004.mcf thru m5.dgn

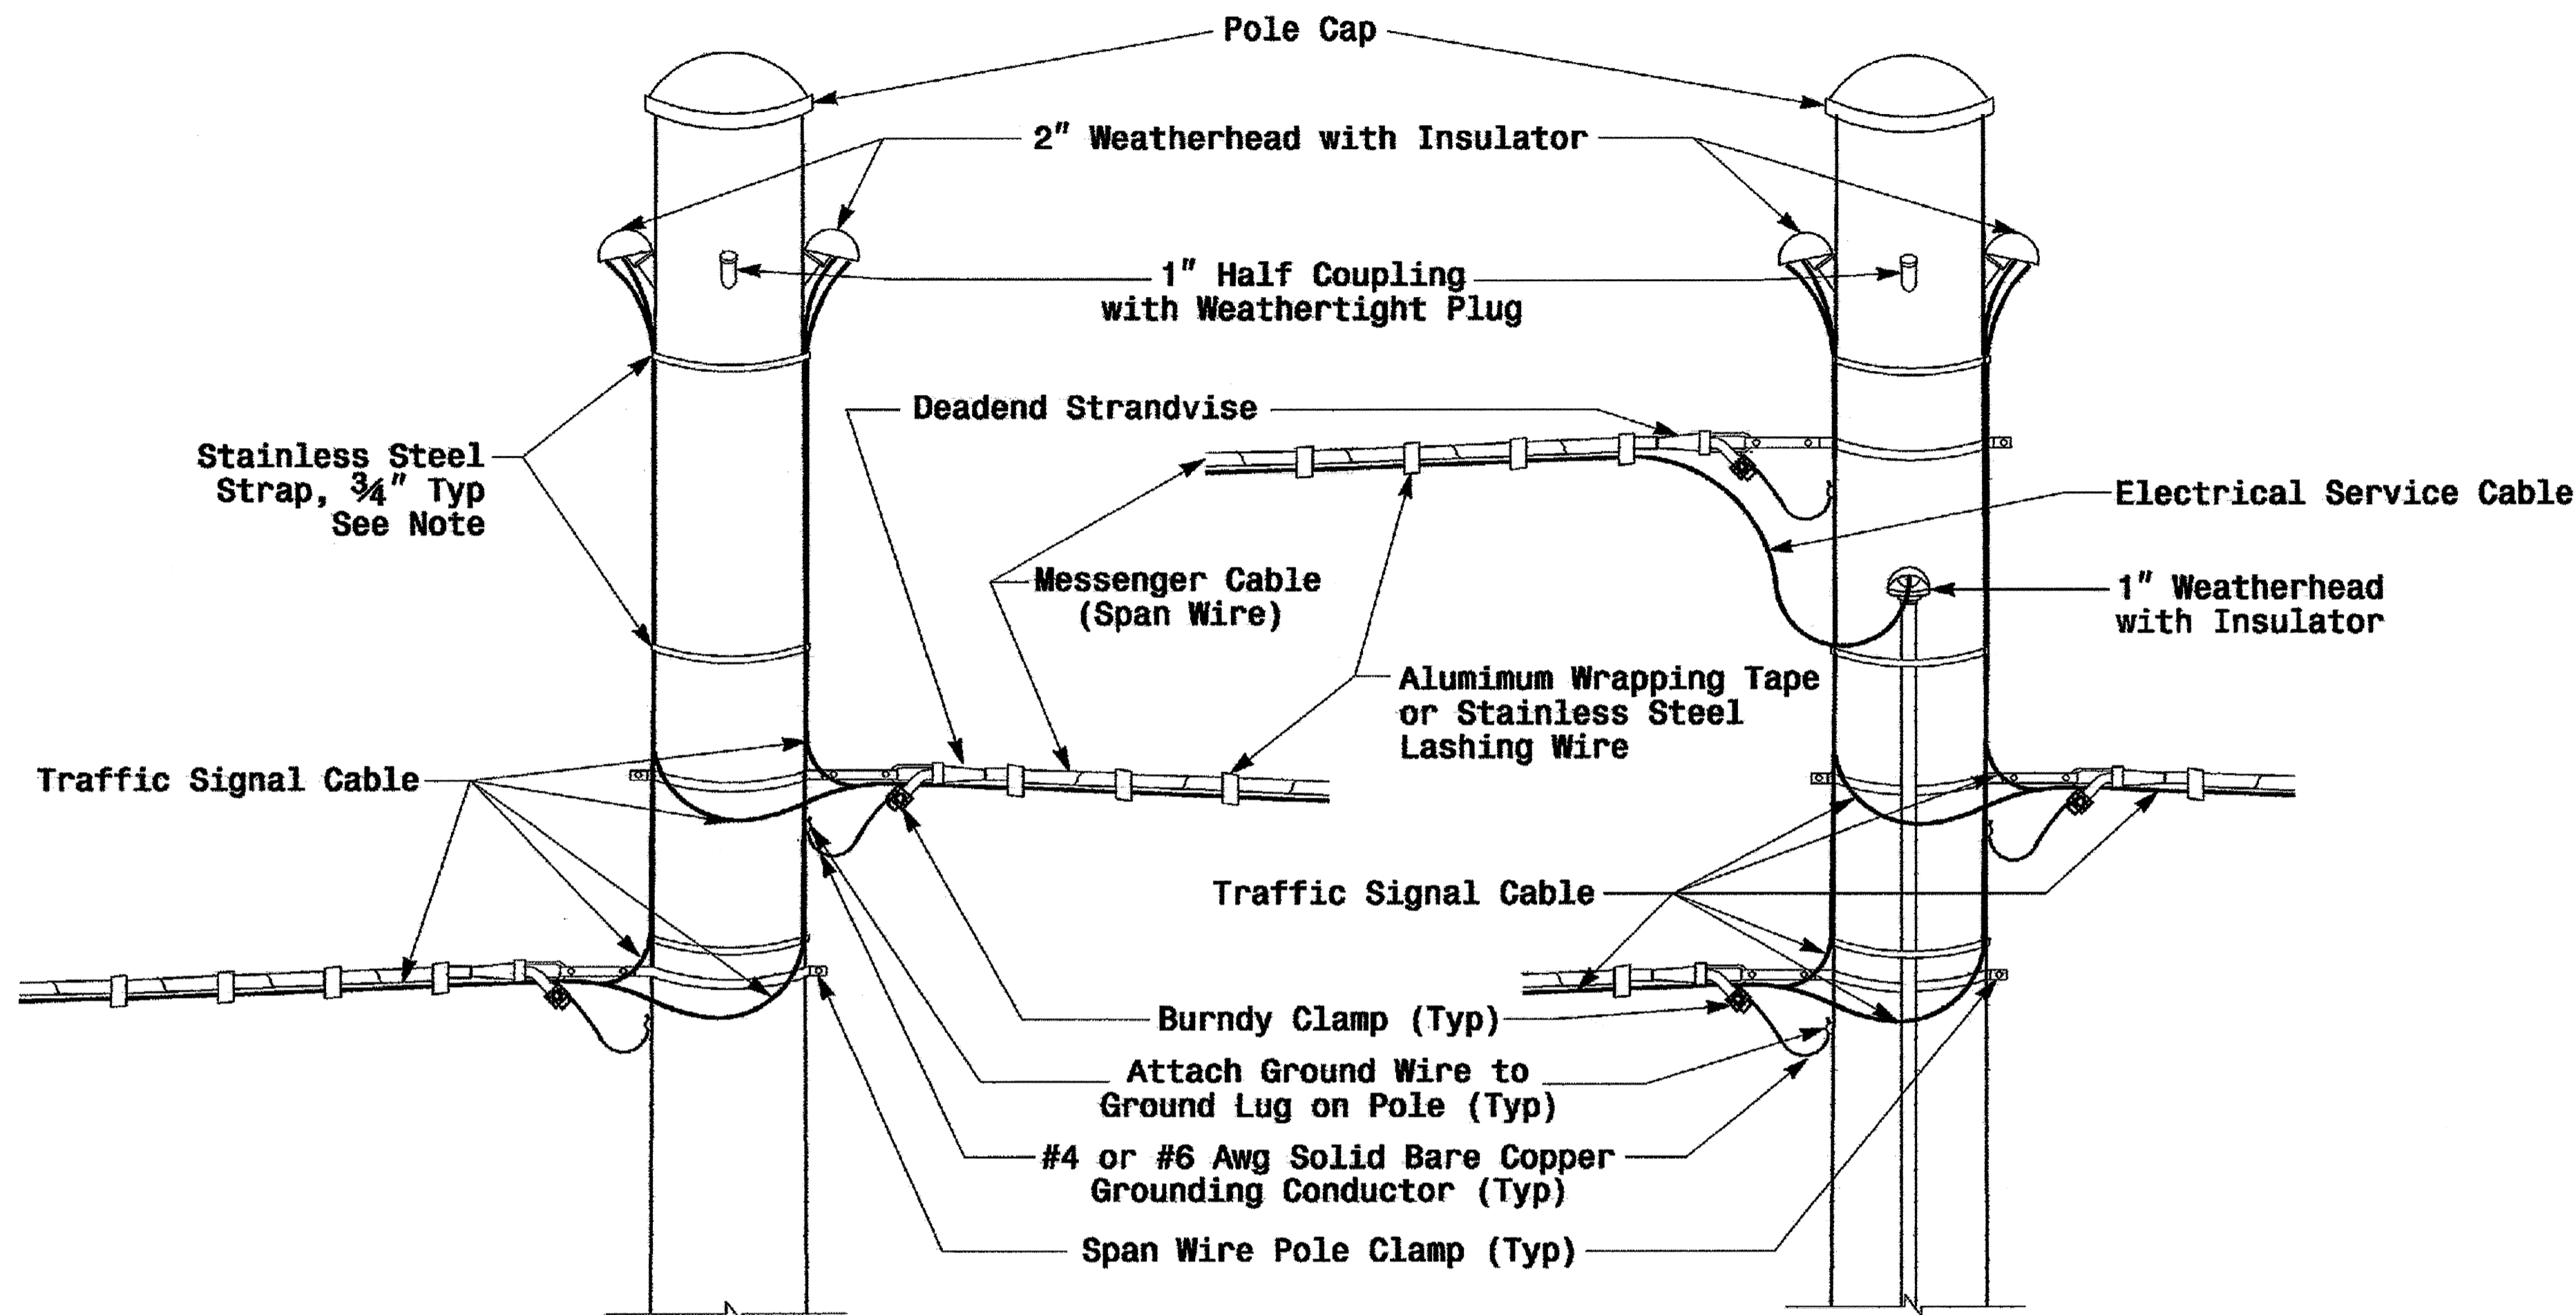


Note: Strap all signal cables to the side of the pole with 3/4" stainless steel straps when the distance between the spanwire attachment clamp and the weatherheads exceeds 36"

Strain Pole Attachments

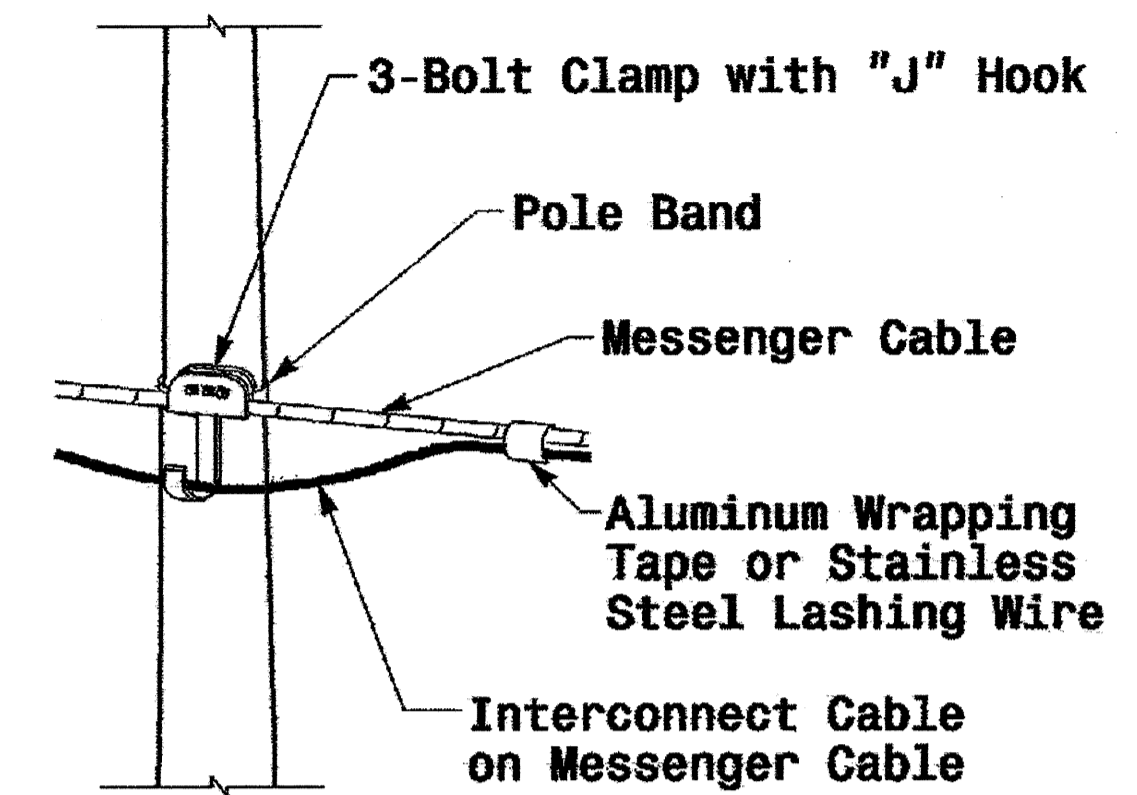

Attachment of Cable to Intermediate Metal Pole

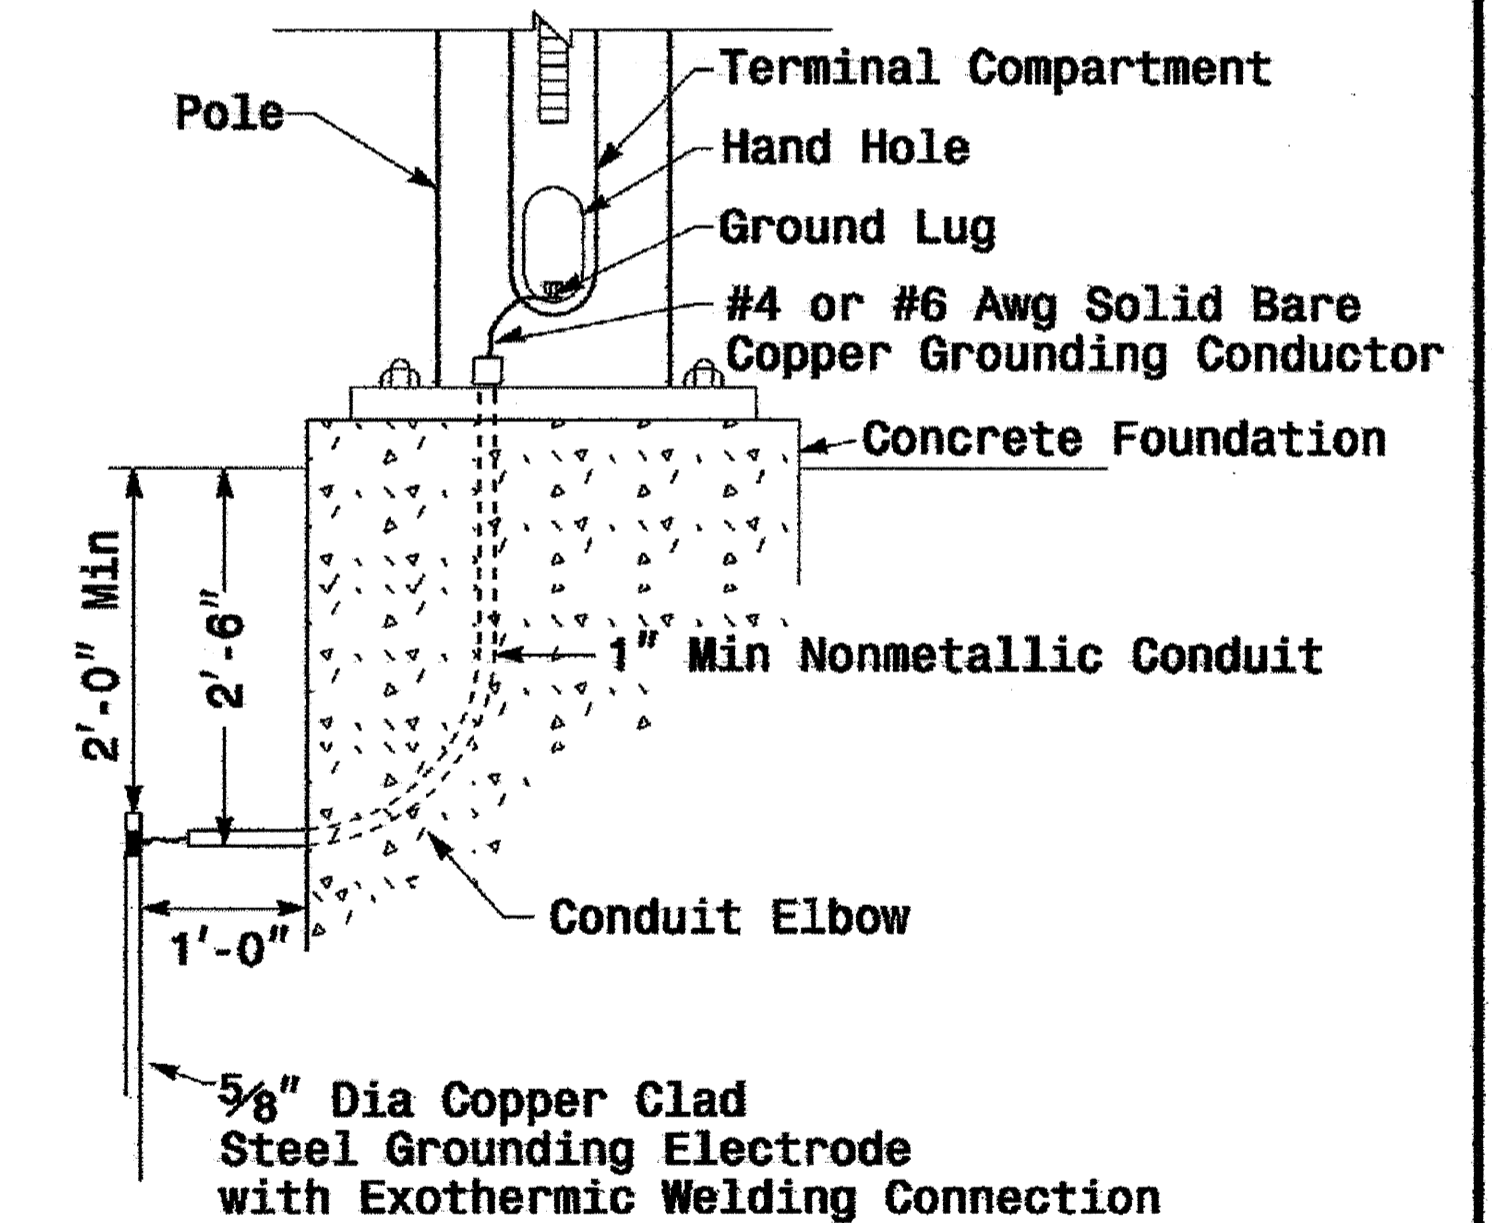

Metal Pole Grounding Detail

Construction Details - Strain Poles

01-SEP-2005 16:33 w:\p001\es-un\m\c\gr\ps#2004.net\pole_stand\ds#2004.mf.dgn p01\alexander

	Construction Details Strain Poles		
	PLAN DATE: May 2005 PREPARED BY: C.F. ANDREWS	REVIEWED BY: P.L. ALEXANDER REVIEWED BY: D.C. SARKAR	
REVISIONS: _____ INIT. DATE _____		SIGNATURE: <i>Milton I. Dean</i> DATE: 9-1-05	
222 N. McDowell St., Raleigh, NC 27603		SIG. INVENTORY NO. _____	

		STANDARD STRAIN POLES				STANDARD FOUNDATIONS 42" Diameter Drilled Pier Length (L) - Feet						
		Case No.	Pole Height (Ft.)	Base Plate BC (in.)	Moment at the Pole Base (ft-kp)	Clay				Sand		
						Medium N-Value 4-8	Stiff N-Value 9-15	Very Stiff N-Value 16-30	Hard N-Value >30	Loose N-Value 4-10	Medium N-Value 11-30	Dense N-Value >30
WIND ZONE 1	LIGHT	S26L3	26	25	280	20.5	14.0	11.5	9.5	18.0	16.0	14.0
		S30L3	30	25	310	21.0	14.5	11.5	9.5	18.5	16.5	14.5
		S35L3	35	25	350	22.5	15.0	12.0	10.0	19.5	17.5	15.5
	HEAVY	S30H3	30	29	450	25.5	16.5	13.0	11.0	21.0	18.5	16.5
		S35H3	35	29	540	26.0	17.0	13.5	11.5	22.0	19.5	17.0
WIND ZONE 2	LIGHT	S26L2	26	23	250	19.5	13.5	11.0	9.0	18.0	15.5	14.0
		S30L2	30	23	290	20.0	14.0	11.5	9.5	18.5	16.0	14.0
		S35L2	35	23	315	21.0	14.5	11.5	9.5	19.0	16.5	14.5
	HEAVY	S30H2	30	29	415	24.5	16.0	13.0	10.5	21.0	18.5	16.0
		S35H2	35	29	485	25.5	16.5	13.5	11.0	21.5	19.0	16.5
WIND ZONE 3	LIGHT	S26L2	26	23	250	18.5	13.0	10.5	9.0	17.5	15.0	13.5
		S30L2	30	23	290	19.5	13.5	11.0	9.0	18.0	15.5	14.0
		S35L2	35	23	315	20.0	14.0	11.5	9.5	18.5	16.0	14.5
	HEAVY	S30H2	30	29	415	23.0	15.5	12.5	10.0	20.5	17.5	16.0
		S35H2	35	29	485	24.0	16.0	13.0	10.5	21.0	18.0	16.5
WIND ZONE 4	LIGHT	S26L1	26	22	195	18.0	13.0	10.5	9.0	16.5	14.5	13.0
		S30L1	30	22	225	18.5	13.0	10.5	9.0	17.0	15.0	13.5
		S35L1	35	22	255	19.0	13.5	11.0	9.0	17.5	15.5	14.0
	HEAVY	S30H1	30	25	330	22.0	15.0	12.0	9.5	19.5	17.0	15.0
		S35H1	35	25	385	23.0	15.5	12.5	10.0	20.0	17.5	15.5
WIND ZONE 5	LIGHT	S26L2	26	23	250	19.0	13.5	10.5	9.0	17.5	15.5	13.5
		S30L2	30	23	290	20.0	14.0	11.0	9.5	18.0	16.0	14.0
		S35L2	35	23	315	21.0	14.5	11.5	10.0	19.0	16.5	14.5
	HEAVY	S30H2	30	29	415	23.5	15.5	12.5	10.5	21.0	18.0	16.0
		S35H2	35	29	485	25.0	16.5	13.0	11.0	21.5	18.5	16.5

Concrete Volume (cubic yards) = .356 X L

Fabrication Design Notes:



1. Values shown in "Moment at the Pole Base" column represents the minimum acceptable capacity allowable for design using a design CSR of 1.
2. Base plate thickness (T) is 2.0 inches.

Foundation Selection:

1. Perform a standard penetration test at each proposed foundation site to determine "N" value.
2. Select the appropriate wind zone from sheet M 1.
3. Select the soil type (Clay or Sand) that best describes the soil characteristics.
4. Get the appropriate pole case load number from the plans or from the Engineer.
5. Select the appropriate column in the chart based on soil type and "N" value. Select the appropriate row based on the pole load case. The foundation depth is the value where the column and the row intersect.

Standard Strain Poles

02-SEP-2005 12:42
w:\p01\ee-unt\nc\p01\groups\ee2004 me std strain pole.dgn
P.L. Alexander

	Standard Strain Poles and Standard Foundations		
	PLAN DATE: May 2005 PREPARED BY: P.L. Alexander	REVIEWED BY: C.F. Andrews REVIEWED BY: A.M. Esposito	
SCALE: NA None		SIGNATURE: <i>D. Sarkar</i> 9.2.2005 DATE	SEAL

- 1 INSTALL REA, PE - 22, SHIELDED, TWISTED PAIR COMMUNICATIONS CABLE
- 2 INSTALL REA, PE - 38, (FIGURE 8) SHIELDED, TWISTED PAIR COMMUNICATIONS CABLE
- 3 INSTALL REA, PE - 39, (UNDERGROUND) SHIELDED, TWISTED PAIR COMMUNICATIONS CABLE
- 4 INSTALL SMFO CABLE
- 5 INSTALL MMFO CABLE
- 6 INSTALL FIBER OPTIC DROP CABLE
- 7 INSTALL TRACER WIRE
- 8 TRENCH
- 9 INSTALL PVC CONDUIT
- 10 INSTALL RIGID, GALVANIZED STEEL CONDUIT
- 11 INSTALL RIGID, GALVANIZED STEEL RISER WITH WEATHERHEAD
- 12 INSTALL RIGID, GALVANIZED STEEL RISER WITH FIBER OPTIC CABLE SEAL
- 13 INSTALL OUTER-DUCT POLYETHYLENE CONDUIT
- 14 INSTALL POLYETHYLENE CONDUIT
- 15 DIRECTIONAL DRILL CONDUIT
- 16 BORE AND JACK CONDUIT
- 17 INSTALL CABLE(S) IN EXISTING CONDUIT
- 18 INSTALL CABLE(S) IN NEW CONDUIT
- 19 INSTALL CABLE(S) IN EXISTING RISER
- 20 INSTALL CABLE(S) IN NEW RISER
- 21 INSTALL CABLE(S) IN EXISTING CONDUIT STUB-OUTS
- 22 INSTALL NEW CONDUIT INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
- 23 INSTALL NEW RISER INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
- 24 INSTALL NEW CONDUIT INTO EXISTING POLE MOUNTED CABINET
- 25 INSTALL NEW RISER INTO EXISTING POLE MOUNTED CABINET
- 26 TERMINATE COMMUNICATIONS CABLE ON EXISTING TELEMETRY INTERFACE PANEL IN TRAFFIC SIGNAL CONTROLLER CABINET
- 27 INSTALL NEW TELEMETRY INTERFACE PANEL IN TRAFFIC SIGNAL CONTROLLER CABINET
- 28 INSTALL INTERCONNECT CENTER, PATCH PANEL, JUMPERS AND FUSION SPlice CABLE IN CABINET
- 29 INSTALL UNDERGROUND SPlice ENCLOSURE
- 30 INSTALL AERIAL SPlice ENCLOSURE
- 31 INSTALL POLE MOUNTED SPlice CABINET
- 32 INSTALL BASE MOUNTED SPlice CABINET
- 33 REMOVE EXISTING SPlice CABINET


- 34 INSTALL CABINET FOUNDATION
- 35 REMOVE EXISTING CABINET FOUNDATION
- 36 INSTALL CCTV CAMERA ASSEMBLY
- 37 INSTALL CCTV CAMERA WOOD POLE
- 38 INSTALL CCTV CAMERA METAL POLE AND FOUNDATION
- 39 INSTALL JUNCTION BOX
- 40 INSTALL OVERSIZED JUNCTION BOX
- 41 REMOVE EXISTING JUNCTION BOX
- 42 INSTALL WOOD POLE
- 43 REMOVE EXISTING WOOD POLE
- 44 INSTALL AERIAL GUY ASSEMBLY
- 45 INSTALL STANDARD GUY ASSEMBLY
- 46 INSTALL SIDEWALK GUY ASSEMBLY
- 47 INSTALL MESSENGER CABLE
- 48 REMOVE EXISTING COMMUNICATIONS AND MESSENGER CABLE
- 49 REMOVE EXISTING MESSENGER CABLE
- 50 INSTALL TELEPHONE SERVICE
- 51 INSTALL CABLE STORAGE RACKS (SNOW SHOES) AND STORE 30 METERS OF CABLE
- 52 INSTALL DELINEATOR MARKER
- 53 STORE 6 METERS OF COMMUNICATIONS CABLE
- 54 LASH CABLE(S) TO EXISTING SIGNAL/COMMUNICATIONS CABLE
- 55 LASH CABLE(S) TO EXISTING MESSENGER CABLE
- 56 LASH CABLE(S) TO NEW MESSENGER CABLE
- 57 MODIFY EXISTING ELECTRICAL SERVICE
- 58 INSTALL NEW ELECTRICAL SERVICE

LEGEND


- FO NEW FIBER OPTIC COMMUNICATIONS CABLE
- TWIST PR NEW TWISTED PAIR COMMUNICATIONS CABLE
- EXI EXISTING COMMUNICATIONS CABLE
- REM EXISTING COMMUNICATIONS CABLE TO BE REMOVED
- NEW AERIAL GUY ASSEMBLY
- NEW CONDUIT
- EXISTING CONDUIT
- DD NEW DIRECTIONAL DRILLED CONDUIT
- B&J NEW BORED AND JACKED CONDUIT
- NEW JUNCTION BOX
- EXISTING JUNCTION BOX
- NEW WOOD POLE
- EXISTING WOOD POLE
- AERIAL SPlice ENCLOSURE
- NEW METAL POLE
- EXISTING METAL POLE
- NEW CCTV ASSEMBLY
- NEW STANDARD GUY ASSEMBLY
- NEW SIDEWALK GUY ASSEMBLY
- NEW CABLE STORAGE RACKS (SNOW SHOES)
- EXISTING CONTROLLER AND CABINET
- EXISTING SPlice CABINET
- NEW SPlice CABINET
- SP SIGNAL POLE
- XX-XXXX SIGNAL INVENTORY NUMBER

CONSTRUCTION NOTE SYMBOLOGY KEY

- XX INDICATES NUMBER OF CABLES, LOOPS, ETC.
- XX INDICATES NUMBER OF FIBERS PER CABLE, TWISTED PAIRS PER CABLE, ETC.
- XX INDICATES NUMBER OF RISER(S)/CONDUIT(S)
- XX INDICATES DIAMETER OF RISER(S)/CONDUIT(S) (INCH)

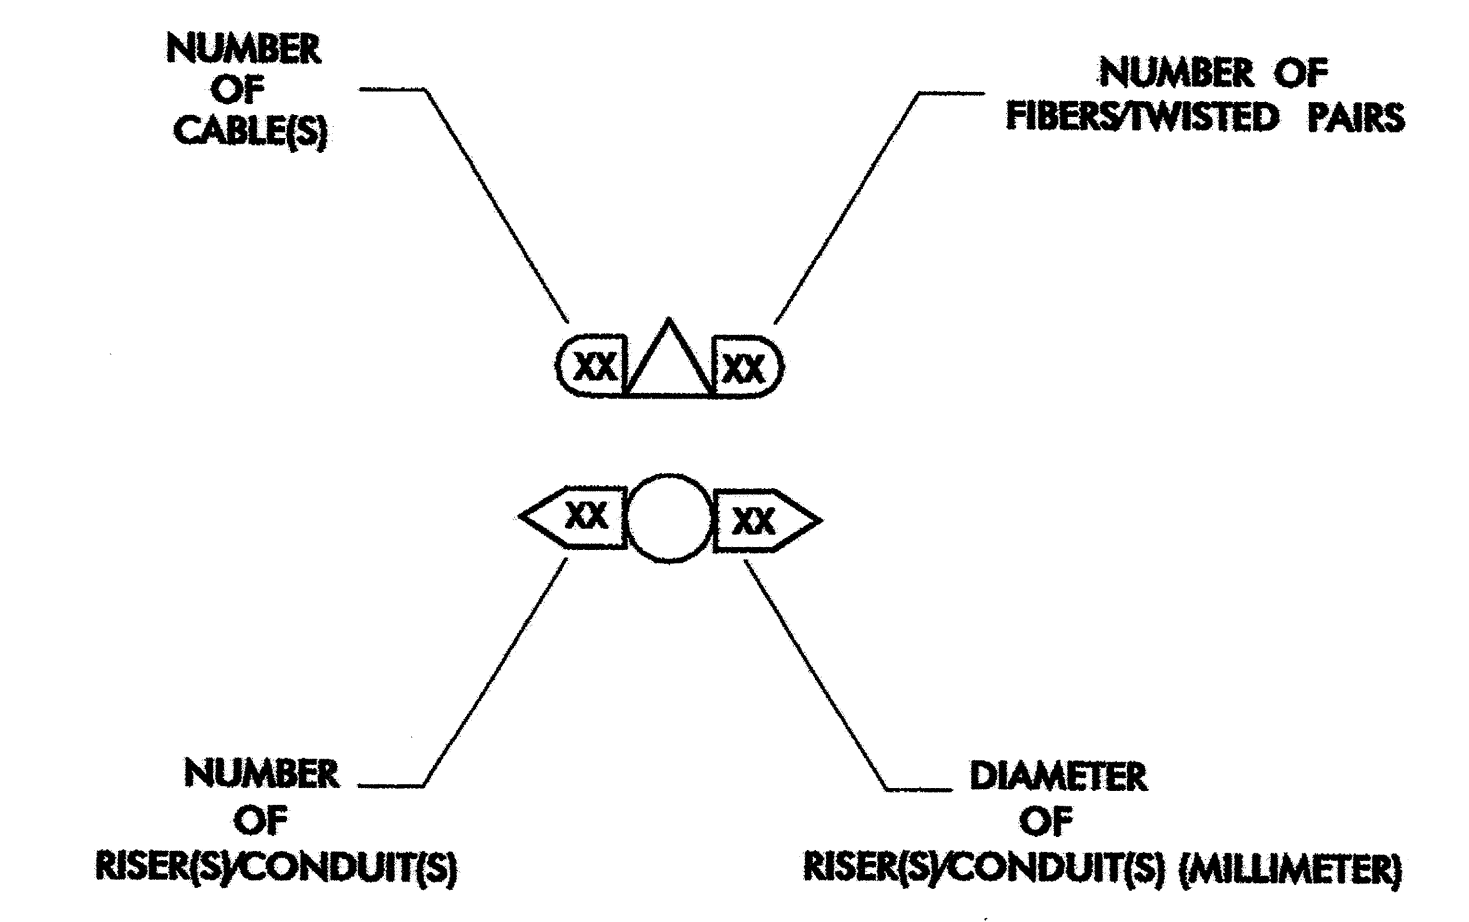



	CONSTRUCTION NOTES		SEAL
	PLAN DATE: _____ PREPARED BY: _____	REVIEWED BY: _____ REVIEWED BY: G. A. FULLER	
222 N. McDowell St., Raleigh, NC 27603 SCALE:			SIGNATURE: <i>Gregory A. Fuller</i> 10/31/02 DATE: _____ CADD File name: _____

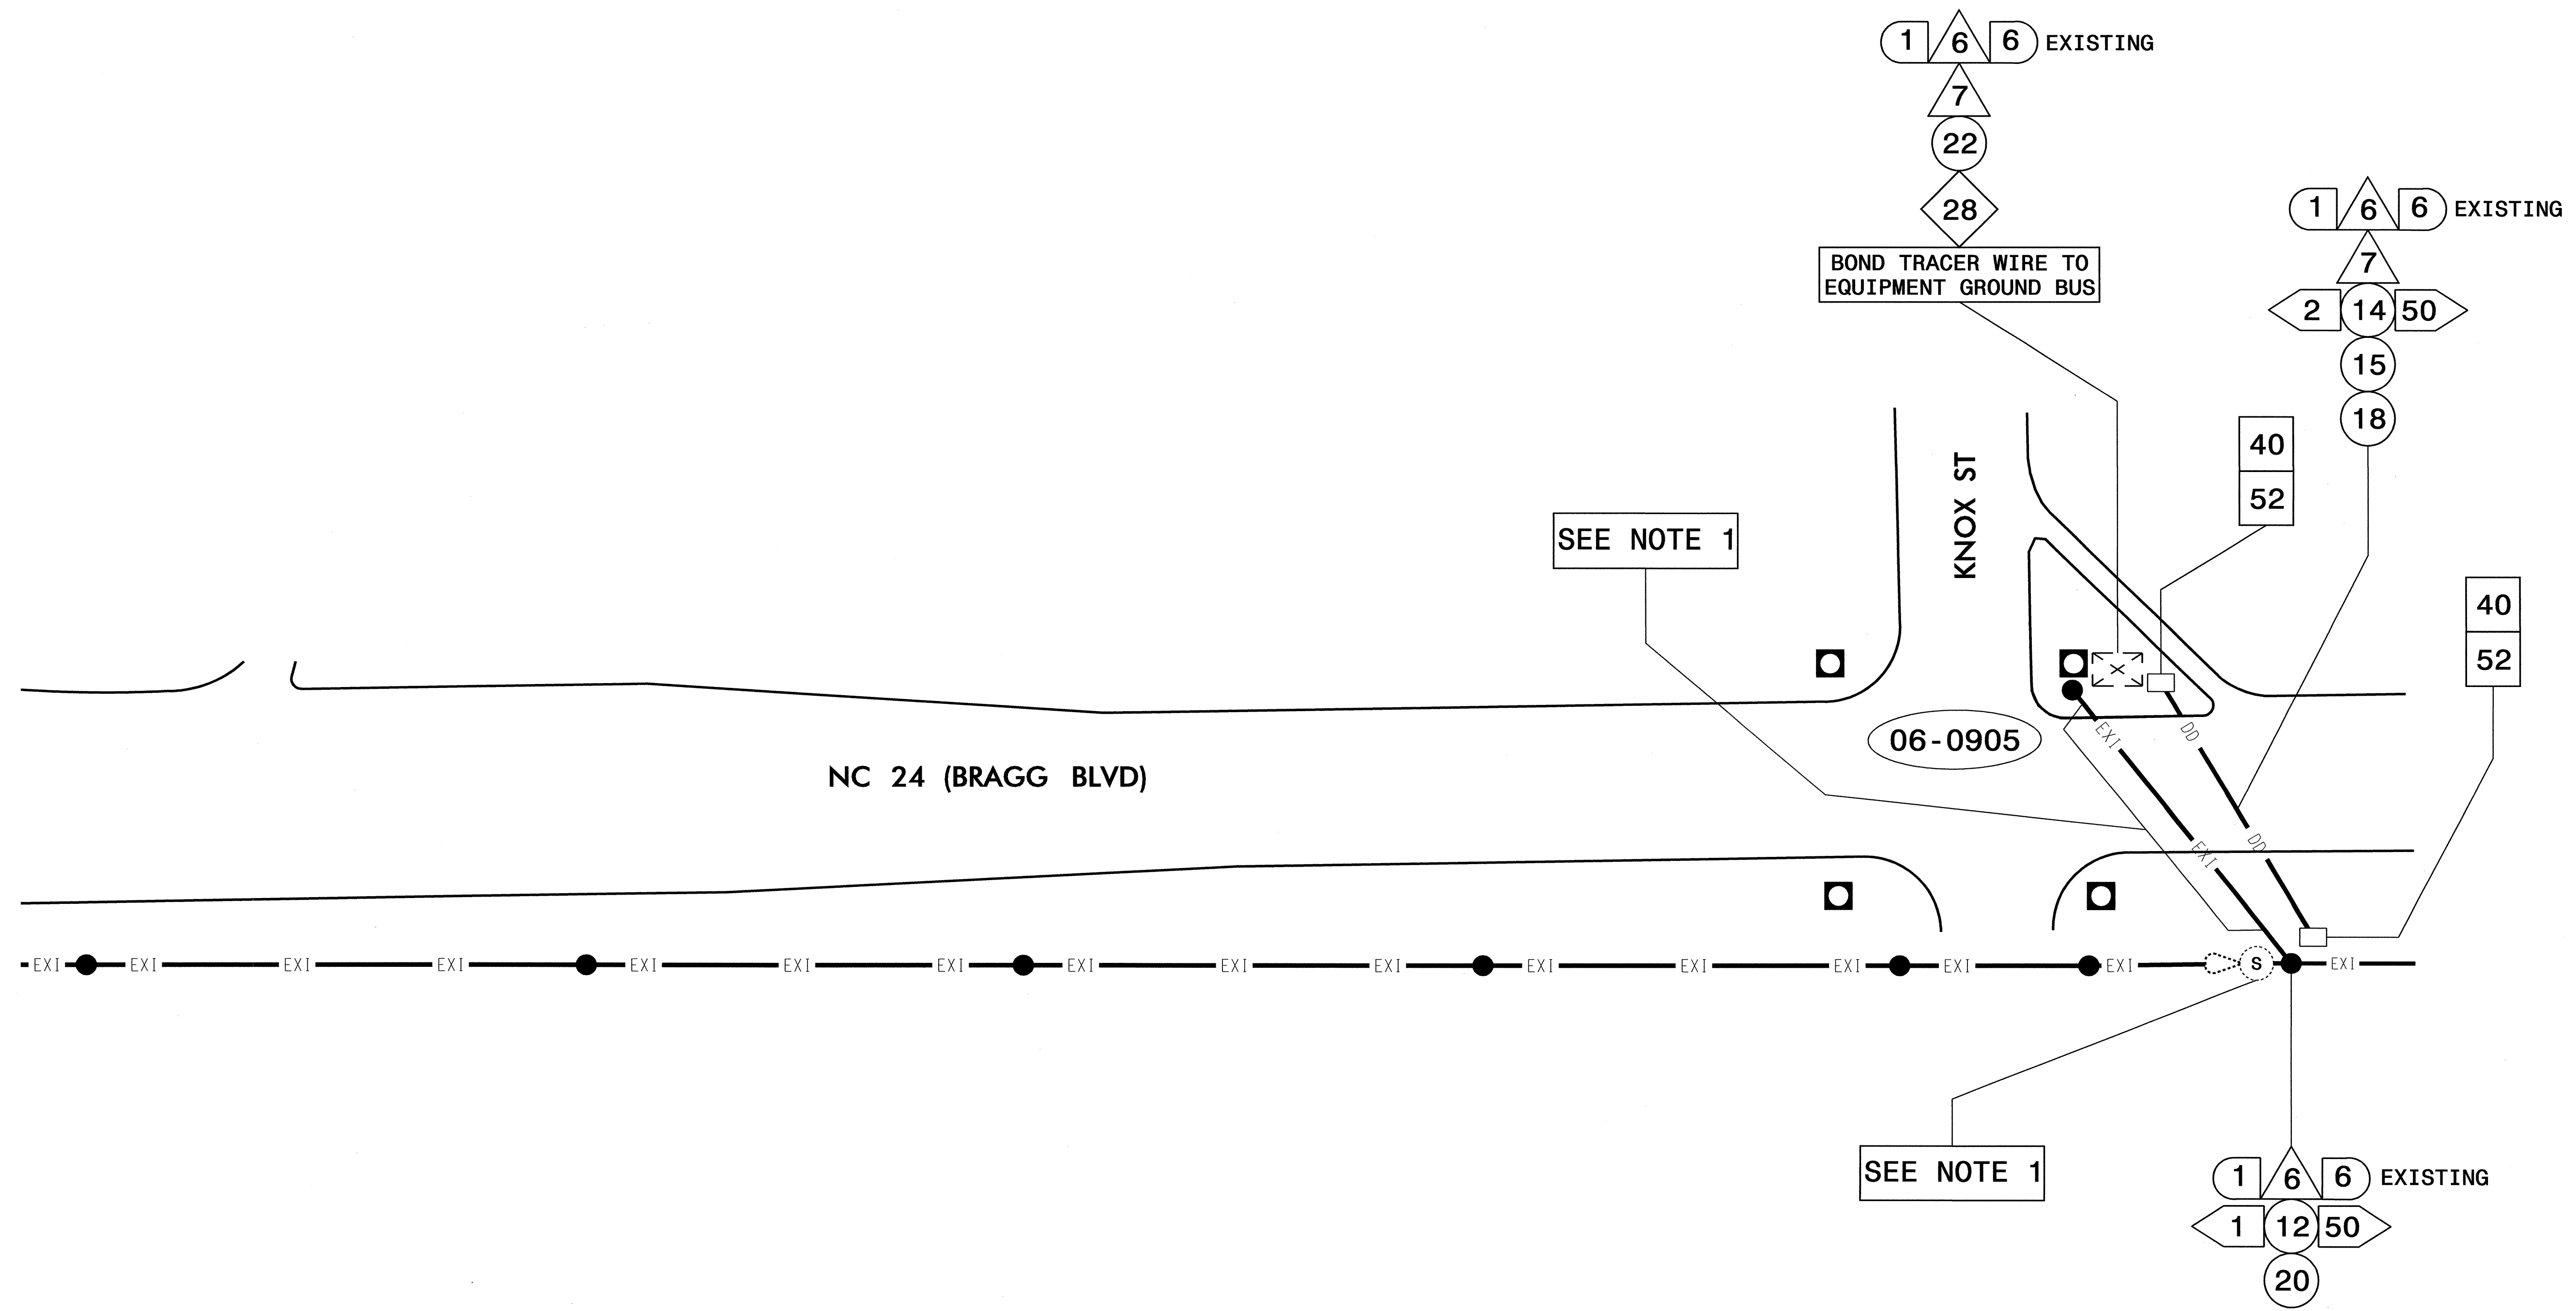

NOTES:

1. REMOVE EXISTING 6 FIBER AERIAL DROP CABLE FROM SIGNAL CABINET. INSTALL NEW RISER AND CONDUIT AND REROUTE DROP CABLE UNDERGROUND TO SIGNAL CABINET. REINSTALL CABLE IN CABINET AND SPLICE AS SHOWN.



SEAL ALL CONDUIT ENDS WITH MECHANICAL SEALING DEVICES AT ALL JUNCTION BOX & SIGNAL CABINET ENTRANCES.

<p>Prepared in the Office of:  North Carolina Department of Transportation 250 N. Greenfield Pkwy., Garner, NC 27529</p>	<p>COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS ALONG NC 24 (BRAGG BOULEVARD)</p>		<p>SEAL  GREGORY A. FULLER ENGINEER SEAL 023919 NORTH CAROLINA</p>					
	<p>PLAN DATE: FEBRUARY 2009 PREPARED BY: S.C. WARDLE</p>	<p>REVIEWED BY: I.N. AVERY REVIEWED BY: G.A. FULLER</p>		<p>REVISIONS</p> <table border="1"> <tr> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>	INIT.	DATE		
INIT.	DATE							

CADD Filename: _____



FIBER OPTIC CABLE

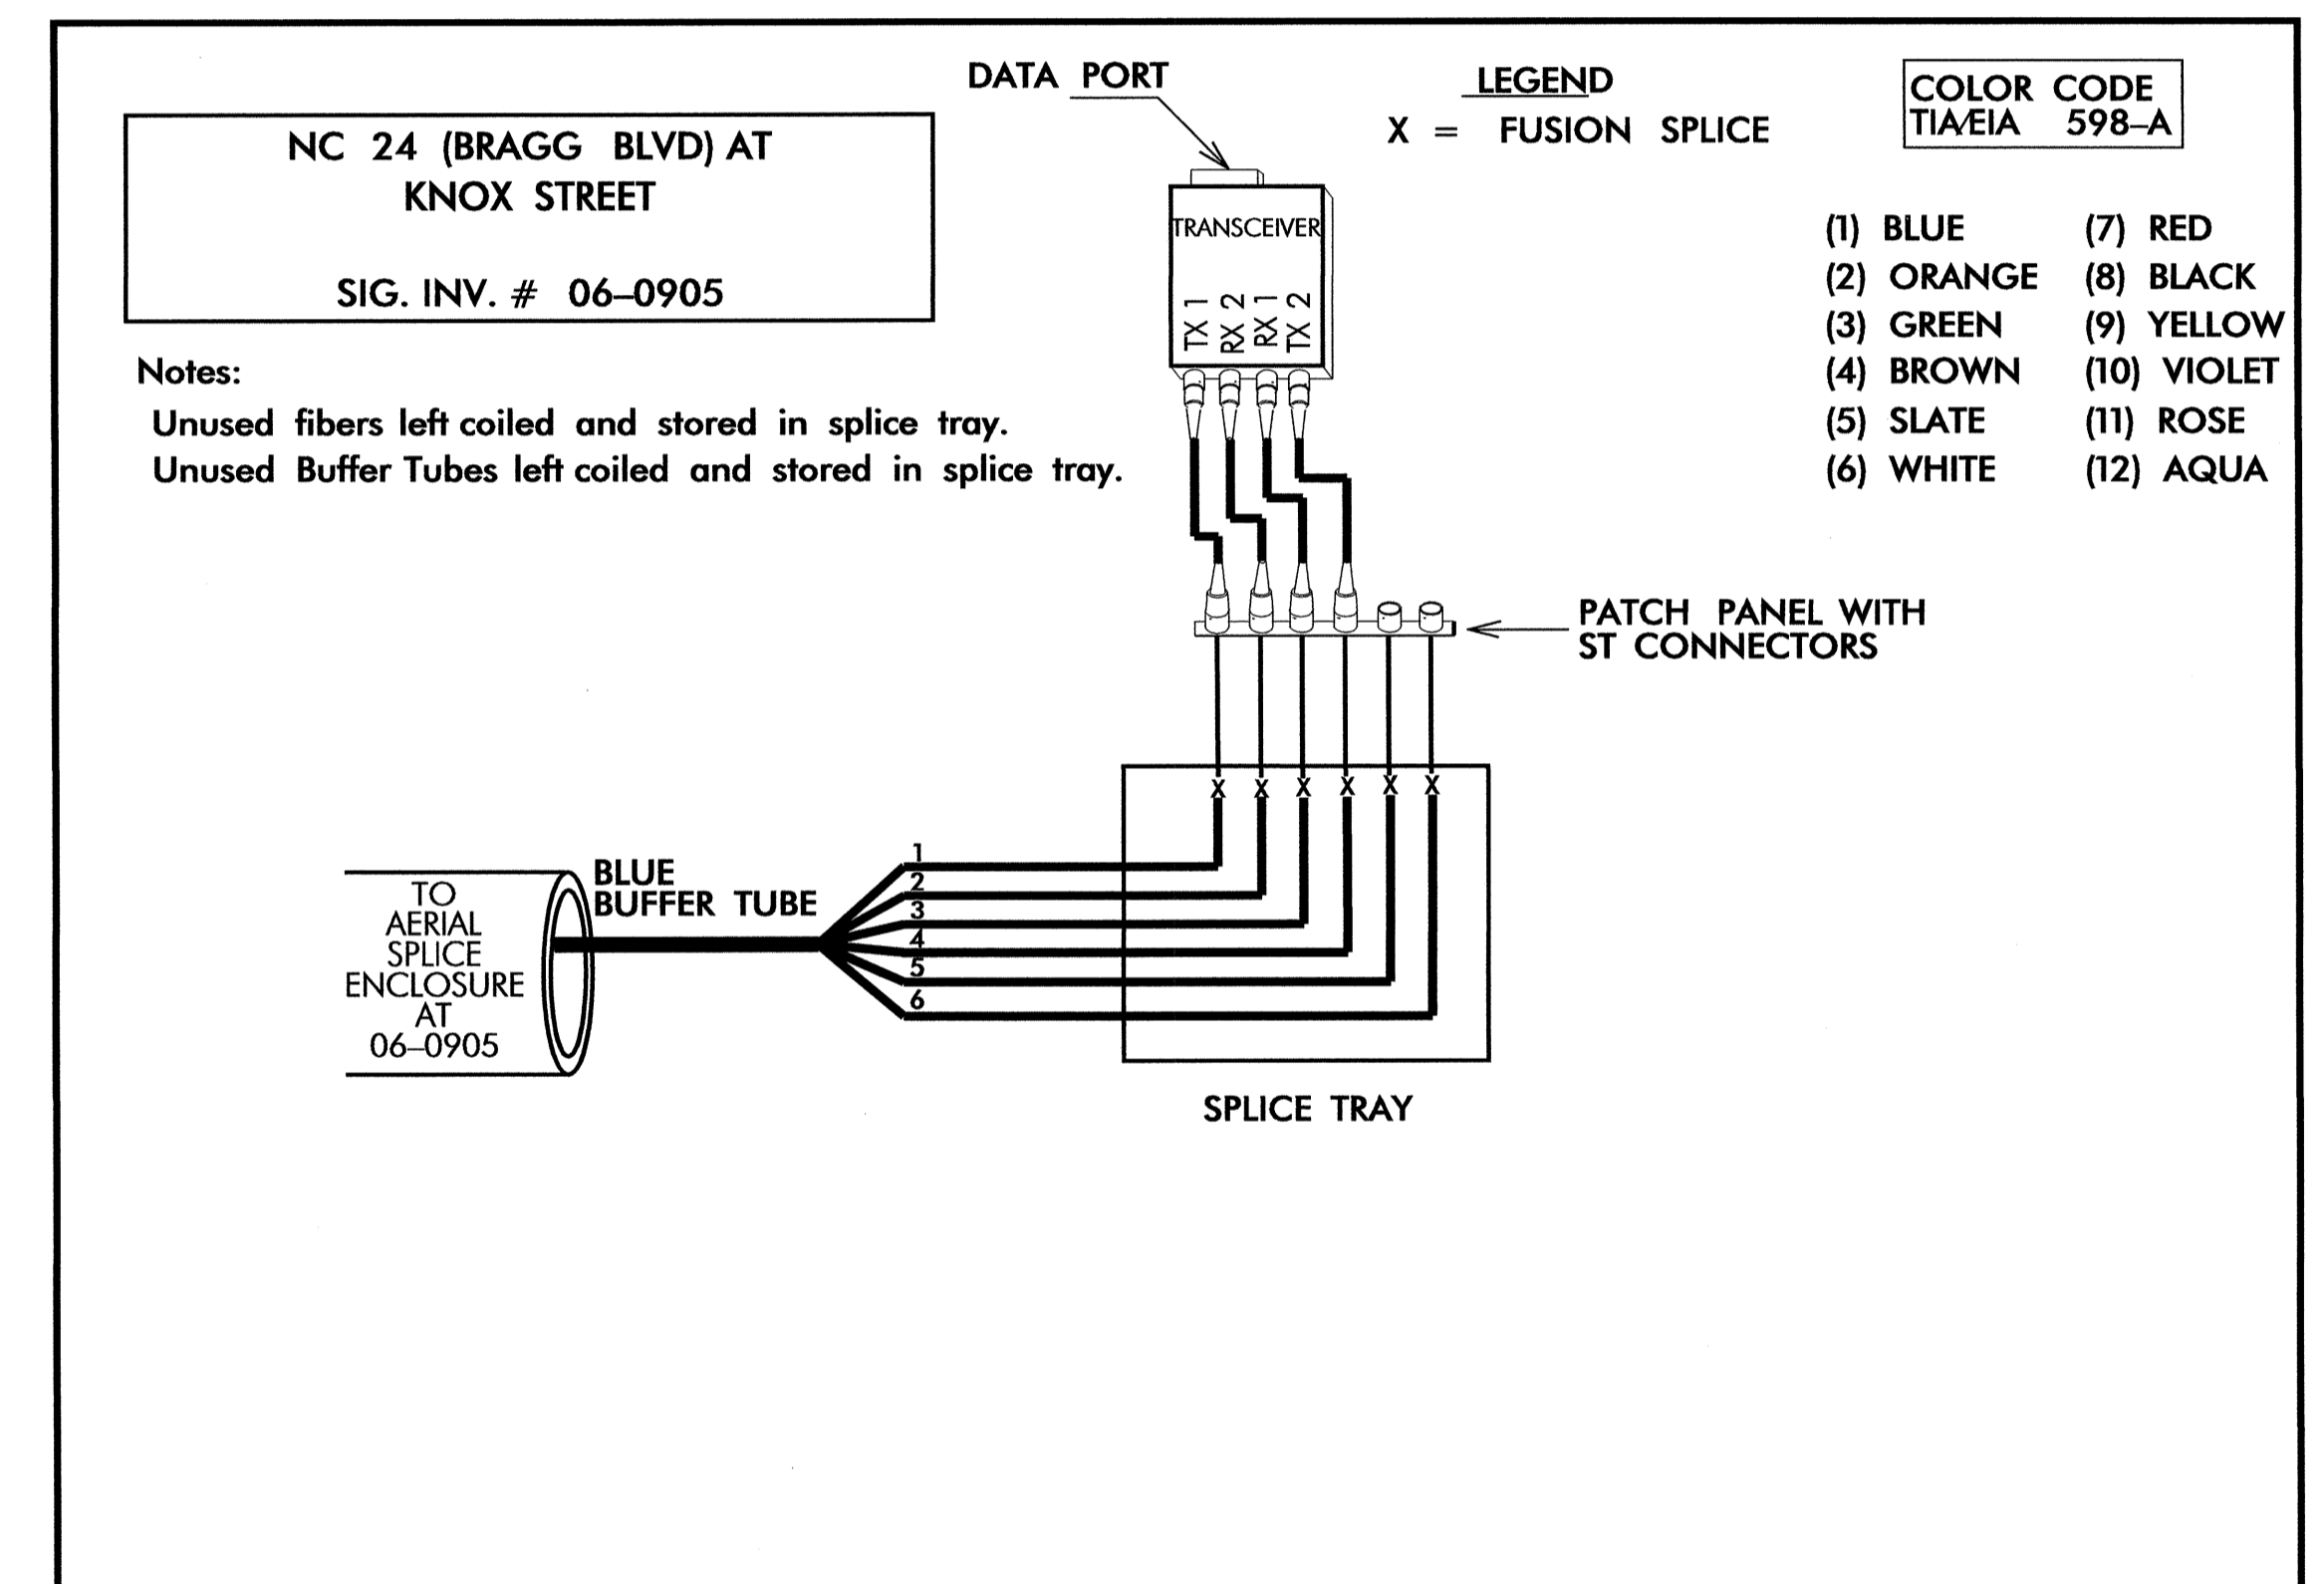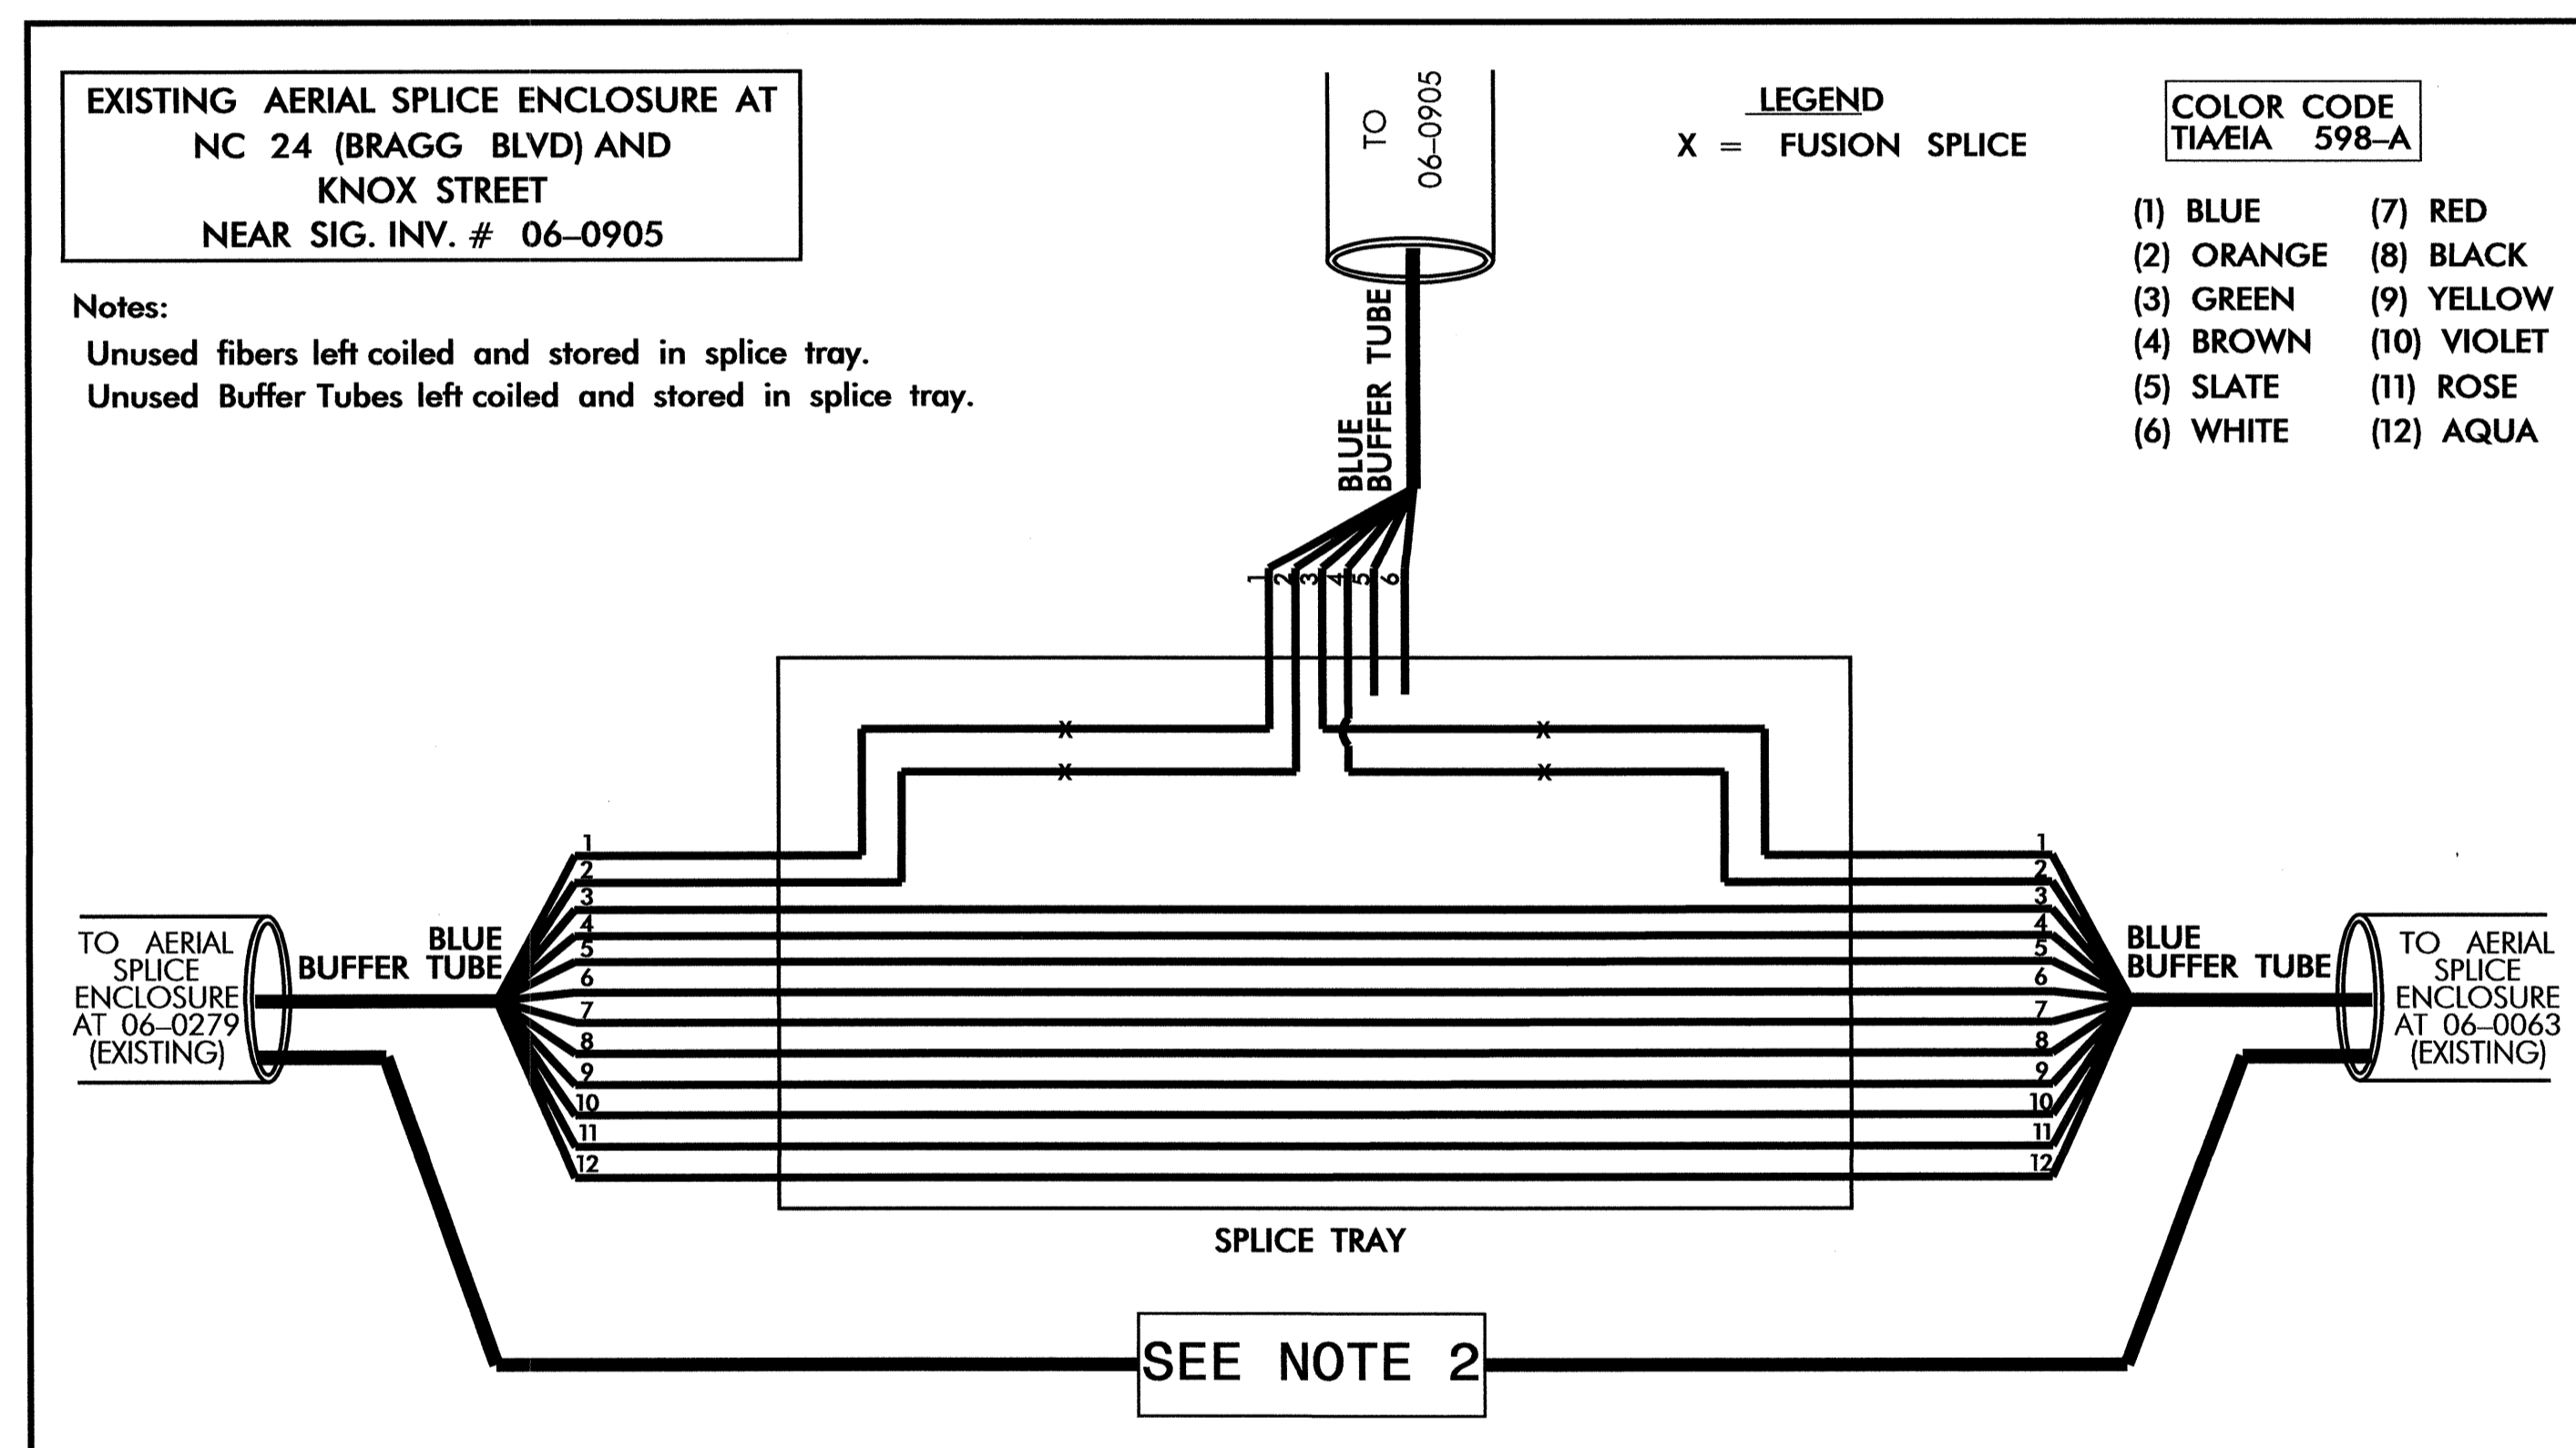

NOTES:

1. PROVIDE IFS MODEL D19130 SHR TRANSCEIVER OR AN APPROVED EQUIVALENT FOR COMPATIBILITY WITH FAYETTEVILLE SIGNAL SYSTEM.
2. REMAINING 84 FIBERS ARE PROPERTY OF PUBLIC WORKS COMMISSION (PWC) OF FAYETTEVILLE. DO NOT CUT. EXPRESS THROUGH.

TRANSCEIVER TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING \ ENSURING PROPER TERMINATIONS

Prepared in the Office of: 750 N. Greenfield Pkwy., Garner, NC 27529	SPLICE PLAN ALONG NC 24 (BRAGG BOULEVARD)		SEAL GREGORY A. FULLER ENGINEER CATEGORY A FULLER
	DIVISION 06 CUMBERLAND CO. FAYETTEVILLE		
	PLAN DATE: FEBRUARY 2009	REVIEWED BY: I.N. AVERY	
	PREPARED BY: S.C. WARDLE	REVIEWED BY: G.A. FULLER	
SCALE 	REVISIONS _____ _____ _____	INIT. DATE _____ _____	SIGNATURE DATE _____

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.


11-08

ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS

SHEET 1 OF 3
1725D01


SAW SLOT DEPTH CHART

DEPTH (IN)	NO. OF WIRE TURNS				
	2	3	4	5	6
CONCRETE	2.0	2.0	2.5	2.5	3.0
ASPHALT	2.0	2.5	3.0	3.0	3.0

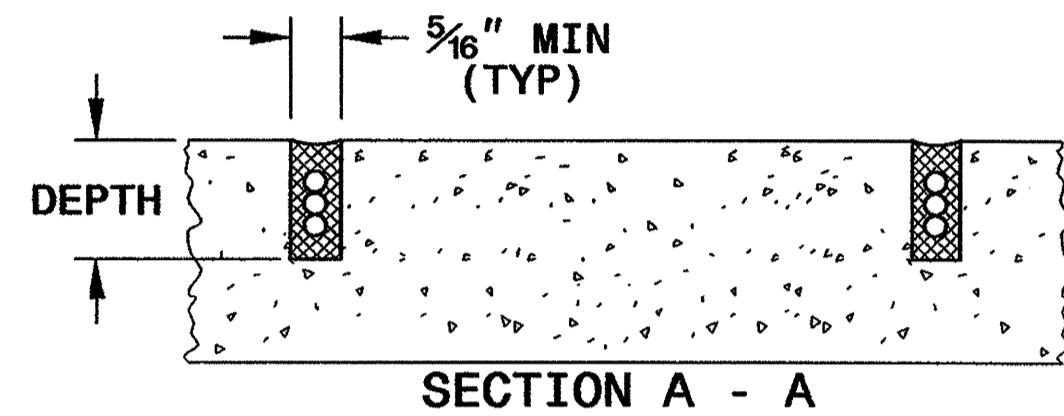


CONVENTIONAL 4-SIDED LOOP

SAW CUT OPTIONS

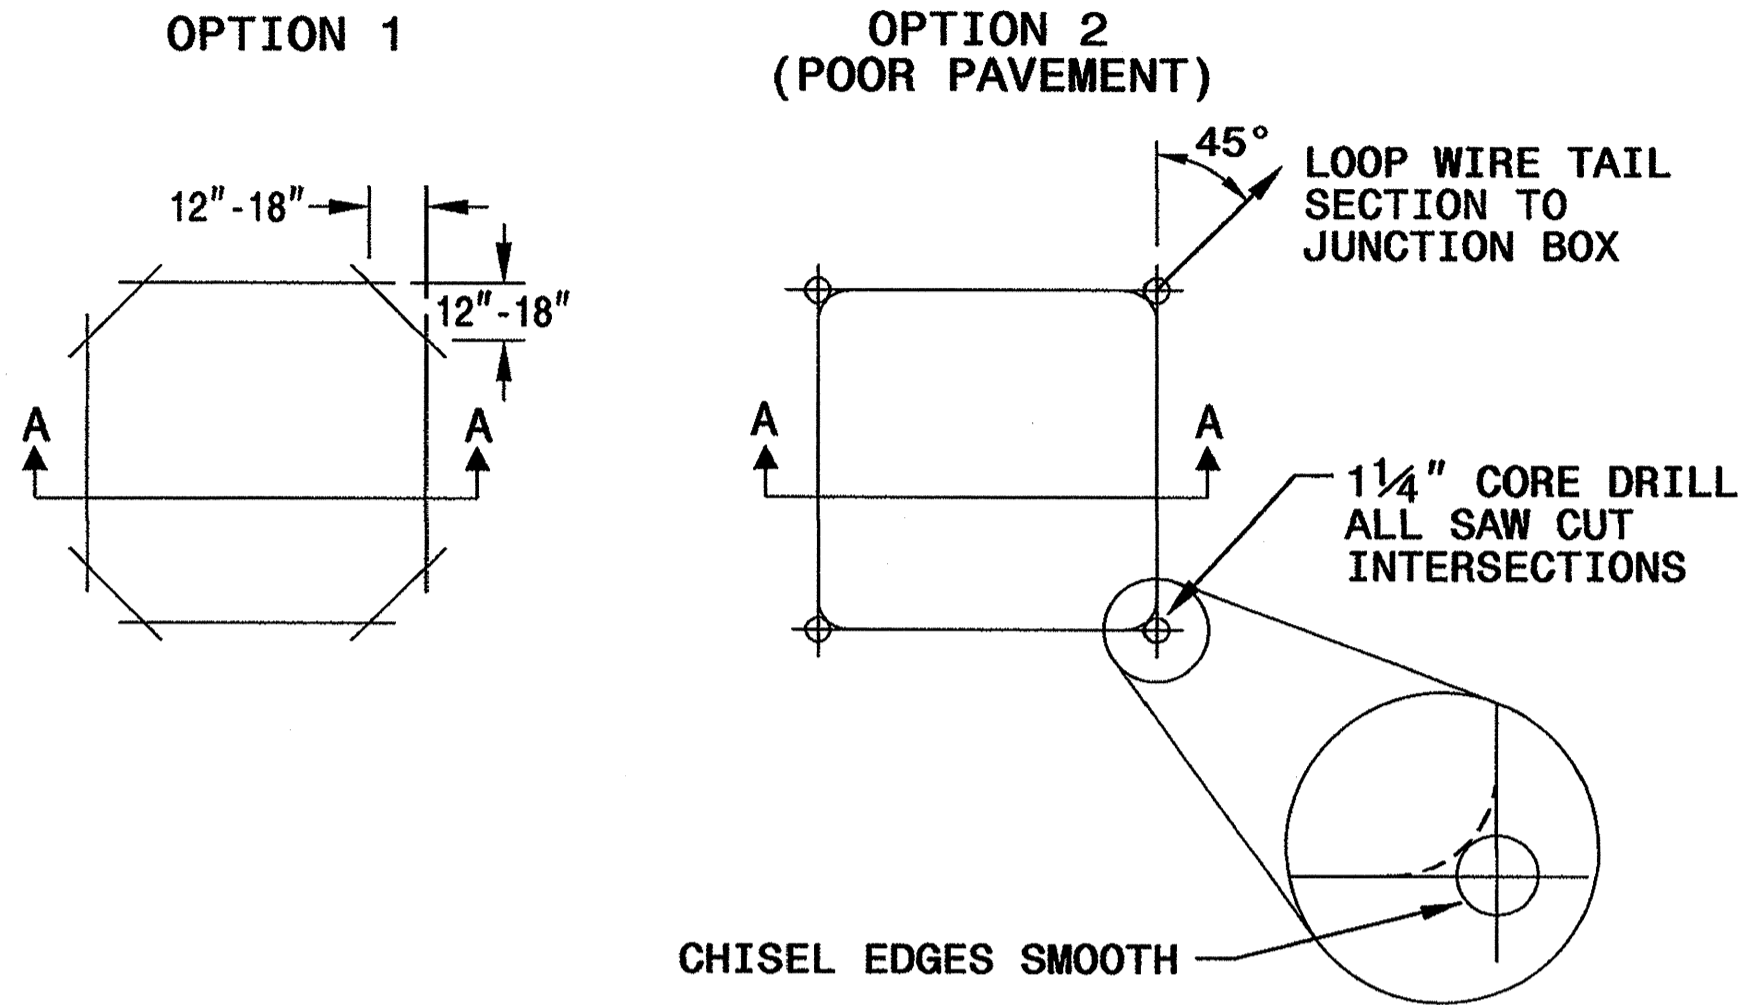

LOOP WINDING METHOD

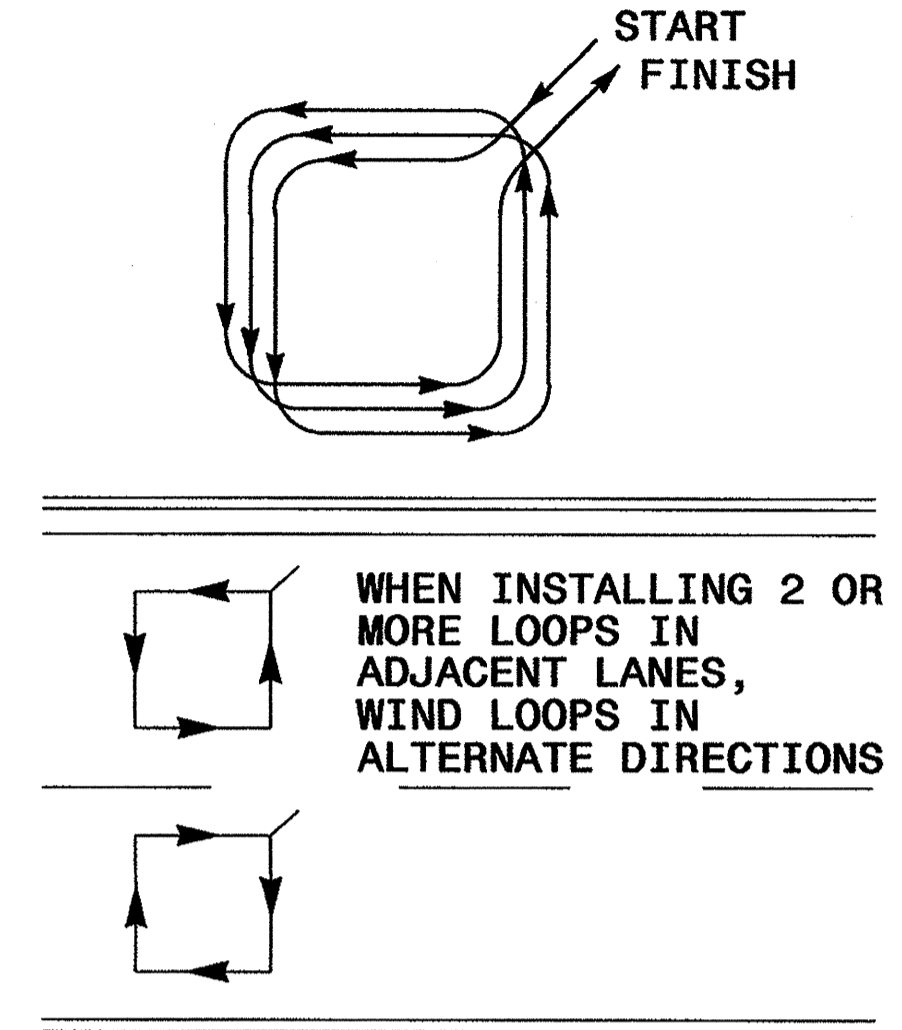

LOOP WIRE TWISTING METHOD

INCORRECT WAY TO TWIST WIRE



CORRECT WAY TO TWIST WIRE




NOTES


1. OVERLAP SAW CUTS AT CORNERS AND INTERSECTION POINTS TO ENSURE UNIFORM SAW SLOT DEPTH.
2. MAINTAIN 12" SPACING BETWEEN LOOP WIRE TAIL SECTIONS.
3. WIRE LOOPS CONNECTED TO THE SAME DETECTOR CHANNEL IN SERIES.
4. LOCATE LOOPS IN CENTER OF LANES UNLESS OTHERWISE SHOWN ON PLANS OR APPROVED BY ENGINEER.

QUADRUPOLE LOOP

SAW CUT OPTIONS

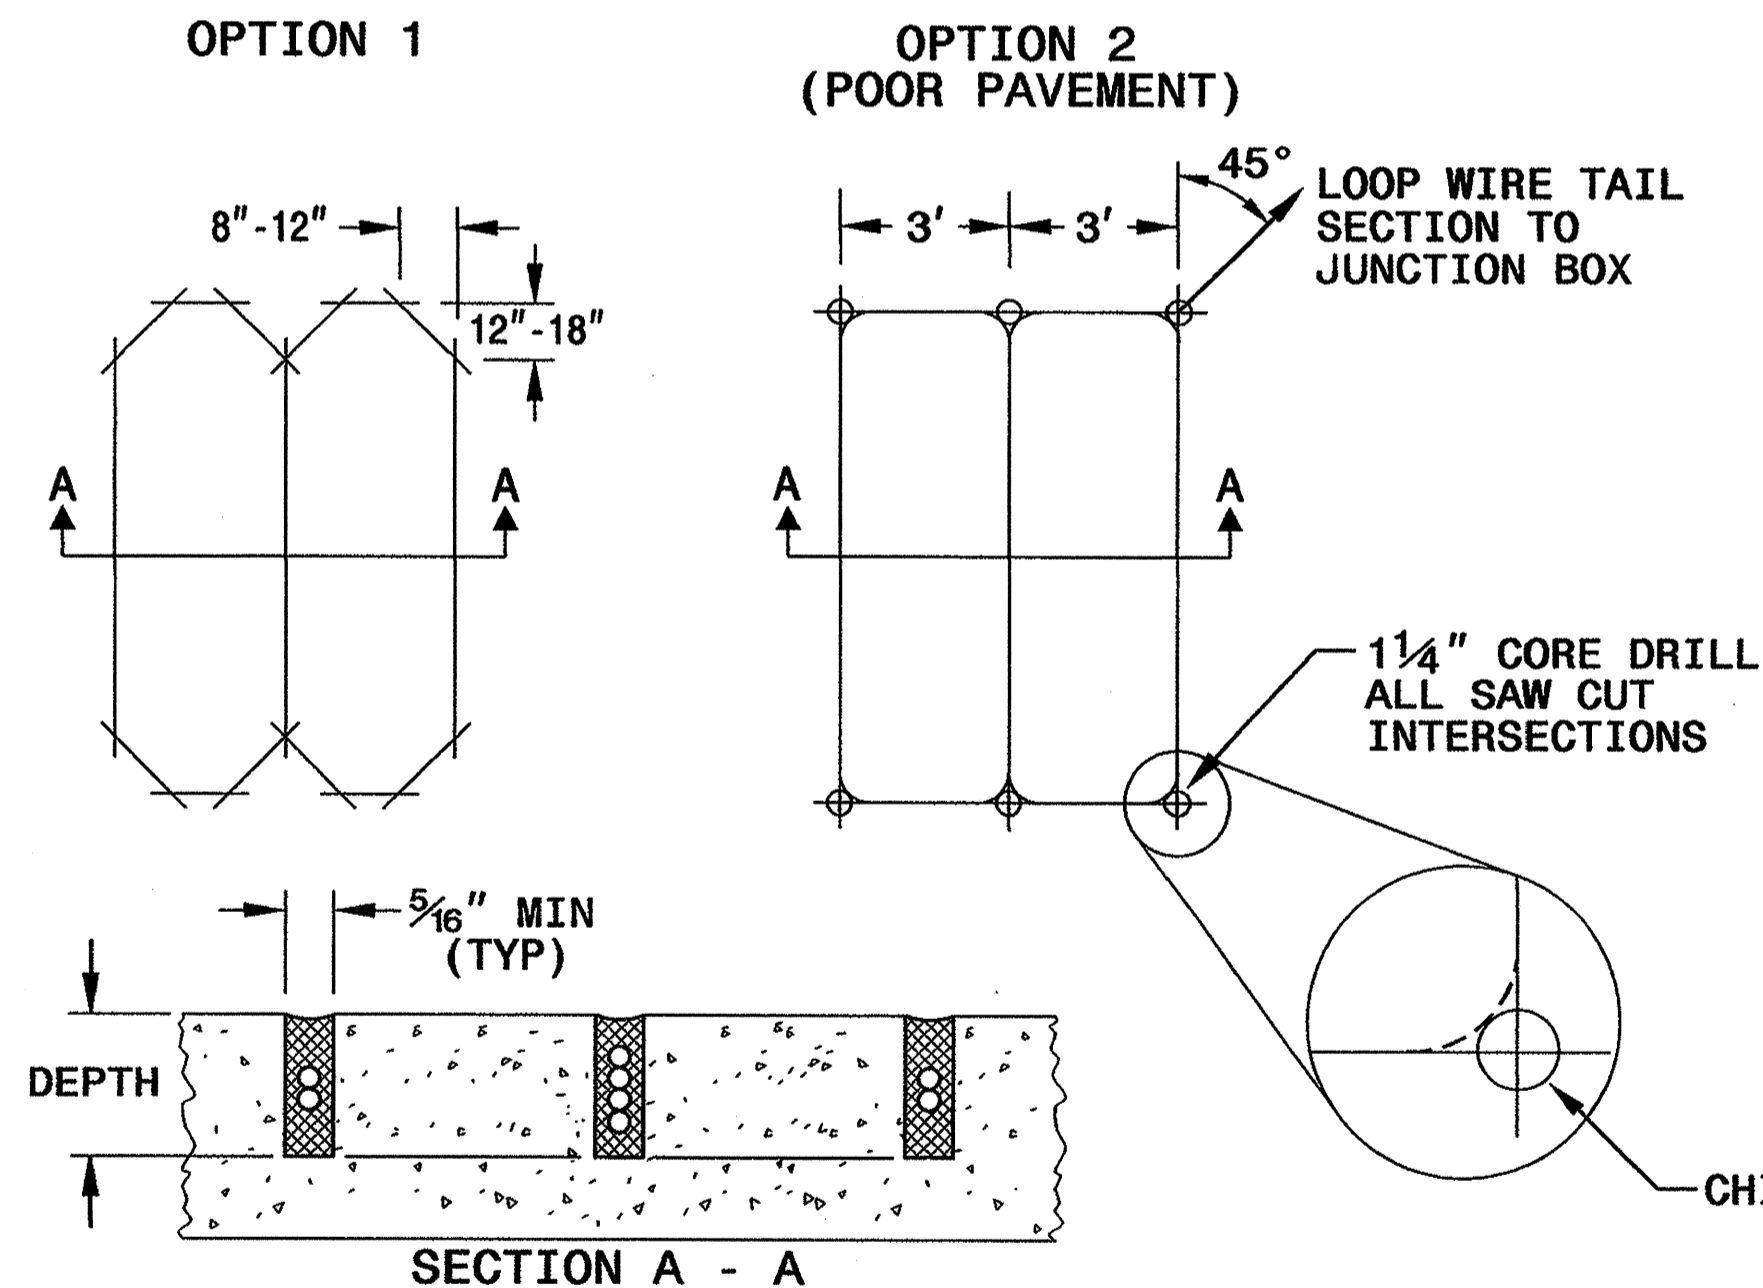

LOOP WINDING METHOD

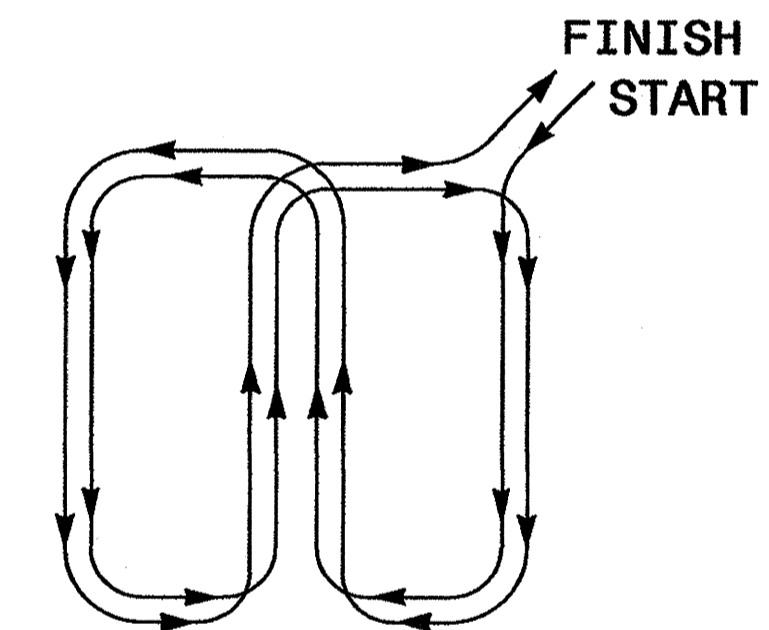

DEPTH IS 2.5" FOR CONCRETE AND 3.0" FOR ASPHALT

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

11-08

ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS

SHEET 1 OF 3
1725D01

See Plate for Title

Prepared in the Offices of:

750 N. Greenfield Parkway
Garner, NC 27529

SEAL

Milton I. Dean 11/24/08
SIGNATURE DATE

STATE OF NORTH CAROLINA
 DEPT. OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 RALEIGH, N.C.


11-08

ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS
 LOOP WIRE DETAILS


SHEET 2 OF 3
1725D01

LOOP WIRE SPLICE POINT DETAILS

LOOP WIRE AT JUNCTION BOX

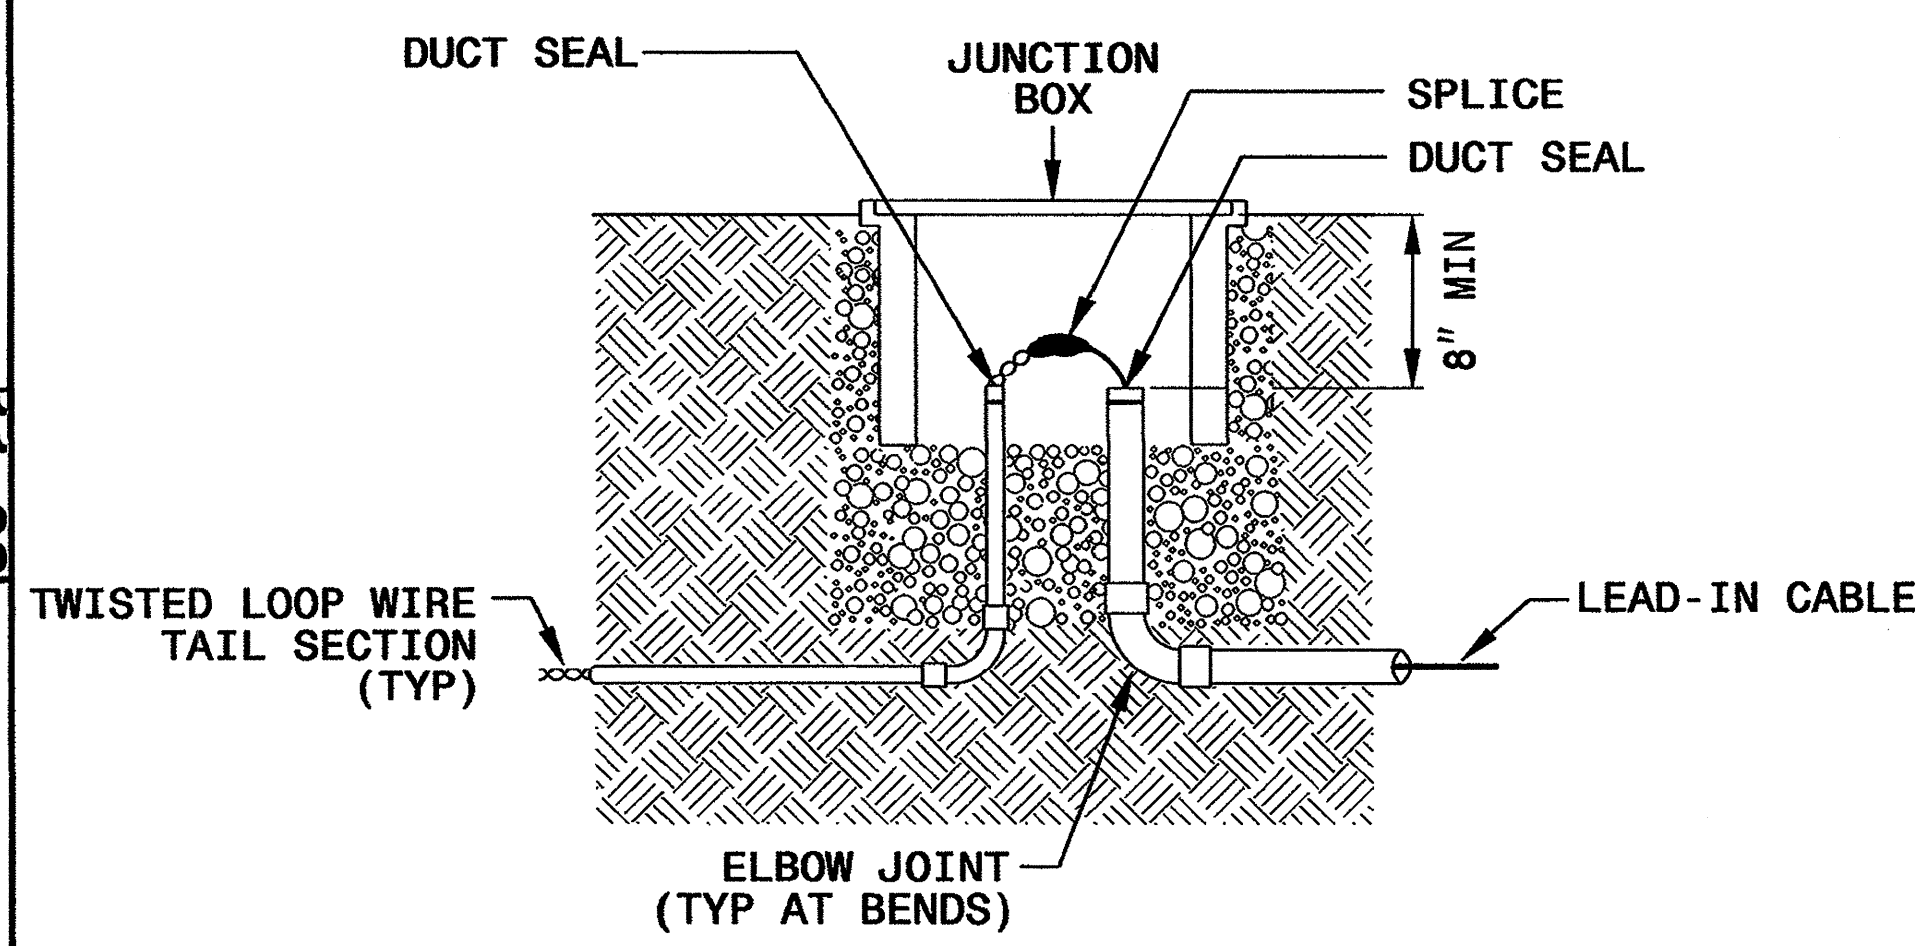

LOOP WIRE AT POLE

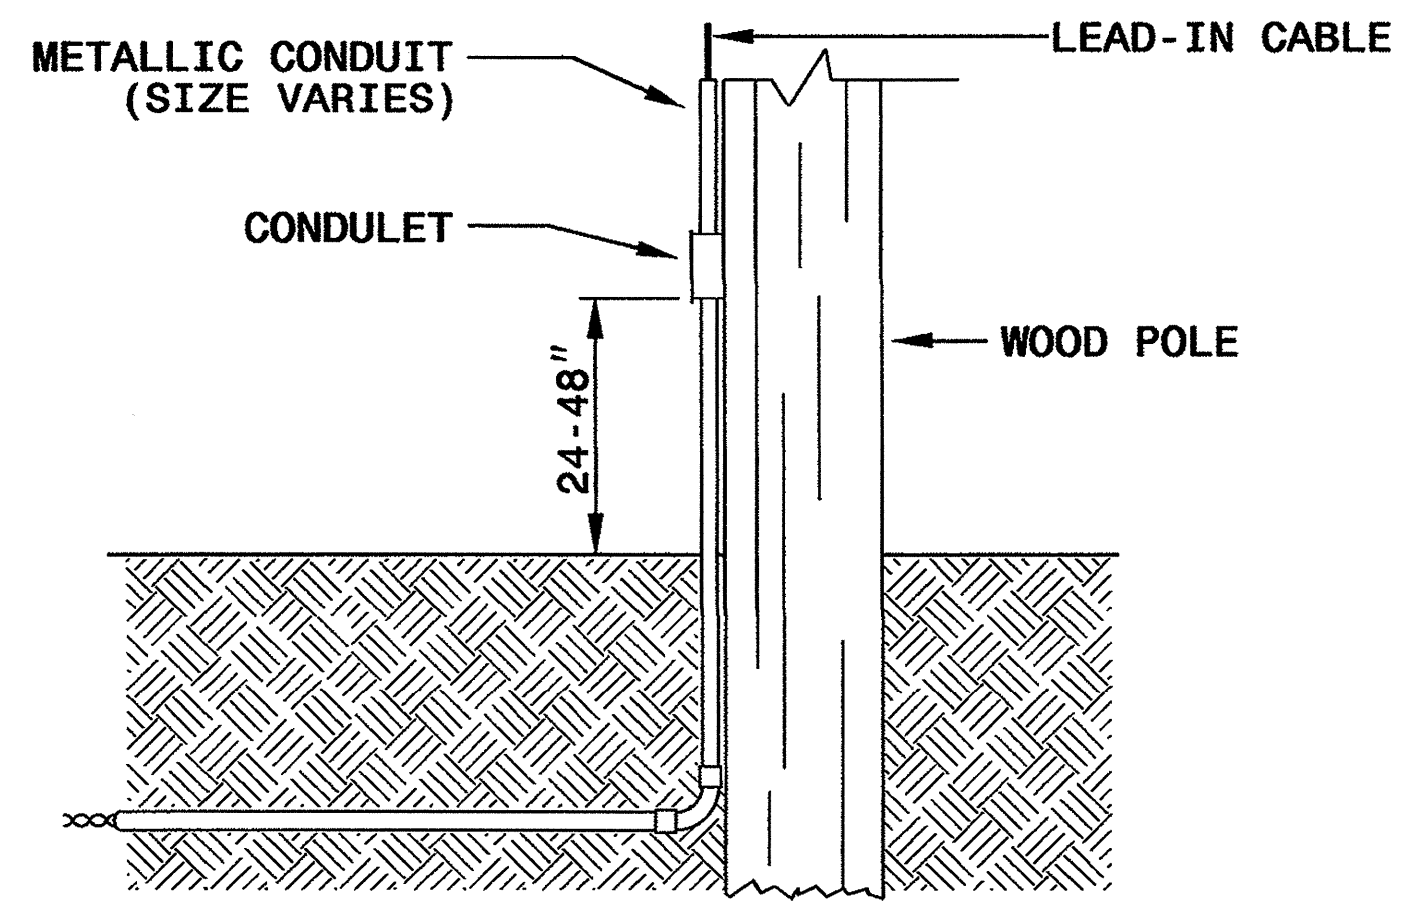


NOTE


SPLICE ALL LOOP WIRE TAIL SECTIONS/LEAD-IN CABLE IN JUNCTION BOXES OR APPROVED CONDULETS.

LOOP WIRE PAVEMENT EDGE DETAILS

LOOP WIRE AT CURB & GUTTER SECTION

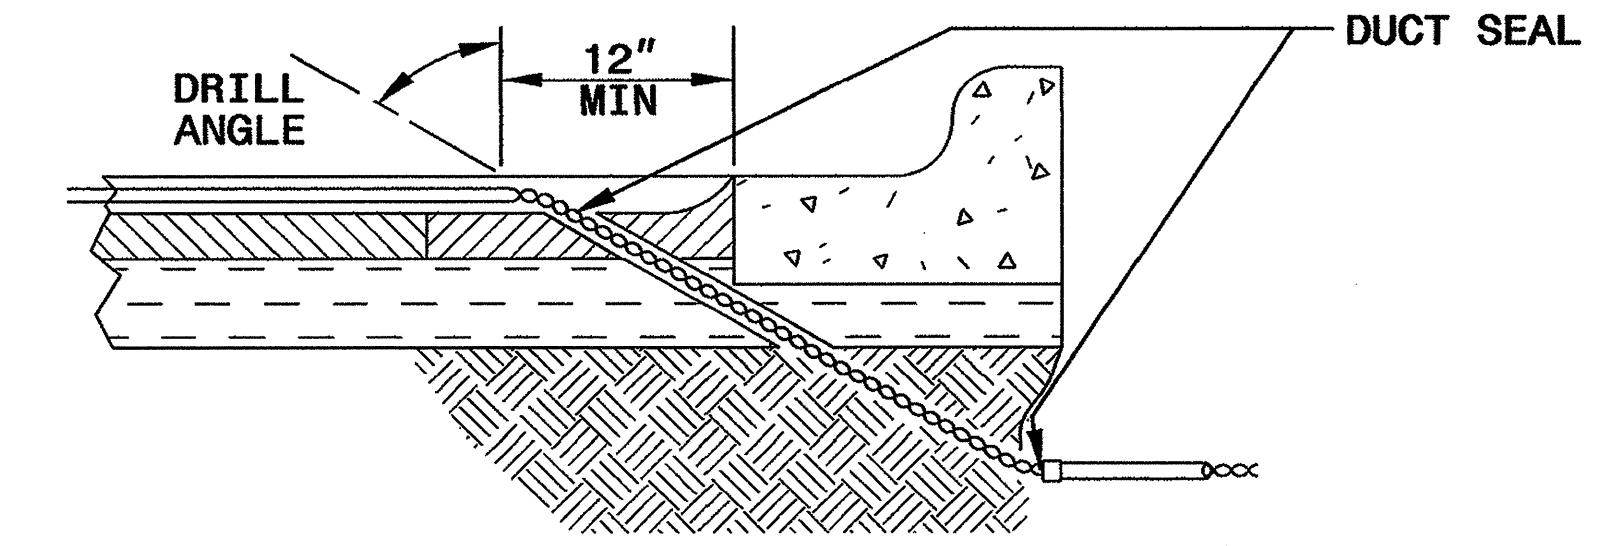

LOOP WIRE AT PAVEMENT SECTION

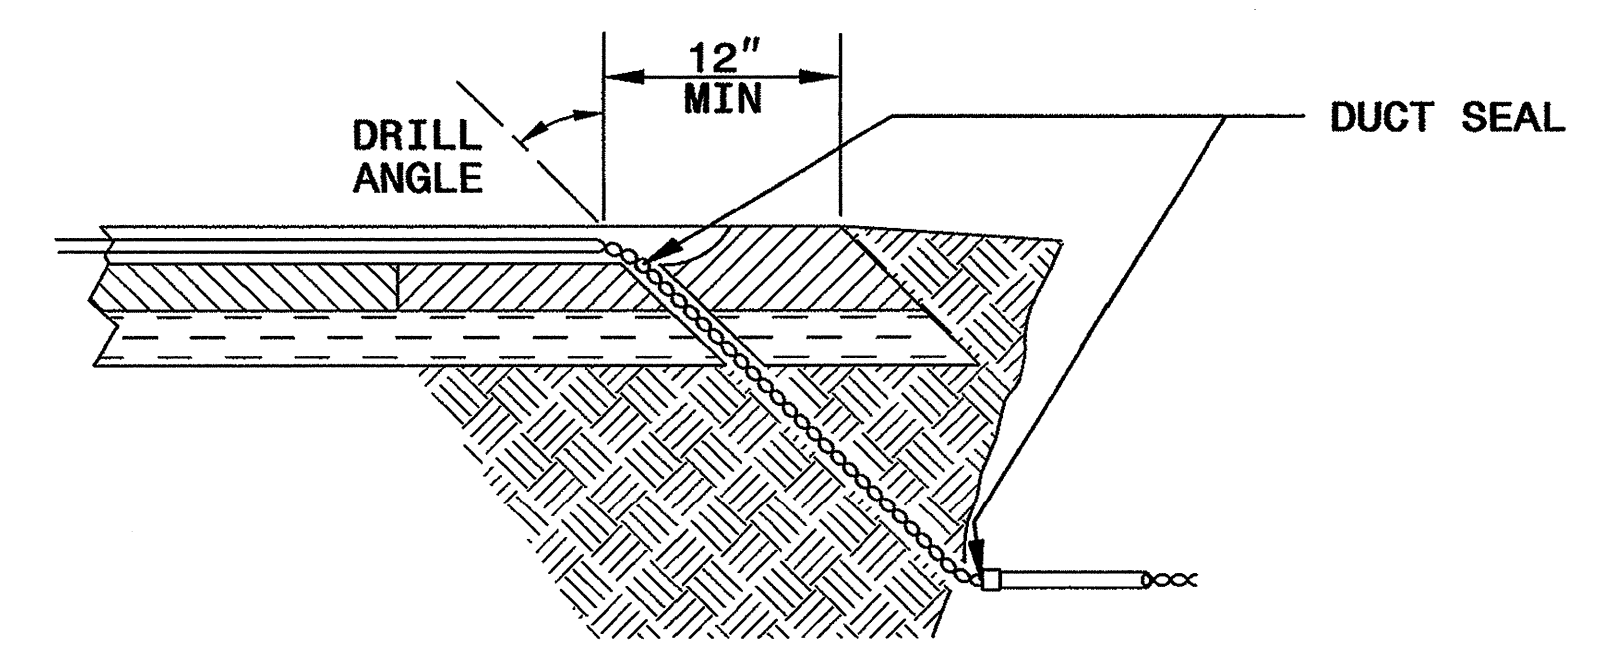

NOTES

- DO NOT EXCAVATE UNDER CURB AND GUTTER SECTIONS FOR CONDUIT INSTALLATION.
- TWIST LOOP WIRE TAIL SECTIONS FROM WHERE LOOP WIRE TAIL LEAVES SAW CUT TO JUNCTION BOX, INCLUDING THROUGH CONDUIT.
- BEFORE SEALING LOOPS, INSTALL DUCT SEAL WHERE LOOP WIRE TAIL SECTION LEAVES SAW CUT IN PAVEMENT AND AT ENTRANCE OF CONDUIT TO JUNCTION BOX.

STATE OF NORTH CAROLINA
 DEPT. OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 RALEIGH, N.C.

11-08

ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS
 LOOP WIRE DETAILS

SHEET 2 OF 3
1725D01

See Plate for Title

Prepared in the Offices of:

750 N. Greenfield Parkway
Garner, NC 27529

SEAL

Milton I. Dean 11/24/08
SIGNATURE DATE


24-Nov-2008 09:29
 d:\work_files\17250102_may2307.dgn
 zmlittle

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.


ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS
SPlicing FOR LEAD-IN CABLE AND LOOP WIRE

SHEET 3 OF 3
1725D01

STEP 1. STRIP LOOP WIRE AND LEAD-IN CABLE

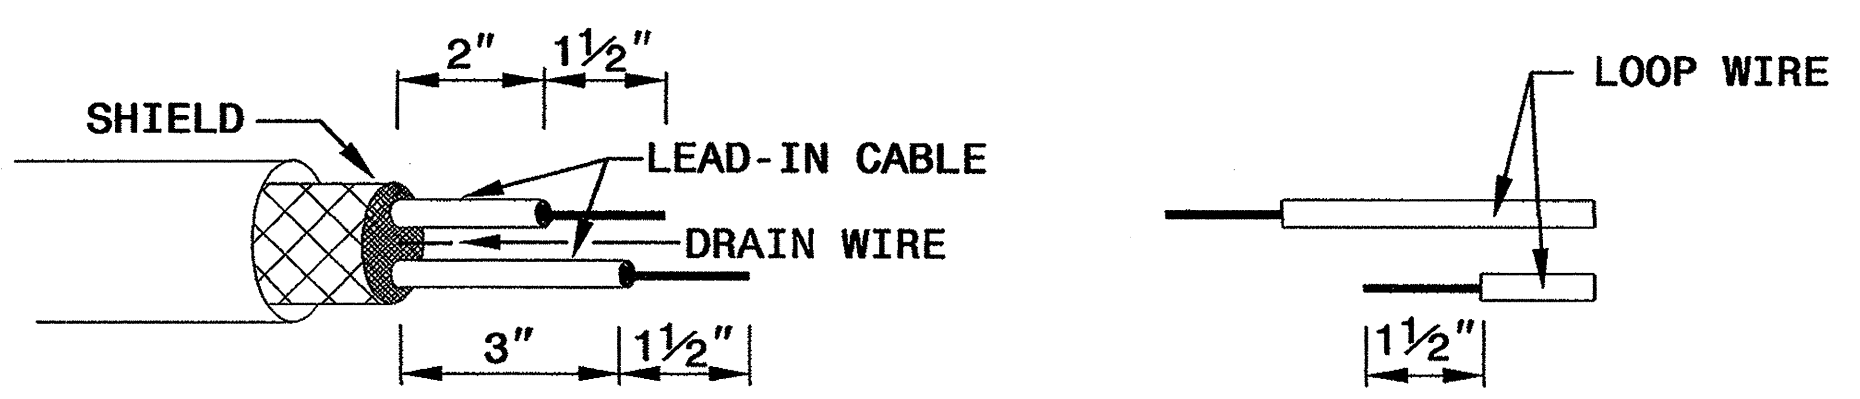


STEP 2. CONNECT AND SOLDER

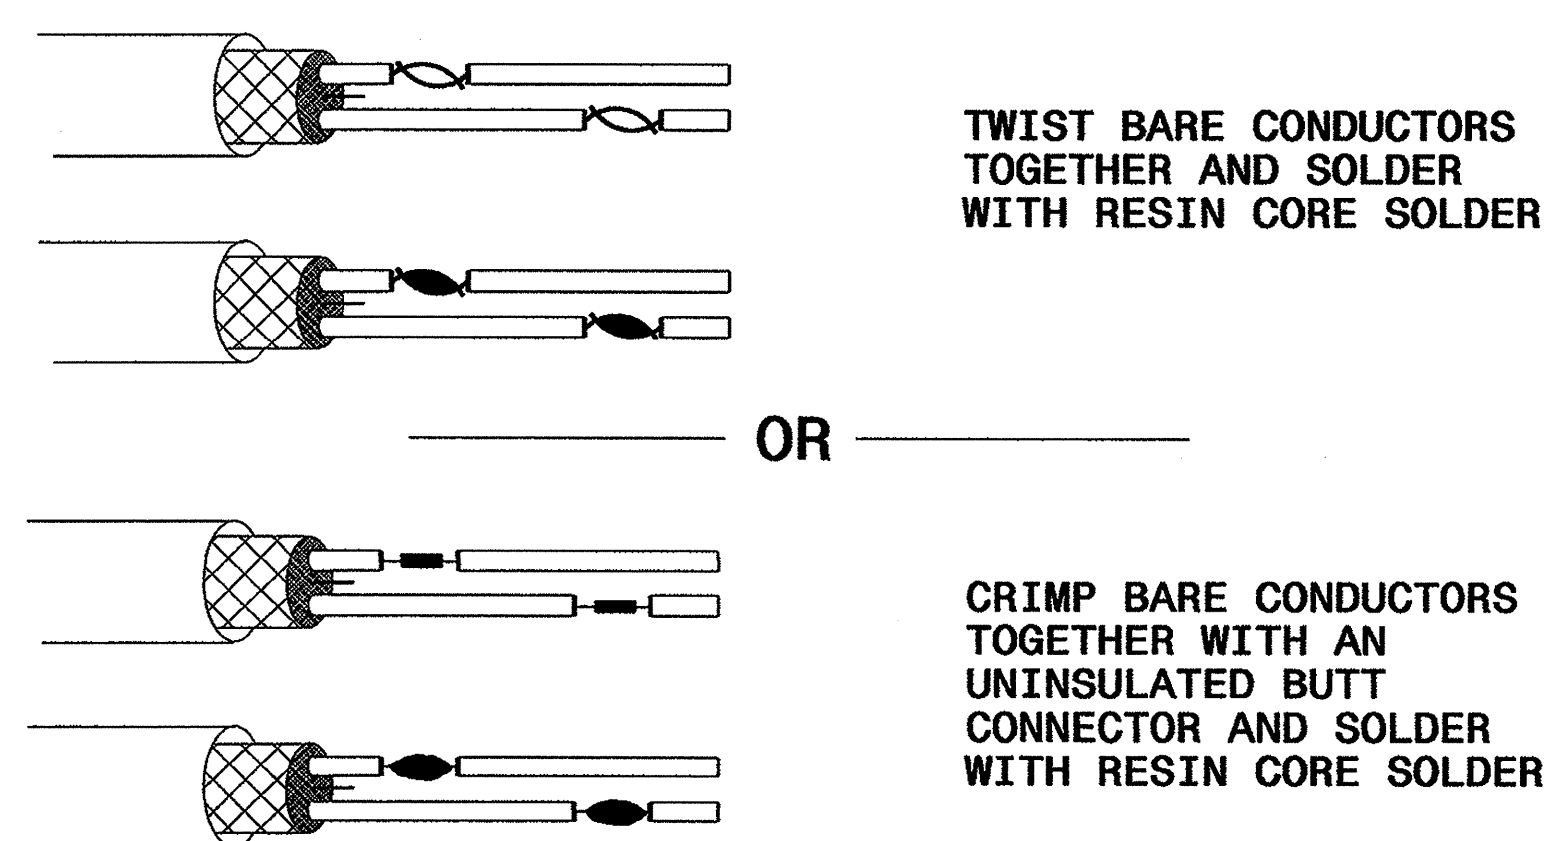


BOND SHIELD DRAIN WIRE AT SPLICE SECTIONS (DO NOT GROUND)


LOOP WIRE AND LEAD-IN CABLE CONNECTION DETAILS

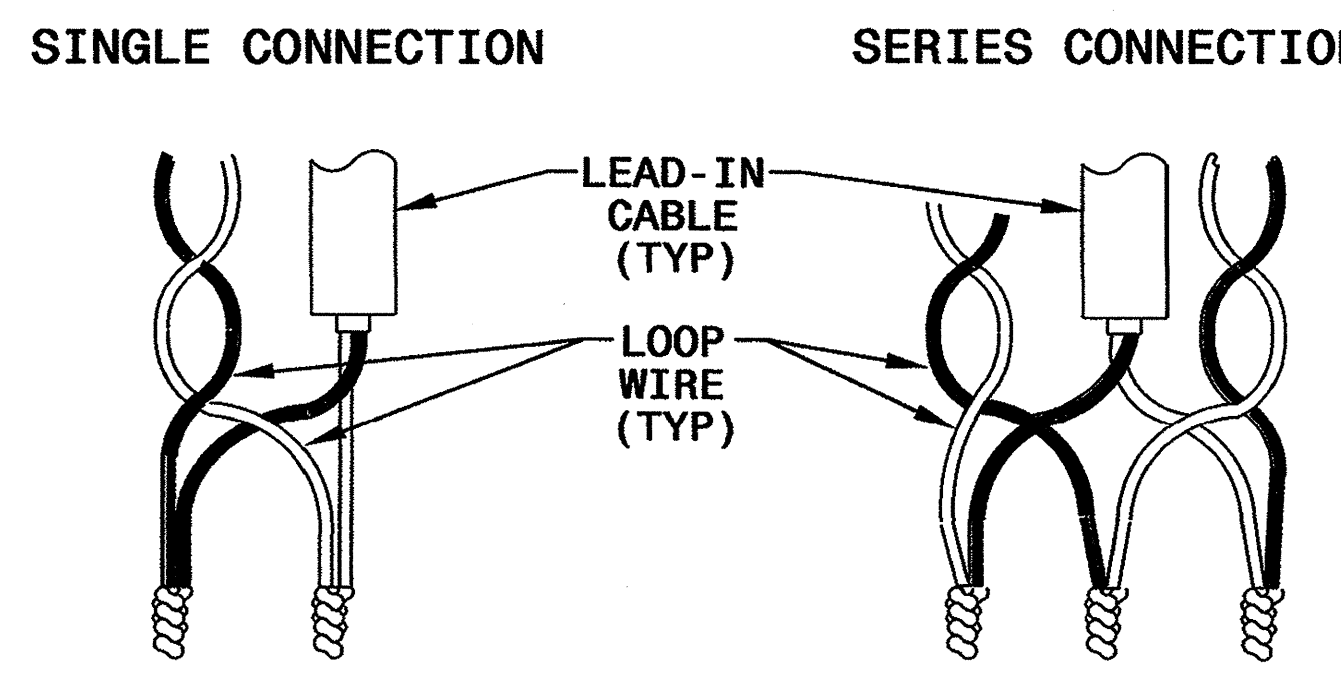

STEP 3. INSULATE EACH SOLDER JOINT SEPARATELY

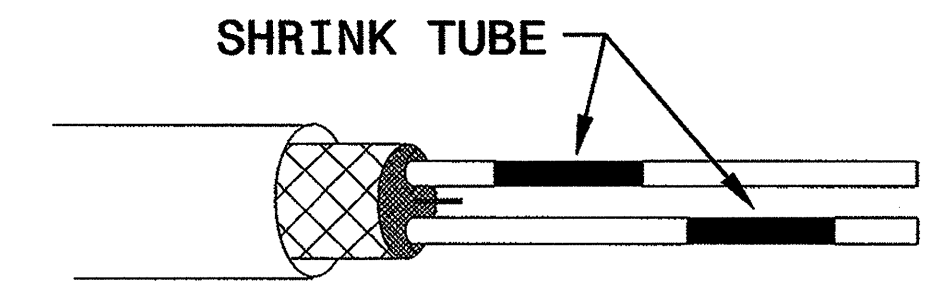

STEP 4. ENVIRONMENTALLY PROTECT SPLICE

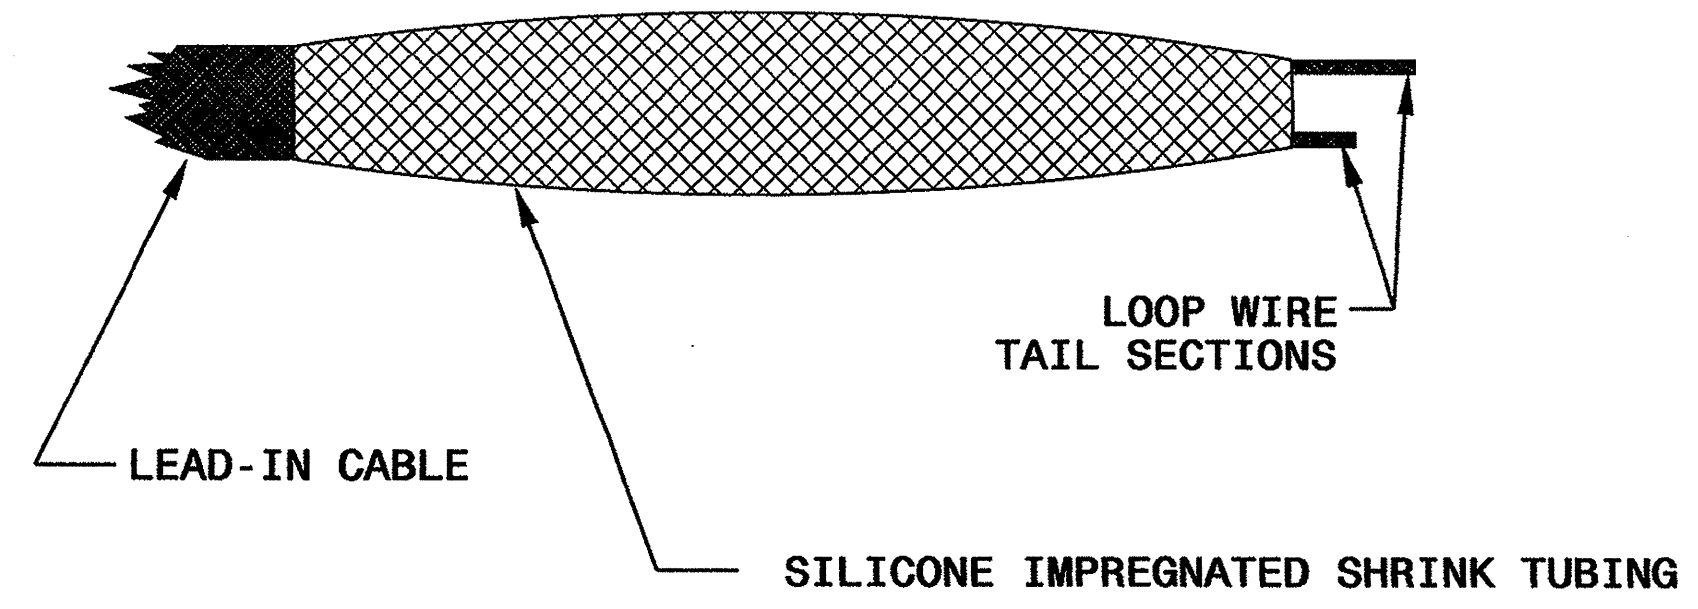

STATE OF NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
INDUCTIVE DETECTION LOOPS
SPlicing FOR LEAD-IN CABLE AND LOOP WIRE

SHEET 3 OF 3
1725D01

See Plate for Title

Prepared in the Offices of:

750 N. Greenfield Parkway
Garner, NC 27529

SEAL

Milton Dean 11/24/08
SIGNATURE DATE

24-Nov-08 09:35
dwg:1725D01.dwg
zmlittle