

NOTE: SEE SHEET 2A FOR PLAN SHEET LAYOUT AT TIME OF INVESTIGATION

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	R-2414B	1	146
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
34430.1.1	STP-158(2)	PE	
34430.2.5		ROW & UTILITIES	
34430.3.3		CONST.	

ALL DIMENSIONS IN THESE PLANS ARE IN METERS UNLESS OTHERWISE SHOWN

CONTENTS

PLAN SHEETS

LINE	STATION	PLAN	PROFILE
-L-	45+68 TO 93+92	4-17	19-32
-Y-	10+00 TO 11+35	4	33
-Y1-	10+00 TO 11+15	5	34
-Y2-	10+00 TO 11+15	5	35
-Y3-	10+00 TO 11+70	8,18	36
-Y4-	10+00 TO 11+63	8,18	37
-Y7-	10+00 TO 12+40	15	38
-Y8-	10+60 TO 12+40	17	39

ROADWAY
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 34430.1.1 (R-2414B) F.A. PROJ. STP-158(2)
COUNTY CAMDEN
PROJECT DESCRIPTION US 158-NC 34 FROM SOUTH OF SR 1257 TO EAST OF NC 34 IN BELCROSS

INVENTORY - REVISED

CROSS SECTION SHEETS

LINE	STATION	SHEET
-L-	45+80 TO 93+80	40-128
-Y-	10+00 TO 11+20	129-130
-Y1-	10+00 TO 11+00	131-132
-Y2-	10+00 TO 11+00	133-134
-Y3-	10+00 TO 11+60	135-137
-Y4-	10+00 TO 11+60	138-140
-Y7-	10+00 TO 12+00	141-143
-Y8-	11+20 TO 12+20	144-146


CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1919 250-4088. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

CONTRACT: C202760 ID: R-2414B

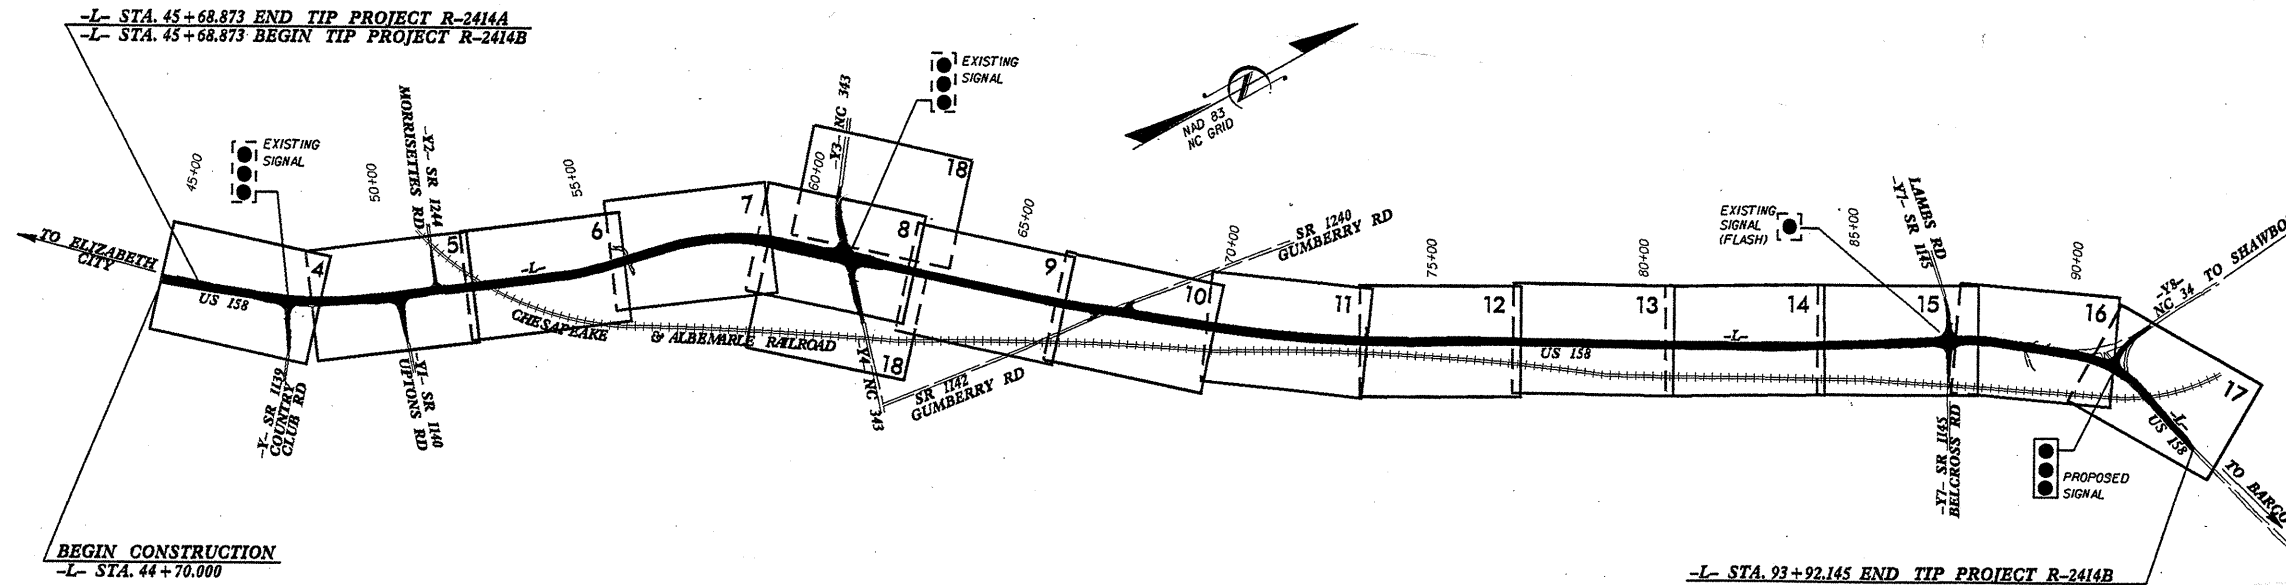


- PERSONNEL
- A. M. HARRIS
 - D. R. PRUIETT
 - R. E. SMITH
 - E. L. DANIELS
 - J. R. SWARTLEY
 - W. N. CHERRY

INVESTIGATED BY F. M. WESCOTT III
CHECKED BY D. N. ARGENBRIGHT
SUBMITTED BY D. N. ARGENBRIGHT
DATE JULY, 2008

DRAWN BY: C. P. TURNER, C.R. SUMNER

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IS IT CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

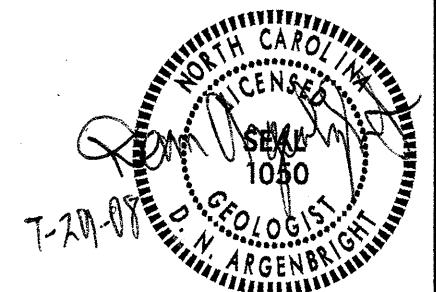





NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT



PROJECT REFERENCE NO. 34430.I.I (R-2414B) SHEET NO. 2 OF 146

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION		GRADATION		ROCK DESCRIPTION		TERMS AND DEFINITIONS																																																																																																																																																																																																																																																										
<p>SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER 30 CM ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE:</p> <p align="center"><i>VERY STIFF, GRN. SATY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i></p>		<p>WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.</p> <p align="center">ANGULARITY OF GRAINS</p> <p>THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.</p>		<p>HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 3 CM PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p> <p>WEATHERED ROCK (WR)  NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER 30 CM IF TESTED.</p> <p>CRYSTALLINE ROCK (CR)  FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.</p> <p>NON-CRYSTALLINE ROCK (NCR)  FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.</p> <p>COASTAL PLAIN SEDIMENTARY ROCK (CP)  COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.</p>		<p>ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. ADUIFIER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 10 CM DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N) OF A 63.5 KG HAMMER FALLING 0.76 M REQUIRED TO PRODUCE A PENETRATION OF 30 CM INTO SOIL WITH A 5 CM OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 3 CM PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 10 CM DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p>																																																																																																																																																																																																																																																										
<p align="center">SOIL LEGEND AND AASHTO CLASSIFICATION</p> <table border="1"> <thead> <tr> <th>GENERAL CLASS.</th> <th colspan="7">GRANULAR MATERIALS (< 35% PASSING #200)</th> <th colspan="7">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="3">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>A-1</th><th>A-1-b</th><th>A-3</th><th>A-2</th><th>A-2-4</th><th>A-2-5</th><th>A-2-6</th><th>A-2-7</th> <th>A-4</th><th>A-5</th><th>A-6</th><th>A-7</th> <th>A-1, A-2</th><th>A-3</th><th>A-4, A-5</th><th>A-6, A-7</th> <th></th><th></th><th></th> </tr> </thead> <tbody> <tr> <td>SYMBOL</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td> </tr> <tr> <td>% PASSING</td> <td>50 MX</td><td>30 MX</td><td>50 MX</td><td>50 MN</td><td>35 MX</td><td>35 MX</td><td>35 MX</td><td>35 MX</td> <td>35 MN</td><td>35 MN</td><td>35 MN</td><td>35 MN</td> <td>40 MX</td><td>40 MX</td><td>40 MX</td><td>40 MX</td> <td>40 MN</td><td>40 MN</td><td>40 MN</td> </tr> <tr> <td>LIQUID LIMIT</td> <td>6 MX</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td> </tr> <tr> <td>PLASTIC INDEX</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td> </tr> <tr> <td>GROUP INDEX</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td><td></td> <td></td><td></td><td></td> </tr> <tr> <td>USUAL TYPES OF MAJOR MATERIALS</td> <td colspan="3">FINE SAND</td><td colspan="4">SILTY OR CLAYEY GRAVEL AND SAND</td><td colspan="4">SILTY SILTS</td><td colspan="4">CLAYEY SILTS</td> <td colspan="3">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> <td colspan="3">HIGHLY ORGANIC SOILS</td> </tr> <tr> <td>GENERATING AS A SUBGRADE</td> <td colspan="7">EXCELLENT TO GOOD</td><td colspan="7">FAIR TO POOR</td><td colspan="3">FAIR TO POOR</td><td colspan="3">POOR</td><td colspan="3">UNSATURABLE</td> </tr> </tbody> </table> <p align="center">PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30</p>		GENERAL CLASS.	GRANULAR MATERIALS (< 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS			GROUP CLASS.	A-1	A-1-b	A-3	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7				SYMBOL																				% PASSING	50 MX	30 MX	50 MX	50 MN	35 MX	35 MX	35 MX	35 MX	35 MN	35 MN	35 MN	35 MN	40 MX	40 MX	40 MX	40 MX	40 MN	40 MN	40 MN	LIQUID LIMIT	6 MX																			PLASTIC INDEX																				GROUP INDEX																				USUAL TYPES OF MAJOR MATERIALS	FINE SAND			SILTY OR CLAYEY GRAVEL AND SAND				SILTY SILTS				CLAYEY SILTS				SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER			HIGHLY ORGANIC SOILS			GENERATING AS A SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR							FAIR TO POOR			POOR			UNSATURABLE			<p align="center">MINERALOGICAL COMPOSITION</p> <p>MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.</p> <p align="center">COMPRESSIBILITY</p> <table border="1"> <thead> <tr> <th></th> <th>SLIGHTLY COMPRESSIBLE</th> <th>MODERATELY COMPRESSIBLE</th> <th>HIGHLY COMPRESSIBLE</th> <th>LIQUID LIMIT LESS THAN 31</th> <th>LIQUID LIMIT EQUAL TO 31-50</th> <th>LIQUID LIMIT GREATER THAN 50</th> </tr> </thead> <tbody> <tr> <td>ORGANIC MATERIAL</td> <td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td><td>3 - 5%</td><td></td><td></td><td></td><td></td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td><td>5 - 12%</td><td></td><td></td><td></td><td></td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td><td>12 - 20%</td><td></td><td></td><td></td><td></td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>>10%</td><td>>20%</td><td></td><td></td><td></td><td></td> </tr> </tbody> </table> <p align="center">PERCENTAGE OF MATERIAL</p> <table border="1"> <thead> <tr> <th></th> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> </thead> <tbody> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td><td></td><td>3 - 5%</td><td>TRACE</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td><td></td><td>5 - 12%</td><td>LITTLE</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td><td></td><td>12 - 20%</td><td>SOME</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>>10%</td><td></td><td>>20%</td><td>HIGHLY</td> </tr> </tbody> </table> <p align="center">GROUND WATER</p> <p> WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING</p> <p> STATIC WATER LEVEL AFTER 24 HOURS</p> <p> PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA</p> <p> SPRING OR SEEP</p>			SLIGHTLY COMPRESSIBLE	MODERATELY COMPRESSIBLE	HIGHLY COMPRESSIBLE	LIQUID LIMIT LESS THAN 31	LIQUID LIMIT EQUAL TO 31-50	LIQUID LIMIT GREATER THAN 50	ORGANIC MATERIAL							TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%					LITTLE ORGANIC MATTER	3 - 5%	5 - 12%					MODERATELY ORGANIC	5 - 10%	12 - 20%					HIGHLY ORGANIC	>10%	>20%						ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%		3 - 5%	TRACE	LITTLE ORGANIC MATTER	3 - 5%		5 - 12%	LITTLE	MODERATELY ORGANIC	5 - 10%		12 - 20%	SOME	HIGHLY ORGANIC	>10%		>20%	HIGHLY	<p align="center">WEATHERING</p> <p>FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE.</p> <p>VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.</p> <p>SLIGHT (SL.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.</p> <p>MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.</p> <p>MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL.</i></p> <p>SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, YIELDS SPT N VALUES > 100 BLOWS PER 30 CM.</i></p> <p>VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, YIELDS SPT N VALUES < 100 BLOWS PER 30 CM.</i></p> <p>COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.</p>	
GENERAL CLASS.	GRANULAR MATERIALS (< 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS																																																																																																																																																																																																																																																	
GROUP CLASS.	A-1	A-1-b	A-3	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7																																																																																																																																																																																																																																																
SYMBOL																																																																																																																																																																																																																																																																
% PASSING	50 MX	30 MX	50 MX	50 MN	35 MX	35 MX	35 MX	35 MX	35 MN	35 MN	35 MN	35 MN	40 MX	40 MX	40 MX	40 MX	40 MN	40 MN	40 MN																																																																																																																																																																																																																																													
LIQUID LIMIT	6 MX																																																																																																																																																																																																																																																															
PLASTIC INDEX																																																																																																																																																																																																																																																																
GROUP INDEX																																																																																																																																																																																																																																																																
USUAL TYPES OF MAJOR MATERIALS	FINE SAND			SILTY OR CLAYEY GRAVEL AND SAND				SILTY SILTS				CLAYEY SILTS				SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER			HIGHLY ORGANIC SOILS																																																																																																																																																																																																																																													
GENERATING AS A SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR							FAIR TO POOR			POOR			UNSATURABLE																																																																																																																																																																																																																																											
	SLIGHTLY COMPRESSIBLE	MODERATELY COMPRESSIBLE	HIGHLY COMPRESSIBLE	LIQUID LIMIT LESS THAN 31	LIQUID LIMIT EQUAL TO 31-50	LIQUID LIMIT GREATER THAN 50																																																																																																																																																																																																																																																										
ORGANIC MATERIAL																																																																																																																																																																																																																																																																
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%																																																																																																																																																																																																																																																														
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%																																																																																																																																																																																																																																																														
MODERATELY ORGANIC	5 - 10%	12 - 20%																																																																																																																																																																																																																																																														
HIGHLY ORGANIC	>10%	>20%																																																																																																																																																																																																																																																														
	ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																																																																																																																																																												
TRACE OF ORGANIC MATTER	2 - 3%		3 - 5%	TRACE																																																																																																																																																																																																																																																												
LITTLE ORGANIC MATTER	3 - 5%		5 - 12%	LITTLE																																																																																																																																																																																																																																																												
MODERATELY ORGANIC	5 - 10%		12 - 20%	SOME																																																																																																																																																																																																																																																												
HIGHLY ORGANIC	>10%		>20%	HIGHLY																																																																																																																																																																																																																																																												
<p align="center">CONSISTENCY OR DENSENESS</p> <table border="1"> <thead> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (KN/M²)</th> </tr> </thead> <tbody> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td><4 4 TO 10 10 TO 30 30 TO 50 >50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td><2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30</td> <td><25 25 TO 50 50 TO 100 100 TO 200 200 TO 400 >400</td> </tr> </tbody> </table>		PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (KN/M ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<25 25 TO 50 50 TO 100 100 TO 200 200 TO 400 >400	<p align="center">MISCELLANEOUS SYMBOLS</p> <table border="1"> <tbody> <tr> <td></td> <td>ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</td> <td></td> <td>SPT TEST BORING</td> <td></td> <td>SAMPLE DESIGNATIONS</td> </tr> <tr> <td></td> <td>SOIL SYMBOL</td> <td></td> <td>AUGER BORING</td> <td></td> <td>S - BULK SAMPLE</td> </tr> <tr> <td></td> <td>ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</td> <td></td> <td>CORE BORING</td> <td></td> <td>SS - SPLIT SPOON SAMPLE</td> </tr> <tr> <td></td> <td>INFERRED SOIL BOUNDARY</td> <td></td> <td>MONITORING WELL</td> <td></td> <td>ST - SHELBY TUBE SAMPLE</td> </tr> <tr> <td></td> <td>INFERRED ROCK LINE</td> <td></td> <td>PIEZOMETER INSTALLATION</td> <td></td> <td>RS - ROCK SAMPLE</td> </tr> <tr> <td></td> <td>ALLUVIAL SOIL BOUNDARY</td> <td></td> <td>SLOPE INDICATOR INSTALLATION</td> <td></td> <td>RT - RECOMPACTED TRIAXIAL SAMPLE</td> </tr> <tr> <td></td> <td>DIP & DIP DIRECTION OF ROCK STRUCTURES</td> <td></td> <td>CBR - CALIFORNIA BEARING RATIO SAMPLE</td> <td></td> <td></td> </tr> <tr> <td></td> <td>SOUNDING ROD</td> <td></td> <td>SPT N-VALUE</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>SPT REFUSAL</td> <td></td> <td></td> </tr> </tbody> </table>			ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		SPT TEST BORING		SAMPLE DESIGNATIONS		SOIL SYMBOL		AUGER BORING		S - BULK SAMPLE		ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		CORE BORING		SS - SPLIT SPOON SAMPLE		INFERRED SOIL BOUNDARY		MONITORING WELL		ST - SHELBY TUBE SAMPLE		INFERRED ROCK LINE		PIEZOMETER INSTALLATION		RS - ROCK SAMPLE		ALLUVIAL SOIL BOUNDARY		SLOPE INDICATOR INSTALLATION		RT - RECOMPACTED TRIAXIAL SAMPLE		DIP & DIP DIRECTION OF ROCK STRUCTURES		CBR - CALIFORNIA BEARING RATIO SAMPLE				SOUNDING ROD		SPT N-VALUE						SPT REFUSAL																																																																																																																																																																																													
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (KN/M ²)																																																																																																																																																																																																																																																													
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A																																																																																																																																																																																																																																																													
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<25 25 TO 50 50 TO 100 100 TO 200 200 TO 400 >400																																																																																																																																																																																																																																																													
	ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		SPT TEST BORING		SAMPLE DESIGNATIONS																																																																																																																																																																																																																																																											
	SOIL SYMBOL		AUGER BORING		S - BULK SAMPLE																																																																																																																																																																																																																																																											
	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		CORE BORING		SS - SPLIT SPOON SAMPLE																																																																																																																																																																																																																																																											
	INFERRED SOIL BOUNDARY		MONITORING WELL		ST - SHELBY TUBE SAMPLE																																																																																																																																																																																																																																																											
	INFERRED ROCK LINE		PIEZOMETER INSTALLATION		RS - ROCK SAMPLE																																																																																																																																																																																																																																																											
	ALLUVIAL SOIL BOUNDARY		SLOPE INDICATOR INSTALLATION		RT - RECOMPACTED TRIAXIAL SAMPLE																																																																																																																																																																																																																																																											
	DIP & DIP DIRECTION OF ROCK STRUCTURES		CBR - CALIFORNIA BEARING RATIO SAMPLE																																																																																																																																																																																																																																																													
	SOUNDING ROD		SPT N-VALUE																																																																																																																																																																																																																																																													
			SPT REFUSAL																																																																																																																																																																																																																																																													
<p align="center">TEXTURE OR GRAIN SIZE</p> <table border="1"> <thead> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th><th>10</th><th>60</th><th>200</th><th>270</th> </tr> </thead> <tbody> <tr> <td></td> <td>4.76</td><td>2.00</td><td>0.42</td><td>0.25</td><td>0.075</td><td>0.053</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> </thead> <tbody> <tr> <td>GRAIN SIZE MM</td> <td>305</td><td>75</td><td>2.0</td><td>0.25</td><td>0.05</td><td>0.005</td> </tr> <tr> <td>IN.</td> <td>12</td><td>3</td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>		U.S. STD. SIEVE SIZE OPENING (MM)	4	10	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE MM	305	75	2.0	0.25	0.05	0.005	IN.	12	3					<p align="center">ABBREVIATIONS</p> <table border="1"> <tbody> <tr> <td>AR - AUGER REFUSAL</td> <td>HI. - HIGHLY</td> <td>W - MOISTURE CONTENT</td> </tr> <tr> <td>BT - BORING TERMINATED</td> <td>MED. - MEDIUM</td> <td>V - VERY</td> </tr> <tr> <td>CL. - CLAY</td> <td>MICA. - MICACEOUS</td> <td>VST - VANE SHEAR TEST</td> </tr> <tr> <td>CPT - CONE PENETRATION TEST</td> <td>MOD. - MODERATELY</td> <td>WEA. - WEATHERED</td> </tr> <tr> <td>CSE. - COARSE</td> <td>NP - NON PLASTIC</td> <td>U - UNIT WEIGHT</td> </tr> <tr> <td>DMT - DILATOMETER TEST</td> <td>ORG. - ORGANIC</td> <td>W - DRY UNIT WEIGHT</td> </tr> <tr> <td>DPT - DYNAMIC PENETRATION TEST</td> <td>PMT - PRESSUREMETER TEST</td> <td></td> </tr> <tr> <td>Ø - VOID RATIO</td> <td>SAP. - SAPROLITIC</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>SD. - SAND, SANDY</td> <td></td> </tr> <tr> <td>FOSS. - FOSSILIFEROUS</td> <td>SL. - SILT, SILTY</td> <td></td> </tr> <tr> <td>FRAC. - FRACTURED, FRACTURES</td> <td>SLI. - SLIGHTLY</td> <td></td> </tr> <tr> <td>FRAGS. - FRAGMENTS</td> <td>TCR - TRICONE REFUSAL</td> <td></td> </tr> </tbody> </table>		AR - AUGER REFUSAL	HI. - HIGHLY	W - MOISTURE CONTENT	BT - BORING TERMINATED	MED. - MEDIUM	V - VERY	CL. - CLAY	MICA. - MICACEOUS	VST - VANE SHEAR TEST	CPT - CONE PENETRATION TEST	MOD. - MODERATELY	WEA. - WEATHERED	CSE. - COARSE	NP - NON PLASTIC	U - UNIT WEIGHT	DMT - DILATOMETER TEST	ORG. - ORGANIC	W - DRY UNIT WEIGHT	DPT - DYNAMIC PENETRATION TEST	PMT - PRESSUREMETER TEST		Ø - VOID RATIO	SAP. - SAPROLITIC		F - FINE	SD. - SAND, SANDY		FOSS. - FOSSILIFEROUS	SL. - SILT, SILTY		FRAC. - FRACTURED, FRACTURES	SLI. - SLIGHTLY		FRAGS. - FRAGMENTS	TCR - TRICONE REFUSAL																																																																																																																																																																																								
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	60	200	270																																																																																																																																																																																																																																																											
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																																																																																																										
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																																																																																																										
GRAIN SIZE MM	305	75	2.0	0.25	0.05	0.005																																																																																																																																																																																																																																																										
IN.	12	3																																																																																																																																																																																																																																																														
AR - AUGER REFUSAL	HI. - HIGHLY	W - MOISTURE CONTENT																																																																																																																																																																																																																																																														
BT - BORING TERMINATED	MED. - MEDIUM	V - VERY																																																																																																																																																																																																																																																														
CL. - CLAY	MICA. - MICACEOUS	VST - VANE SHEAR TEST																																																																																																																																																																																																																																																														
CPT - CONE PENETRATION TEST	MOD. - MODERATELY	WEA. - WEATHERED																																																																																																																																																																																																																																																														
CSE. - COARSE	NP - NON PLASTIC	U - UNIT WEIGHT																																																																																																																																																																																																																																																														
DMT - DILATOMETER TEST	ORG. - ORGANIC	W - DRY UNIT WEIGHT																																																																																																																																																																																																																																																														
DPT - DYNAMIC PENETRATION TEST	PMT - PRESSUREMETER TEST																																																																																																																																																																																																																																																															
Ø - VOID RATIO	SAP. - SAPROLITIC																																																																																																																																																																																																																																																															
F - FINE	SD. - SAND, SANDY																																																																																																																																																																																																																																																															
FOSS. - FOSSILIFEROUS	SL. - SILT, SILTY																																																																																																																																																																																																																																																															
FRAC. - FRACTURED, FRACTURES	SLI. - SLIGHTLY																																																																																																																																																																																																																																																															
FRAGS. - FRAGMENTS	TCR - TRICONE REFUSAL																																																																																																																																																																																																																																																															
<p align="center">SOIL MOISTURE - CORRELATION OF TERMS</p> <table border="1"> <thead> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td rowspan="2">LL - LIQUID RANGE (PI)</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td rowspan="2">OM - OPTIMUM MOISTURE RANGE (PI)</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </tbody> </table>		SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID RANGE (PI)	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE RANGE (PI)	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<p align="center">EQUIPMENT USED ON SUBJECT PROJECT</p> <table border="1"> <thead> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> MOBILE B-</td> <td><input checked="" type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input type="checkbox"/> BK-51</td> <td><input checked="" type="checkbox"/> 152mm CONTINUOUS FLIGHT AUGER</td> <td>CORE SIZE:</td> </tr> <tr> <td><input type="checkbox"/> CME-45C</td> <td><input type="checkbox"/> 203mm HOLLOW AUGERS</td> <td><input type="checkbox"/> -B</td> </tr> <tr> <td><input type="checkbox"/> CME-550</td> <td><input type="checkbox"/> HARD FACED FINGER BITS</td> <td><input type="checkbox"/> -H</td> </tr> <tr> <td><input type="checkbox"/> CME-850</td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td><input type="checkbox"/> -H</td> </tr> <tr> <td><input type="checkbox"/> CME-45B</td> <td><input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER</td> <td>HAND TOOLS:</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/> TRICONE 75 mm STEEL TEETH</td> <td><input type="checkbox"/> POST HOLE DIGGER</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/> TRICONE mm TUNG-CARB.</td> <td><input checked="" type="checkbox"/> HAND AUGER</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/> CORE BIT</td> <td><input checked="" type="checkbox"/> SOUNDING ROD</td> </tr> <tr> <td><input type="checkbox"/></td> <td></td> <td><input checked="" type="checkbox"/> VANE SHEAR TEST</td> </tr> </tbody> </table>		DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	<input type="checkbox"/> MOBILE B-	<input checked="" type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> BK-51	<input checked="" type="checkbox"/> 152mm CONTINUOUS FLIGHT AUGER	CORE SIZE:	<input type="checkbox"/> CME-45C	<input type="checkbox"/> 203mm HOLLOW AUGERS	<input type="checkbox"/> -B	<input type="checkbox"/> CME-550	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -H	<input type="checkbox"/> CME-850	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H	<input type="checkbox"/> CME-45B	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	HAND TOOLS:	<input type="checkbox"/>	<input checked="" type="checkbox"/> TRICONE 75 mm STEEL TEETH	<input type="checkbox"/> POST HOLE DIGGER	<input type="checkbox"/>	<input type="checkbox"/> TRICONE mm TUNG-CARB.	<input checked="" type="checkbox"/> HAND AUGER	<input type="checkbox"/>	<input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> SOUNDING ROD	<input type="checkbox"/>		<input checked="" type="checkbox"/> VANE SHEAR TEST																																																																																																																																																																																																															
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																																																																																																																																														
LL - LIQUID RANGE (PI)	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																																																																																																																																														
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																														
OM - OPTIMUM MOISTURE RANGE (PI)	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																																																																																																																																														
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																																																																																																														
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																																																																																																																																																																														
<input type="checkbox"/> MOBILE B-	<input checked="" type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																																																																																																																																																																																														
<input type="checkbox"/> BK-51	<input checked="" type="checkbox"/> 152mm CONTINUOUS FLIGHT AUGER	CORE SIZE:																																																																																																																																																																																																																																																														
<input type="checkbox"/> CME-45C	<input type="checkbox"/> 203mm HOLLOW AUGERS	<input type="checkbox"/> -B																																																																																																																																																																																																																																																														
<input type="checkbox"/> CME-550	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -H																																																																																																																																																																																																																																																														
<input type="checkbox"/> CME-850	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H																																																																																																																																																																																																																																																														
<input type="checkbox"/> CME-45B	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	HAND TOOLS:																																																																																																																																																																																																																																																														
<input type="checkbox"/>	<input checked="" type="checkbox"/> TRICONE 75 mm STEEL TEETH	<input type="checkbox"/> POST HOLE DIGGER																																																																																																																																																																																																																																																														
<input type="checkbox"/>	<input type="checkbox"/> TRICONE mm TUNG-CARB.	<input checked="" type="checkbox"/> HAND AUGER																																																																																																																																																																																																																																																														
<input type="checkbox"/>	<input type="checkbox"/> CORE BIT	<input checked="" type="checkbox"/> SOUNDING ROD																																																																																																																																																																																																																																																														
<input type="checkbox"/>		<input checked="" type="checkbox"/> VANE SHEAR TEST																																																																																																																																																																																																																																																														
<p align="center">PLASTICITY</p> <table border="1"> <thead> <tr> <th>NONPLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> </thead> <tbody> <tr> <td>LOW PLASTICITY</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MED. PLASTICITY</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGH PLASTICITY</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </tbody> </table> <p align="center">COLOR</p> <p>DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.</p>		NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	LOW PLASTICITY	0-5	VERY LOW	MED. PLASTICITY	6-15	SLIGHT	HIGH PLASTICITY	16-25	MEDIUM		26 OR MORE	HIGH	<p align="center">ROCK HARDNESS</p> <table border="1"> <thead> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> </thead> <tbody> <tr> <td>VERY HARD</td> <td>MORE THAN 3 M</td> <td>VERY THICKLY BEDDED</td> <td>> 1 M</td> </tr> <tr> <td>HARD</td> <td>3 TO 10 M</td> <td>THICKLY BEDDED</td> <td>0.5 - 1 M</td> </tr> <tr> <td>MODERATELY HARD</td> <td>30 TO 100 CM</td> <td>THINLY BEDDED</td> <td>0.05 - 0.5 M</td> </tr> <tr> <td>MEDIUM HARD</td> <td>5 TO 30 CM</td> <td>VERY THINLY BEDDED</td> <td>10 - 50 MM</td> </tr> <tr> <td>SOFT</td> <td>LESS THAN 5 CM</td> <td>THICKLY LAMINATED</td> <td>2.5 - 10 MM</td> </tr> <tr> <td>VERY SOFT</td> <td></td> <td>THINLY LAMINATED</td> <td>< 2.5 MM</td> </tr> </tbody> </table> <p align="center">INDURATION</p> <p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p> <table border="1"> <tbody> <tr> <td>FRIABLE</td> <td>RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</td> </tr> <tr> <td>MODERATELY INDURATED</td> <td>GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</td> </tr> <tr> <td>INDURATED</td> <td>GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</td> </tr> <tr> <td>EXTREMELY INDURATED</td> <td>SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</td> </tr> </tbody> </table>		TERM	SPACING	TERM	THICKNESS	VERY HARD	MORE THAN 3 M	VERY THICKLY BEDDED	> 1 M	HARD	3 TO 10 M	THICKLY BEDDED	0.5 - 1 M	MODERATELY HARD	30 TO 100 CM	THINLY BEDDED	0.05 - 0.5 M	MEDIUM HARD	5 TO 30 CM	VERY THINLY BEDDED	10 - 50 MM	SOFT	LESS THAN 5 CM	THICKLY LAMINATED	2.5 - 10 MM	VERY SOFT		THINLY LAMINATED	< 2.5 MM	FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																																																										
NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																																																																																																																																																																														
LOW PLASTICITY	0-5	VERY LOW																																																																																																																																																																																																																																																														
MED. PLASTICITY	6-15	SLIGHT																																																																																																																																																																																																																																																														
HIGH PLASTICITY	16-25	MEDIUM																																																																																																																																																																																																																																																														
	26 OR MORE	HIGH																																																																																																																																																																																																																																																														
TERM	SPACING	TERM	THICKNESS																																																																																																																																																																																																																																																													
VERY HARD	MORE THAN 3 M	VERY THICKLY BEDDED	> 1 M																																																																																																																																																																																																																																																													
HARD	3 TO 10 M	THICKLY BEDDED	0.5 - 1 M																																																																																																																																																																																																																																																													
MODERATELY HARD	30 TO 100 CM	THINLY BEDDED	0.05 - 0.5 M																																																																																																																																																																																																																																																													
MEDIUM HARD	5 TO 30 CM	VERY THINLY BEDDED	10 - 50 MM																																																																																																																																																																																																																																																													
SOFT	LESS THAN 5 CM	THICKLY LAMINATED	2.5 - 10 MM																																																																																																																																																																																																																																																													
VERY SOFT		THINLY LAMINATED	< 2.5 MM																																																																																																																																																																																																																																																													
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.																																																																																																																																																																																																																																																															
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.																																																																																																																																																																																																																																																															
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.																																																																																																																																																																																																																																																															
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																																																																																																															
<p align="center">BENCH MARK:</p> <p align="right">ELEVATION: _____ M</p>		<p align="center">NOTES:</p> <p align="center">APPROXIMATE LIMITS OF ORGANIC SOILS</p>																																																																																																																																																																																																																																																														



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

MICHAEL F. EASLEY
GOVERNOR

LYNDO TIPPETT
SECRETARY

July 29, 2008

STATE PROJECT: 34430.1.1 R-2414B
F.A. PROJECT: STP-158(2)
COUNTY: Camden
DESCRIPTION: US 158 – NC 34 from South of SR 1257 to East of NC 34 in Belcross
SUBJECT: Geotechnical Report – Inventory-Revised

Project Description

The project consists of upgrading the existing two to three lane highway to a five lane curb and gutter facility. The project begins in the vicinity of SR 1139 (Country Club Road) and proceeds 4.8± kilometers to a point approximately 280 meters northeast of the NC 34 and US 158 intersection. The southern terminus of the project ties in with a future roadway project (R-2414A) and the northern terminus ties in with existing US 158. The investigation of subsurface conditions was confined to the corridor of proposed new construction.

The following base lines were investigated for this project:

<u>Line</u>	<u>Station</u>
-L-	45+68 to 93+92
-Y-	10+00 to 11+30
-Y1-	10+00 to 11+15
-Y2-	10+12 to 11+14
-Y3-	10+00 to 11+69
-Y4-	10+00 to 11+63
-Y7-	10+10 to 12+12
-Y8-	11+00 to 12+36

MAILING ADDRESS:
N C Department of Transportation
GEOTECHNICAL ENGINEERING UNIT
1589 MAIL SERVICE CENTER
RALEIGH NC 27699-1589

TELEPHONE: 919-250-4088
FAX: 919-250-4237
WEBSITE: WWW.NCDOT.ORG/DOH

LOCATION:
Century Center Complex
Entrance B-2
120 BIRCH RIDGE DRIVE
RALEIGH, NC 27610

Areas of Special Geotechnical Interest

1) The following sections contain relatively soft organic soils which have potential for settlement and stability problems:

<u>Line</u>	<u>Station (±)</u>
-L-	55+33 to 56+34
-L-	62+72 to 62+96
-L-	72+50 to 74+12
-L-	88+55 to 89+18

The approximate limits of surficial organic soils are shown on the accompanying plan view sheets.

2) The entire project contains surficial cohesive sediments of A-4, A-6 or A-7 AASHTO Classification with moderate to high percentage passing the number 200 sieve and/or relatively high moisture contents and may have the potential to cause subgrade failure:

3) Several sites were identified as potentially hazardous waste sites by the GeoEnvironmental Section in their report dated October 26, 1993.

4) The entire project was found to exhibit a high water table, seasonal high ground water or the potential for ground water related construction problems.

Physiography and Geology

The project is located in the Lower Coastal Plain Physiographic Province. The geology of the area basically consists of Quaternary age undivided Coastal Plain surficial sediments and Recent alluvial deposits. Topography along the corridor is nearly flat. Elevations range from 0.5 meters along the flood plain segments to 4 meters along upland areas. The majority of the project lies between an elevation of 2 to 3 meters above sea level.

The project lies within the Pasquotank River drainage system. Drainage is provided by man-made ditches and several tributaries which eventually flow into the Pasquotank River. Surface drainage is generally fair to poor due to the relatively flat terrain.

Ground Water

Ground water data was collected primarily from February, 2001 to March, 2001 during below average rainfall conditions. The water table along much of the project is high due to the relatively flat terrain. During our investigation, ground water was generally encountered between 1 and 2 meters of the existing roadway shoulder and along the upland areas. During wet seasons

or after heavy precipitation, water may be within 0.5 to 1 meter of the natural ground. In flood plain and adjacent low lying areas, water is at or near the natural ground surface.

Soils

Soils encountered during this investigation are separated into three major categories based on origin and occurrence. These categories are alluvial soils, surficial soils and embankment soils.

Alluvial soils encountered in the flood plains in the vicinity of -L- stations 55+60±, 62+80±, 73+40± and 89+00± generally consist of 0.5 to 6 meters of organic soils. Organic contents of tested samples range from 4.7 to 21.8 percent and moisture contents range from 33 to 193 percent. Vane Shear Tests performed in the organic alluvial sediments generally range from < 2.4 to 26.6 kPa. Loose to medium dense fine sand and sandy silt (A-2-4, A-4) underlies the organic soils. Typically, the alluvial sediments exhibit poor engineering properties and undercutting or other methods of stabilizing the subgrade may be required.

Surficial soils from the beginning of the project to station 62+70± generally consist of 6 or more feet of clayey sandy silt (A-4) and silty sandy clay (A-6, A-7-6). Engineering properties of the silt-clay soils range from fair to poor with tests showing 50 percent or more passing the 75µm sieve, plasticity indices of 11 to 34 and/or relatively high moisture contents. The consistency of these soils will typically vary seasonally. During relatively dry seasons, the cohesive material will more likely have a medium stiff consistency. During wet seasons, the same soils will be relatively soft. From station 62+70± to the end of the project, surficial upland soils consist of medium stiff to stiff sandy silt (A-4) and silty sand (A-2-4) which exhibit fair to good engineering properties. The majority of the silt/clay soils will require undercutting to stabilize the subgrade.

Embankments are man-made fills built during construction of existing roadways. The fill material generally consists of loose to medium dense fine to coarse sand and sandy silt (A-2-4, A-4). Thickness of the fill material ranges from 0.5 to 2 meters and has good to excellent engineering properties. This material was primarily encountered along existing US 158/NC 34 and associated -Y- lines.

Undisturbed Samples

Undisturbed (Shelby Tube) samples were taken in the organic and silt soils at the following locations and submitted for testing:

<u>Sample No.</u>	<u>Station</u>	<u>Depth(m)</u>	<u>Test</u>
ST-1	55+60, 11.5m Rt.	0.45 - 1.05	Consolidation
ST-1	88+80, 1.0m Lt.	8.00 - 8.60	Consolidation
ST-2	73+20, 11.5m Lt.	0.30 - 0.95	Consolidation
ST-3	89+09, 7.0m Rt.	0.15 - 0.75	Consolidation
ST-4	88+70, 10.0m Rt.	1.40 - 2.00	Consolidation
ST-5	55+62, 2.5m Rt.	8.53 - 9.14	Triaxial CU
ST-6	55+62, 2.5m Rt.	10.67 - 11.28	Consolidation

<u>Sample No.</u>	<u>Station</u>	<u>Depth(m)</u>	<u>Test</u>
ST-7	88+80, 15m Rt.	9.24 - 9.85	Triaxial CU
ST-8	73+18, 2.5m Rt.	7.10 - 7.61	Consolidation
ST-9	73+18, 2.5m Rt.	10.15 - 10.76	Triaxial CU

Culvert at -L- Station 55+81

A 2.4 m x 1.8 m RCBC is proposed at -L- Station 55+81. Standard Penetration Test and hand auger borings made in the immediate vicinity show 3.5 to 5.5 meters of very soft organic silt and muck underlain by 12 to 15 meters of very loose to medium dense sand (A-2-4) and very soft to medium stiff sandy silt (A-4) and silty clay (A-7-6) at the site. Approximately 5 to 7 meters of medium dense to very dense sand (A-3, A-2-4) was encountered below an elevation of -18 meters. Medium stiff to very stiff sandy silt (A-4) underlies the granular soils. Ground water was measured at an elevation of sea level to 0.4 meters.


Culvert at -L- Station 73+49

A dual 1.8 m x 1.5 m RCBC is proposed at -L- Station 73+49. Standard Penetration Test and hand auger borings made in the immediate vicinity show 1.5 to 4.5 meters of very soft muck underlain by 9± meters of loose to medium dense sand (A-2-4) and very soft to medium stiff sandy silt (A-4) and silty clay (A-7-6) at the site. Approximately 9± meters of interlayered loose to medium dense gray sand (A-2-4, A-1-b), very soft to very stiff sandy silt (A-4) and soft to very stiff sandy and silty clay (A-6, A-7-6). Medium dense to very dense sand (A-3, A-1-b) was encountered below an elevation of -22 meters. Ground water was measured at an elevation of sea level to 0.5 meters.

Culvert at -L- Station 89+05

A 3.0 m x 1.5 m RCBC is proposed at -L- Station 89+05. Standard Penetration Test and hand auger borings made in the immediate vicinity show 1.0 to 2.5 meters of very soft organic clay and muck underlain by 3 to 4.5 meters of very loose to loose sand (A-2-4) and very stiff sandy silt (A-4). Very soft to hard sandy silt (A-4) and sandy silty clay (A-6, A-7-6), 15 to 17 meters thick, underlies the granular soils. Approximately 4.5 to 7.5 meters of medium dense to very dense sand (A-3, A-2-4) was encountered below an elevation of -19 to -22 meters. Stiff to very stiff sandy silt (A-4) and clay (A-6) underlies the granular soils. Ground water was measured at an elevation of 0.3 to 0.7 meters.

Prepared by,

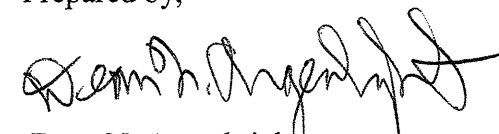

Dean N. Argenbright
Regional Geological Engineer

NWW/DNA

CAMDEN

EARTHWORK BALANCE SHEET

Volumes in Cubic Meters

PROJECT

IP # R-2414B

CAMDEN

DATE 4/25/2011

SHEET 1 OF 3 SHEETS

LINE	STATION	STATION	TOTAL EXCAV. (UNCL.)	UNDERCUT EXCAV.	UNSUIT. EXCAV.	SUITABLE EXCAV.	TOTAL EMB.	EARTH EMB.	EMBANK. 30%	BORROW	SUITABLE WASTE	UNSUIT. WASTE	TOTAL WASTE
PHASE I													
SUMMARY #1													
L LT	45+68.873	52+40.000	912		912		2559	2559	3327	3327		912	912
Y2	10+12.000	11+05.232	2		2		454	454	590	590		2	2
SUMMARY #1 SUBTOTAL			914		914	0	3013	3013	3917	3917		914	914
SUMMARY #2													
L RT	52+60.000	58+80.000	99		99		6301	6301	8191	8191		99	99
L RT SURCHARGE	55+33.000	56+34.000					1502	1502	1953	1953			
L RT SURCHARGE REM.	55+33.000	56+34.000	1365			1365					1365		1365
SUMMARY #2 SUBTOTAL			1464		99	1365	7803	7803	10144	10144	1365	99	1464
SUMMARY #3													
L LT	58+80.000	68+80.000	128		128		6579	6579	8553	8553		128	128
Y3	9+48.03	11+55.955	128		128		614	614	798	798		128	128
SUMMARY #3 SUBTOTAL			256		256	0	7193	7193	9351	9351		256	256
SUMMARY #4													
L LT	68+80.000	78+80.000	299		299		5259	5259	6837	6837		299	299
L LT SURCHARGE	72+50.000	73+80.000					2100	2100	2730	2730			
L LT SURCHARGE REM.	72+50.000	73+80.000	1909			1909					1909		1909
SUMMARY #4 SUBTOTAL			2208		299	1909	7359	7359	9567	9567	1909	299	2208
SUMMARY #5													
L LT	78+80.000	87+60.000	178		178		3733	3733	4853	4853		178	178
Y7	10+00.000	11+04.067	218		218		623	623	810	810		218	218
SUMMARY #5 SUBTOTAL			396		396	0	4356	4356	5663	5663		396	396
SUMMARY #6													
L RT	87+60.000	93+92.145	1163		1163		2088	2088	2714	2714		1163	1163
L RT SURCHARGE	88+55.000	89+18.000					801	801	1041	1041			
L RT SURCHARGE REM.	88+55.000	89+18.000	728			728					728		728
SUMMARY #6 SUBTOTAL			1891		1163	728	2889	2889	3755	3755	728	1163	1891
SHEET TOTAL			7129		3127	4002	32613	32613	42397	42397	4002	3127	7129

* EARTHWORK QUANTITIES ARE CALCULATED BY THE ROADWAY DESIGN UNIT. THESE EARTHWORK QUANTITIES ARE BASED IN PART ON SUBSURFACE DATA PROVIDED BY THE GEOTECHNICAL ENGINEERING UNIT.

EARTHWORK BALANCE SHEET

Volumes in Cubic Meters

3D of 146

PROJECT

IP # R-2414B

CAMDEN

DATE 4/25/2011

SHEET 2 OF 3 SHEETS

LINE	STATION	STATION	TOTAL EXCAV. (UNCL.)	UNDERCUT EXCAV.	UNSUIT. EXCAV.	SUITABLE EXCAV.	TOTAL EMB.	EARTH EMB.	EMBANK. 30%	BORROW	SUITABLE WASTE	UNSUIT. WASTE	TOTAL WASTE
PHASE II													
SUMMARY #7 SUBTOTAL													
L RT	45+68.873	52+60.000	202		202		3021	3021	3927	3927		202	202
Y	10+09.600	11+30.000	878		878		371	371	482	482		878	878
Y1	10+00.000	11+05.780	336		336		174	174	226	226		336	336
SUMMARY #7 SUBTOTAL			1416		1416	0	3566	3566	4635	4635		1416	1416
SUMMARY #8													
L LT	52+40.000	58+80.000	302		302		4067	4067	5287	5287		302	302
L LT SURCHARGE	55+33.000	56+34.000					1949	1949	2534	2534			
L LT SURCHARGE REM.	55+33.000	56+34.000	1771			1771					1771		1771
SUMMARY #8 SUBTOTAL			2073		302	1771	6016	6016	7821	7821	1771	302	2073
SUMMARY #9													
L RT	58+80.000	68+80.000	50		50		6610	6610	8593	8593		50	50
Y4	10+12.483	11+63.200	77		77		288	288	374	374		77	77
SUMMARY #9 SUBTOTAL			127		127	0	6898	6898	8967	8967		127	127
SUMMARY #10													
L RT	68+80.000	78+80.000	256		256		3701	3701	4811	4811		256	256
L RT SURCHARGE	72+50.000	73+80.000					2491	2491	3238	3238			
L RT SURCHARGE REM.	72+50.000	73+80.000	2264			2264					2264		2264
SUMMARY #10 SUBTOTAL			2520		256	2264	6192	6192	8049	8049	2264	256	2520
SUMMARY #11													
L RT	78+80.000	87+60.000	395		395		2873	2873	3735	3735		395	395
Y7	11+23.273	12+12.000	348		348		897	897	1166	1166		348	348
SUMMARY #11 SUBTOTAL			743		743	0	3770	3770	4901	4901		743	743
SUMMARY #12													
L LT	87+60.000	93+92.145	245		245		5141	5141	6683	6683		245	245
Y8	11+00.000	12+27.393	21		21		1235	1235	1606	1606		21	21
L LT SURCHARGE	88+55.000	89+18.000					1232	1232	1602	1602			
L LT SURCHARGE REM.	88+55.000	89+18.000	1120			1120					1120		1120
SUMMARY #12 SUBTOTAL			1386		266	1120	7608	7608	9891	9891	1120	266	1386
SHEET TOTAL			8265		3110	5155	34050	34050	44264	44264	5155	3110	8265

* EARTHWORK QUANTITIES ARE CALCULATED BY THE ROADWAY DESIGN UNIT. THESE EARTHWORK QUANTITIES ARE BASED IN PART ON SUBSURFACE DATA PROVIDED BY THE GEOTECHNICAL ENGINEERING UNIT.

EARTHWORK BALANCE SHEET

Volumes in Cubic Meters

PROJECT

IP # R-2414B

CAMDEN

DATE 4/25/2011

SHEET 3 OF 3 SHEETS

LINE	STATION	STATION	TOTAL EXCAV. (UNCL.)	UNDERCUT EXCAV.	UNSUIT. EXCAV.	SUITABLE EXCAV.	TOTAL EMB.	EARTH EMB.	EMBANK. 30%	BORROW	SUITABLE WASTE	UNSUIT. WASTE	TOTAL WASTE
SHEET 1 TOTAL (PHASE I)			7129		3127	4002	32613	32613	42397	42397	4002	3127	7129
SHEET 2 TOTAL (PHASE II)			8265		3110	5155	34050	34050	44264	44264	5155	3110	8265
PROJECT SUBTOTAL			15394		6237	9157	66663	66663	86661	86661	9157	6237	15394
SHOULDER CONSTRUCTION							410	410	533	533			
LOSS DUE TO CLEARING AND GRUBBING			-1000			-1000				1000			
SELECT MATERIAL, CLASS III							-150	-150	-195	-195			
WASTE IN LIEU OF BORROW										-4002	-4002		-4002
BORROW EXCAVATION FOR MASS SOIL MIXING										5000			
PROJECT TOTAL			14394		6237	8157	66923	66923	86999	88997	5155	6237	11392
EST 5% TO REPLACE TOP SOIL ON BORROW PIT										4450			
GRAND TOTAL			14394							93447			
SAY			14500							95000			

FABRIC FOR SOIL STABILIZATION = 70,250 SQ METERS (GEOTECH MEMO OF 3/12/07)

CL IV SUBGRADE STABILIZATION MATERIAL = EST. 111,100 MTN COMPUTED & 5,000 MTN CONTINGENCY (GEOTECH MEMO OF 10/10/08)

SHALLOW UNDERCUT = EST. 26,600CM COMPUTED & 2,500CM CONTINGENCY (GEOTECH MEMO OF 10/10/08)

UNDERCUT EXCAVATION=EST. 2,000CM CONTINGENCY & 150CM ADDITIONAL (GEOTECH MEMO OF 7/28/10)

=7,000CM CONTINGENCY FOR MASS SOIL MIXING (GEOTECH MEMO OF 4/21/11)

SELECT GRANULAR MATERIAL, CL 'III'= EST. 150CM COMPUTED & 3,000 CU. METERS CONTINGENCY (GEOTECH MEMOS OF 10/10/08 & 7/28/10)

= 7,000CM CONTINGENCY FOR MASS SOIL MIXING (GEOTECH MEMO OF 4/24/11)

= 1,375CM COMPUTED (PER EMAIL FROM GEOTECH 12/1/10)

OBSTRUCTION REMOVAL FOR MASS SOIL MIXING = 5000CM CONTINGENCY (GEOTECH MEMO OF 4/21/11)

MASS SOIL MIXING=45,250CM (GEOTECH MEMO OF 9/13/10)

150mm PERFORATED SUBDRAIN PIPE = EST. 9,648LM COMPUTED & 2,000LM CONTINGENCY (GEOTECH MEMO OF 10/10/08)

* EARTHWORK QUANTITIES ARE CALCULATED BY THE ROADWAY DESIGN UNIT. THESE EARTHWORK QUANTITIES ARE BASED IN PART ON SUBSURFACE

DATA PROVIDED BY THE GEOTECHNICAL ENGINEERING UNIT.

REVISIONS

WETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CIVIL/SITE DESIGN - GIS/APS - CONSTRUCTION OBSERVATION



TRANSITE CONSULTING ENGINEERS, INCORPORATED
 300 Pasquot Drive, Suite G-10
 Raleigh, N.C. 27609

METRIC

5 0 10

CONST. REV.
R/W REV.

PROJECT REFERENCE NO. R-2414B	SHEET NO. 8
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	

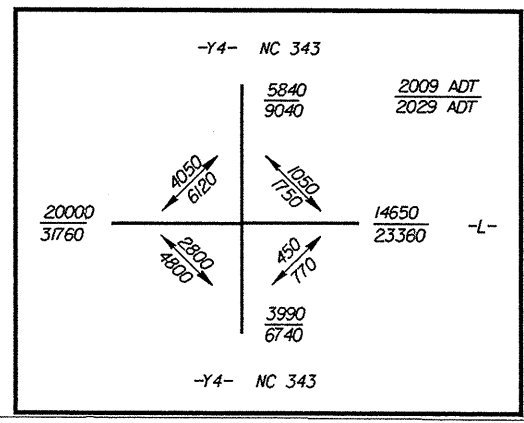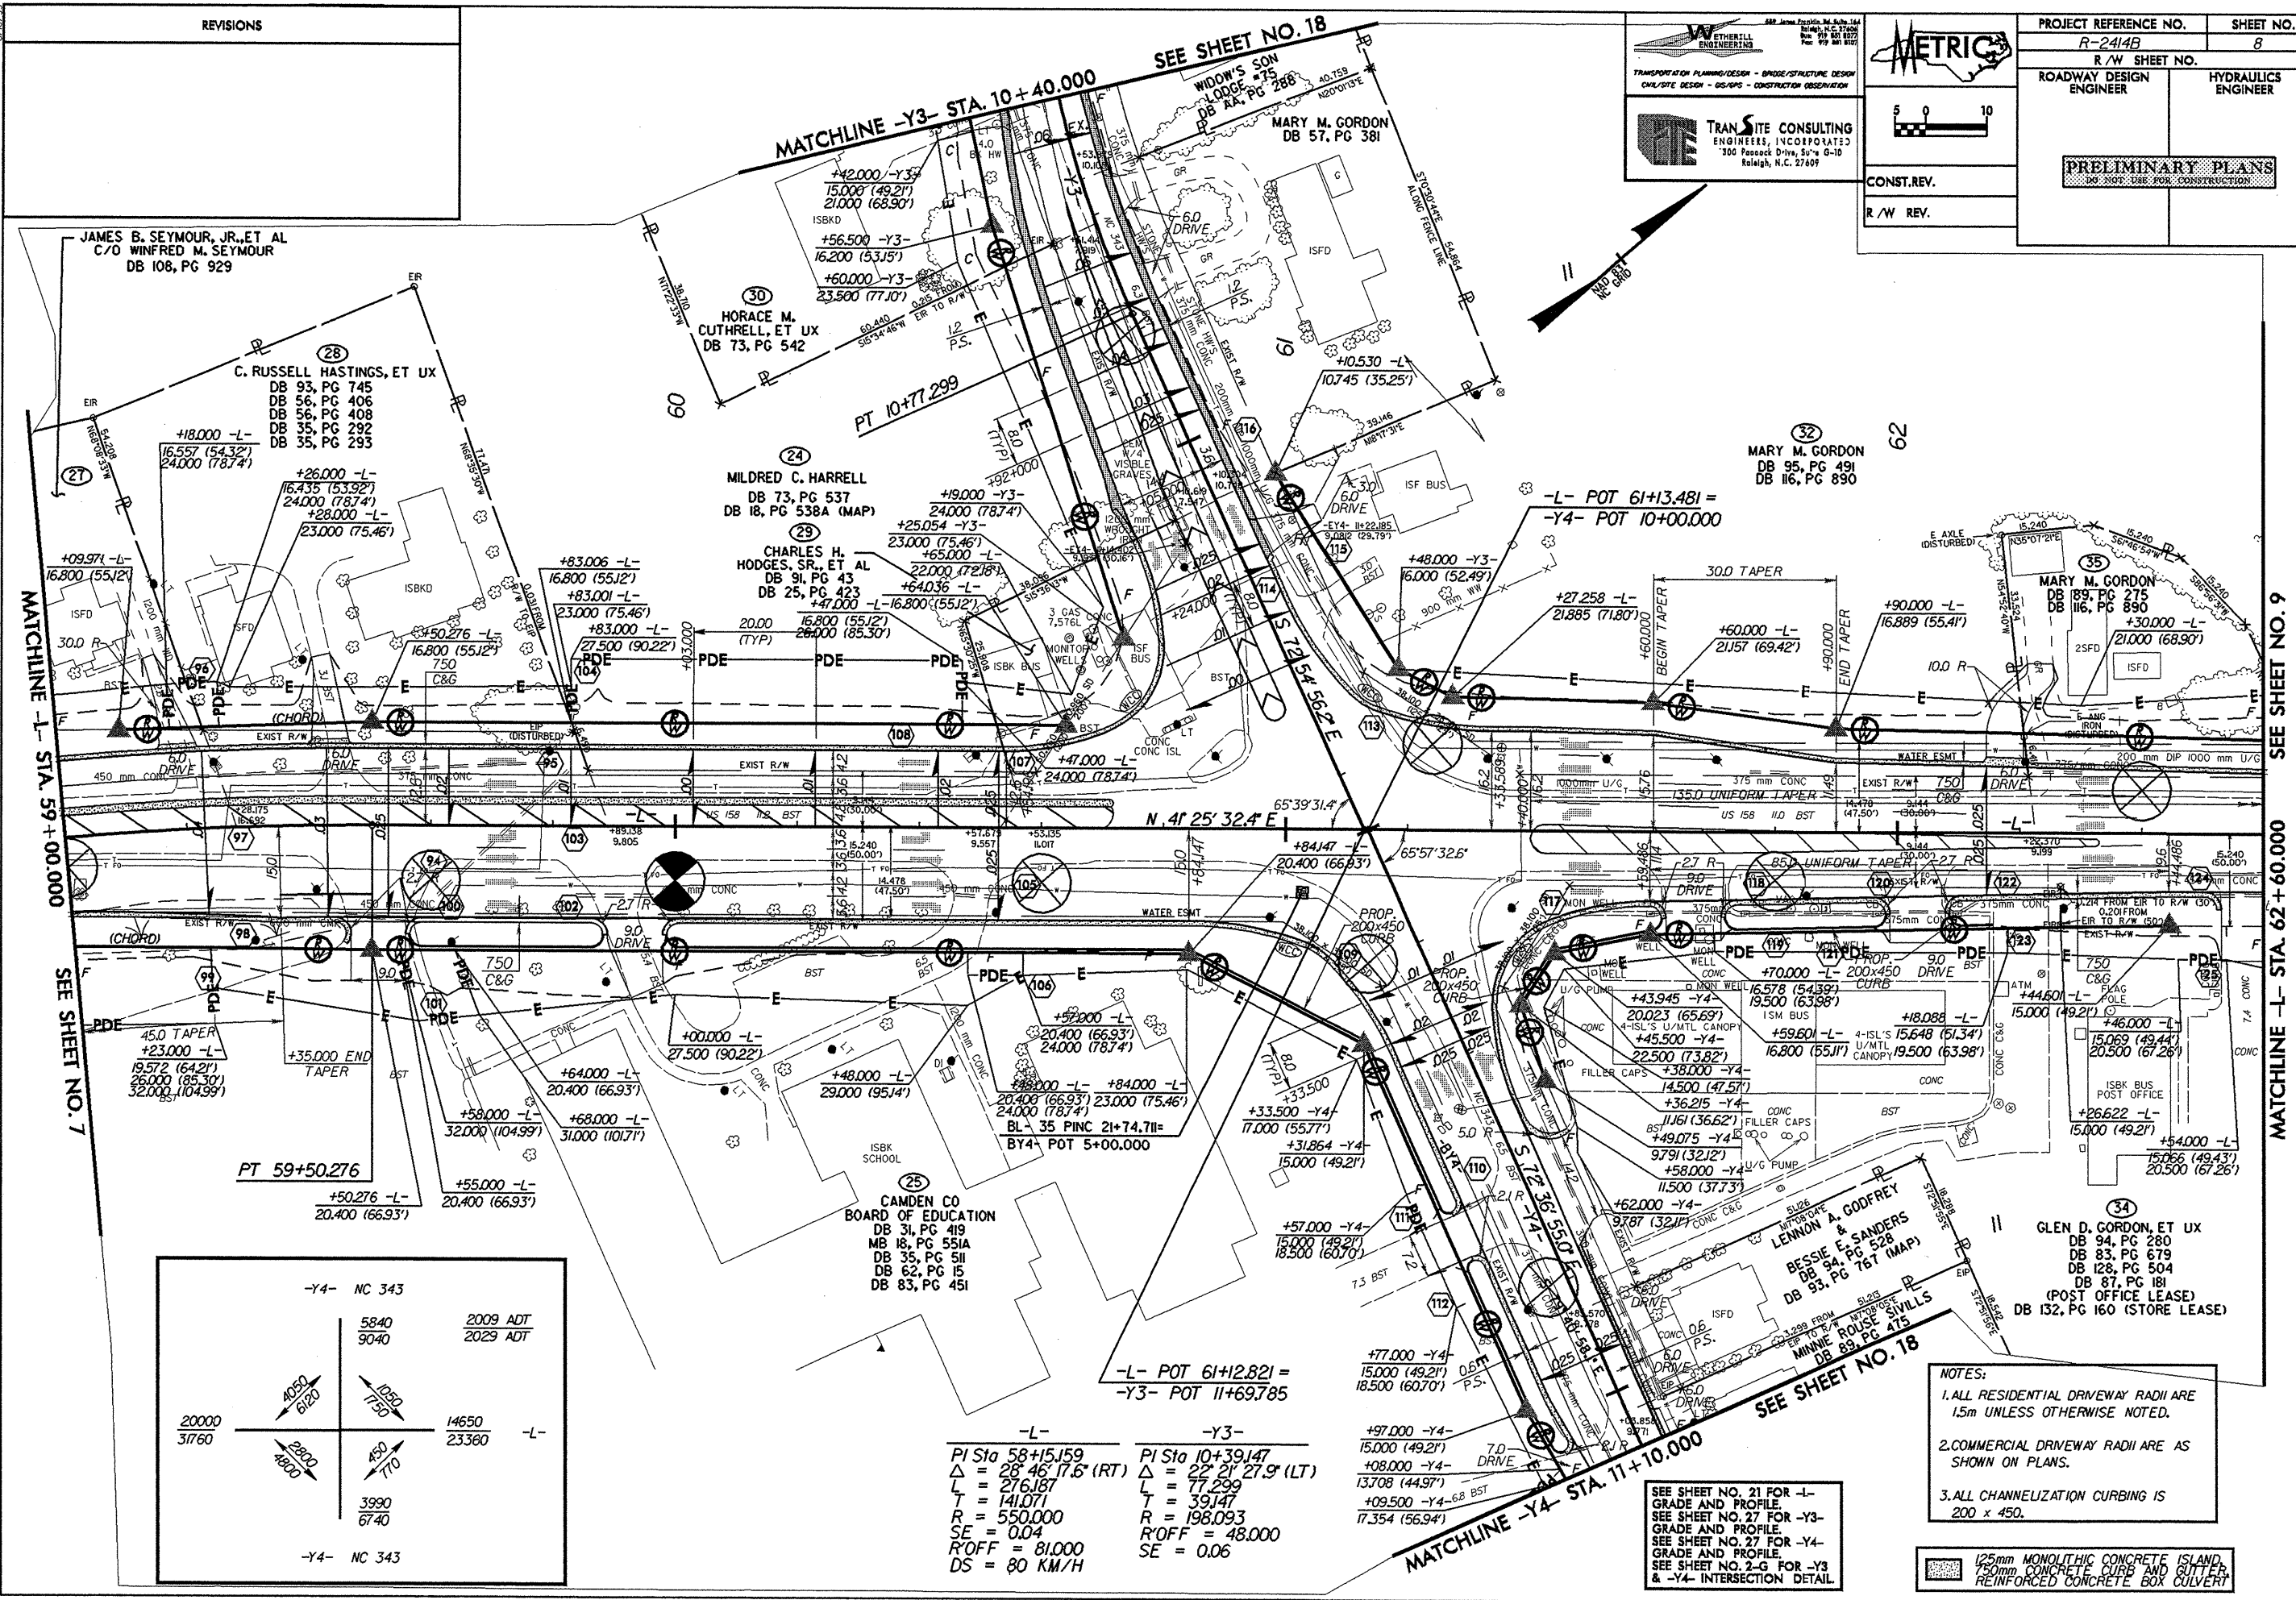

-L-	-Y3-
PI Sta 58+15.59	PI Sta 10+39.17
$\Delta = 28' 46'' (7.6' (RT))$	$\Delta = 22' 21'' (27.9' (LT))$
$L = 276.187$	$L = 17.299$
$T = 141.071$	$T = 39.147$
$R = 550.000$	$R = 198.093$
$SE = 0.04$	$SE = 0.06$
$R/OFF = 81.000$	
$DS = 80 \text{ KM/H}$	

SEE SHEET NO. 21 FOR -L- GRADE AND PROFILE.
 SEE SHEET NO. 27 FOR -Y3- GRADE AND PROFILE.
 SEE SHEET NO. 27 FOR -Y4- GRADE AND PROFILE.
 SEE SHEET NO. 2, 2-G FOR -Y3 & -Y4- INTERSECTION DETAIL.

- NOTES:
1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
 2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
 3. ALL CHANNELIZATION CURBING IS 200 x 450.


125mm MONOLITHIC CONCRETE ISLAND,
 750mm CONCRETE CURB AND GUTTER,
 REINFORCED CONCRETE BOX CULVERT

2008.11.14 REV.2-CADD, GEOTECHNICAL, R-2414B, rdj, wph, bld, gpr

REVISIONS

NOTES:

1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
3. ALL CHANNEUZATION CURBING IS 200 x 450.



ETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CHALGATE DESIGN - DESIGN - CONSTRUCTION OBSERVATION

TRANSITE CONSULTING ENGINEERS, INC.
 300 Ferris Drive, Suite 6-10
 Raleigh, N.C. 27609


METRIC

PROJECT REFERENCE NO. R-2414B
 SHEET NO. 9
 R/W SHEET NO.

ROADWAY DESIGN ENGINEER
 HYDRAULICS ENGINEER

PRELIMINARY PLANS

CONST. REV.
 R/W REV.

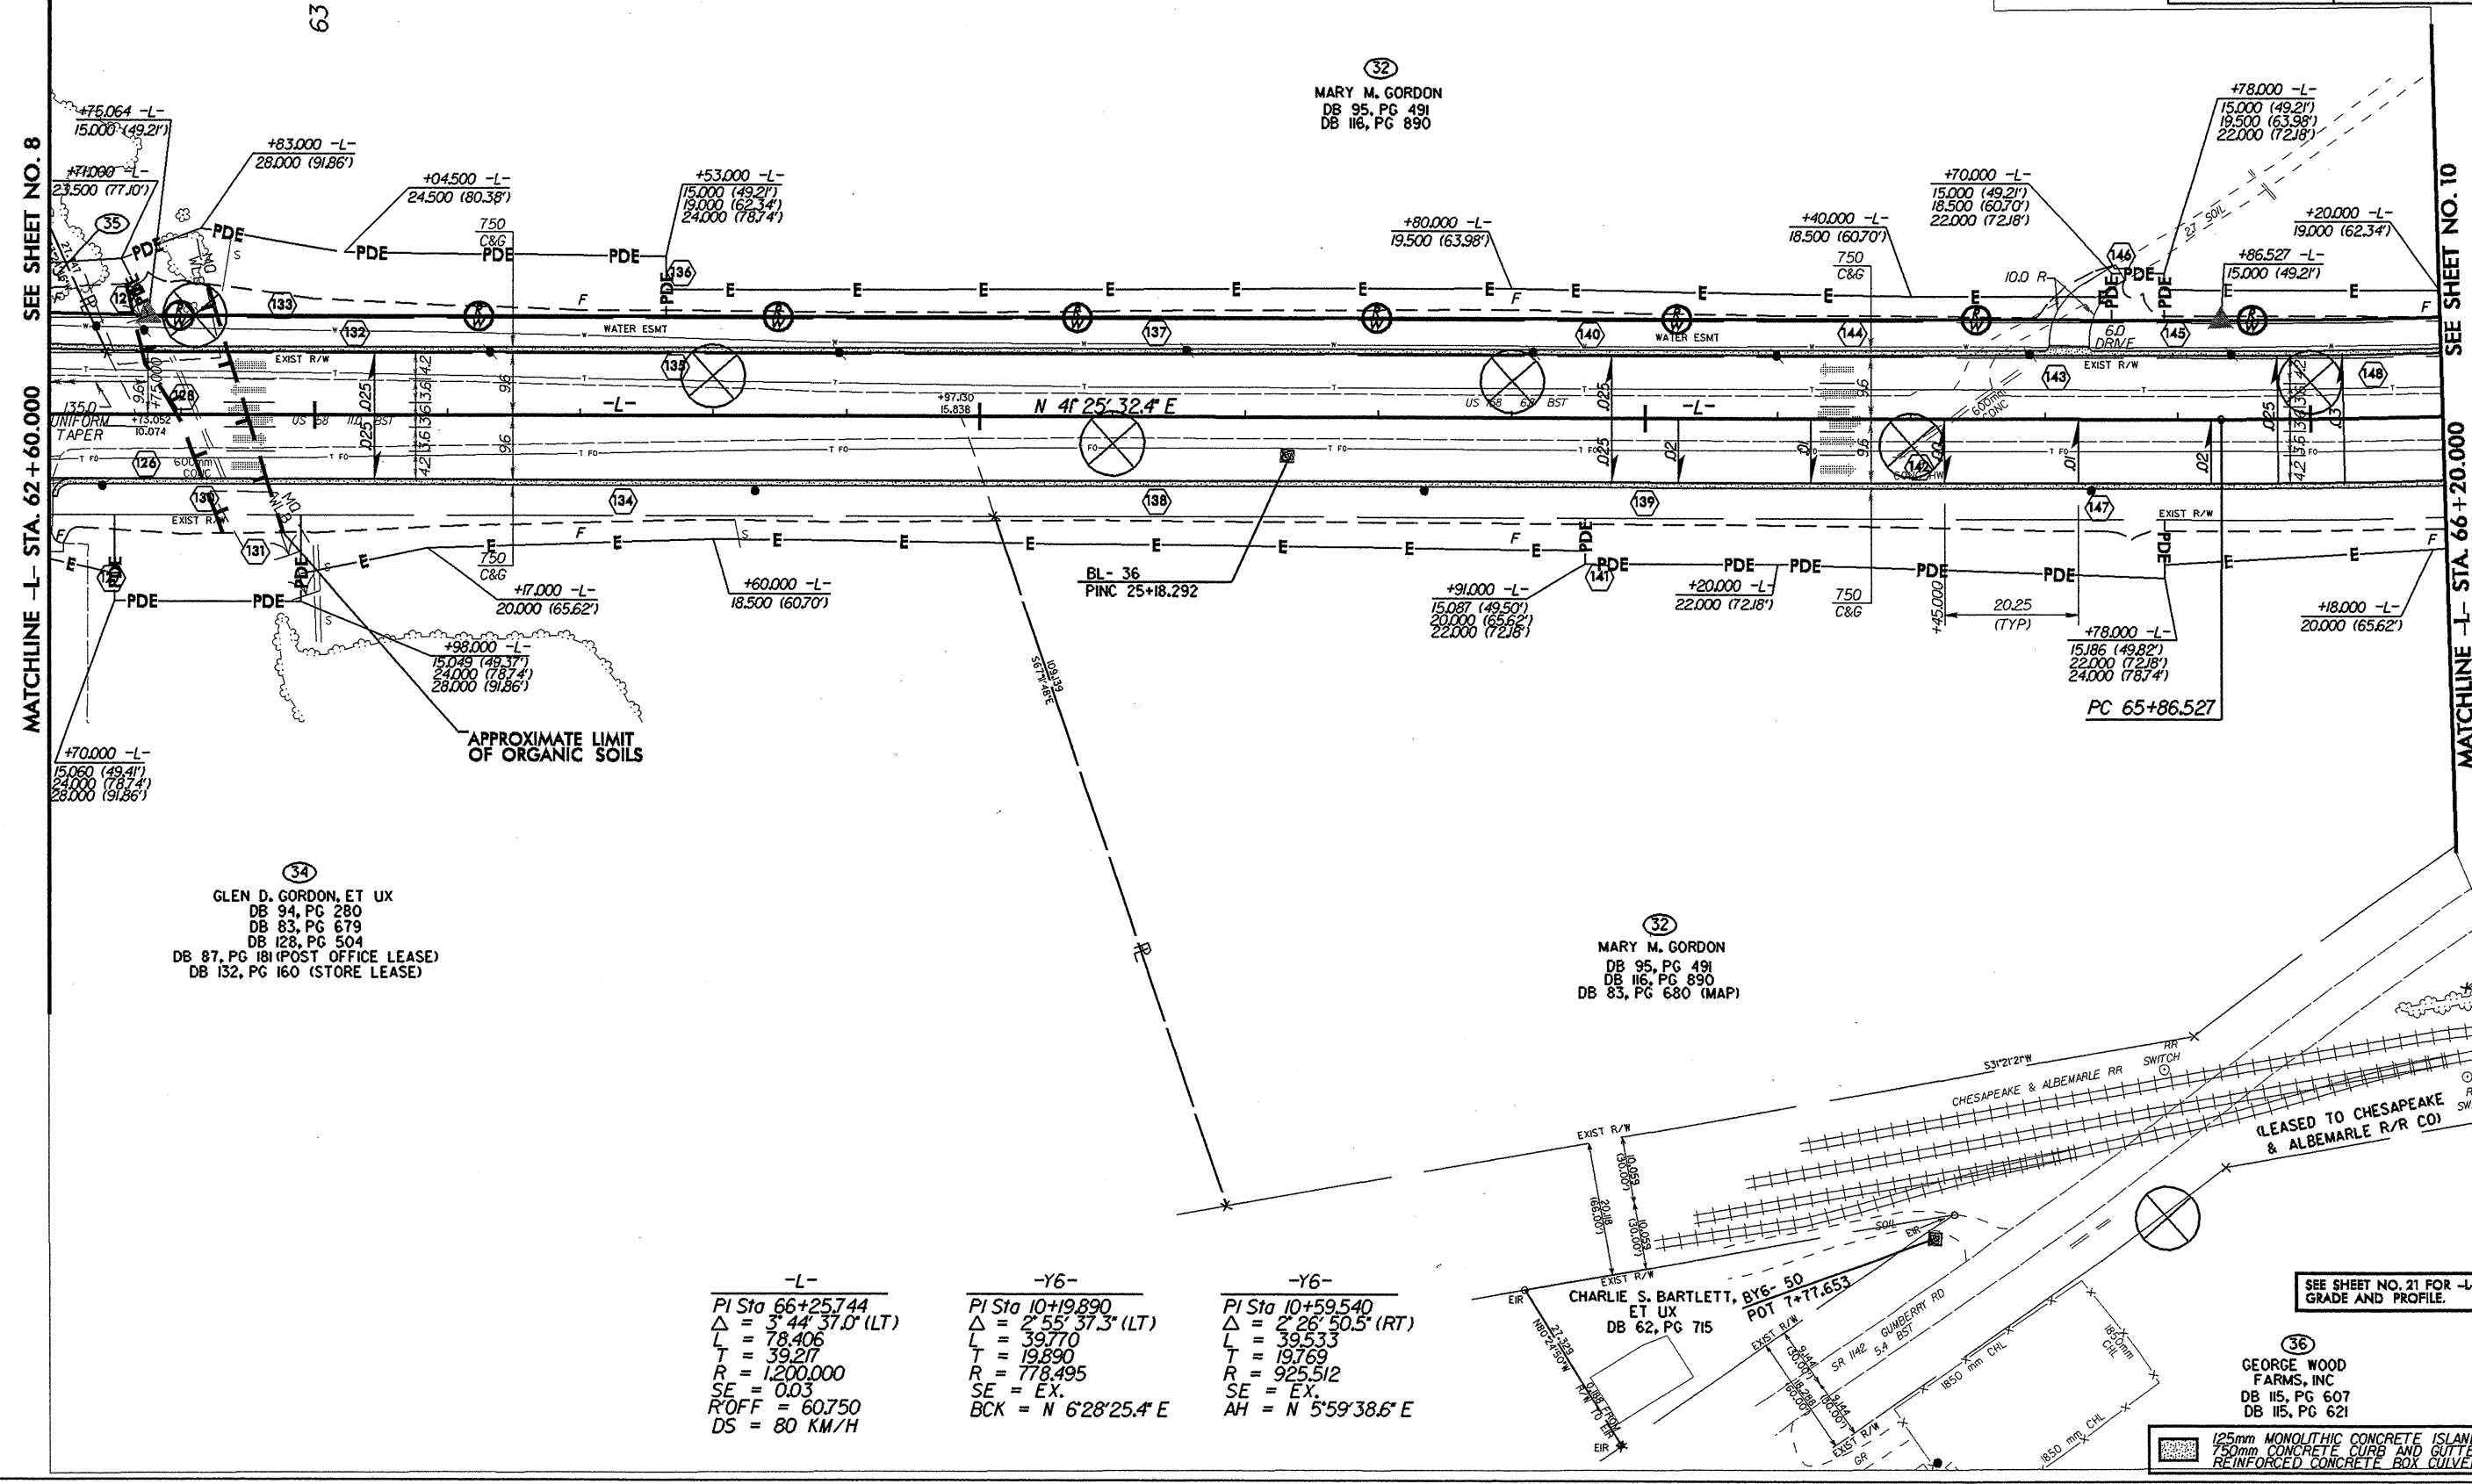

I:\PROJECTS\2008\146\REV2\CADD\GEOTECH\Plan\2414b_rdw.dwg
 6/10/09

REVISIONS

PROJECT REFERENCE NO.	SHEET NO.
R-2414B	10
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS	
CONST. REV.	
R/W REV.	

WETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CIVIL/SITE DESIGN - GEOTECHNICAL - CONSTRUCTION OBSERVATION

TRANSITE CONSULTING ENGINEERS, INCORPORATED
 300 Paradise Drive, Suite G-10
 Raleigh, N.C. 27609

5 0 10
 METRIC

32 MARY M. GORDON
 DB 46, PG 316A

M. W. GODWIN, HEIRS
 C/O JOYCE GODWIN
 DB 36, PG 656
 MB 2, PG 23

MARY GODWIN HARRIS
 DB 52, PG 659
 MB 2, PG 23

39 LOIS G. WHITE
 WB 95-E-59
 DB 72, PG 597
 MB 2, PG 23
 DB 116, PG 738
 DB 44, PG 59
 BL- 37 PINC 28+52.820
 BY6- POT 5+00.000

37 DORIS S. BERRY
 DB 65, PG 187
 DB 46, PG 316A
 DB 117, PG 179

40 WATERMARK ASSOCIATION OF ARTISANS, INC
 DB 91, PG 430
 DB 89, PG 112 (MAP)
 DB 116, PG 740
 DB 44, PG 61


41 NORTHEASTERN COMMUNITY DEVELOPMENT CORP, INC
 DB 111, PG 217
 DB 116, PG 742
 PC 2, SL 87A

SEE SHEET NO. 9

MATCHLINE -L- STA. 66+20.000

MATCHLINE -L- STA. 69+80.000

SEE SHEET NO. 11

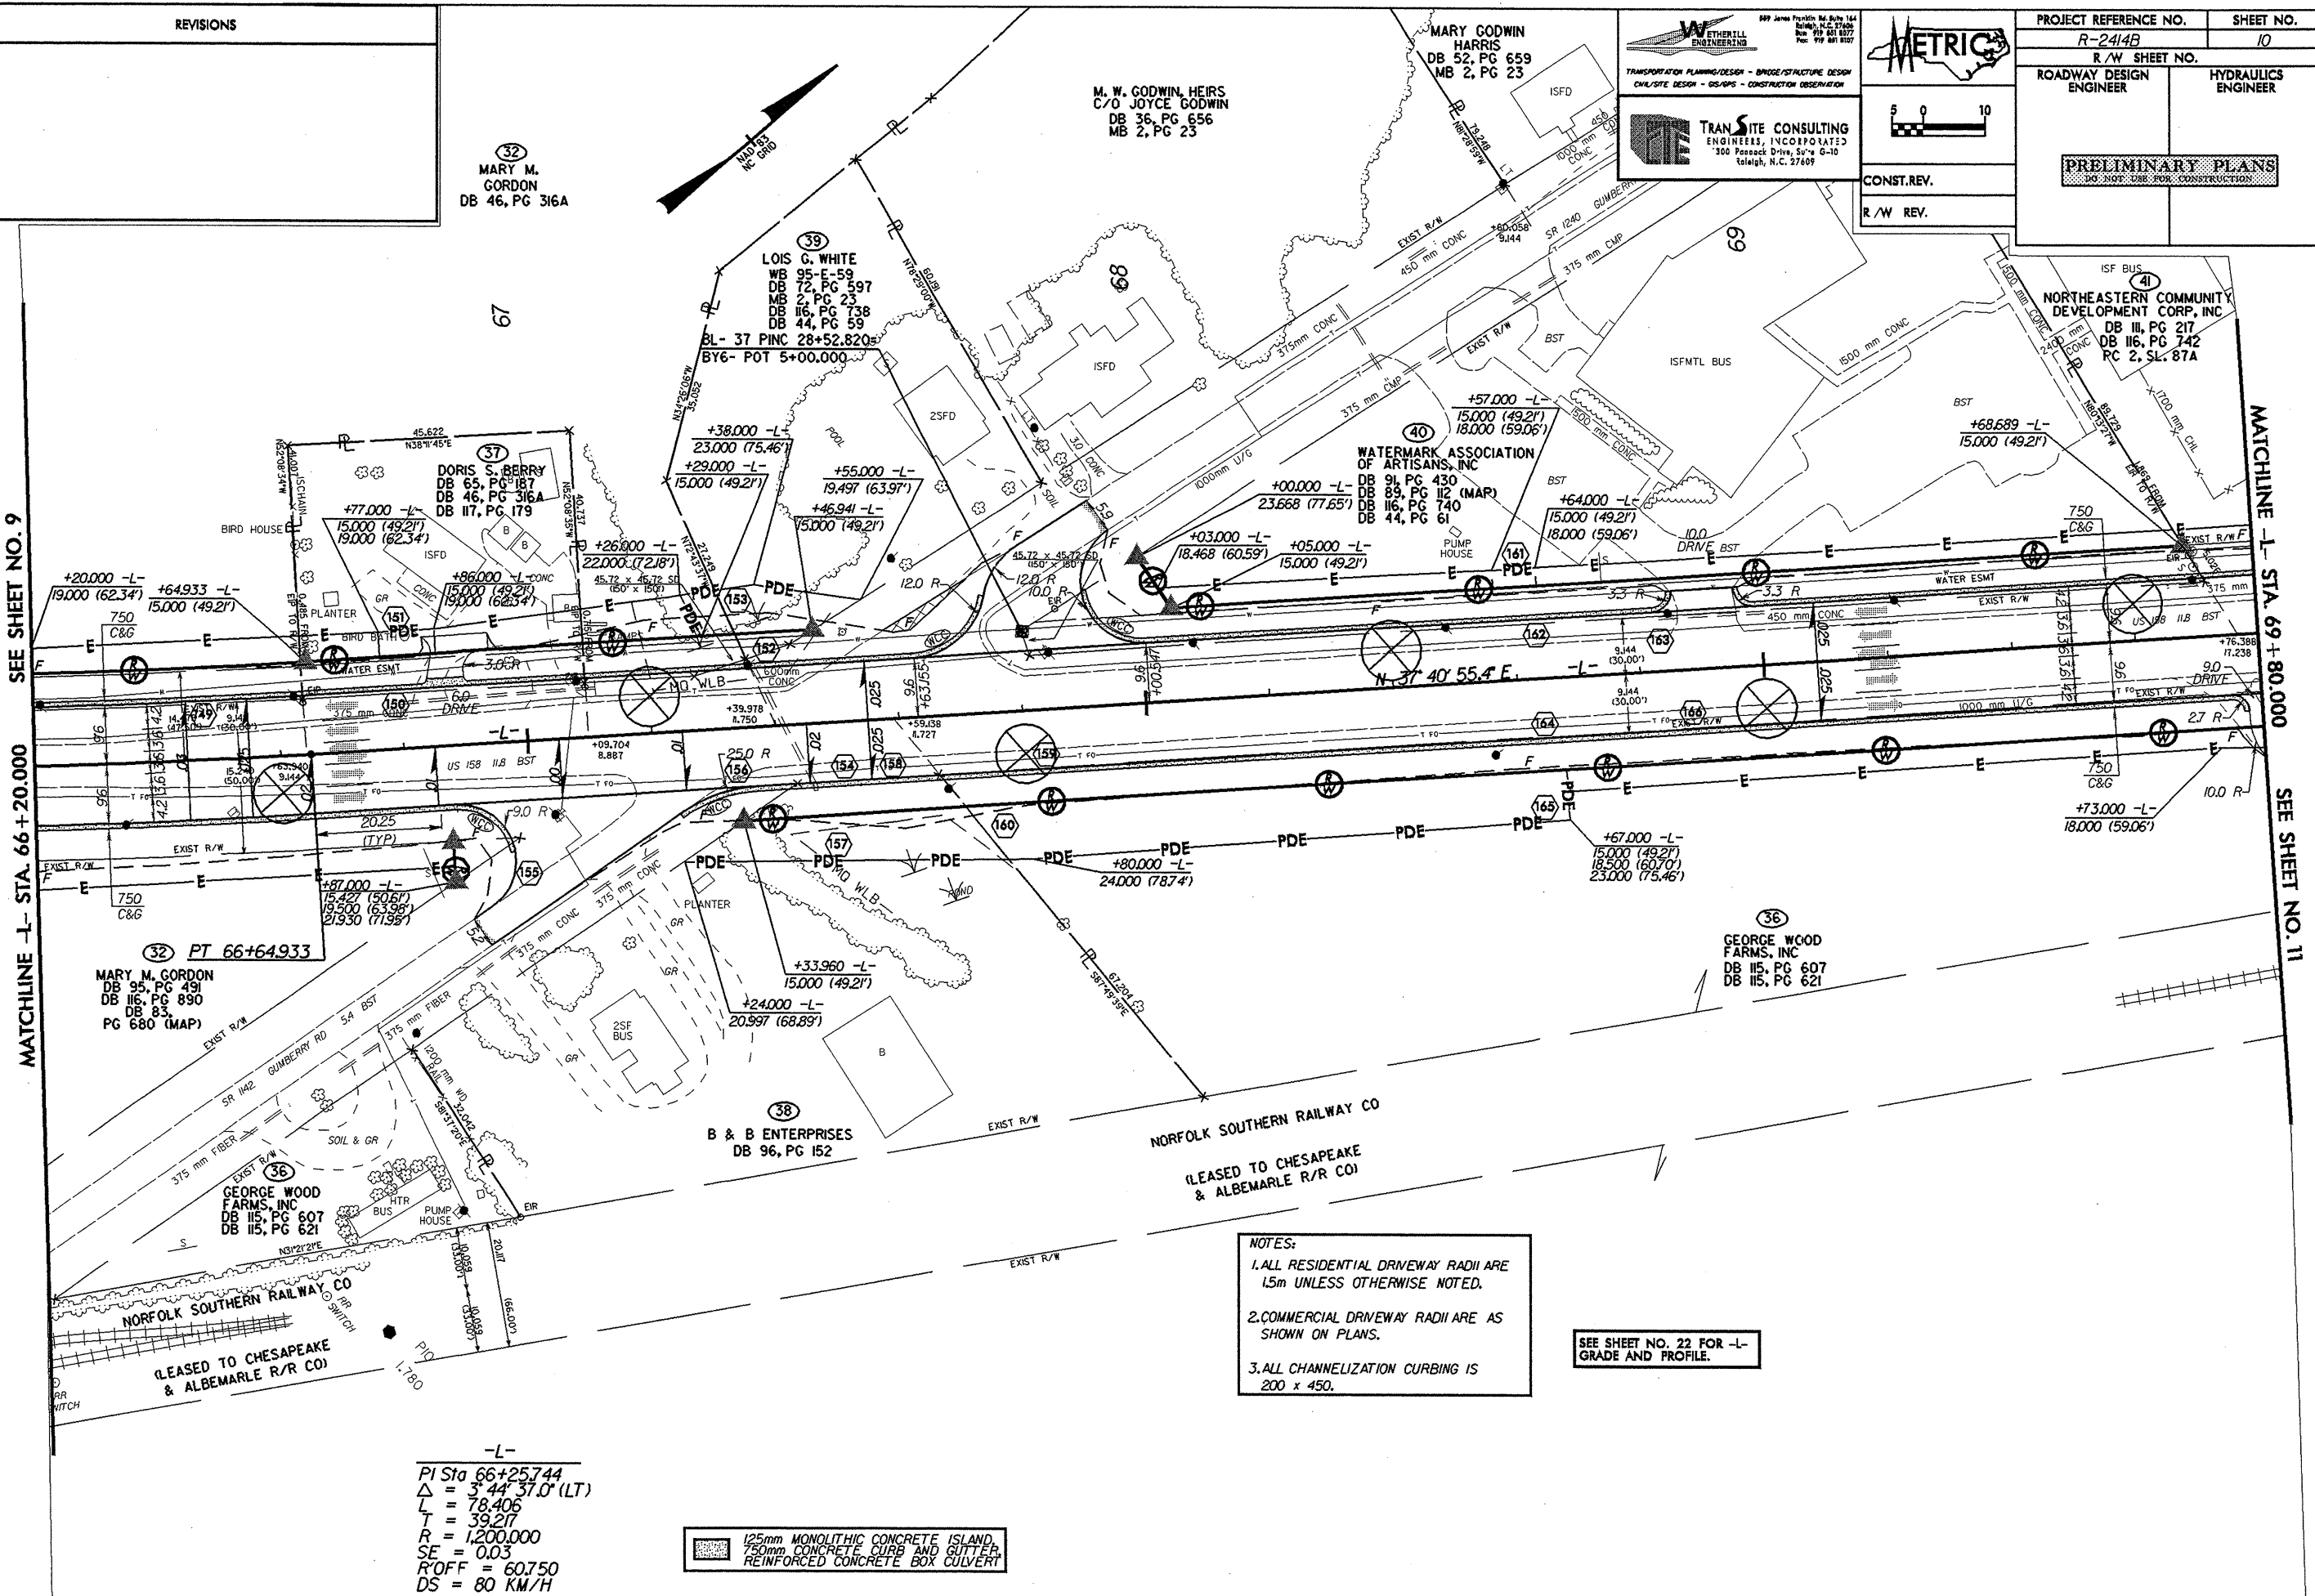

32 PT 66+64.933
 MARY M. GORDON
 DB 95, PG 491
 DB 116, PG 890
 DB 83, PG 680 (MAP)

38 B & B ENTERPRISES
 DB 96, PG 152

36 GEORGE WOOD FARMS, INC
 DB 115, PG 607
 DB 115, PG 621

- NOTES:
1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
 2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
 3. ALL CHANNELIZATION CURBING IS 200 x 450.

SEE SHEET NO. 22 FOR -L- GRADE AND PROFILE.

-L-
 PI Sta 66+25.744
 $\Delta = 3^{\circ} 44' 37.0''$ (LT)
 L = 78.406
 T = 39.217
 R = 1,200.000
 SE = 0.03
 R'OFF = 60.750
 DS = 80 KM/H


125mm MONOLITHIC CONCRETE ISLAND
 750mm CONCRETE CURB AND GUTTER
 REINFORCED CONCRETE BOX CULVERT

2008.11.15 REVISED GEOTECHNICAL REPORT R-2414B.rdg-pml/ldg

REVISIONS

R/W REVISION - REVISED PDE & TCE ON PARCEL NO.36.(BAM)

NOTES:
 1. ALL RESIDENTIAL DRIVEWAY RADII ARE 15m UNLESS OTHERWISE NOTED.
 2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
 3. ALL CHANNELIZATION CURBING IS 200 x 450.



WETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CHAL/SITE DESIGN - GIS/GIS - CONSTRUCTION OBSERVATION


TRANSITE CONSULTING ENGINEERS, INCORPORATED
 300 Pasaden Drive, Suite G-10
 Raleigh, N.C. 27607

METRIC

5 0 10

CONST. REV.
 R/W REV.

PROJECT REFERENCE NO.	R-2414B	SHEET NO.	12
R/W SHEET NO.			
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	
PRELIMINARY PLANS			

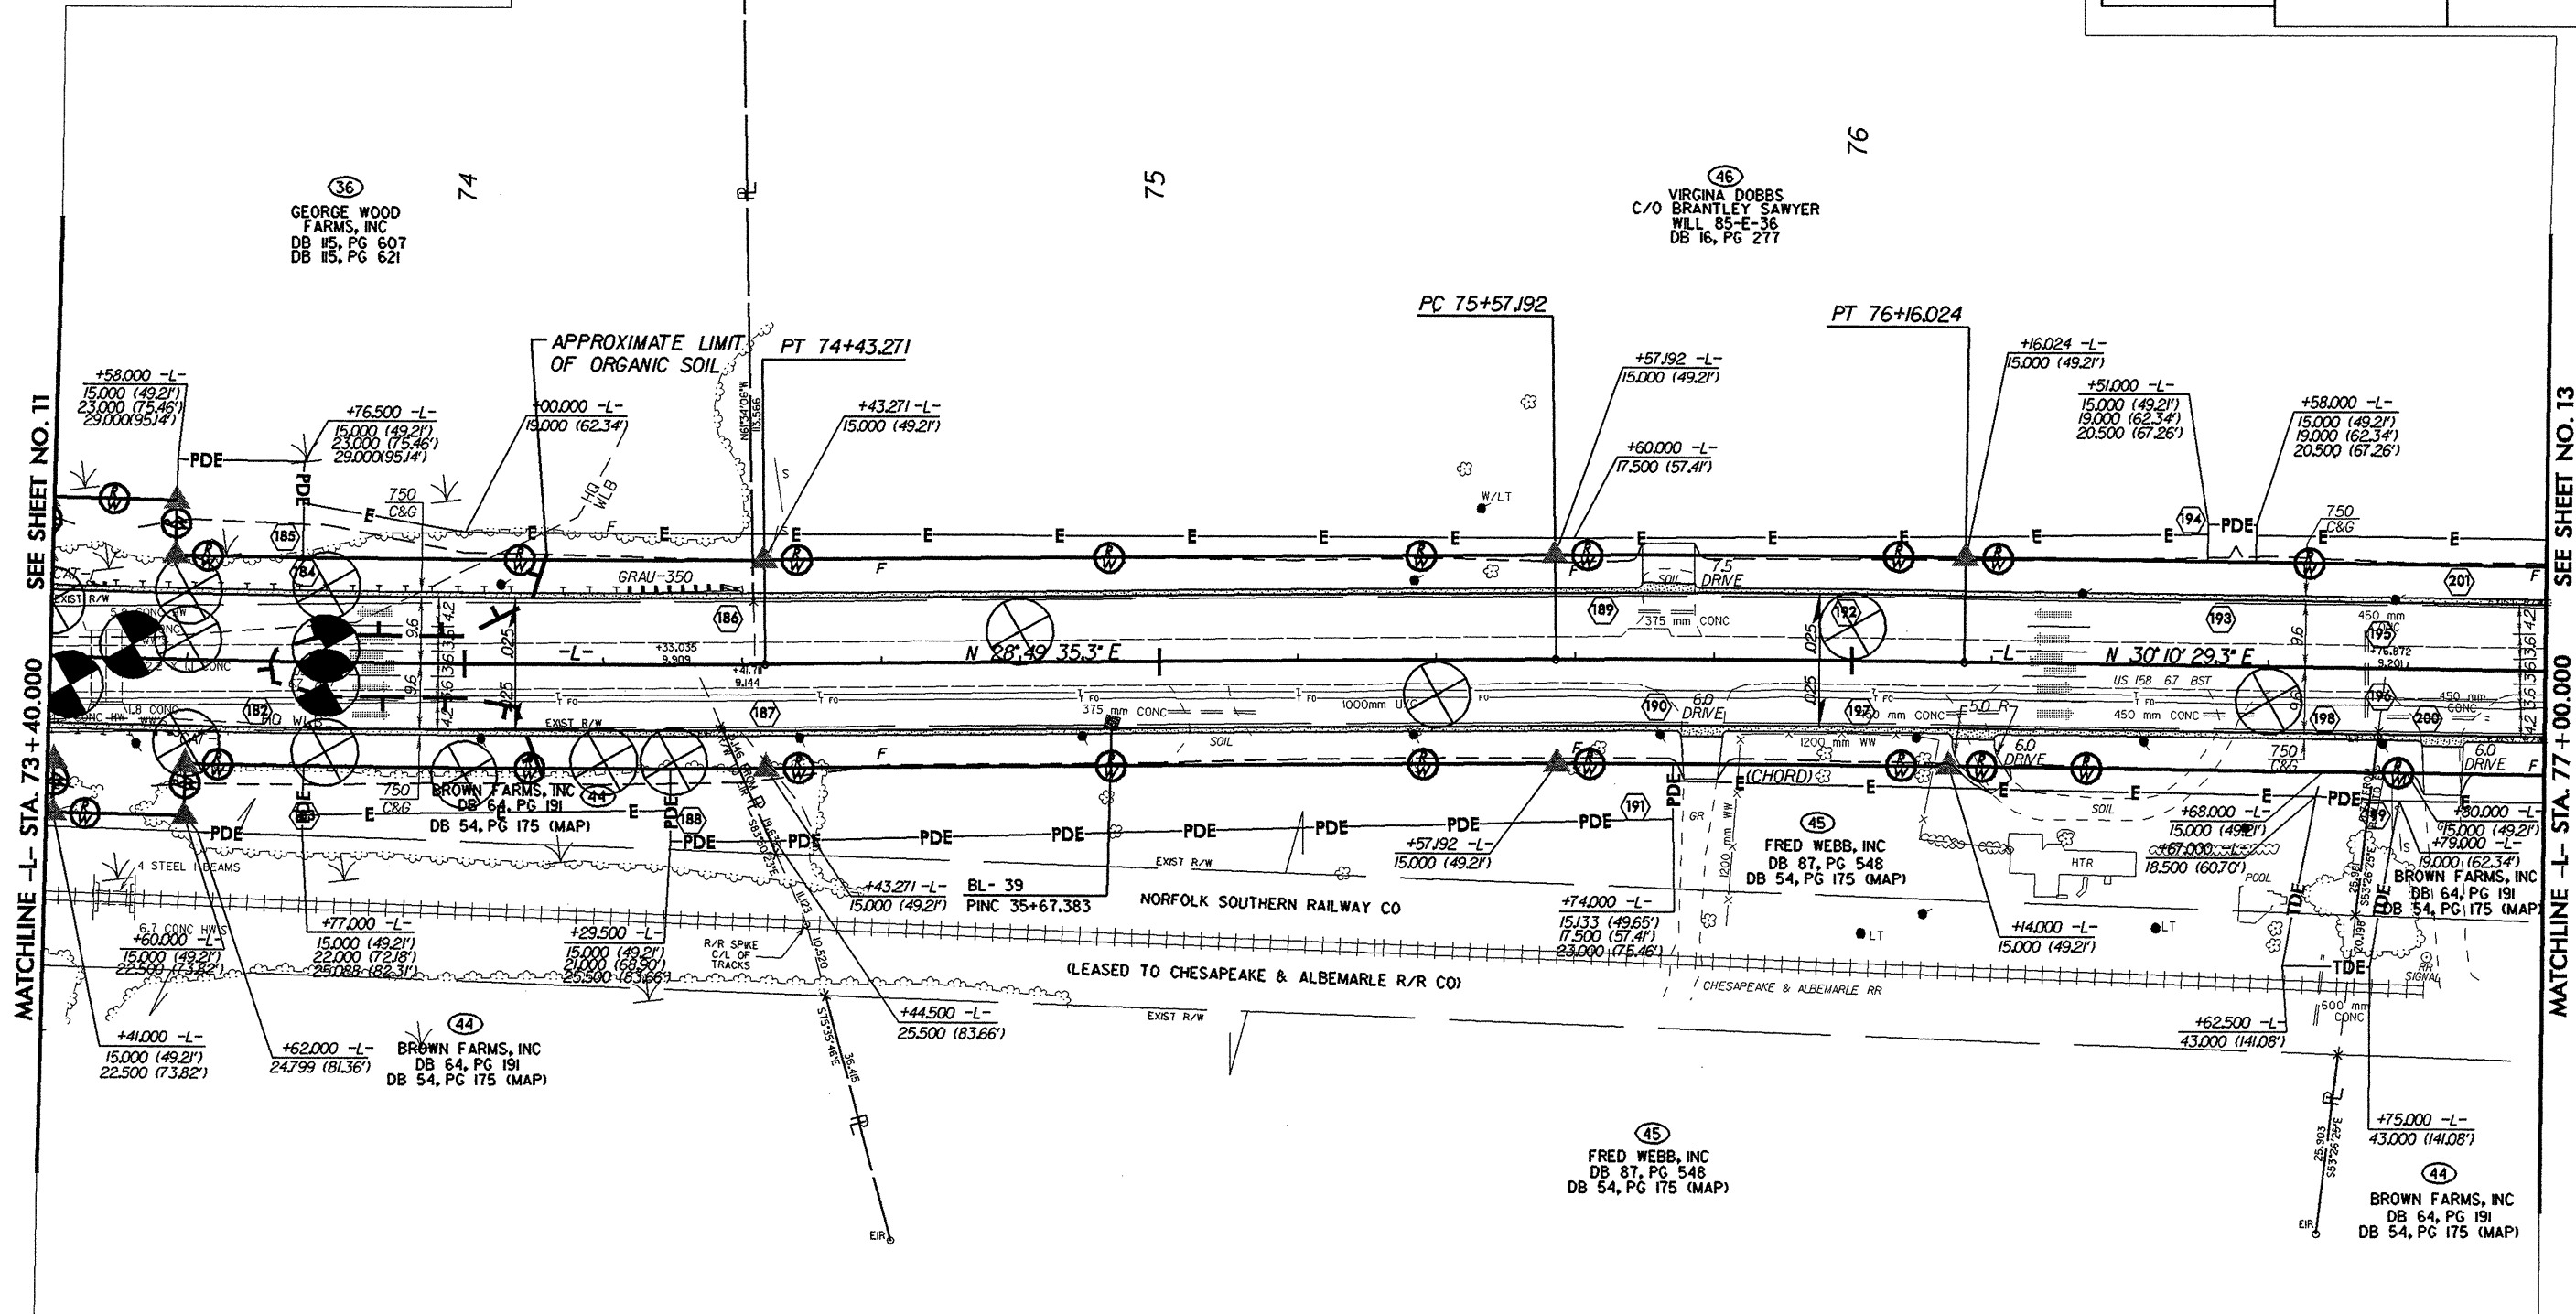

-L-	-L-
PI Sta 72+27.319	PI Sta 75+86.610
$\Delta = 8' 51' 20.1''$ (LT)	$\Delta = 1' 20' 54.0''$ (RT)
L = 432.766	L = 58.832
T = 216.815	T = 29.418
R = 2,800.000	R = 2,500.000
SE = NC	SE = NC
DS = 80 KM/H	DS = 80 KM/H


125mm MONOLITHIC CONCRETE ISLAND
 750mm CONCRETE CURB AND GUTTER
 REINFORCED CONCRETE BOX CULVERT

SEE SHEET NO. 23 FOR -L- GRADE AND PROFILE.

2008.04.14 REV2.CADD.GEOTECH.PLAN.P-01-R-2414B.rdw.pml2.dgn
 11:25:31 AM
 5/10/2008

REVISIONS

NOTES:
 1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
 2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
 3. ALL CHANNELIZATION CURBING IS 200 x 450.




WETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

TRANSITE CONSULTING ENGINEERS, INCORPORATED
 300 Pensacola Drive, Suite G-10
 Raleigh, N.C. 27609

METRIC

PROJECT REFERENCE NO.	SHEET NO.
R-2414B	14
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS	
CONST. REV.	
R/W REV.	

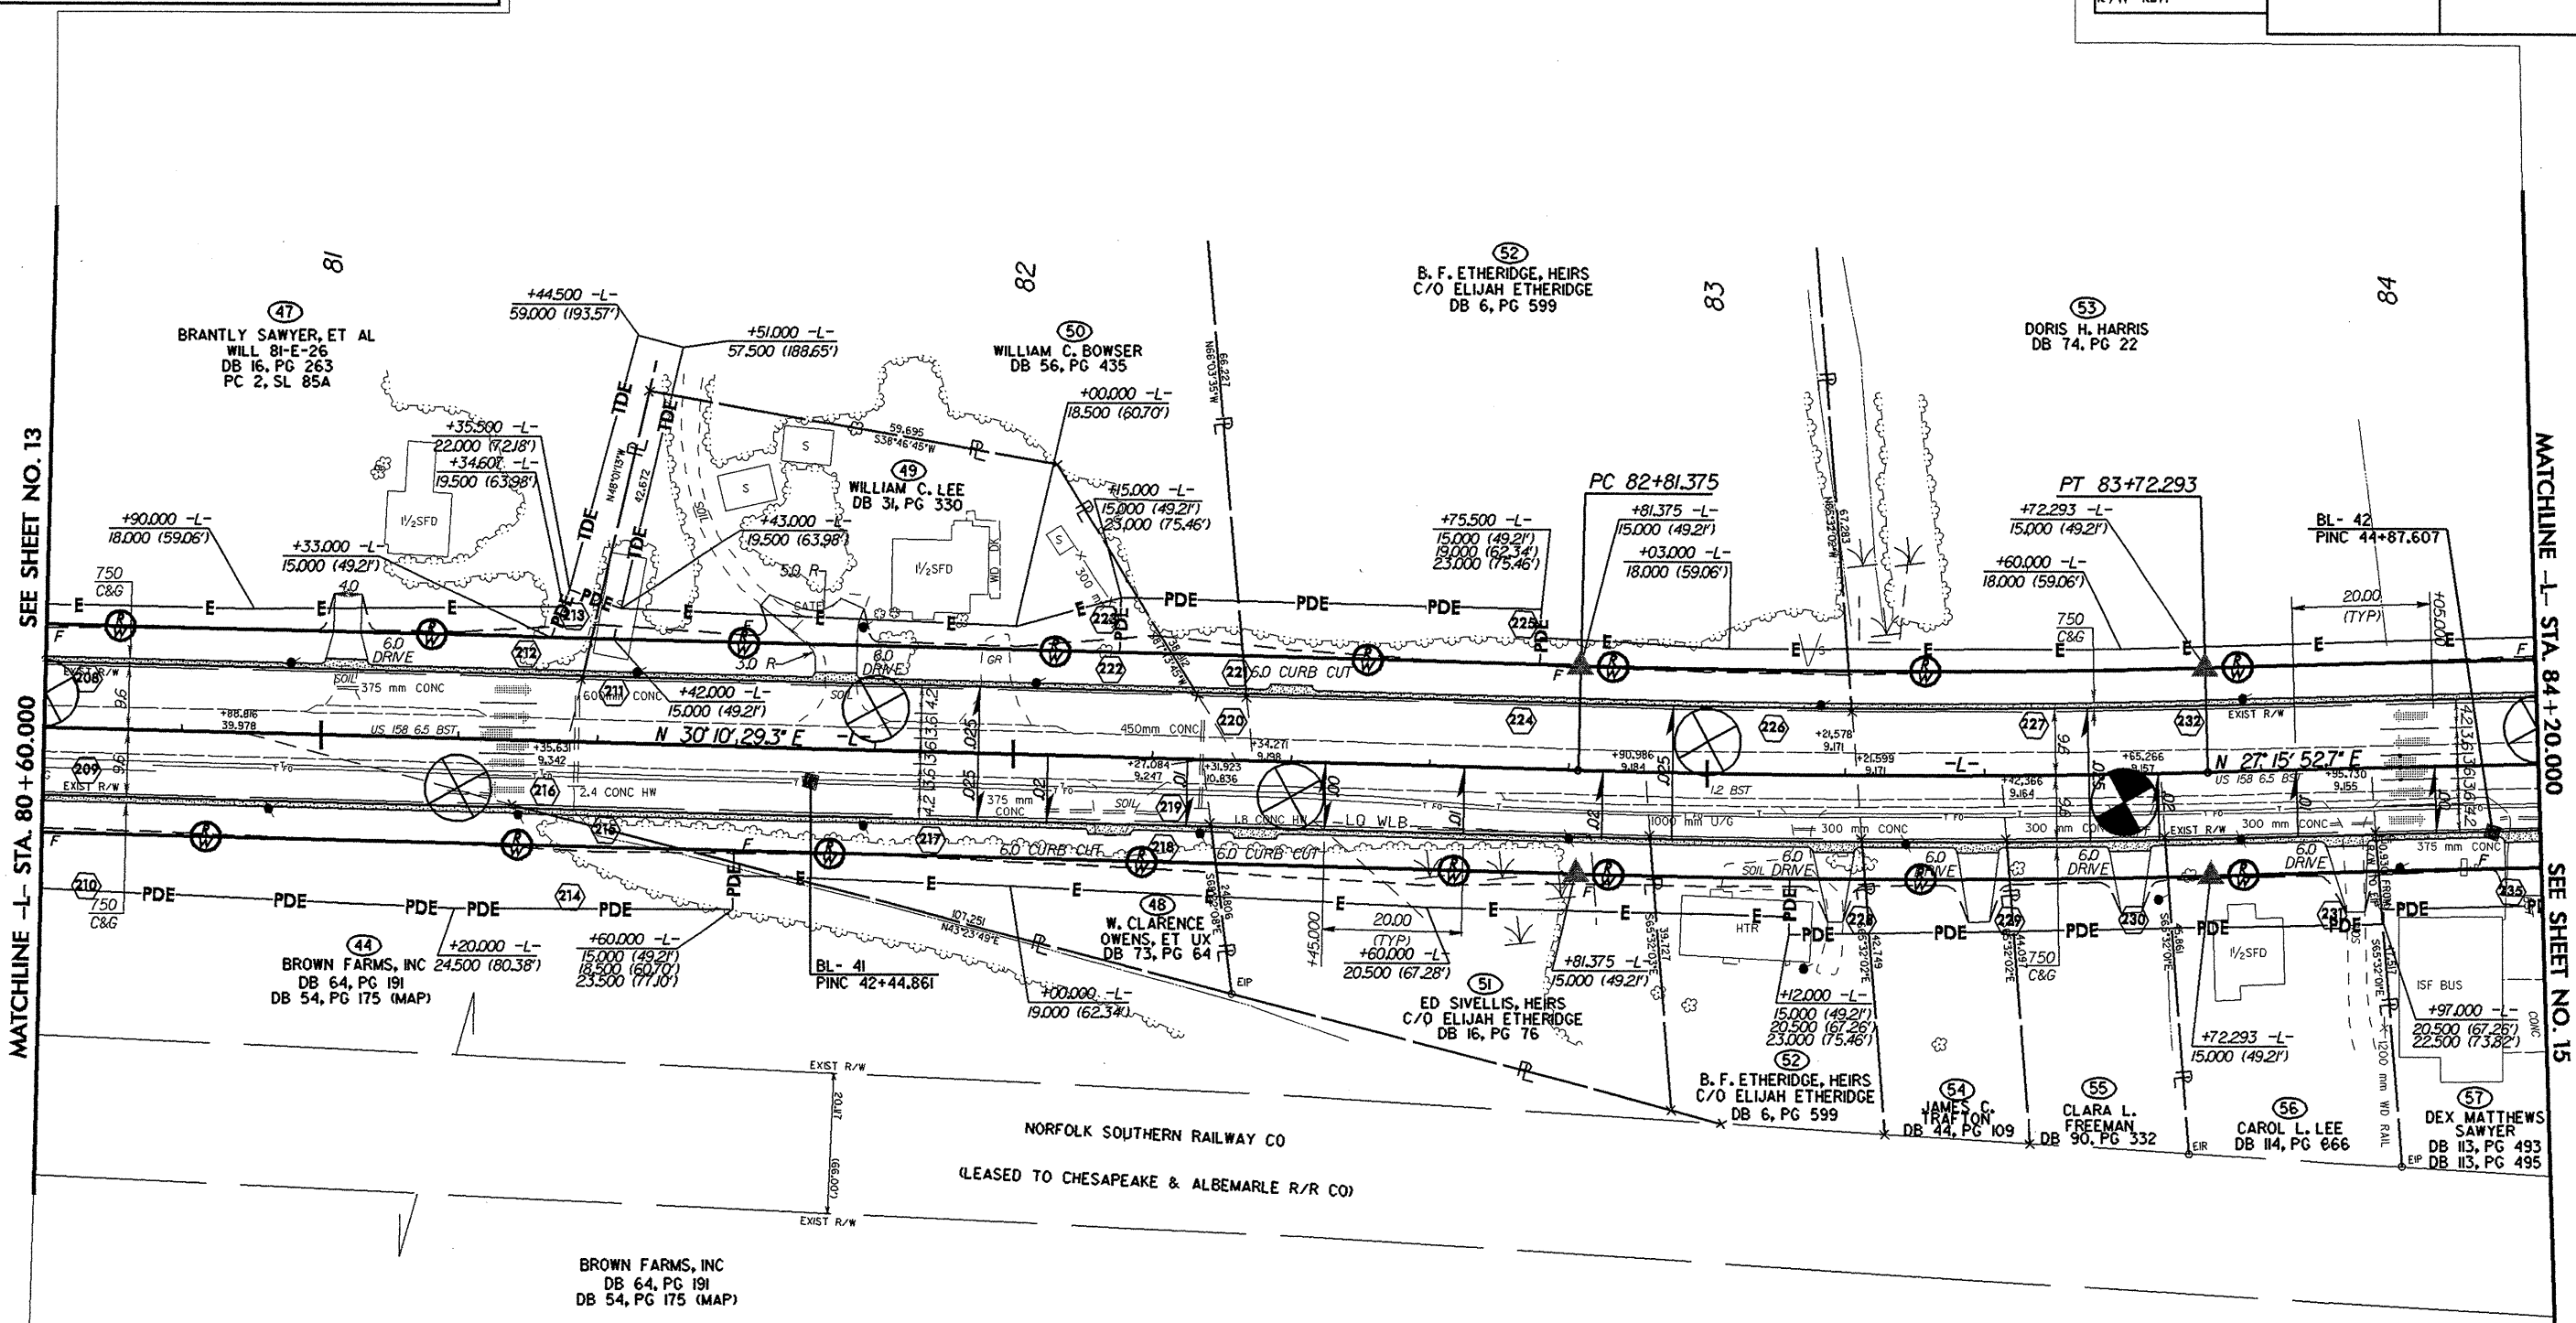

MATCHLINE -L- STA. 80 + 60.000 SEE SHEET NO. 13

MATCHLINE -L- STA. 84 + 20.000 SEE SHEET NO. 15

-L-
 PI Sta 83+26.844
 $\Delta = 254' 36.6" (LT)$
 $L = 90.918$
 $T = 45.469$
 $R = 1790.000$
 $SE = 0.025$
 $R'OFF = 50.625$
 $DS = 80 KM/H$

125mm MONOLITHIC CONCRETE ISLAND,
 150mm CONCRETE CURB AND CUTTER,
 REINFORCED CONCRETE BOX CULVERT

SEE SHEET NO. 24 FOR -L-
 GRADE AND PROFILE.

DATE: 23 MAY 2008 10:08 AM
 FILE: C:\WORK\REVZ\CADD\GEOTECH\Plan\p-2414b_rdy.pbl.dgn

REVISIONS

TRANSITE CONSULTING
ENGINEERS, INCORPORATED
1300 Paddock Drive, Suite G-10
Raleigh, N.C. 27609

W. WITHERELL ENGINEERING
TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
CIVIL/SITE DESIGN - GEOTECH - CONSTRUCTION OBSERVATION



PROJECT REFERENCE NO. R-2414B	SHEET NO. 15
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	
5 0 10	
CONST. REV.	R/W REV.



NOTES:
1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
3. ALL CHANNELIZATION CURBING IS 200 x 450.

MATCHLINE -L- STA. 84+20.000

SEE SHEET NO. 14

SEE SHEET NO. 16

MATCHLINE -L- STA. 87+80.000

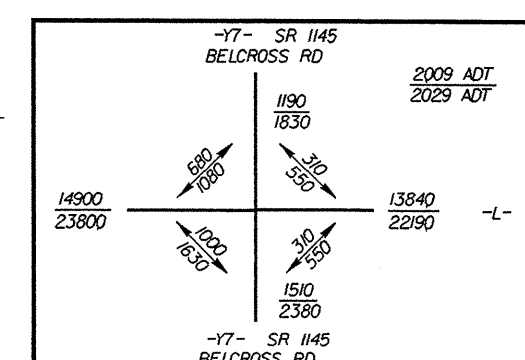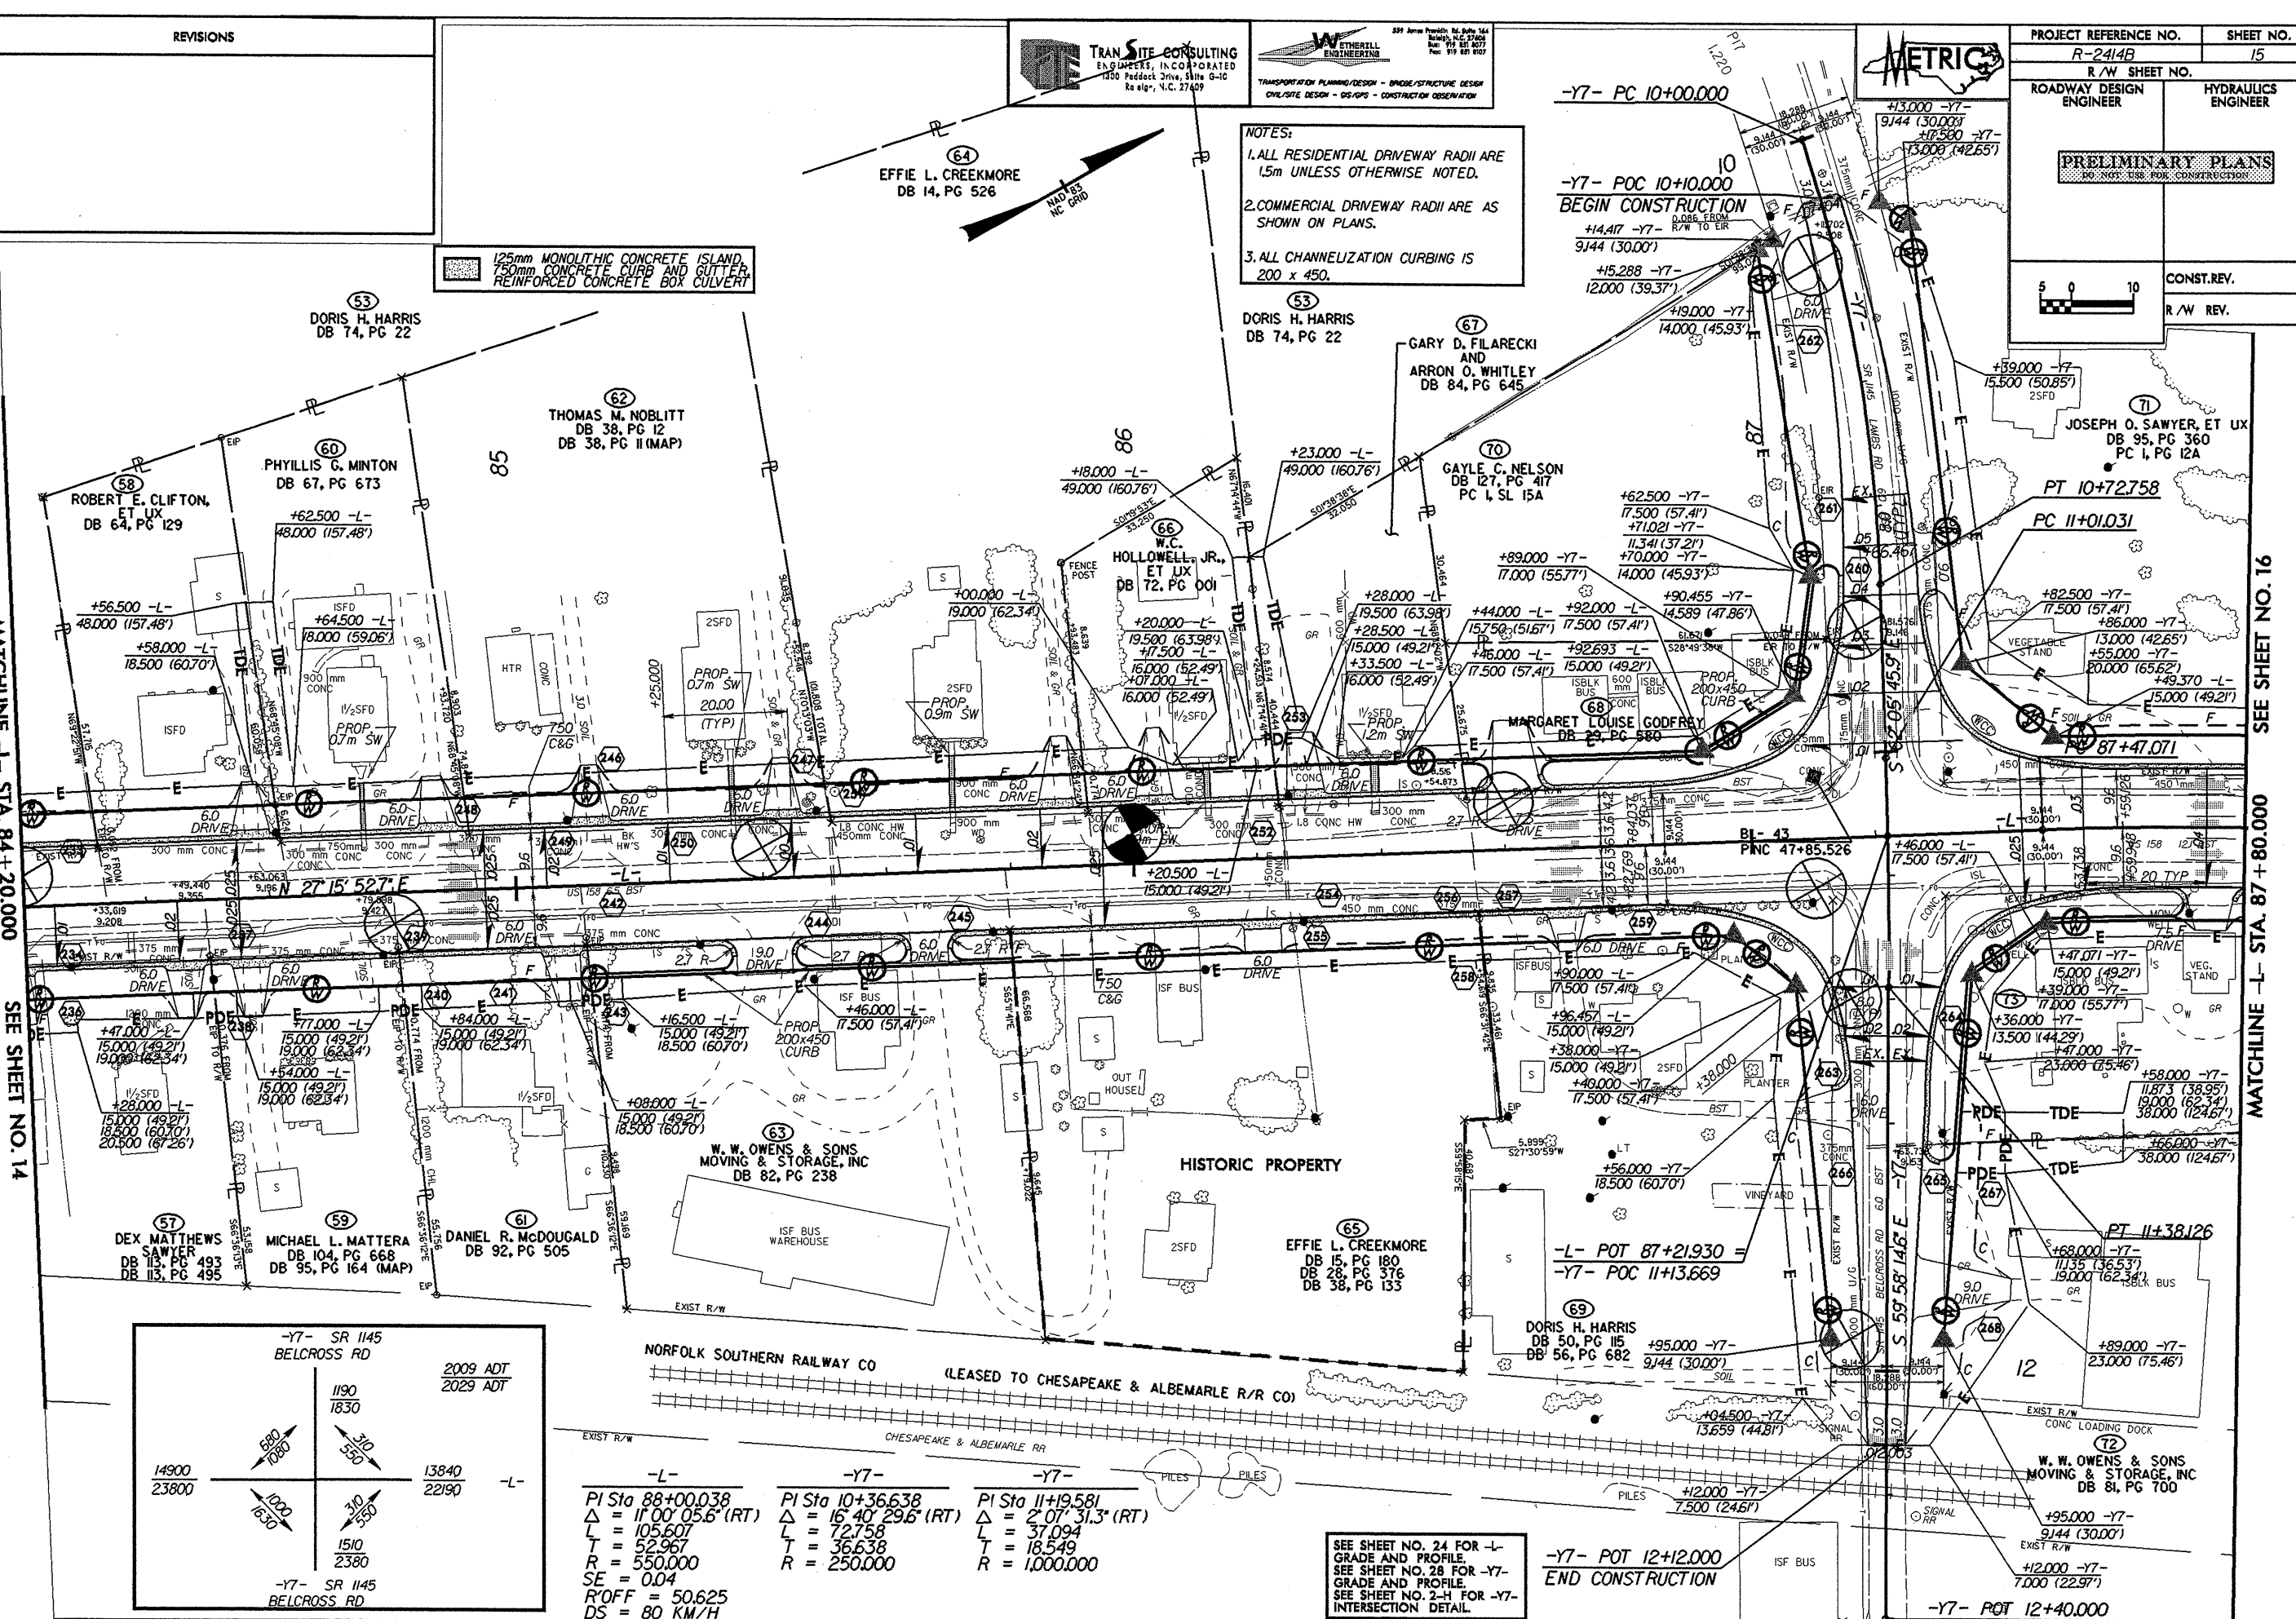

-L-	-Y7-	-Y7-
PI Sta 88+00.038	PI Sta 10+36.638	PI Sta 11+19.581
$\Delta = 11^{\circ}00'05.6''$ (RT)	$\Delta = 16^{\circ}40'29.6''$ (RT)	$\Delta = 2^{\circ}07'31.3''$ (RT)
L = 105.607	L = 72.758	L = 37.094
T = 52.967	T = 36.638	T = 18.549
R = 550.000	R = 250.000	R = 1,000.000
SE = 0.04		
R'OFF = 50.625		
DS = 80 KM/H		

SEE SHEET NO. 24 FOR -L- GRADE AND PROFILE.
SEE SHEET NO. 28 FOR -Y7- GRADE AND PROFILE.
SEE SHEET NO. 2-H FOR -Y7- INTERSECTION DETAIL.

-Y7- POT 12+12.000
END CONSTRUCTION


-Y7- POT 12+40.000

REVISIONS

R/W REVISION- REVISED ROW, PDE & TCE ON PARCEL NOS. 71, 74, 75, 76 & 77. REVISED FLAGGING DUE TO THE ELIMINATION OF EQUATUTY. (BAM)

NOTES:

1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
3. ALL CHANNELIZATION CURBING IS 200 x 450.




W. W. OWENS & SONS
ENGINEERING
TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
CIVIL/SITE DESIGN - GS/OPS - CONSTRUCTION OBSERVATION

TRANSITE CONSULTING
ENGINEERS, INC. PROJECTS
300 Fasonock Drive, Suite G-10
Tallahassee, N.C. 27409

METRIC

PROJECT REFERENCE NO. R-2414B	SHEET NO. 16
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	
CONST. REV.	
R/W REV.	

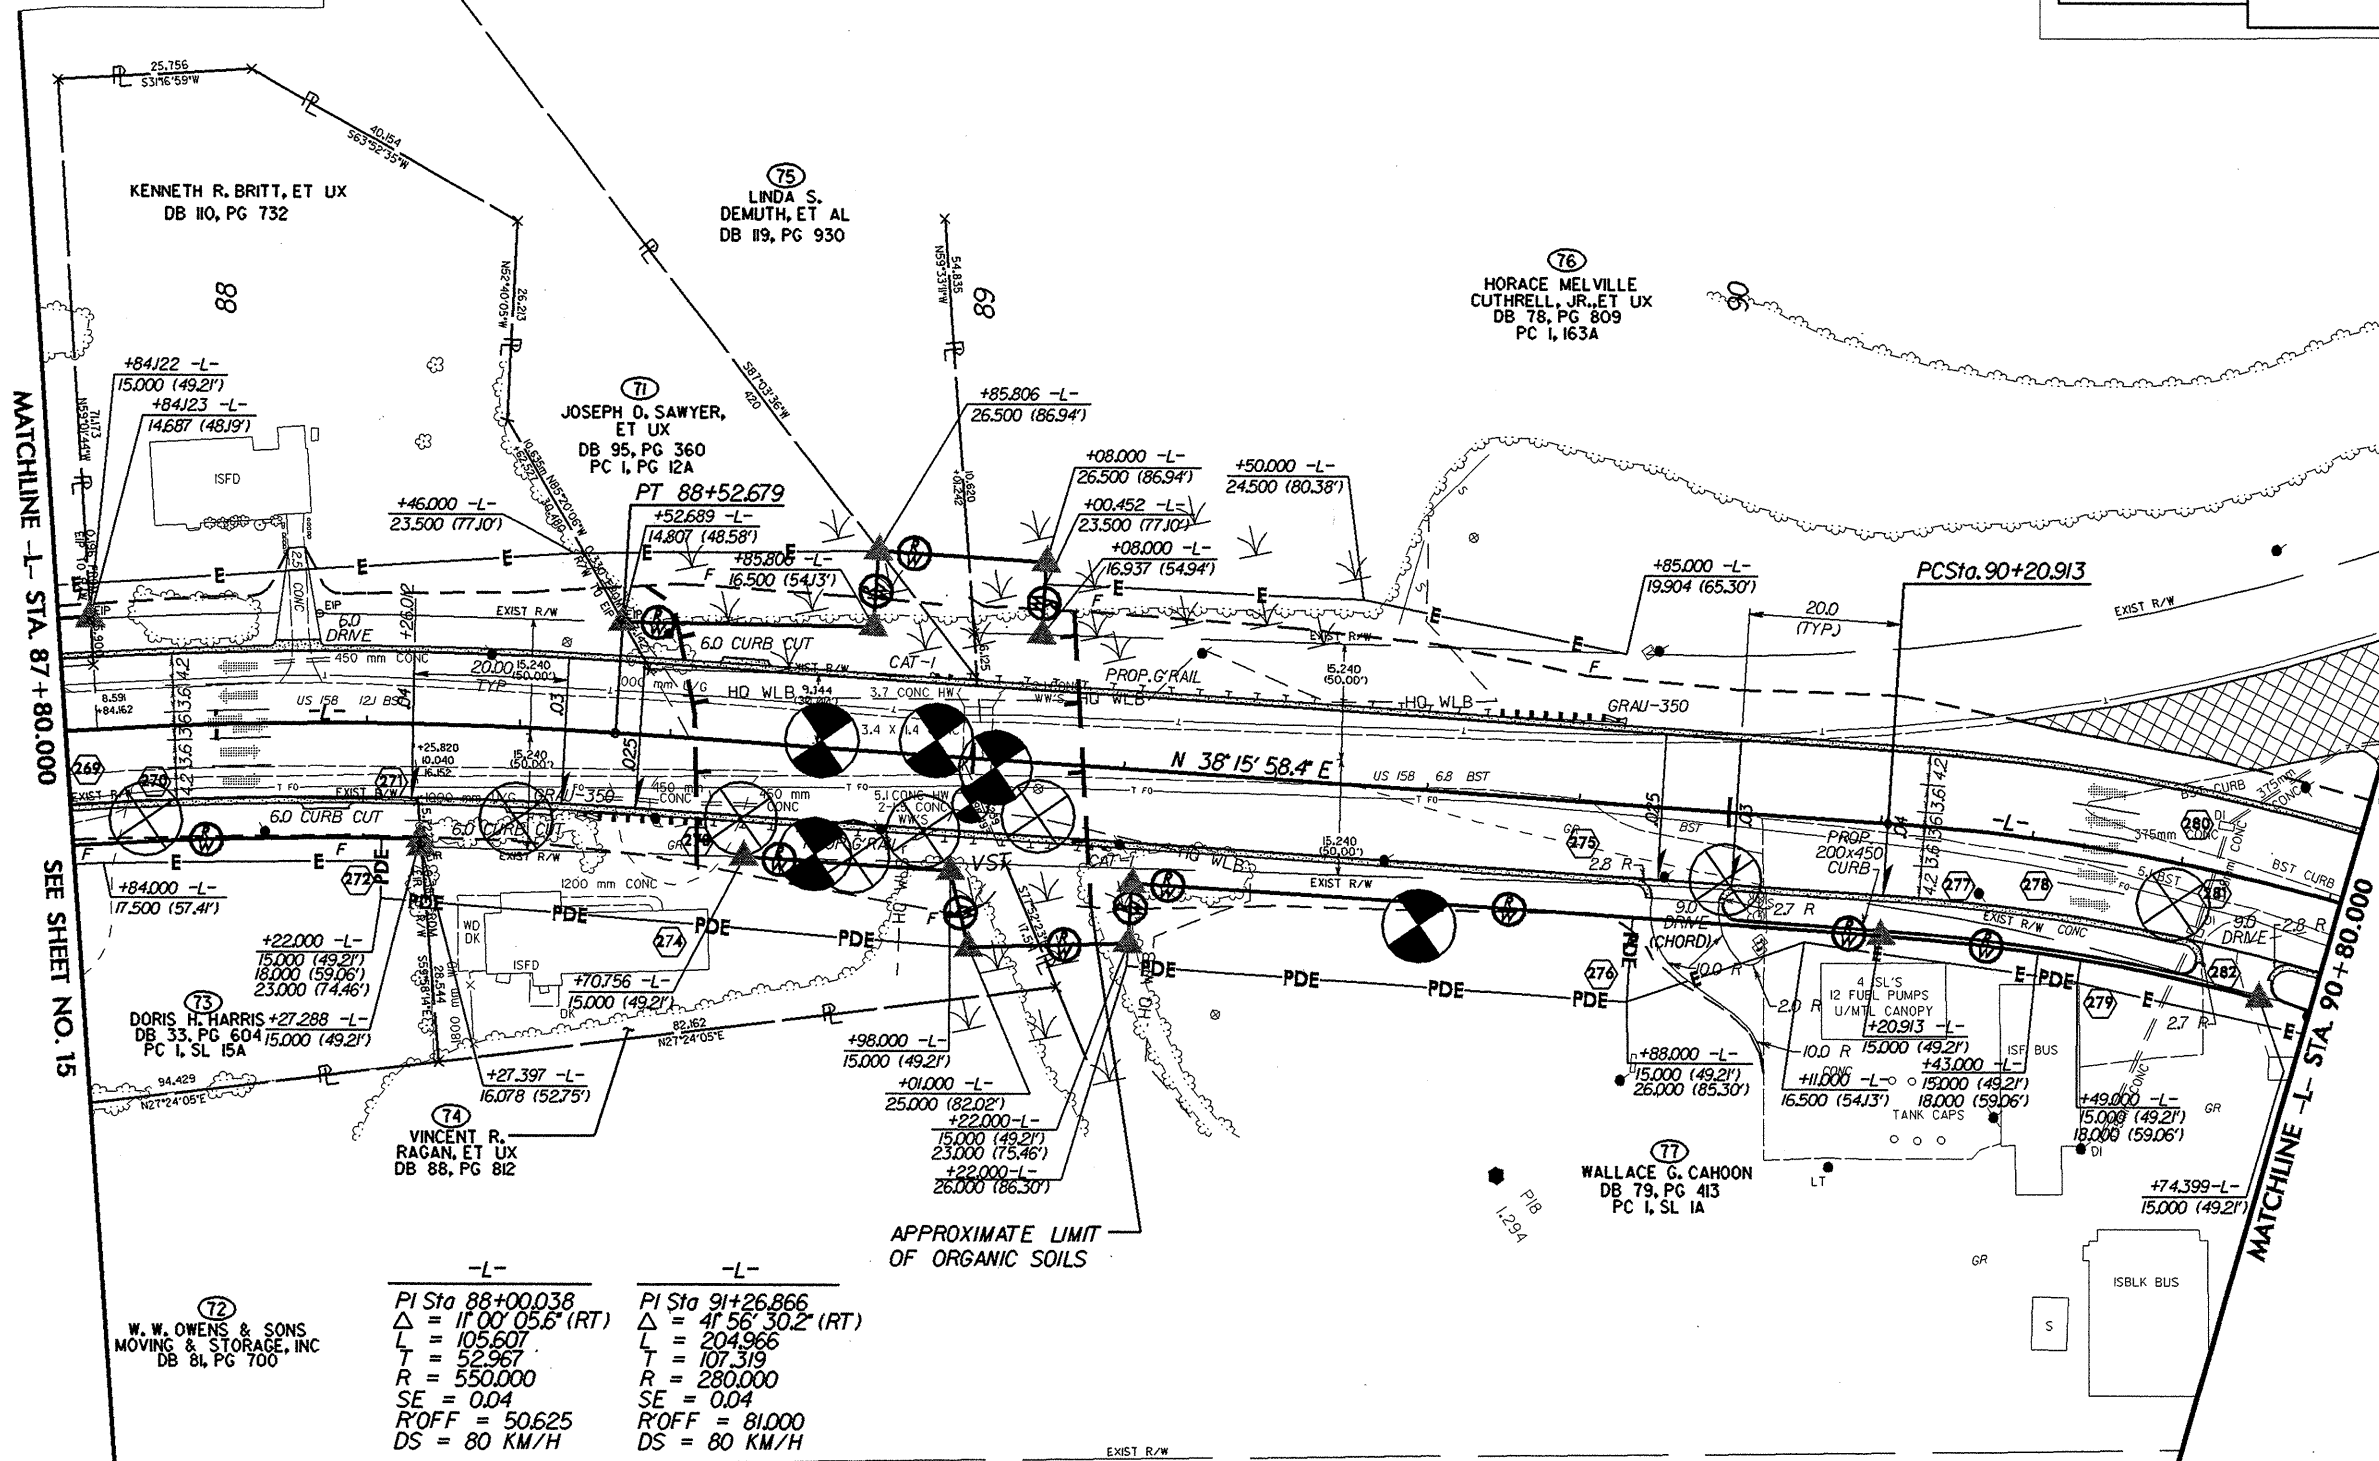

MATCHLINE -L- STA. 87+80.000
SEE SHEET NO. 15

MATCHLINE -L- STA. 90+80.000
SEE SHEET NO. 17

-L-	-L-
PI Sta 88+00.038	PI Sta 91+26.866
$\Delta = 11^{\circ}00'05.6''$ (RT)	$\Delta = 41^{\circ}56'30.2''$ (RT)
L = 105.607	L = 204.966
T = 52.967	T = 107.319
R = 550.000	R = 280.000
SE = 0.04	SE = 0.04
R'OFF = 50.625	R'OFF = 81.000
DS = 80 KM/H	DS = 80 KM/H

NORFOLK SOUTHERN RAILWAY CO
(LEASED TO CHESAPEAKE & ALBEMARLE R/R CO)

SEE SHEET NO. 25 FOR -L- GRADE AND PROFILE.

125mm MONOLITHIC CONCRETE ISLAND
75mm CONCRETE CURB AND GUTTER
REINFORCED CONCRETE BOX CULVERT

18-44-2008 10:03
w:\p16\2414b\2414b.dwg
18-44-2008 10:03
w:\p16\2414b\2414b.dwg

REVISIONS

NOTES:

1. ALL RESIDENTIAL DRIVEWAY RADII ARE 1.5m UNLESS OTHERWISE NOTED.
2. COMMERCIAL DRIVEWAY RADII ARE AS SHOWN ON PLANS.
3. ALL CHANNELIZATION CURBING IS 200 x 450.

WETHERILL ENGINEERING
 TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
 CIVIL/SITE DESIGN - GIS/APS - CONSTRUCTION OBSERVATION








TRANSITE CONSULTING ENGINEERS, INCORPORATED
 300 Paradise Drive, 5th Fl. G-10
 Raleigh, N.C. 27609

METRIC

5 0 10

CONST. REV.
 R/W REV.

PROJECT REFERENCE NO.	SHEET NO.
R-2414B	18
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS	

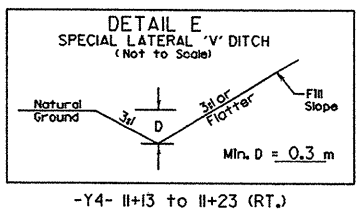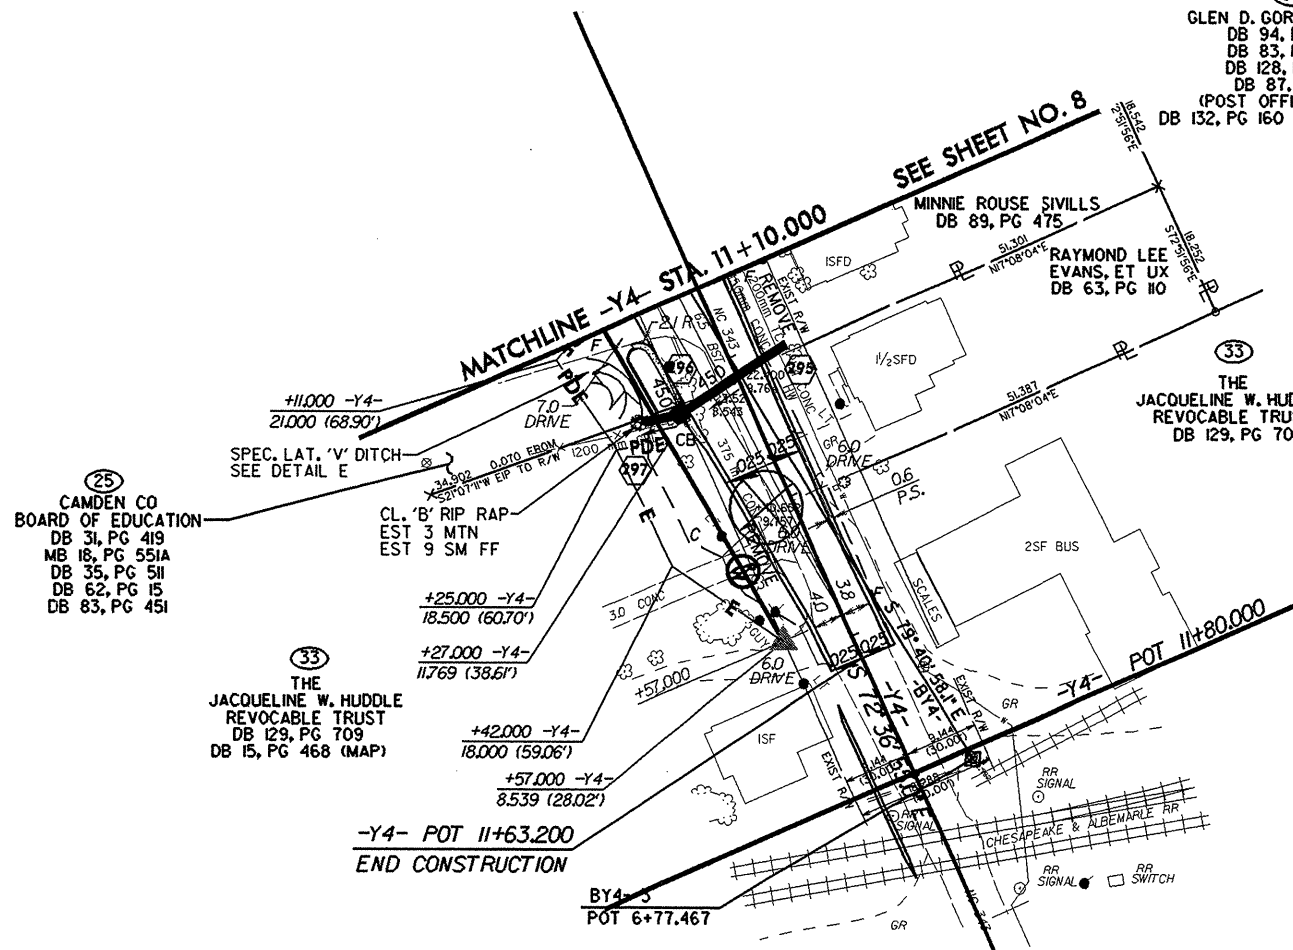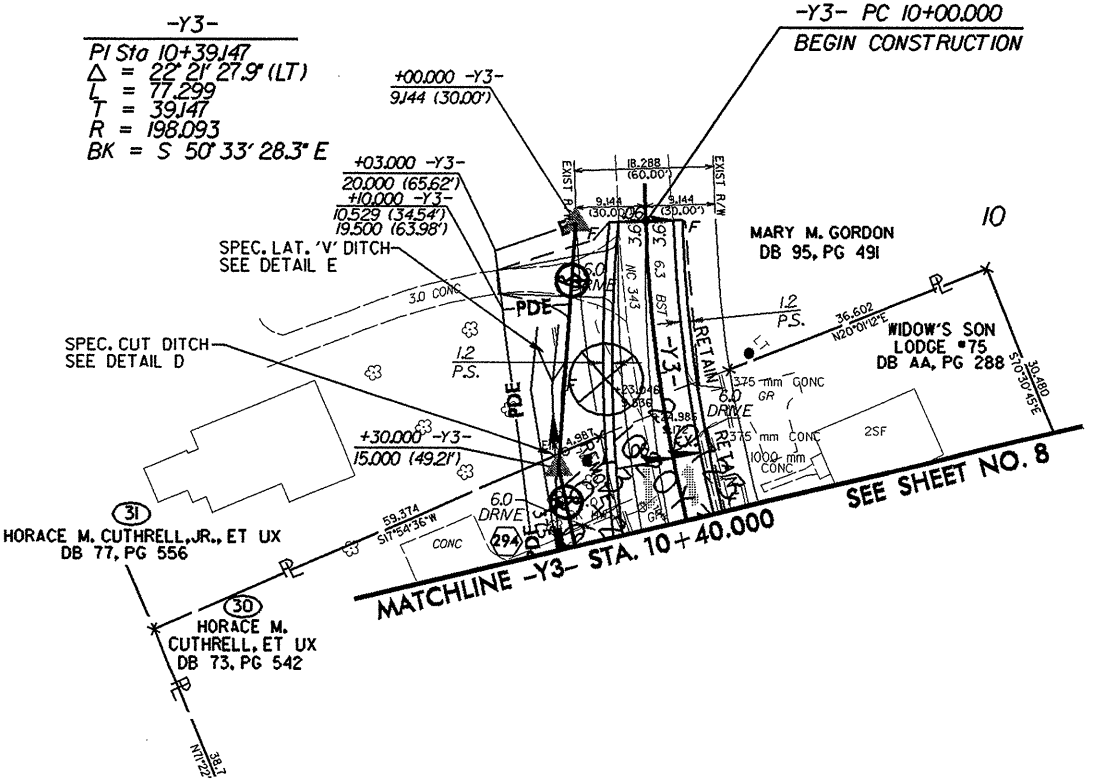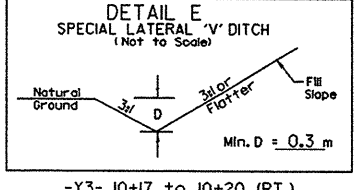

125mm MONOLITHIC CONCRETE ISLAND,
 750mm CONCRETE CURB AND GUTTER,
 REINFORCED CONCRETE BOX CULVERT

SEE SHEET NO. 27 FOR -Y3-
 GRADE AND PROFILE.
 SEE SHEET NO. 27 FOR -Y4-
 GRADE AND PROFILE.
 SEE SHEET NO. 2-G FOR -Y3-
 & -Y4- INTERSECTION DETAIL.

23 MAY 2008 14:55 REV2.CADD.GEOTECH/PI/SP/OT/V-2414b.rdy.psh[B]dgn

METRIC

PROJECT REFERENCE NO. R-2414B SHEET NO. 21

ROADWAY DESIGN ENGINEER HYDRAULICS ENGINEER


PRELIMINARY PLANS
DO NOT USE FOR CONSTRUCTION

INCOMPLETE PLANS
DO NOT USE FOR R/W ACQUISITION

CONST. REV.
R/W REV.

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-44	9M RT	53+00	0.00-1.00	A-6(12)	33	15	4.2	35.4	26.1	34.2	100	99	84	26.6	
S-45	9M RT	53+00	1.00-1.93	A-4(0)	22	NP	7.9	75.3	8.8	8.1	96	95	53		

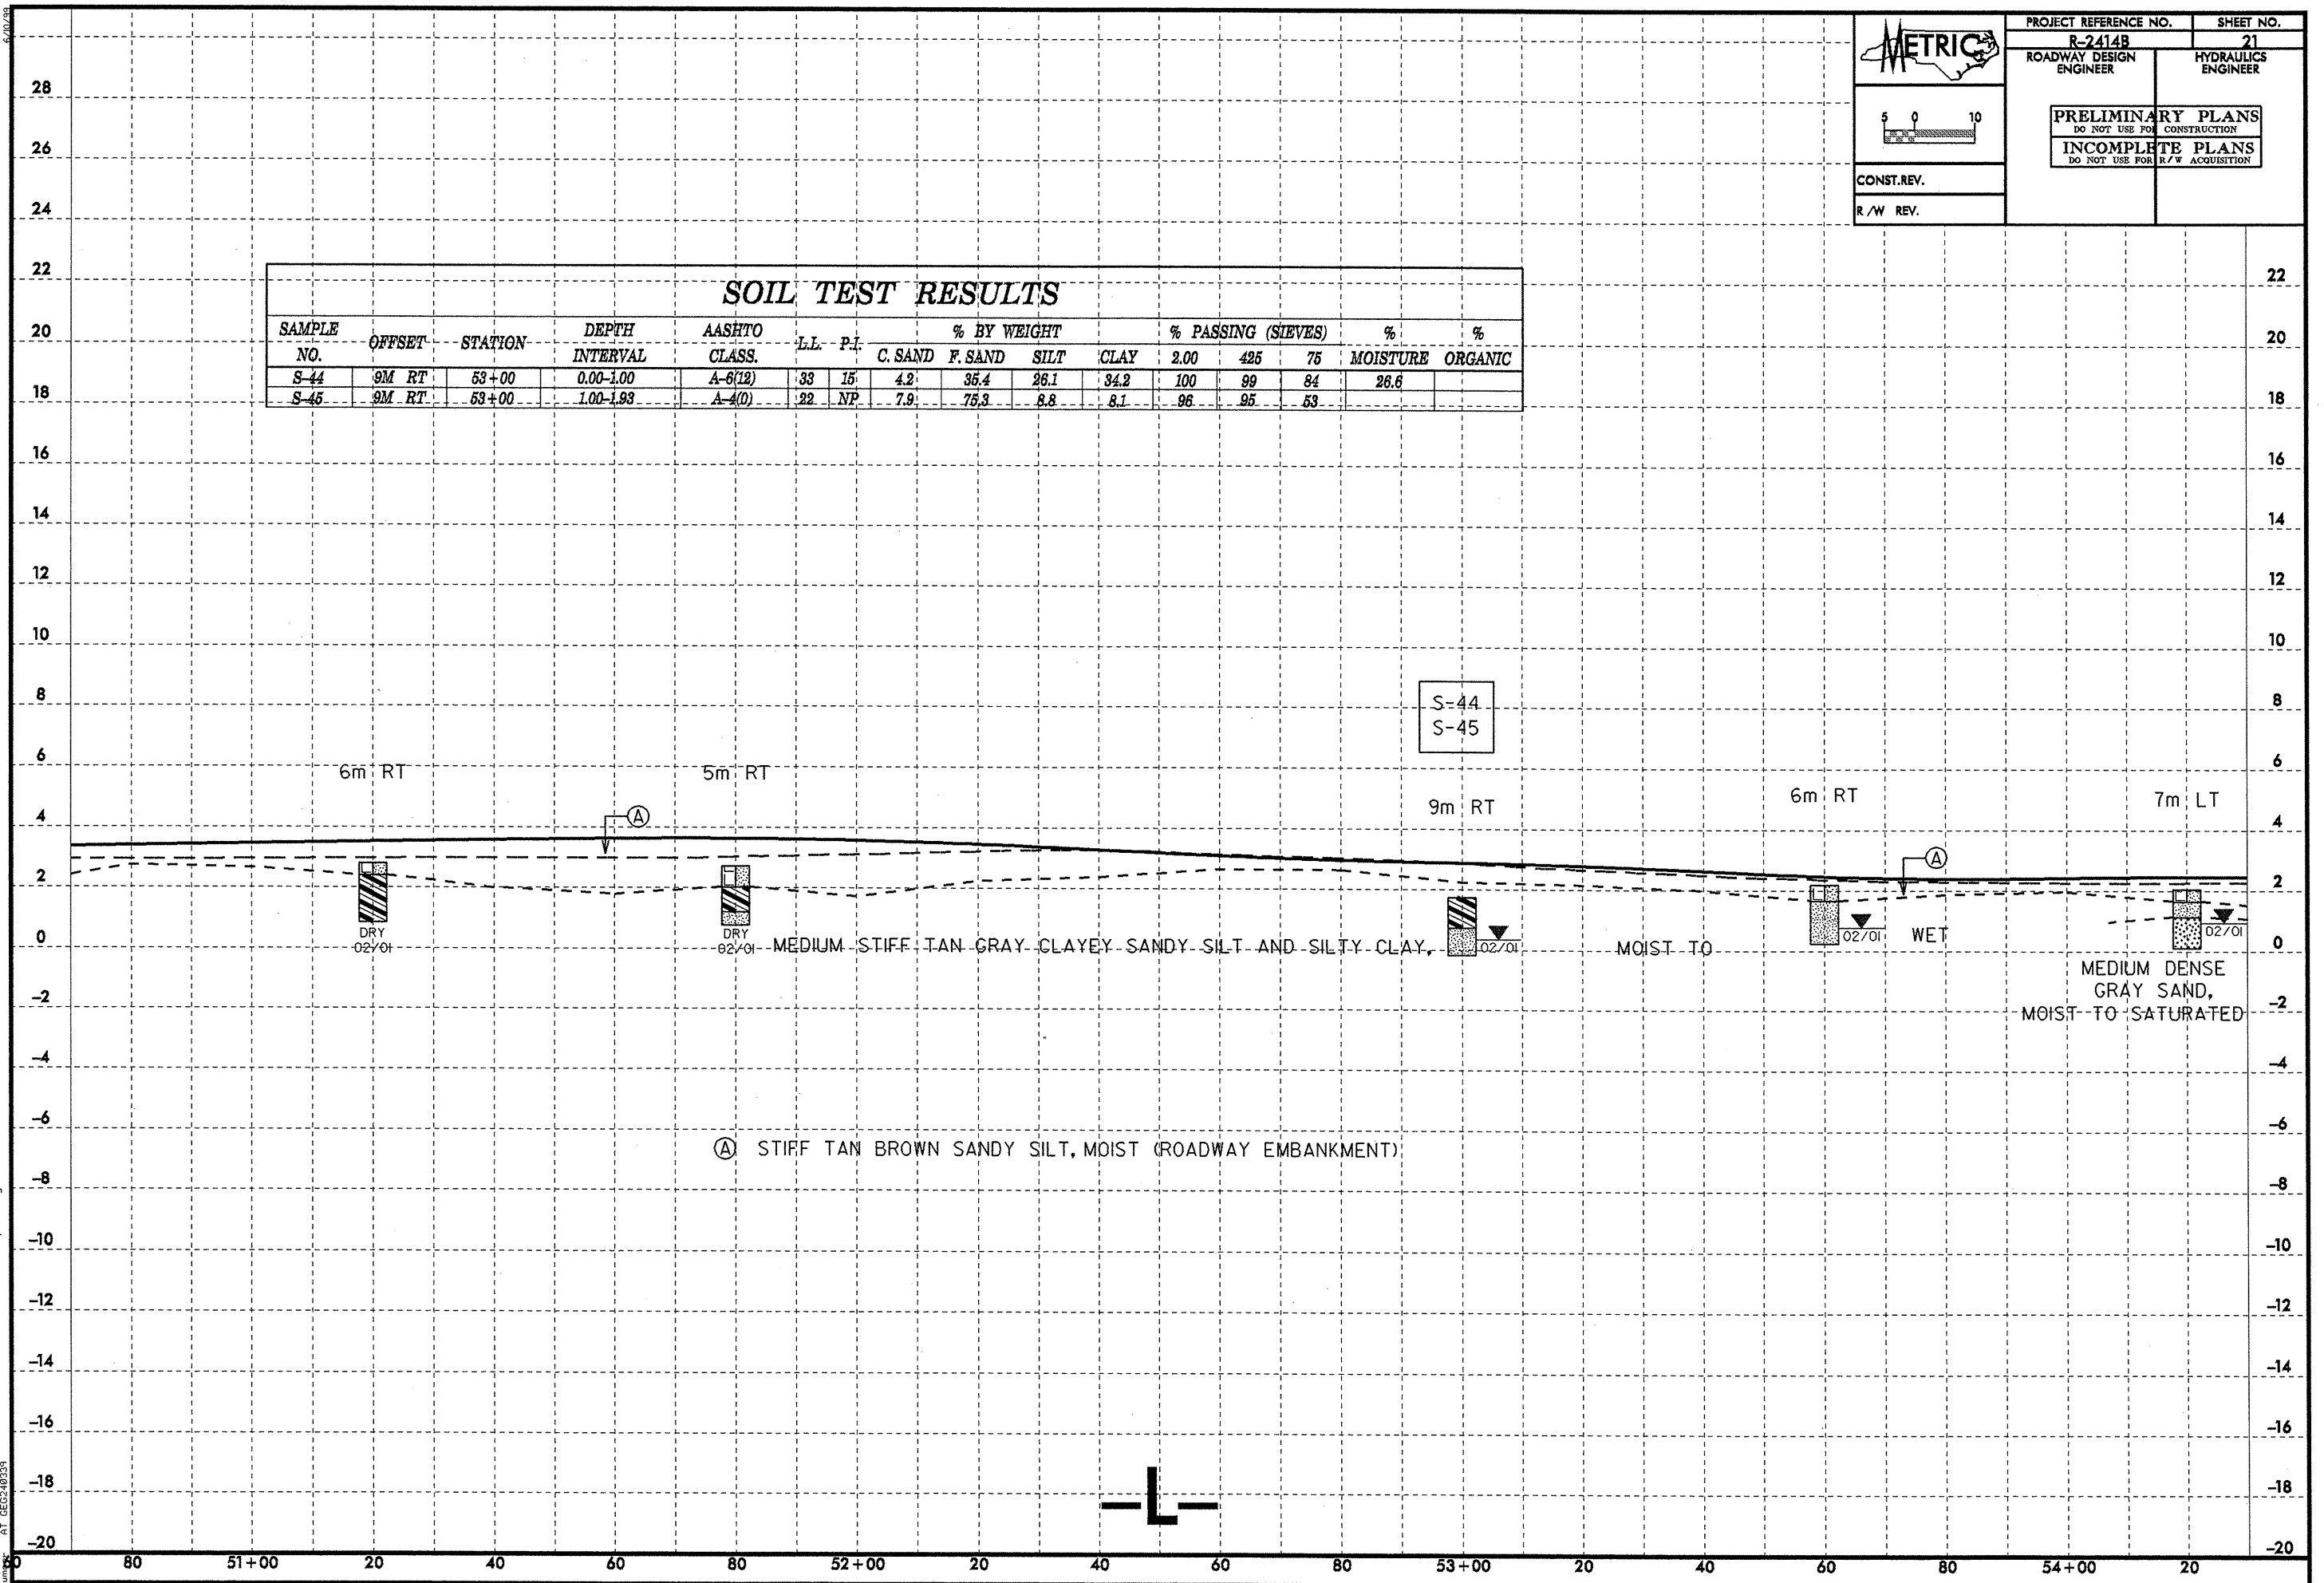

b:\projects\2008\148\REV2\CADD\GEO\TECH\1\p1.dgn
 2008/05/21 11:05:33 AM
 6/10/08





PROJECT REFERENCE NO.	SHEET NO.
R-2414B	22
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
CONST. REV.	
R/W REV.	

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-9	7M RT	54+80	0.00-1.10	A-4(0)	23	2	5.2	50.2	24.4	20.2	100	99	72		
S-10	7M RT	54+80	1.10-1.93	A-2-4(0)	17	NP	11.1	74.6	2.2	12.1	100	99	19		
S-11	1M LT	57+80	0.00-1.00	A-4(0)	16	NP	8.5	61.7	13.7	16.1	100	99	58		
S-12	1M LT	57+80	1.00-1.93	A-6(13)	34	16	2.0	39.3	22.4	36.3	100	99	87	27.3	


VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
55+77	13m LT	0.2	13.3	
55+77	13m LT	0.6	19.5	
55+77	13m LT	0.8	14.6	
55+77	13m LT	1.0	10.6	
55+77	13m LT	1.2	13.7	
55+77	13m LT	1.4	10.2	
55+77	13m LT	1.6	11.5	
55+77	13m LT	1.8	15.9	
55+77	13m LT	2.0	13.7	
55+77	13m LT	2.2	20.4	
55+77	13m LT	2.8	19.5	
55+77	13m LT	3.2	26.6	

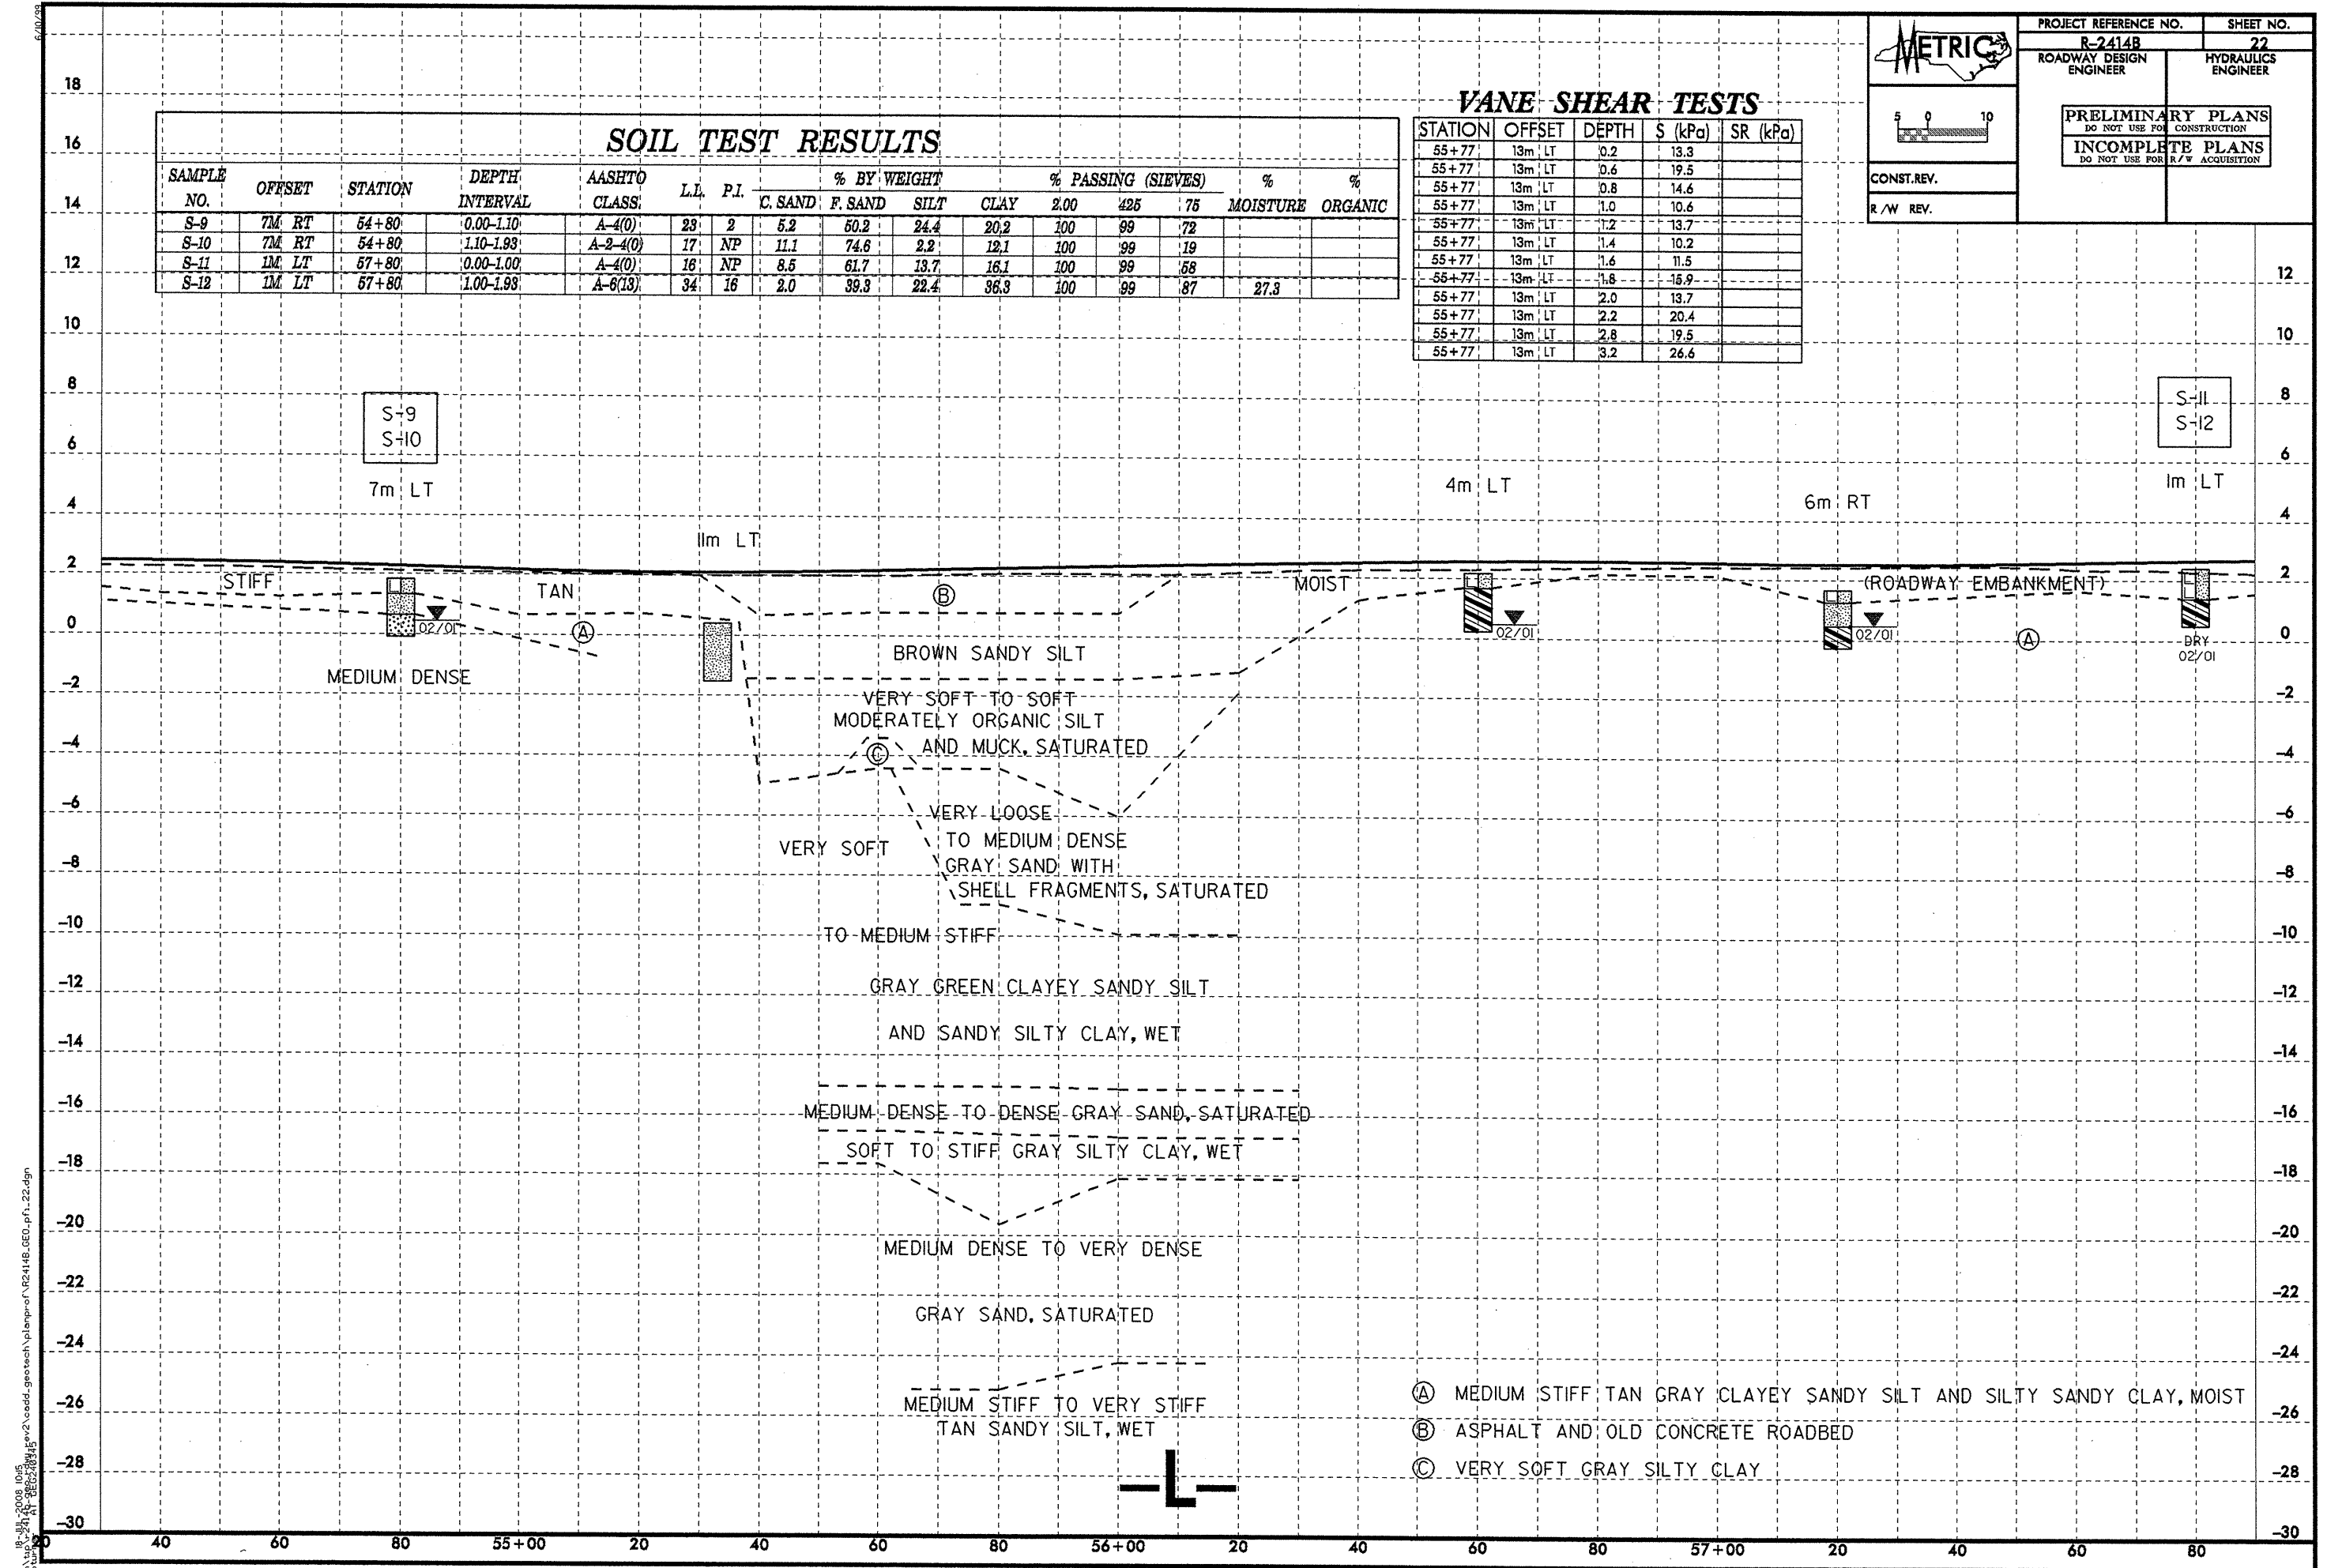

18-JUL-2008 10:45
 tuen\ba\2414B\2414B.dwg
 AT: 2414B.dwg
 2414B.dwg

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C SAND	F SAND	SILT	CLAY	2.00	425	75		
S-14	8M RT	61+80	0.50-1.00	A-6(9)	31	12	1.4	44.0	22.4	32.3	100	100	86		
S-15	8M RT	61+80	1.00-1.93	A-4(0)	28	NP	7.1	76.8	10.1	6.0	100	99	62		
S-16	5.5M LT	64+80	0.30-1.93	A-4(0)	20	4	20.6	49.6	11.7	18.1	100	94	40		

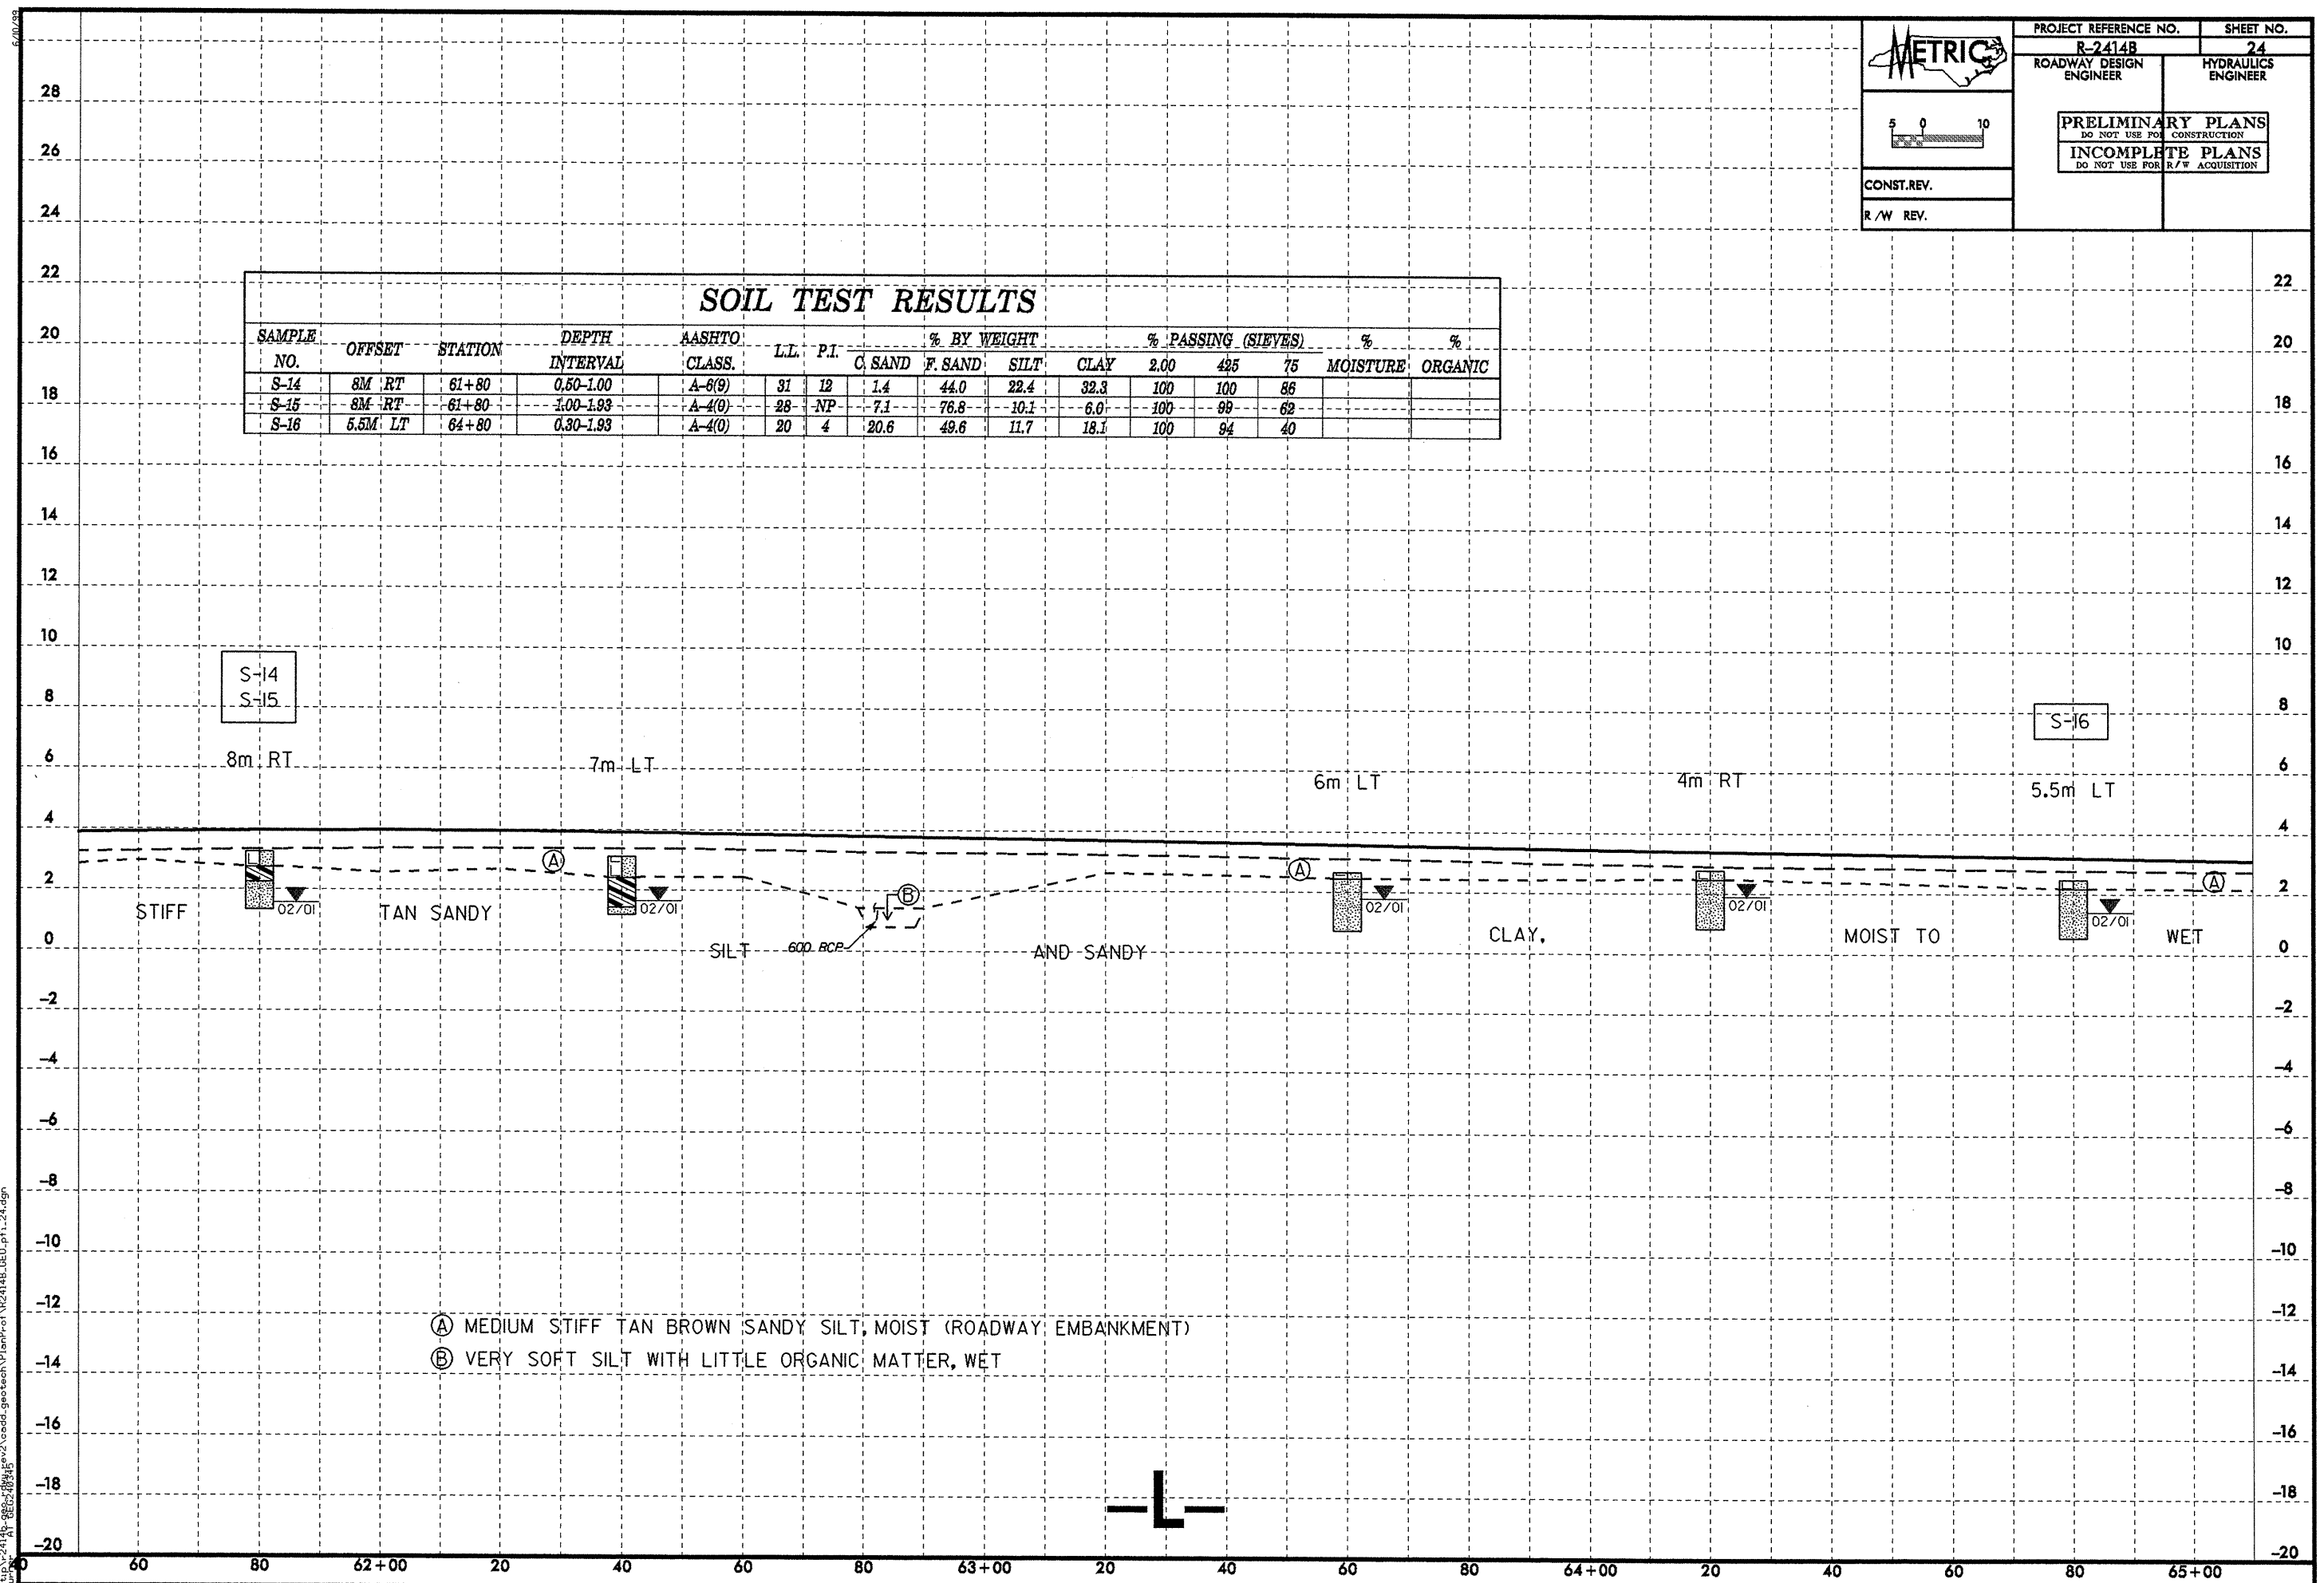

(A) MEDIUM STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)
 (B) VERY SOFT SILT WITH LITTLE ORGANIC MATTER, WET


27-JUN-2008 09:54
 c:\p\2414b\2414b.dwg
 AT 08:52:30

VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
73+20	14m RT	0.0	<2.4	
73+20	14m RT	0.5	6.2	
73+20	14m RT	0.7	10.6	
73+20	14m RT	0.9	14.2	
73+20	14m RT	1.1	7.9	
73+20	14m RT	1.3	14.2	
73+20	14m RT	1.5	11.1	
73+20	14m RT	1.9	18.6	
73+20	14m RT	2.1	22.2	
73+20	14m RT	2.3	21.3	
73+20	14m RT	2.5	20.4	

VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
73+20	9m LT	0.4	9.8	
73+20	9m LT	0.6	5.3	
73+20	9m LT	0.8	4.5	
73+20	9m LT	1.0	<2.4	
73+20	9m LT	1.2	<2.4	
73+20	9m LT	1.4	5.3	
73+20	9m LT	1.6	2.7	
73+20	9m LT	1.8	5.3	
73+20	9m LT	2.2	11.5	
73+20	9m LT	2.4	9.8	
73+20	9m LT	2.6	16.9	
73+20	9m LT	3.0	15.9	
73+20	9m LT	3.2	16.9	

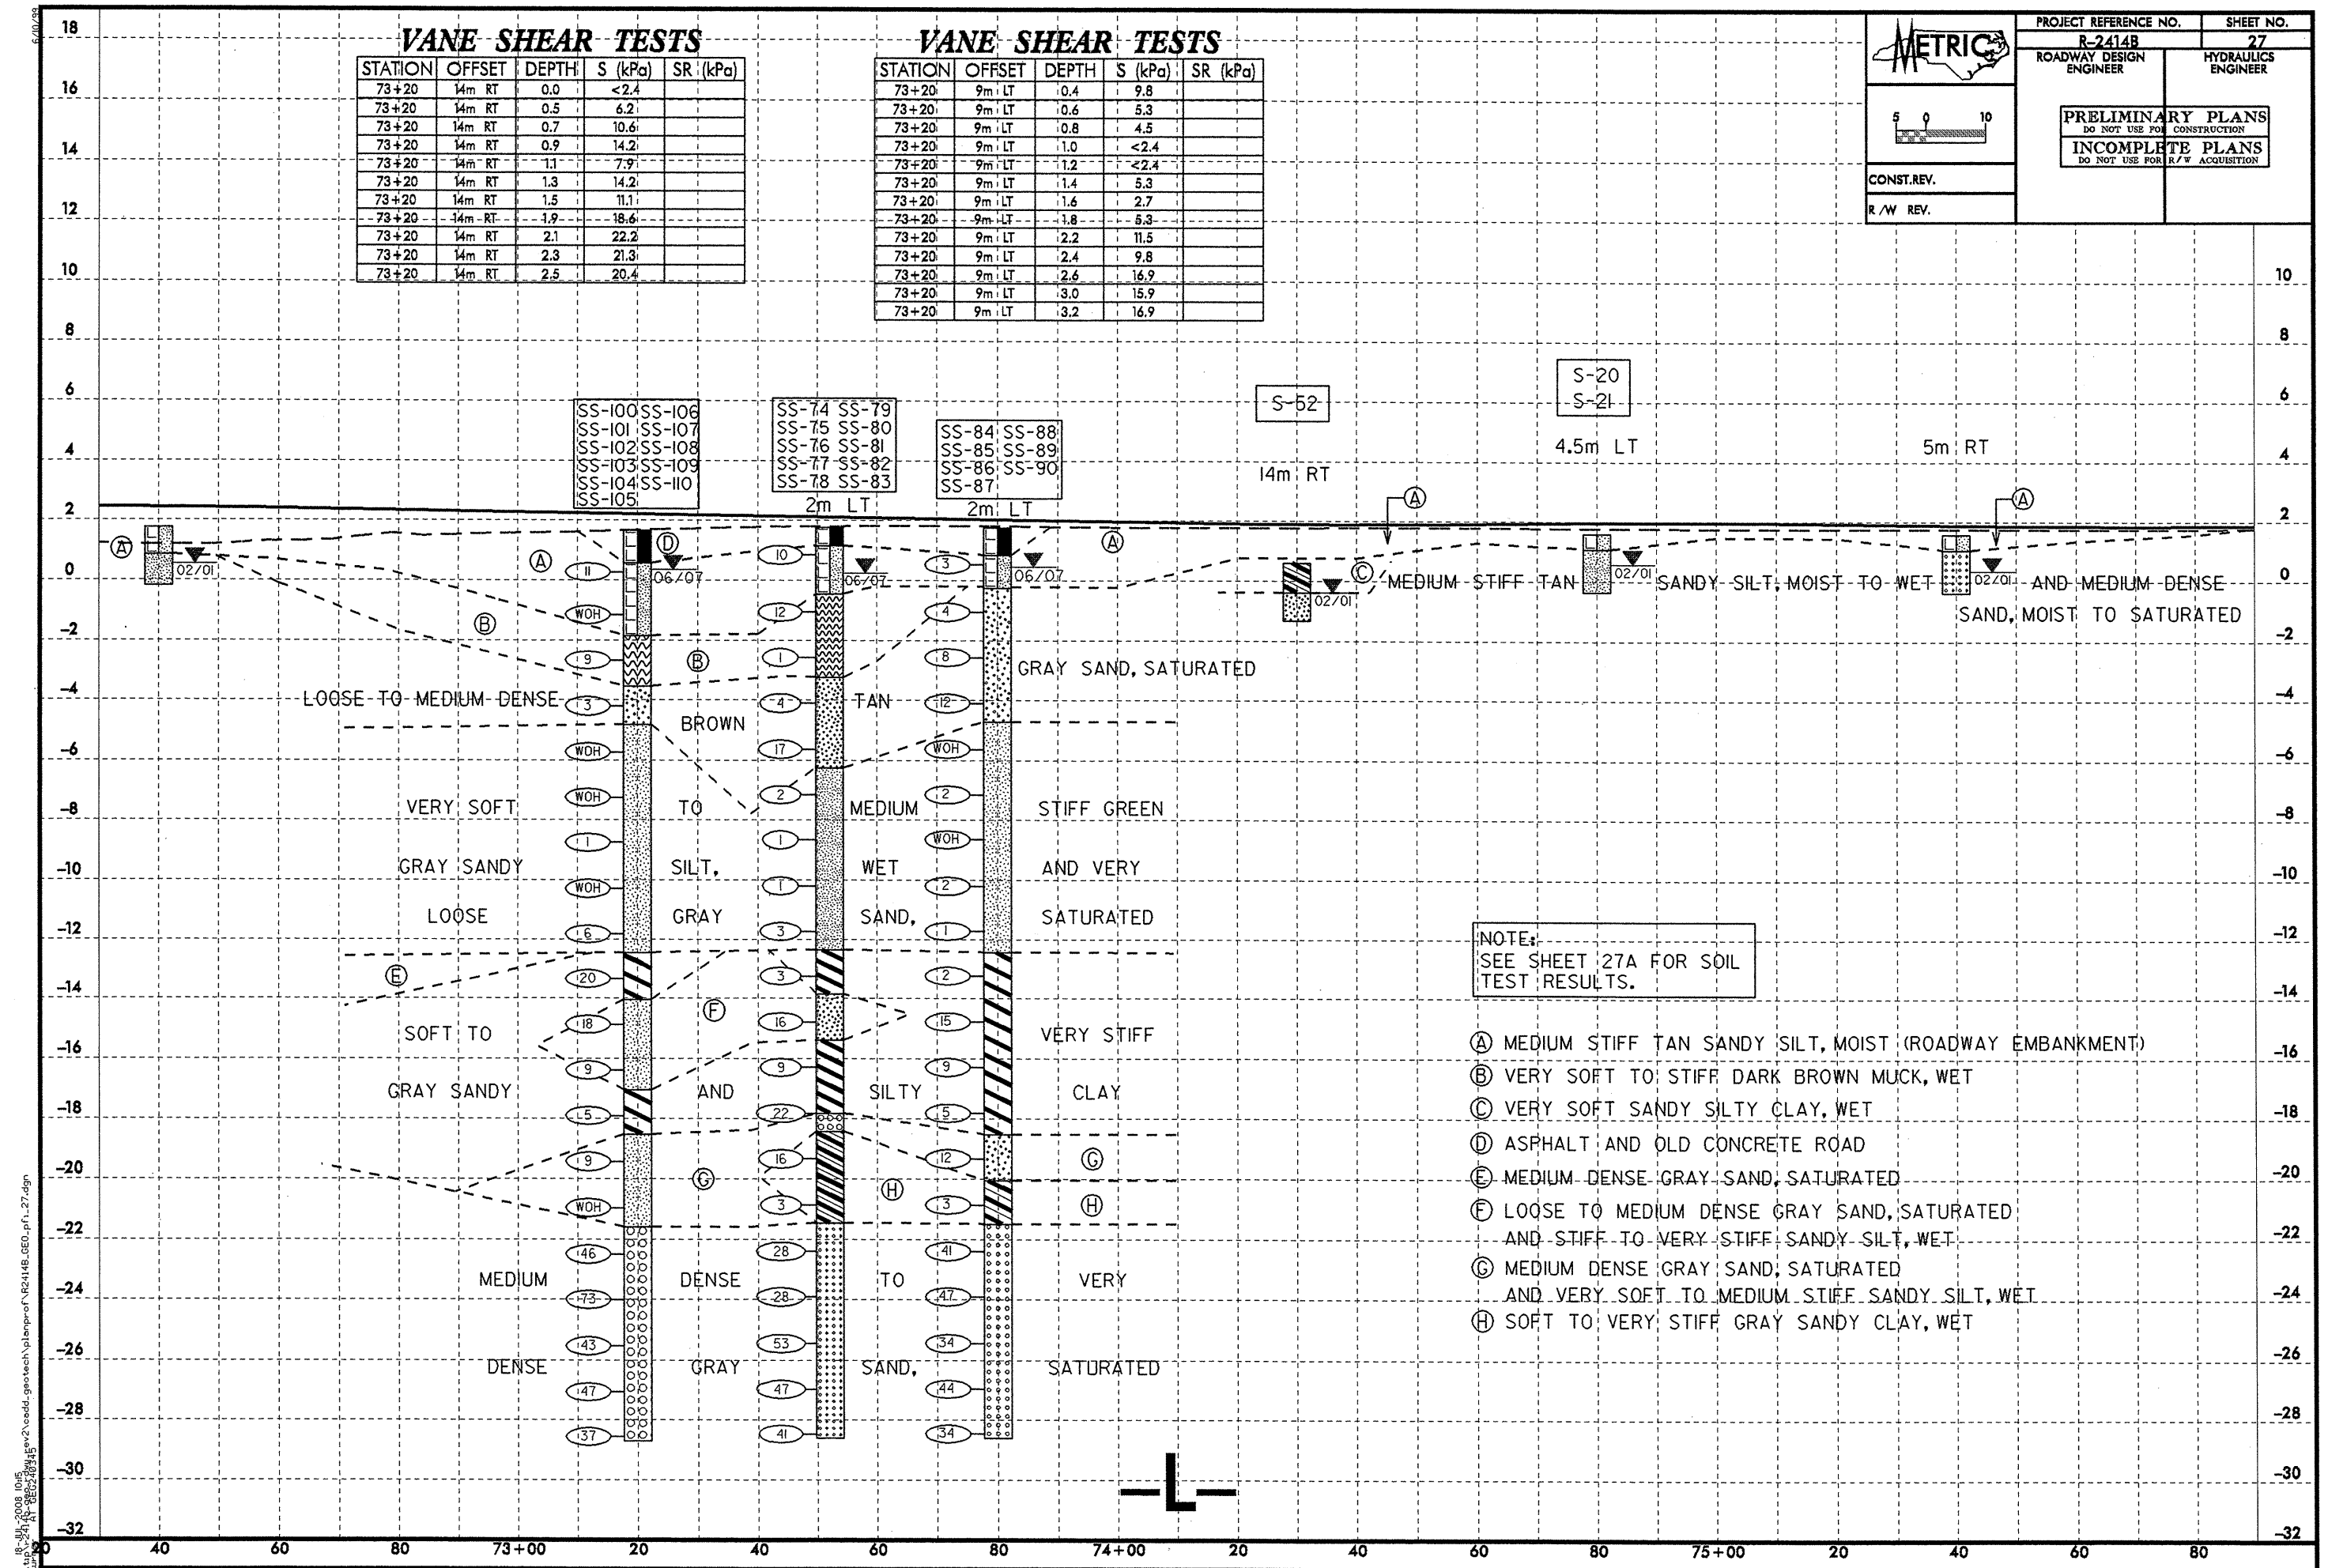


NOTE:
SEE SHEET 27A FOR SOIL TEST RESULTS.

- (A) MEDIUM STIFF TAN SANDY SILT, MOIST (ROADWAY EMBANKMENT)
- (B) VERY SOFT TO STIFF DARK BROWN MUCK, WET
- (C) VERY SOFT SANDY SILTY CLAY, WET
- (D) ASPHALT AND OLD CONCRETE ROAD
- (E) MEDIUM DENSE GRAY SAND, SATURATED
- (F) LOOSE TO MEDIUM DENSE GRAY SAND, SATURATED AND STIFF TO VERY STIFF SANDY SILT, WET
- (G) MEDIUM DENSE GRAY SAND, SATURATED AND VERY SOFT TO MEDIUM STIFF SANDY SILT, WET
- (H) SOFT TO VERY STIFF GRAY SANDY CLAY, WET


18-JUL-2008 10:45
 t:\p\2414B\2414B.dwg
 AT: 2414B.dwg
 g:\tech\p\2414B.dwg

6/0/08

	PROJECT REFERENCE NO.	SHEET NO.
	R-2414B ROADWAY DESIGN ENGINEER	30 HYDRAULICS ENGINEER
<p>PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION</p> <p>INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION</p>		
CONST. REV.		
R/W REV.		

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE ORGANIC	
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75	%	%
SS-8	4M RT	83+60	0.00-0.45	A-2-4(0)	15	NP	45.1	36.9	12.0	6.0	81	59	20		
SS-9	4M RT	83+60	0.76-1.21	A-4(0)	18	2	24.4	48.9	14.6	12.1	100	95	44		
S-25	5M RT	84+80	0.00-1.93	A-2-4(0)	16	NP	49.4	42.3	4.2	4.0	100	90	18		
S-26	5M LT	85+40	0.00-1.93	A-2-4(0)	20	NP	41.9	37.3	12.7	8.1	100	94	25		
SS-1	5M LT	86+00	0.76-1.21	A-4(0)	16	3	41.5	34.4	10.0	14.1	100	92	36		
SS-2	5M LT	86+00	1.52-1.97	A-4(0)	23	NP	4.4	71.3	16.2	8.1	100	99	65		

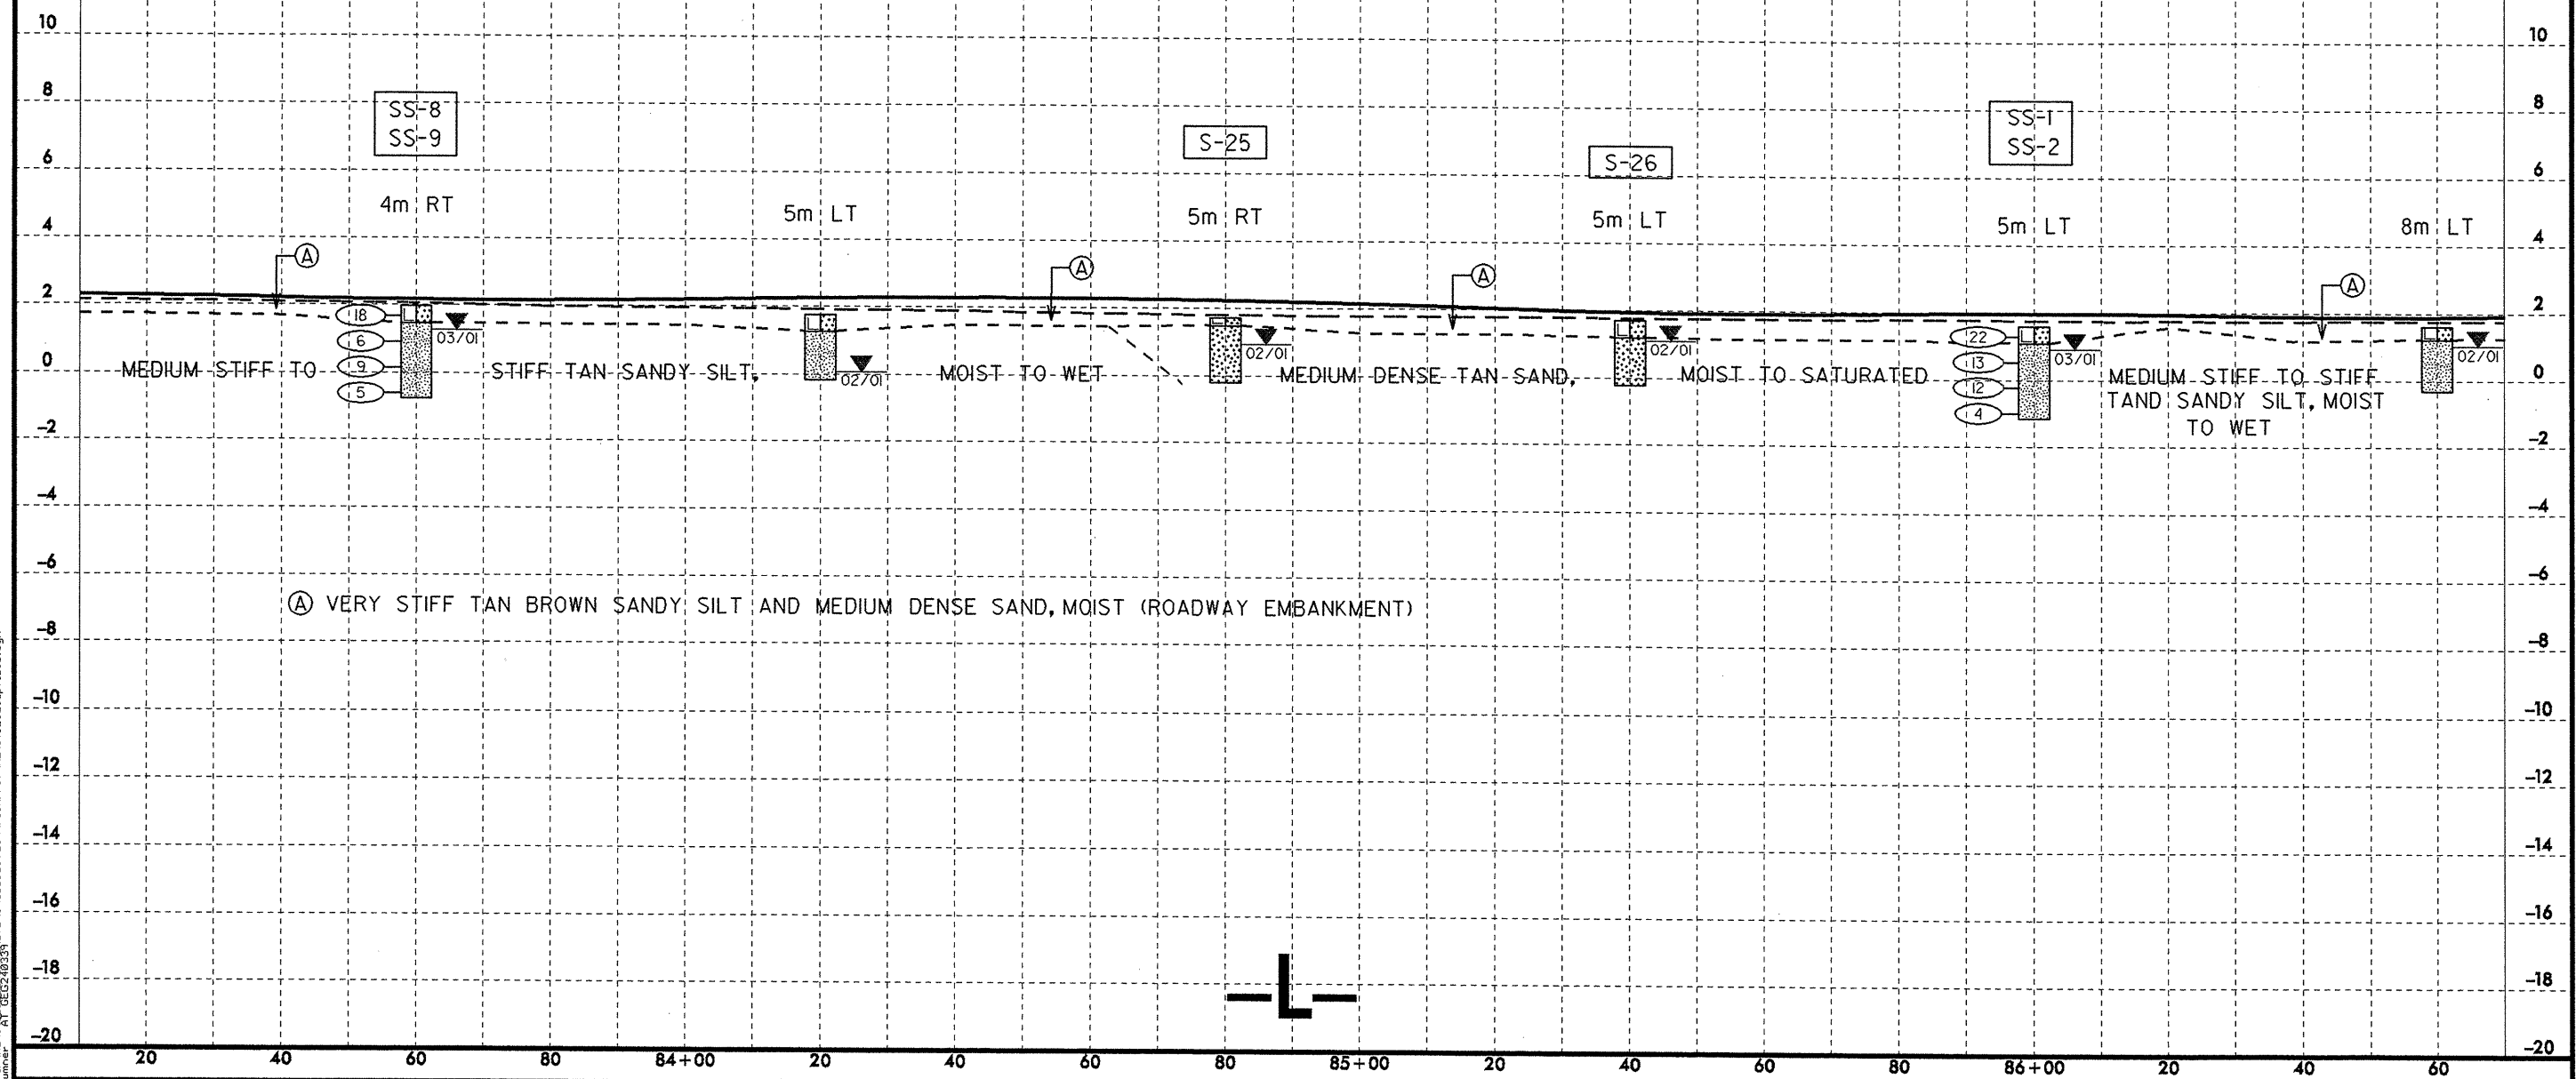

I:\Projects\2008\1432\REV2\CAD\GEO\TECH\Plan\Ref\VR2414B_GEO.p1_30.dgn
 2008-05-13 10:43:21 AM
 User: jg

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			%	%
							C. SAND	F. SAND	SILT	CLAY	2:00	425	75		
SS-29	1M LT	88+80	4.02-4.47	A-4(0)	17	NP	42.6	35.7	15.7	6.0	100	85	37	-	-
SS-30	1M LT	88+80	7.07-7.50	A-4(0)	24	NP	2.6	65.3	18.0	14.0	100	89	45	-	-
SS-31	1M LT	88+80	16.21-16.66	A-4(1)	26	9	10.4	44.5	21.0	24.0	100	96	49	-	-
SS-32	1M LT	88+80	17.74-18.19	A-7-6(23)	48	20	2.0	7.5	62.2	38.3	100	99	96	-	-
SS-33	1M LT	88+80	22.31-22.76	A-2-4(0)	20	NP	33.4	53.4	8.2	5.0	100	92	15	-	-
SS-1	1M RT	89+03	0.76-1.21	A-4(0)	16	NP	29.7	43.1	17.2	10.0	100	92	38	-	-
SS-2	1M RT	89+03	2.50-2.95	A-7-5(34)	79	31	7.2	15.0	33.7	44.1	100	97	84	89.5	-
SS-3	1M RT	89+03	5.55-6.00	A-3(0)	22	NP	12.3	80.8	3.9	3.0	100	99	9	-	-
SS-4	1M RT	89+03	7.07-7.52	A-2-4(0)	21	NP	22.7	66.2	5.0	6.0	99	93	13	-	-
SS-5	1M RT	89+03	8.60-9.50	A-4(0)	22	NP	0.4	67.3	18.3	14.0	100	100	45	-	-
SS-6	1M RT	89+03	13.17-13.62	A-4(0)	22	NP	1.8	68.5	17.6	12.0	100	100	42	-	-
SS-7	1M RT	89+03	19.26-19.71	A-7-6(31)	61	29	1.3	6.5	62.1	40.1	100	100	96	-	-
SS-8	1M RT	89+03	22.31-22.76	A-4(0)	22	NP	1.0	70.4	18.5	10.0	100	100	41	-	-
SS-9	1M RT	89+03	25.36-25.81	A-3(0)	19	NP	66.8	25.1	7.1	1.0	96	62	9	-	-
SS-10	1M RT	89+03	29.93-30.38	A-6(10)	31	14	0.5	28.3	45.1	26.1	100	100	80	-	-
SS-10	18M RT	89+60	0.76-1.21	A-2-4(0)	17	NP	60.9	28.5	4.5	6.0	100	89	19	-	-

VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
89+00	6m RT	0.2		5.3
89+00	6m RT	0.4		15.5
89+00	6m RT	0.6		10.6
89+00	6m RT	0.8		12.4
89+00	6m RT	1.0		10.6
89+00	6m RT	1.2		13.3
89+00	6m RT	1.4		15.5
89+00	6m RT	1.6		21.3
89+00	6m RT	1.8		23.0

PROJECT REFERENCE NO. R-2414B
ROADWAY DESIGN ENGINEER


SHEET NO. 31
HYDRAULICS ENGINEER

PRELIMINARY PLANS
DO NOT USE FOR CONSTRUCTION

INCOMPLETE PLANS
DO NOT USE FOR R/W ACQUISITION

CONST. REV. 5

R/W REV. 10

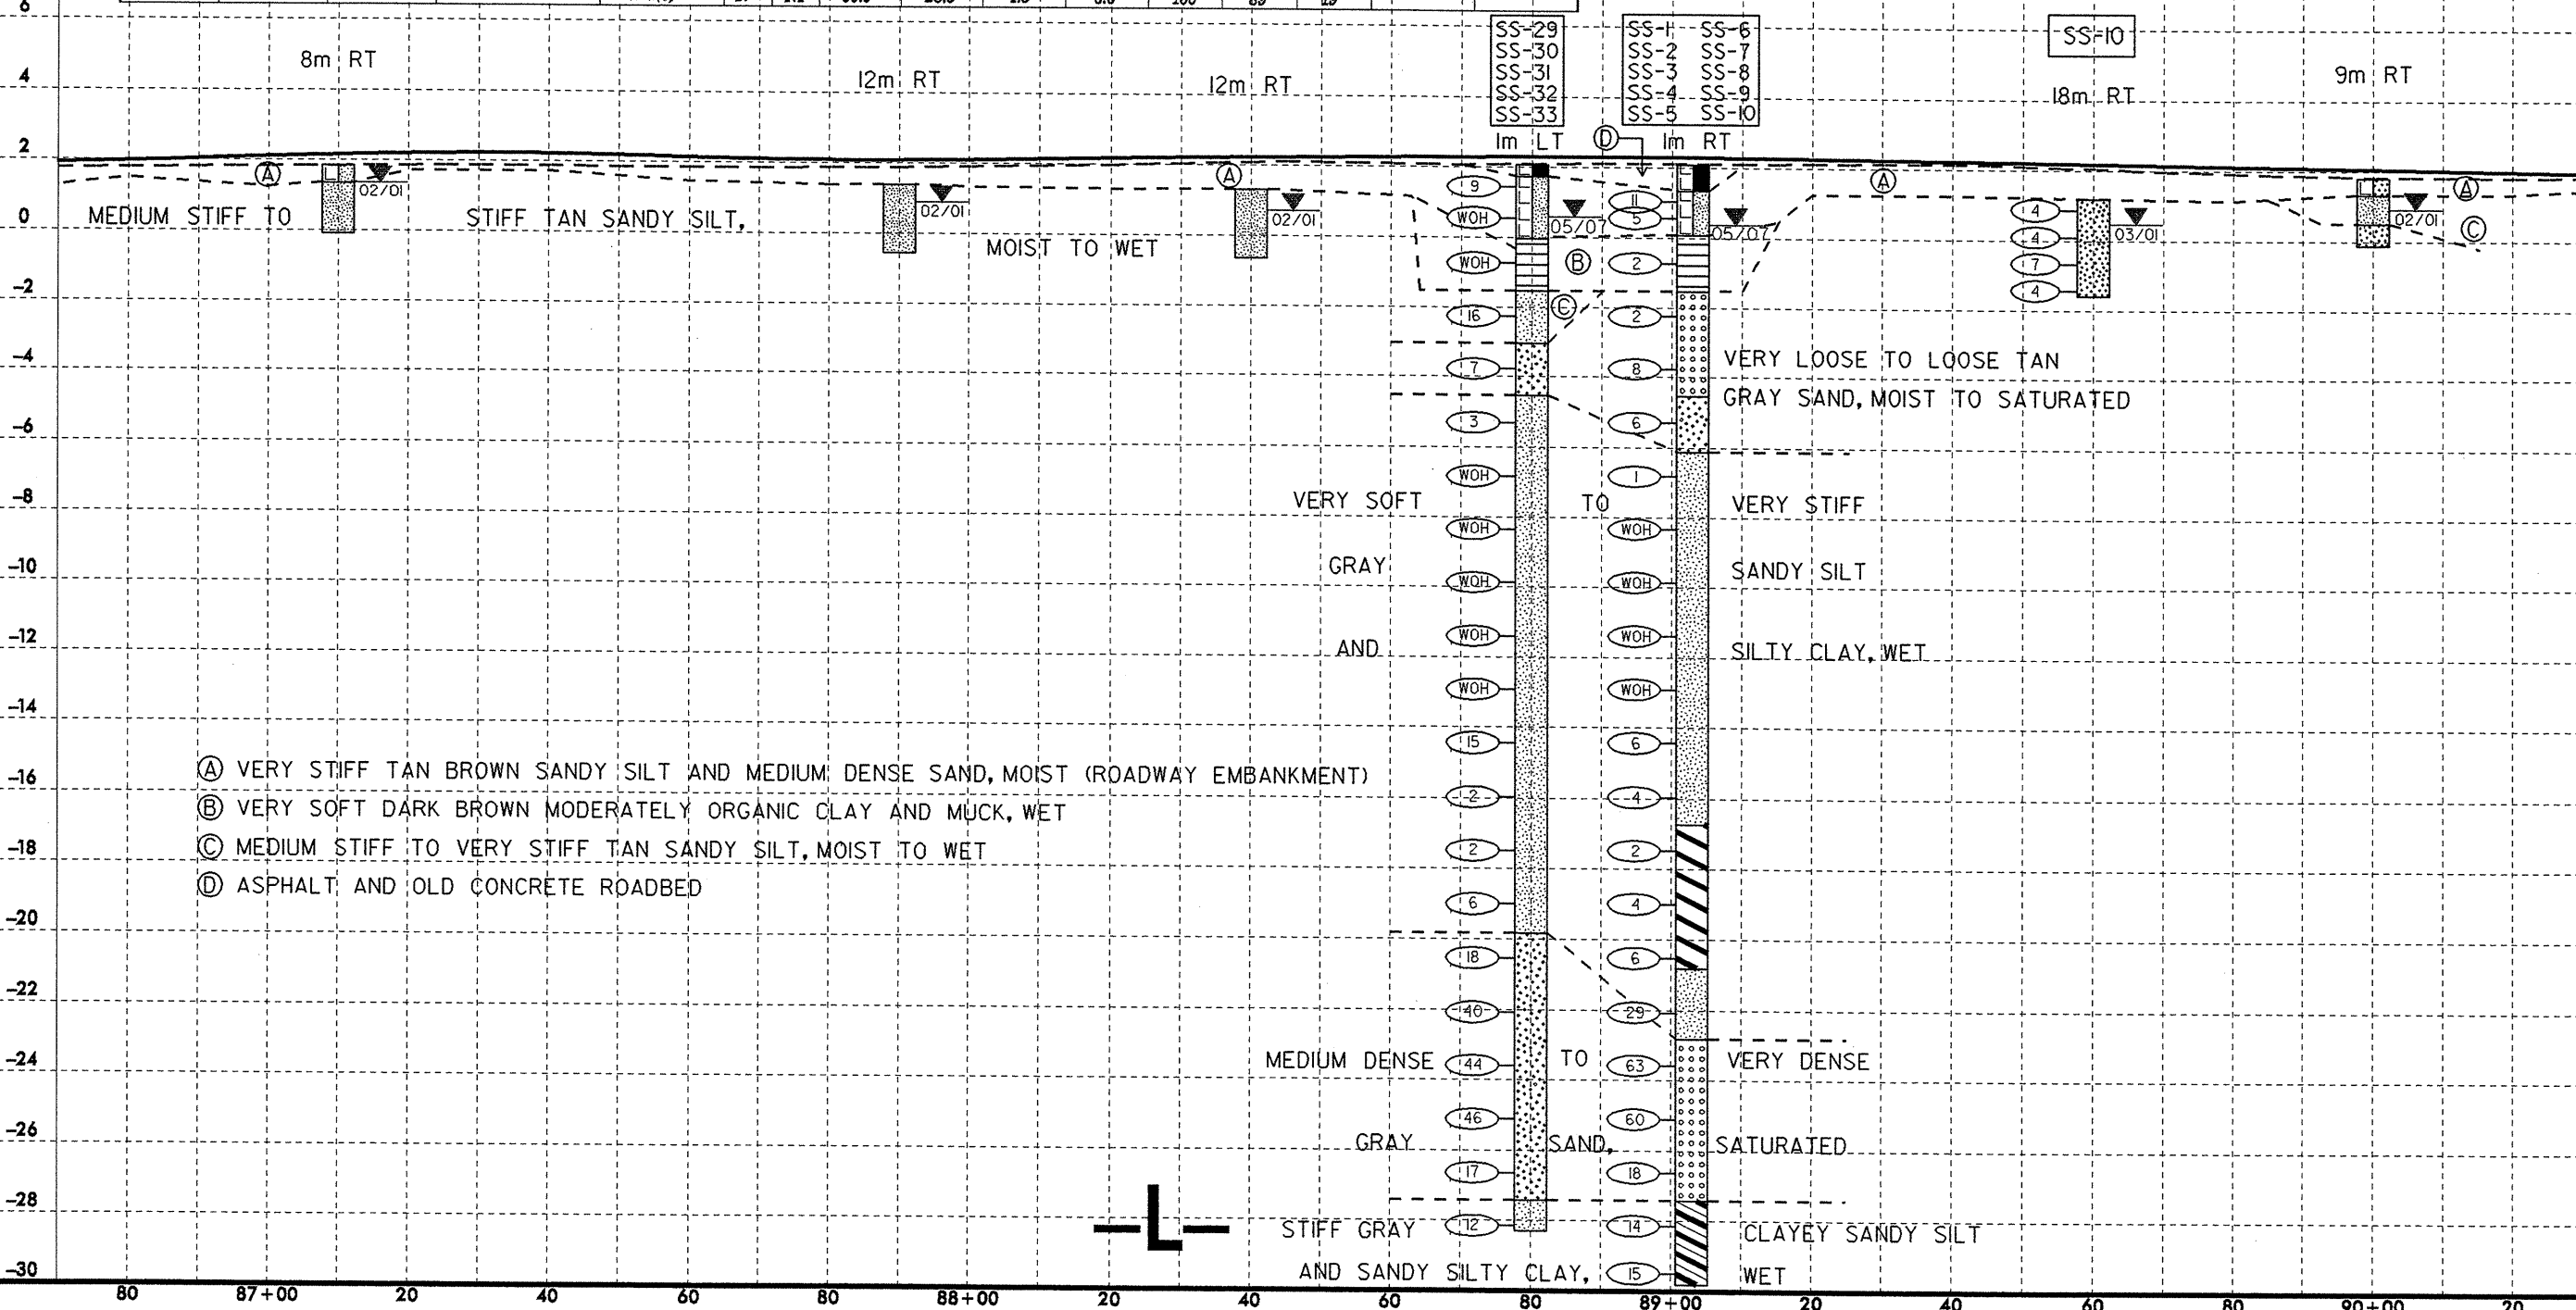


- Ⓐ VERY STIFF TAN BROWN SANDY SILT AND MEDIUM DENSE SAND, MOIST (ROADWAY EMBANKMENT)
- Ⓑ VERY SOFT DARK BROWN MODERATELY ORGANIC CLAY AND MUCK, WET
- Ⓒ MEDIUM STIFF TO VERY STIFF TAN SANDY SILT, MOIST TO WET
- Ⓓ ASPHALT AND OLD CONCRETE ROADBED

18-001-2008-1045
 sp...
 18-001-2008-1045
 sp...




PROJECT REFERENCE NO. R-2414B	SHEET NO. 35
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
CONST. REV.	
R/W REV.	



SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-41	3M LT	10+80	0.00-0.20	A-7-6(21)	43	25	3.6	34.4	23.7	36.3	100	99	85		
S-42	3M LT	10+80	0.20-1.20	A-6(8)	38	11	0.4	62.4	0.9	36.3	100	100	82		
S-43	3M LT	10+80	1.20-1.93	A-2-4(0)	18	NP	5.6	75.5	10.8	8.1	100	99	35		

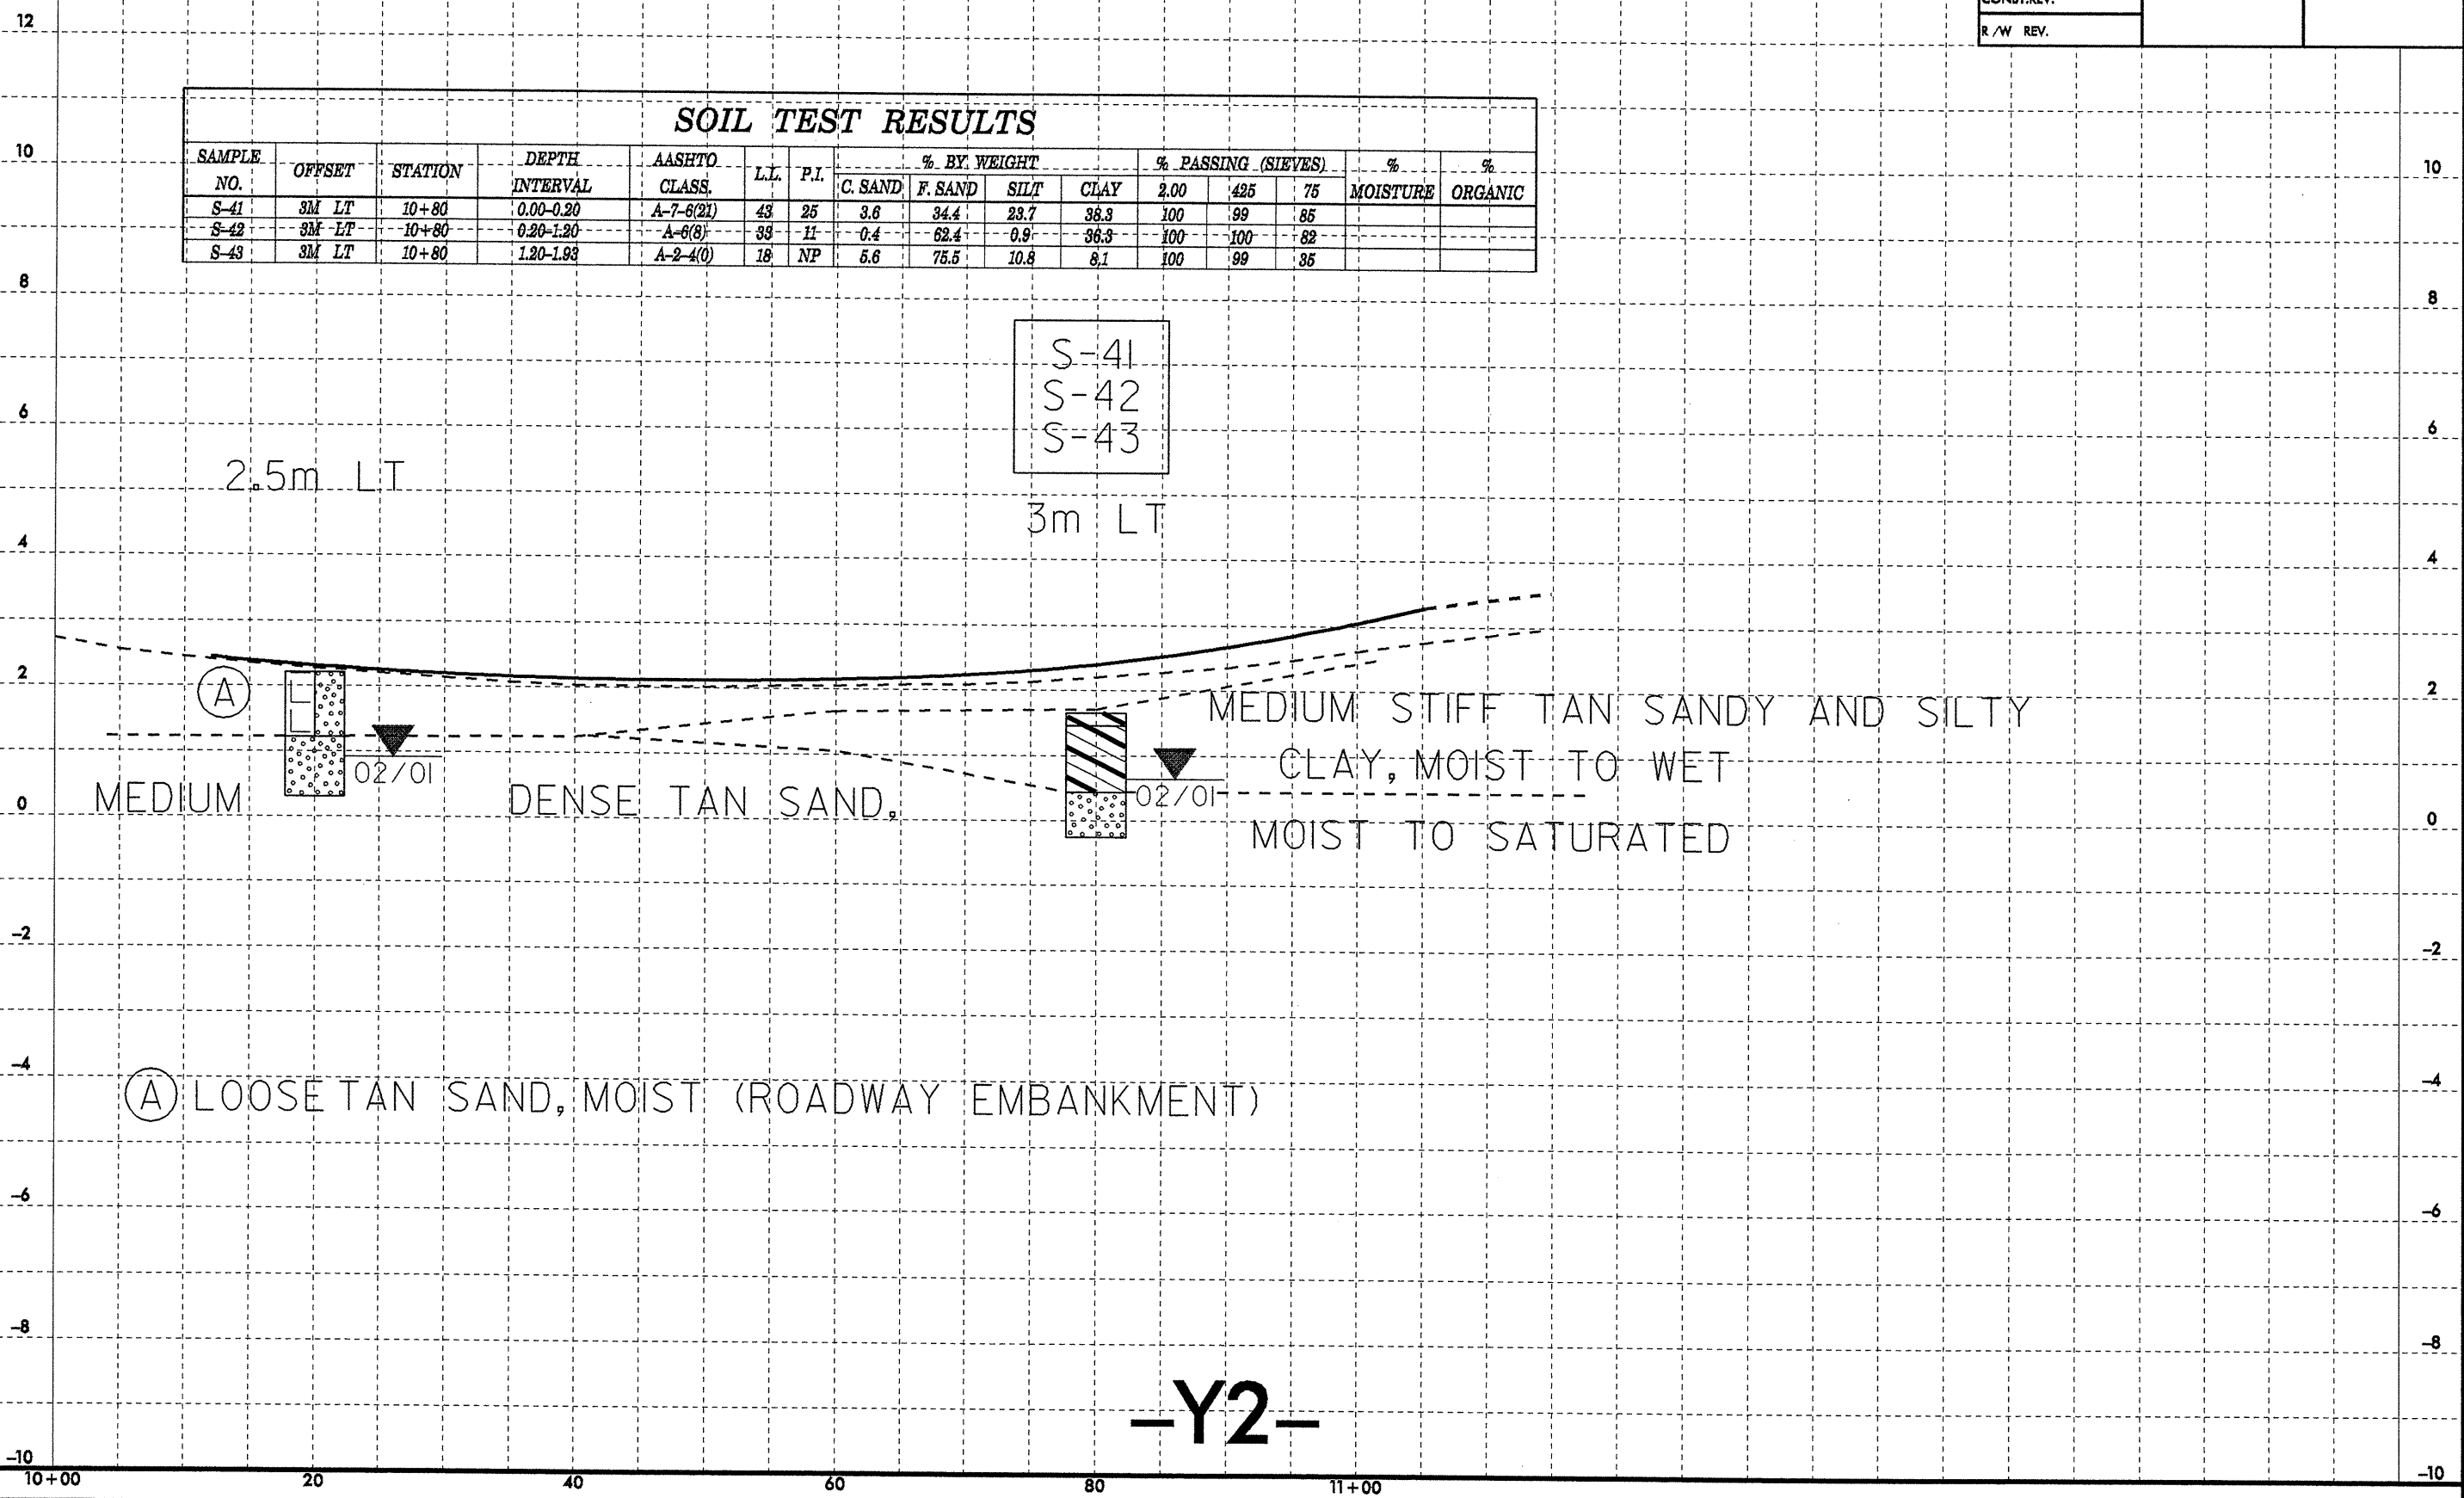


MEDIUM STIFF TAN SANDY AND SILTY CLAY, MOIST TO WET MOIST TO SATURATED
 DENSE TAN SAND


(A) LOOSE TAN SAND, MOIST (ROADWAY EMBANKMENT)

-Y2-

23-JUL-2008 15:41
 h:\projects\2414B\2414B_02\2414B_02.dgn


 2.5 0 5 CONST. REV. R/W REV.	PROJECT REFERENCE NO.	SHEET NO.
	R-2414B ROADWAY DESIGN ENGINEER	36 HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION		

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C SAND	F SAND	SILT	CLAY	2.00	425	75		
S-40	2.5M RT	10+80	0.00-1.93	A-4(0)	23	NP	10.5	63.4	16.0	10.1	98	92	65		

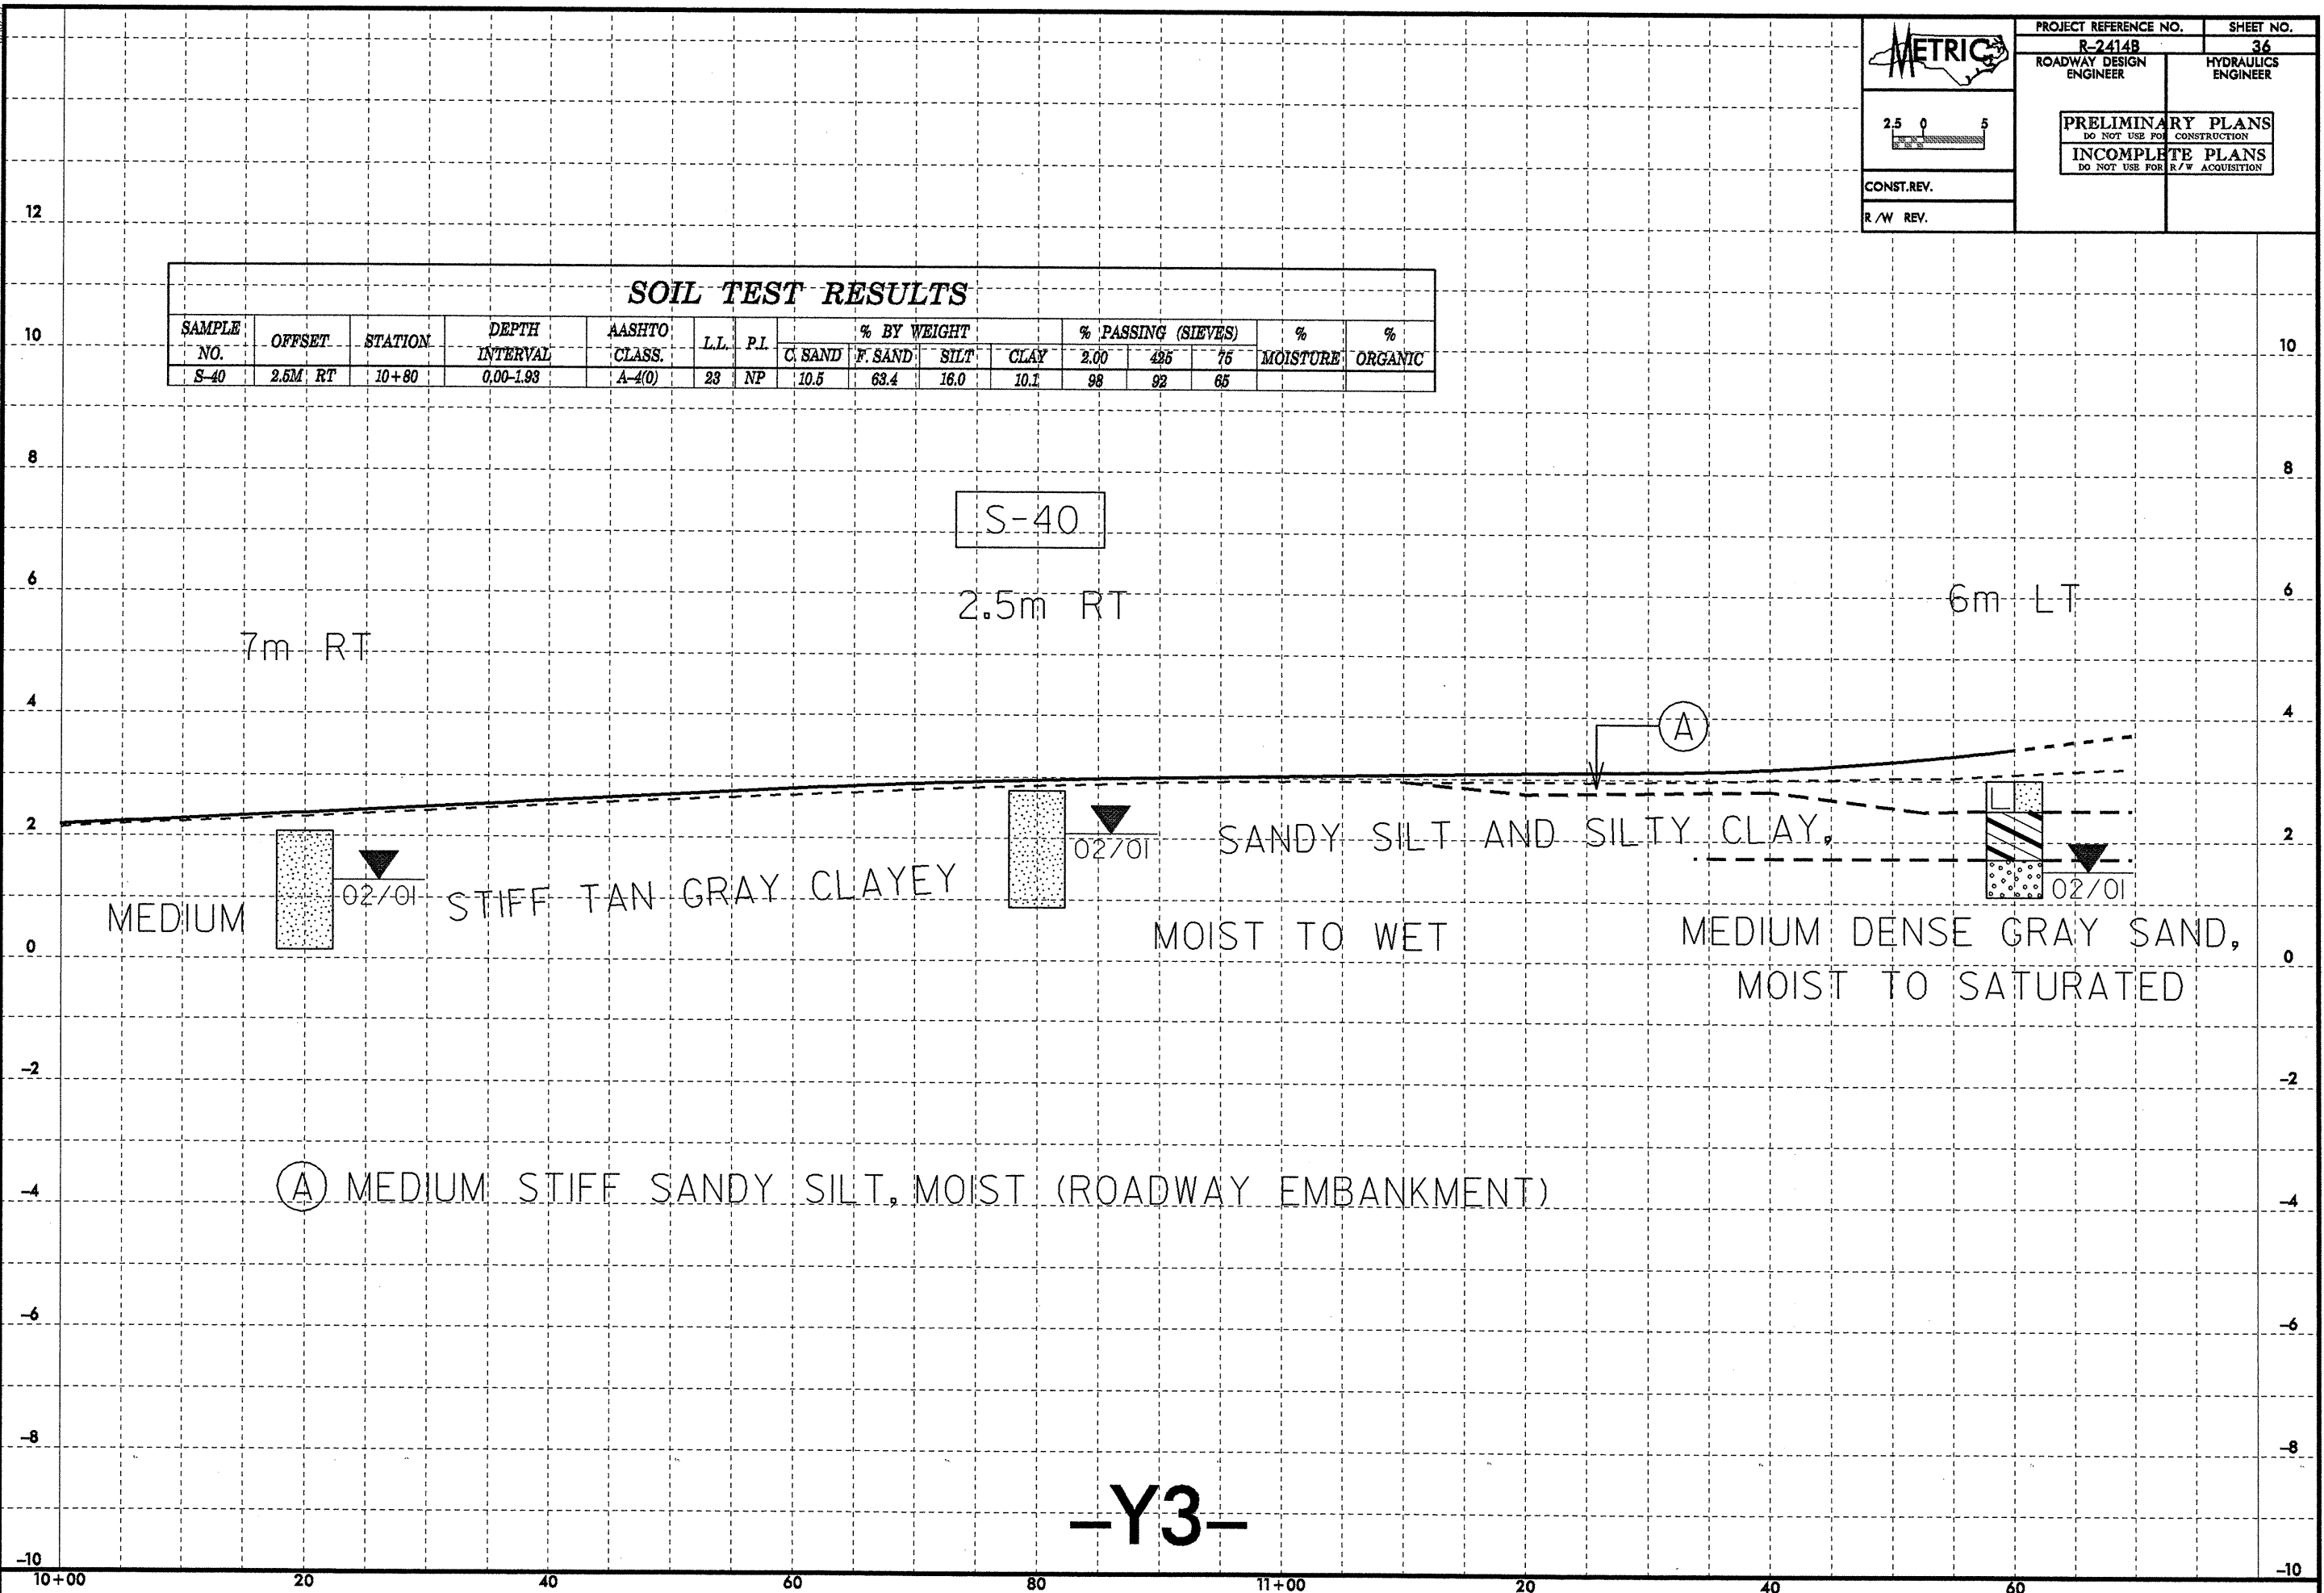

I:\Projects\2008\114\114-Geo\114-Geo-p1.dgn
 10/21/08 10:53:53 AM
 114-Geo-p1.dgn

-Y3-




2.5 0 5

CONST. REV.
R/W REV.

PROJECT REFERENCE NO. R-2414B	SHEET NO. 37
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-39	3.5M RT	10+80	0.00-1.93	A-4(0)	22	3	2.6	61.4	17.8	18.1	100	100	70		


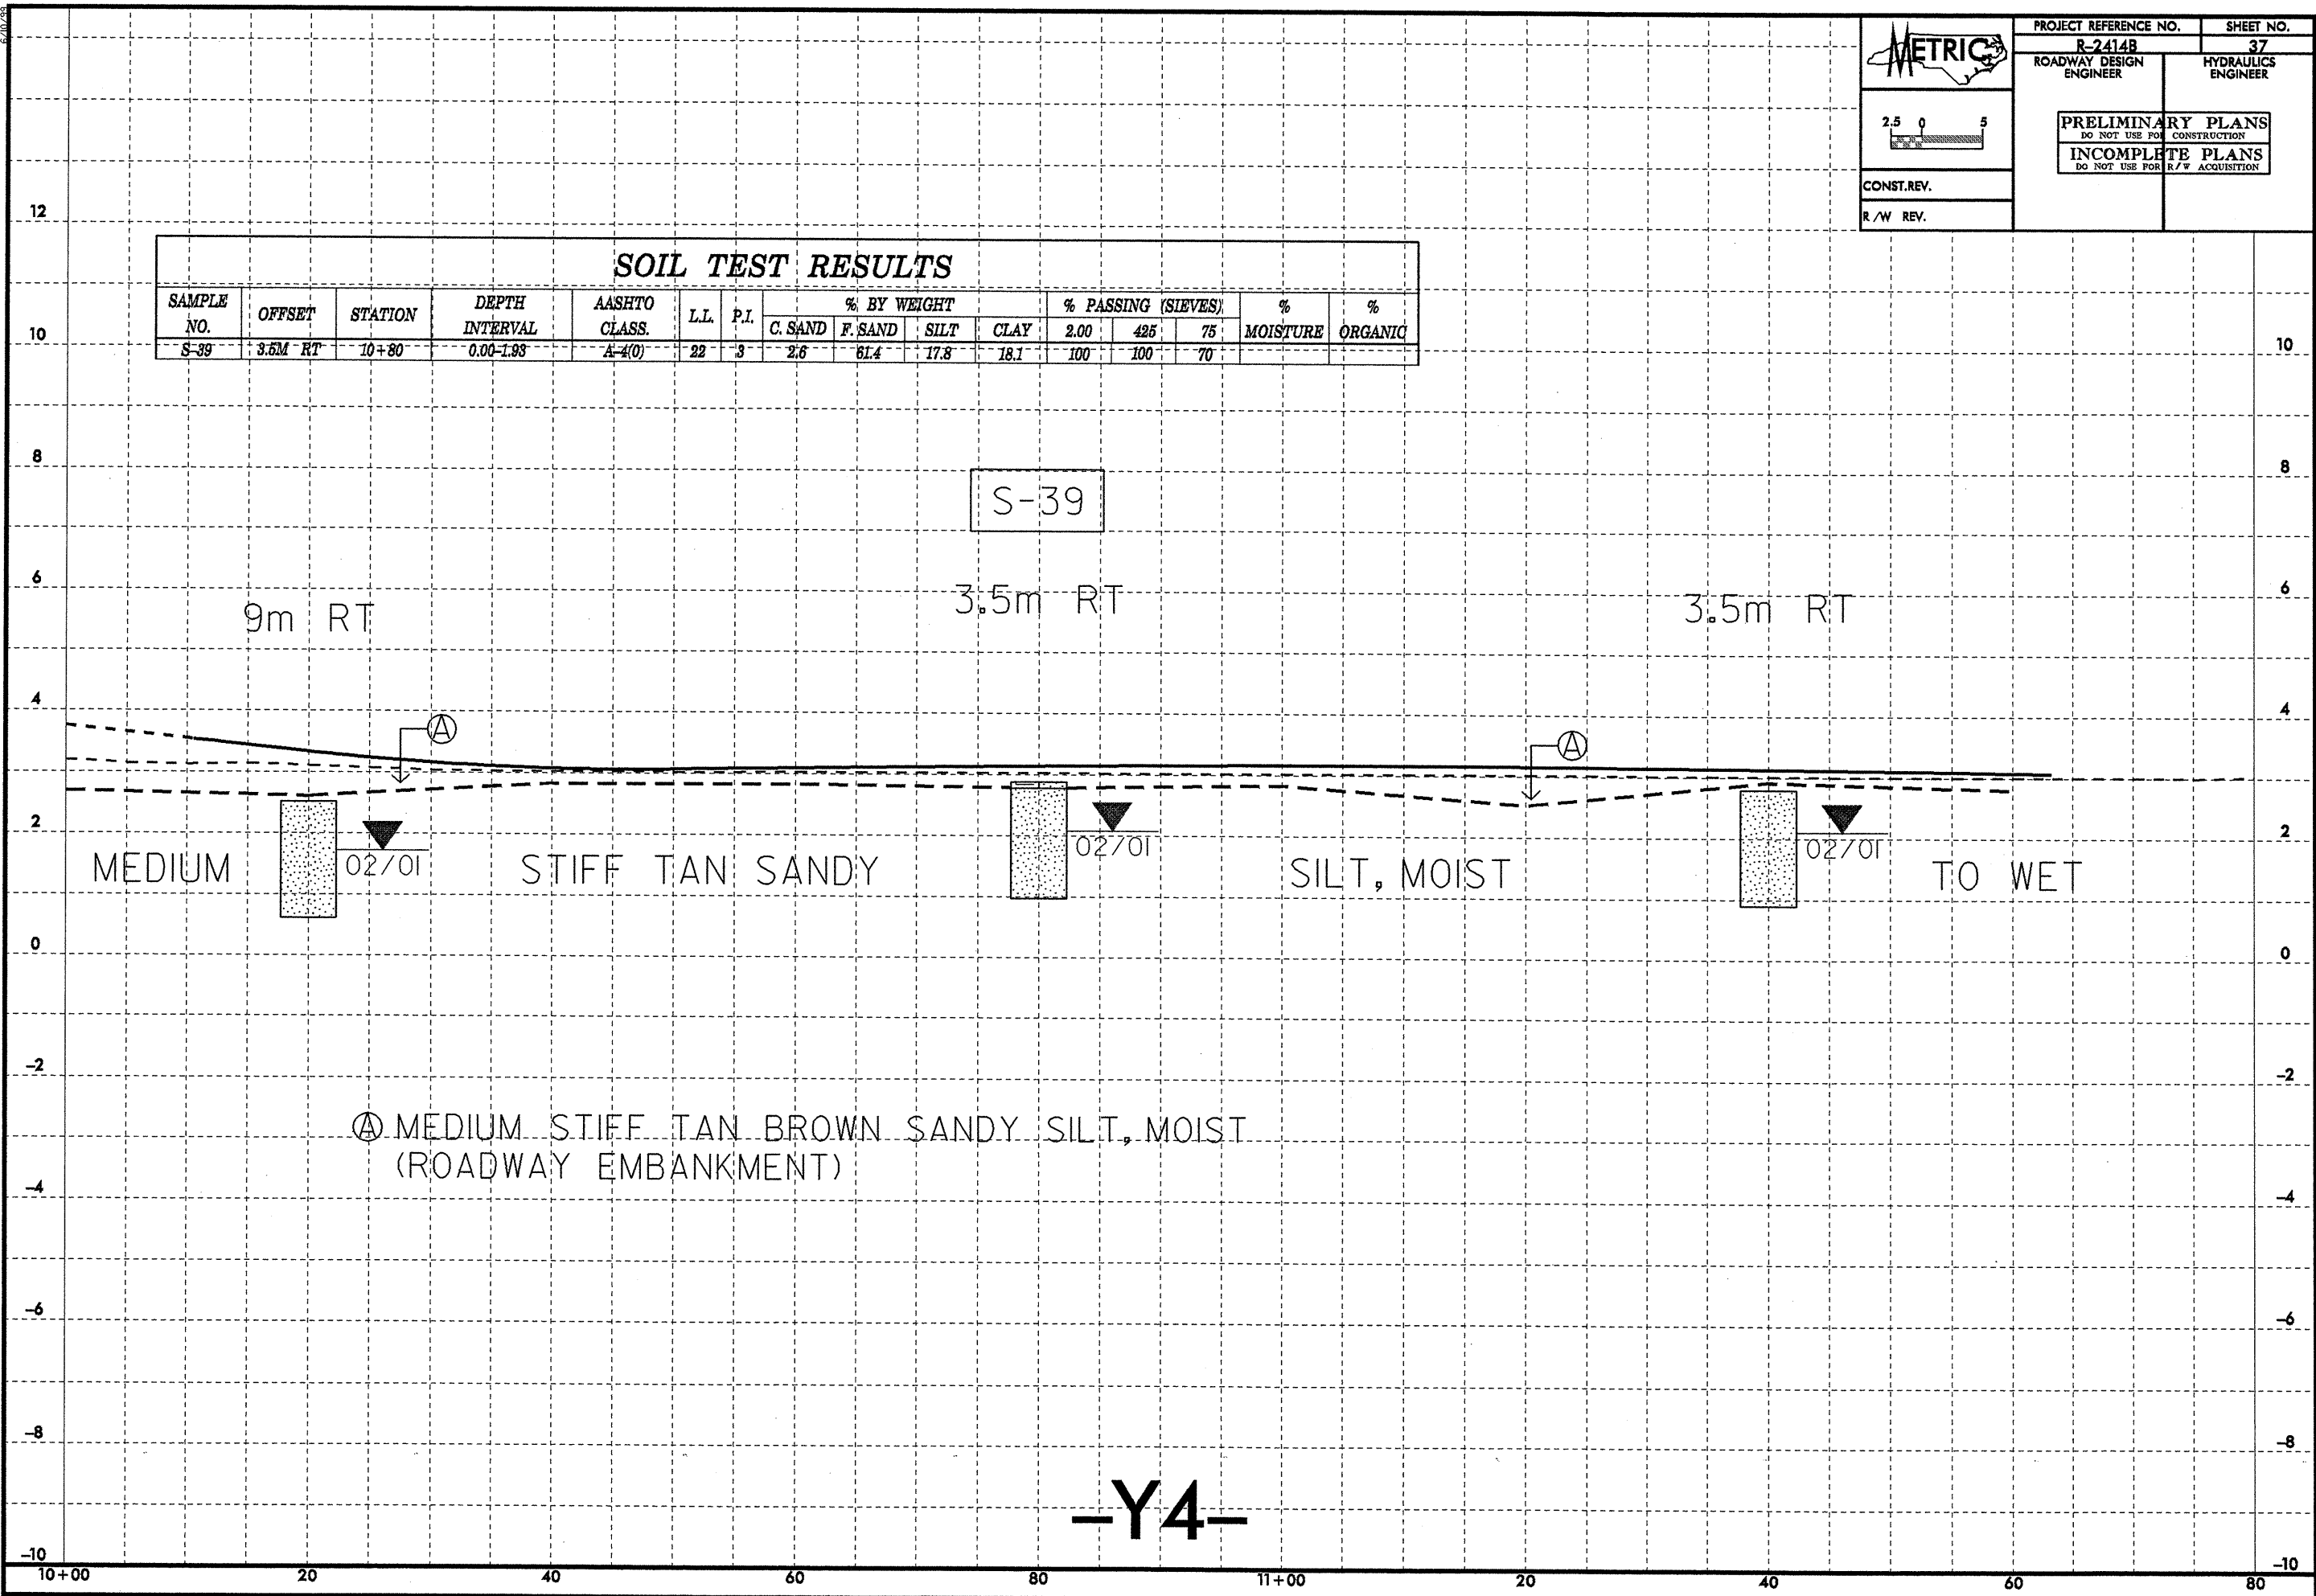


Ⓐ MEDIUM STIFF TAN BROWN SANDY SILT, MOIST
(ROADWAY EMBANKMENT)

-Y4-

10-01-2008 11:2
 tom\p\p\311414\14-86627035\2\cadd\geotech\planprof\2414b-geo-pf_1.dgn
 8/10/2008

	PROJECT REFERENCE NO.	SHEET NO.
	R-2414B	39
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER	
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION		INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION
CONST.REV.		
R/W REV.		

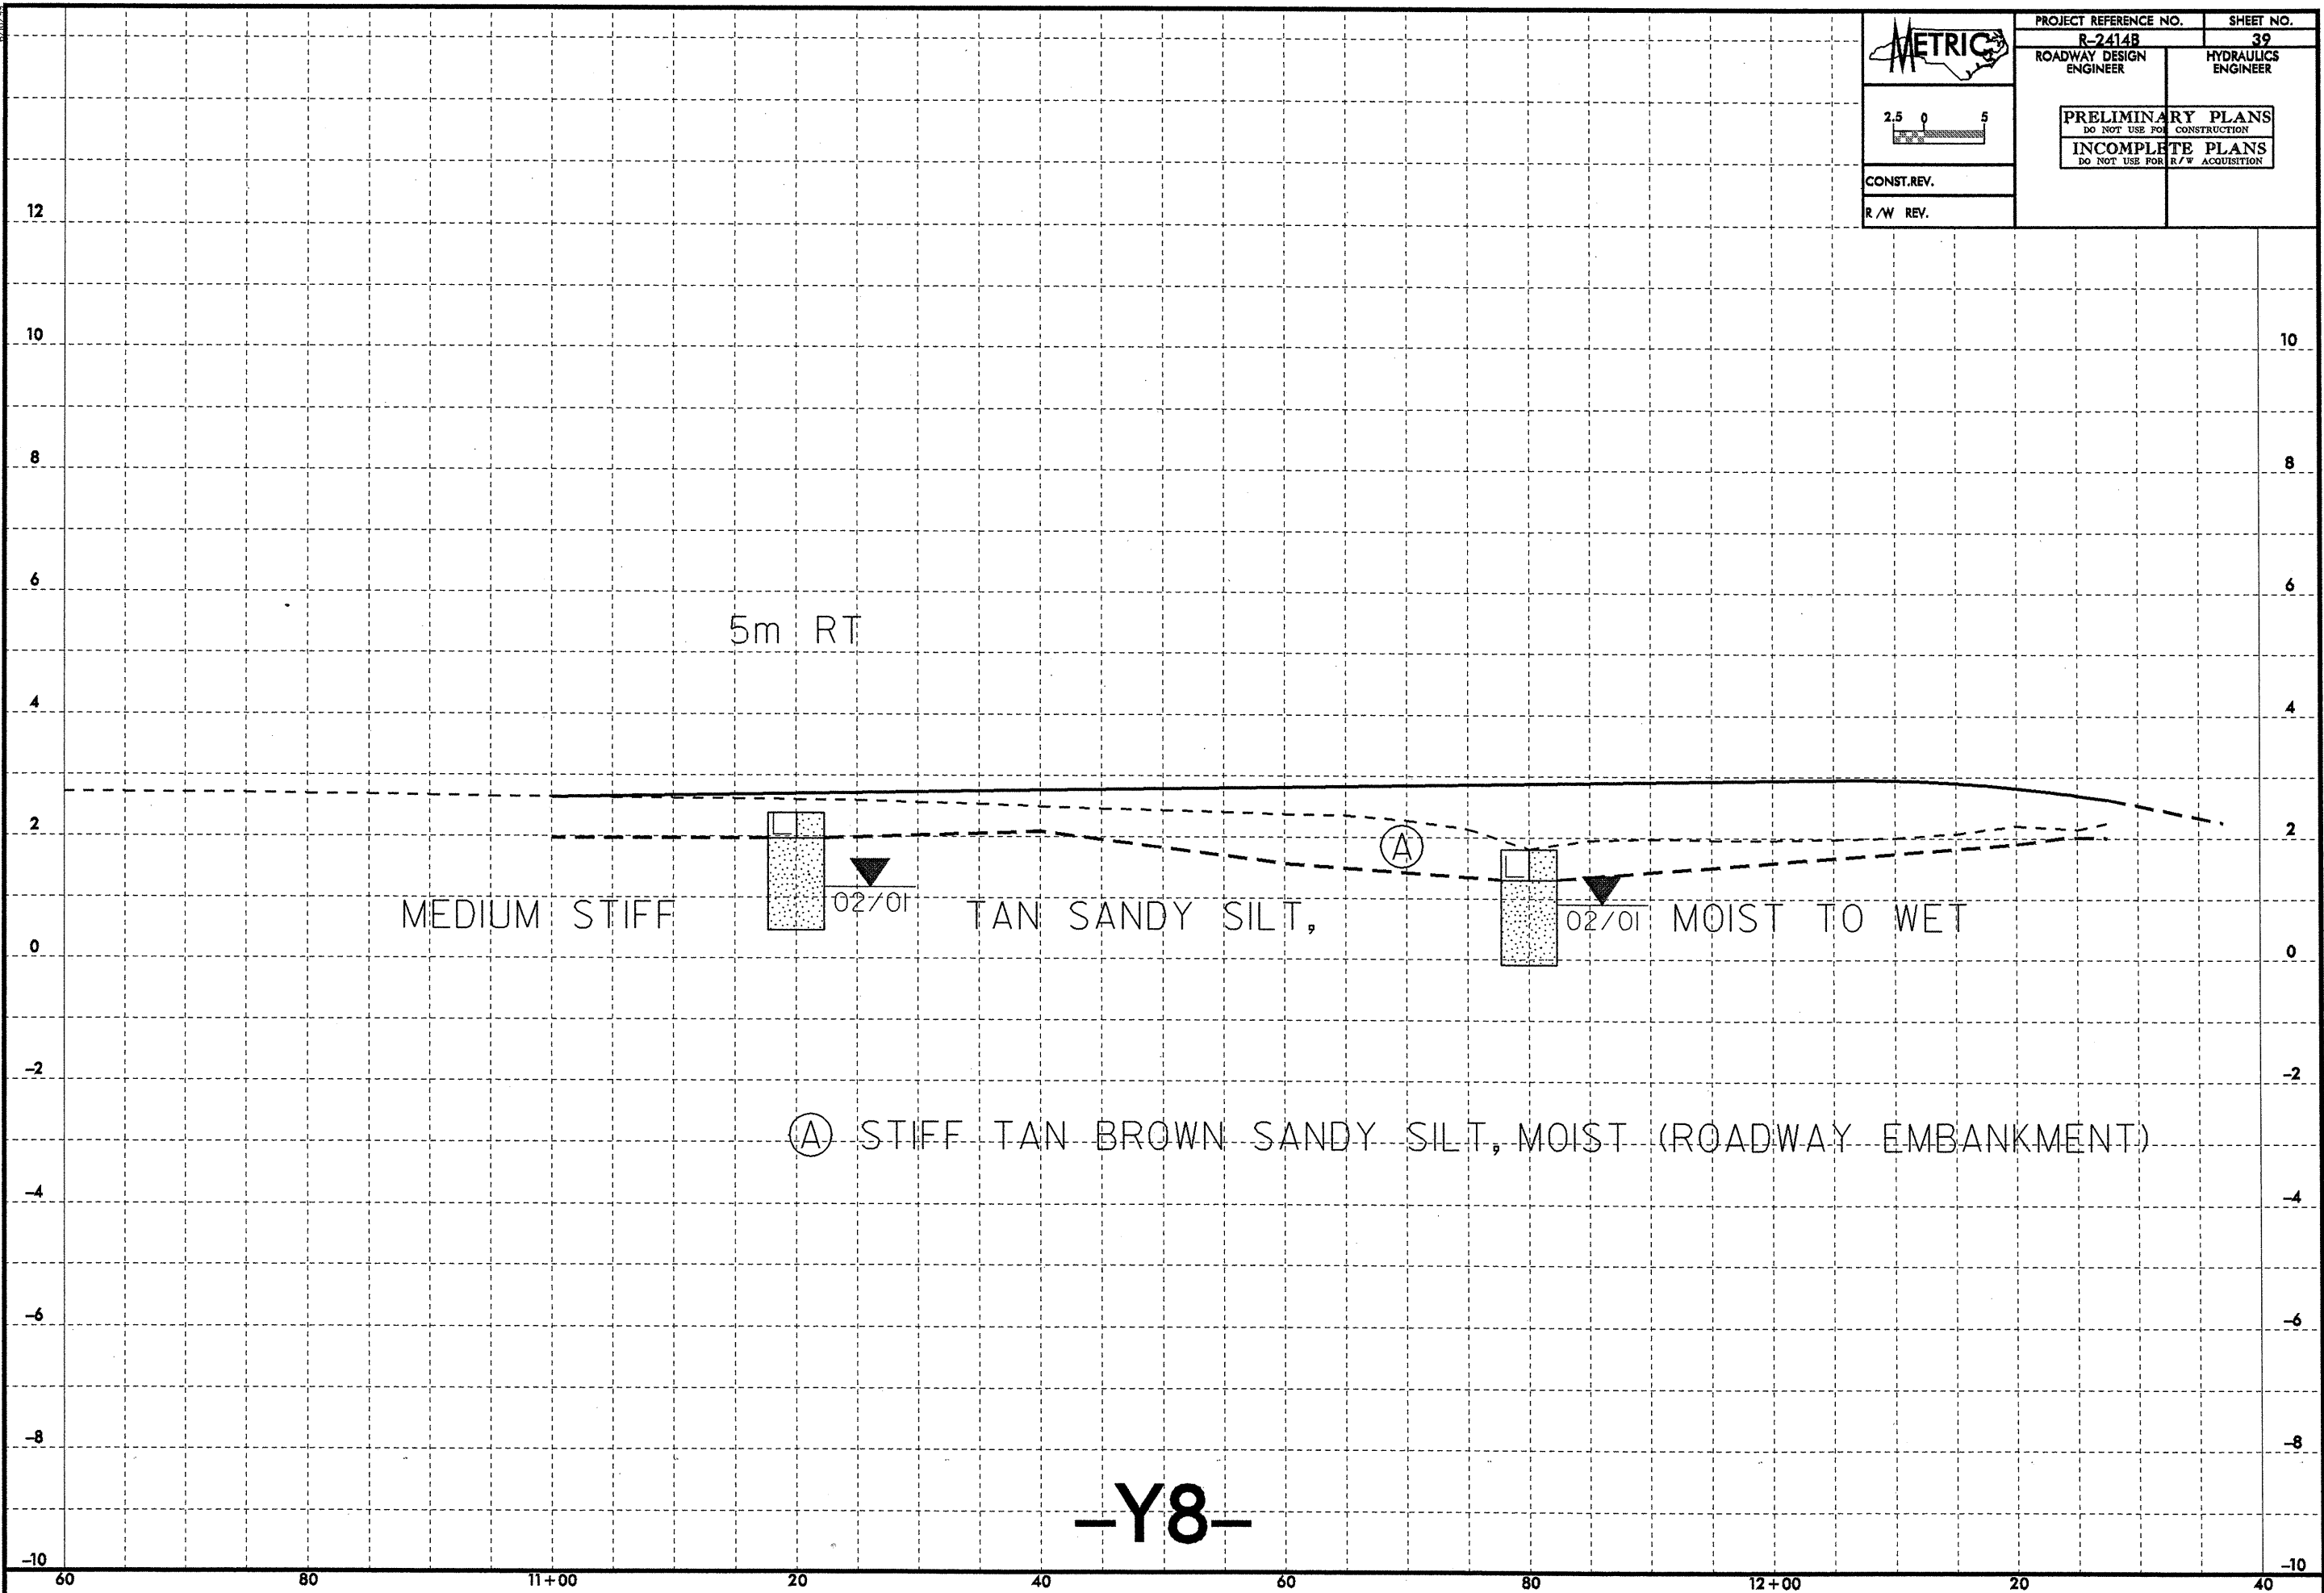

5m RT

MEDIUM STIFF

0.2/0.1

TAN SANDY SILT,

(A)


0.2/0.1

MOIST TO WET


(A) STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

-Y8-

10/24/2008 11:45 AM AT 866240338\ev2\oaddd\geotech\p\amprof\2414b-geo-pf-y8.dgn
 6/10/2008



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	40

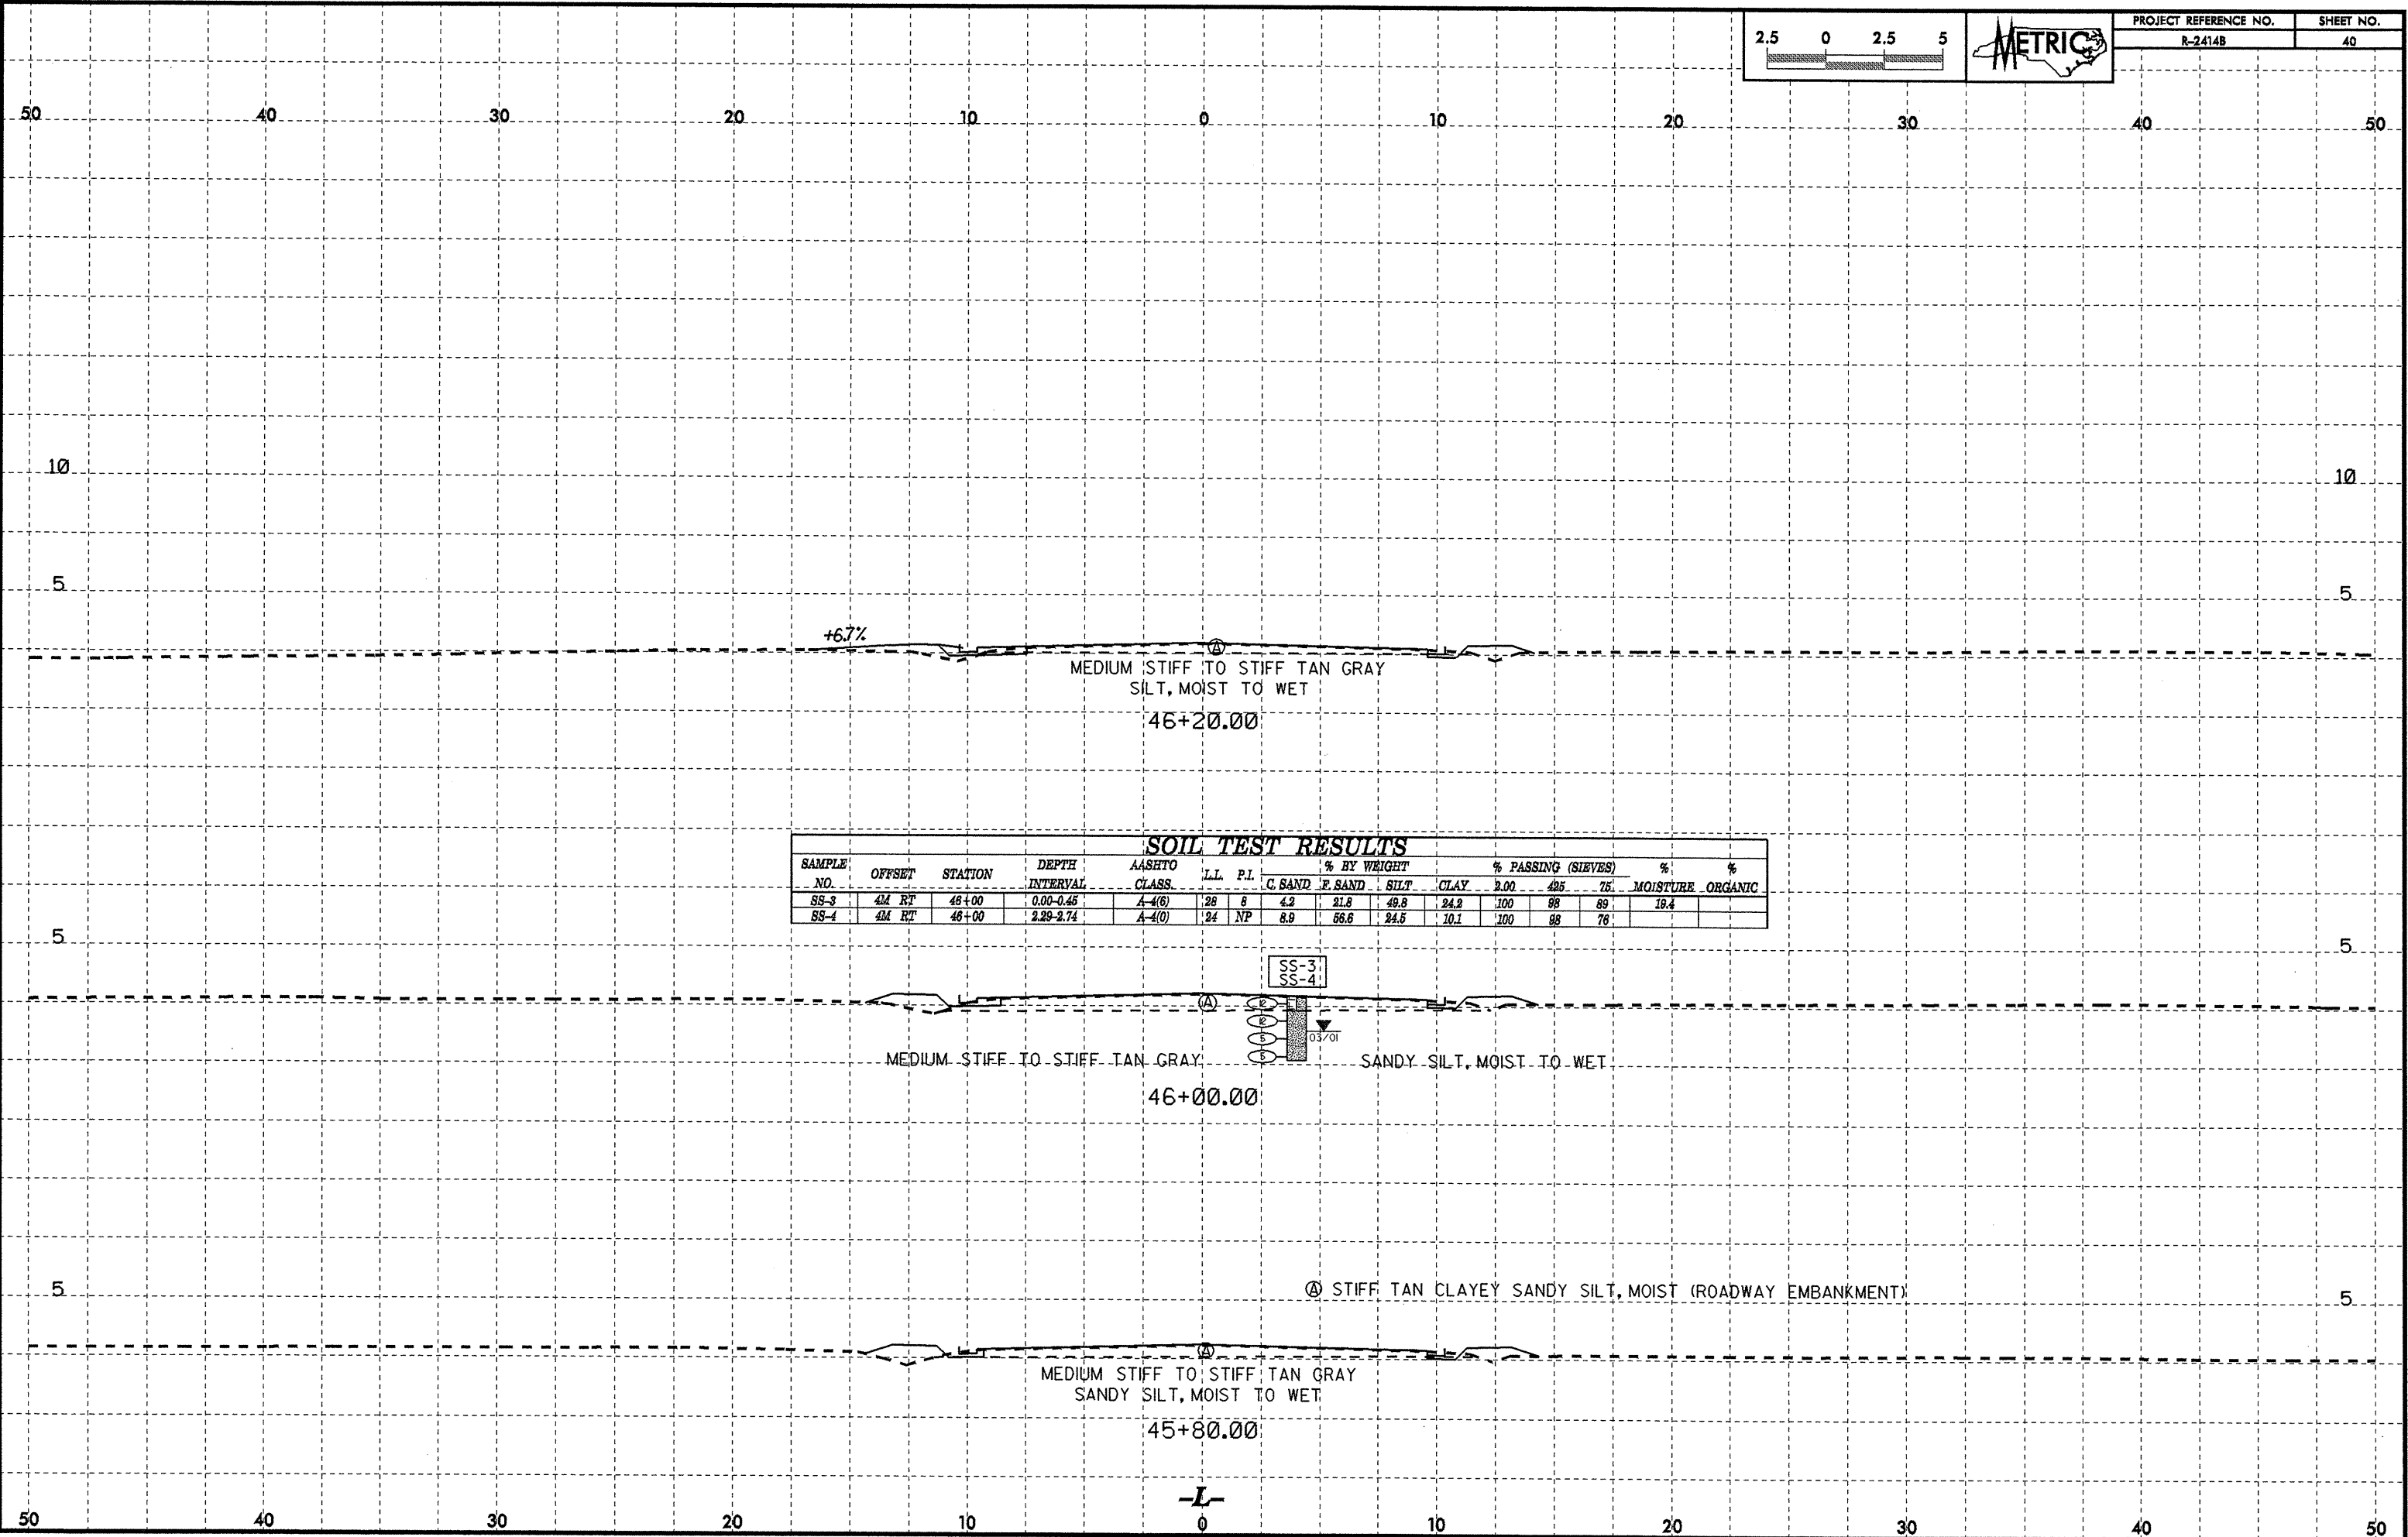


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							G SAND	F SAND	SILT	CLAY	3.00	425	75		
SS-3	4M RT	46+00	0.00-0.45	A-4(6)	28	8	4.2	21.8	49.8	24.2	100	98	89	19.4	
SS-4	4M RT	46+00	2.29-2.74	A-4(0)	24	NP	8.9	66.6	24.5	10.1	100	98	76		


SS-3
SS-4

20-MAY-2008 14:58
 I:\projects\2414B\2414B_0500\RDWY_REV2\ROAD.GEOTECH\sec\2414b_Rdw\sta1.dgn
 User: rdw AT 06/24/08

10/26/09
20-MAY-2008 14:56
agstoc\171\171-214B-LS00-ROADWAY-REV2\CA00_GEO TECH\sec\2414b_Rdy_xa1.dgn
B:\Summer_01\02040331



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	42

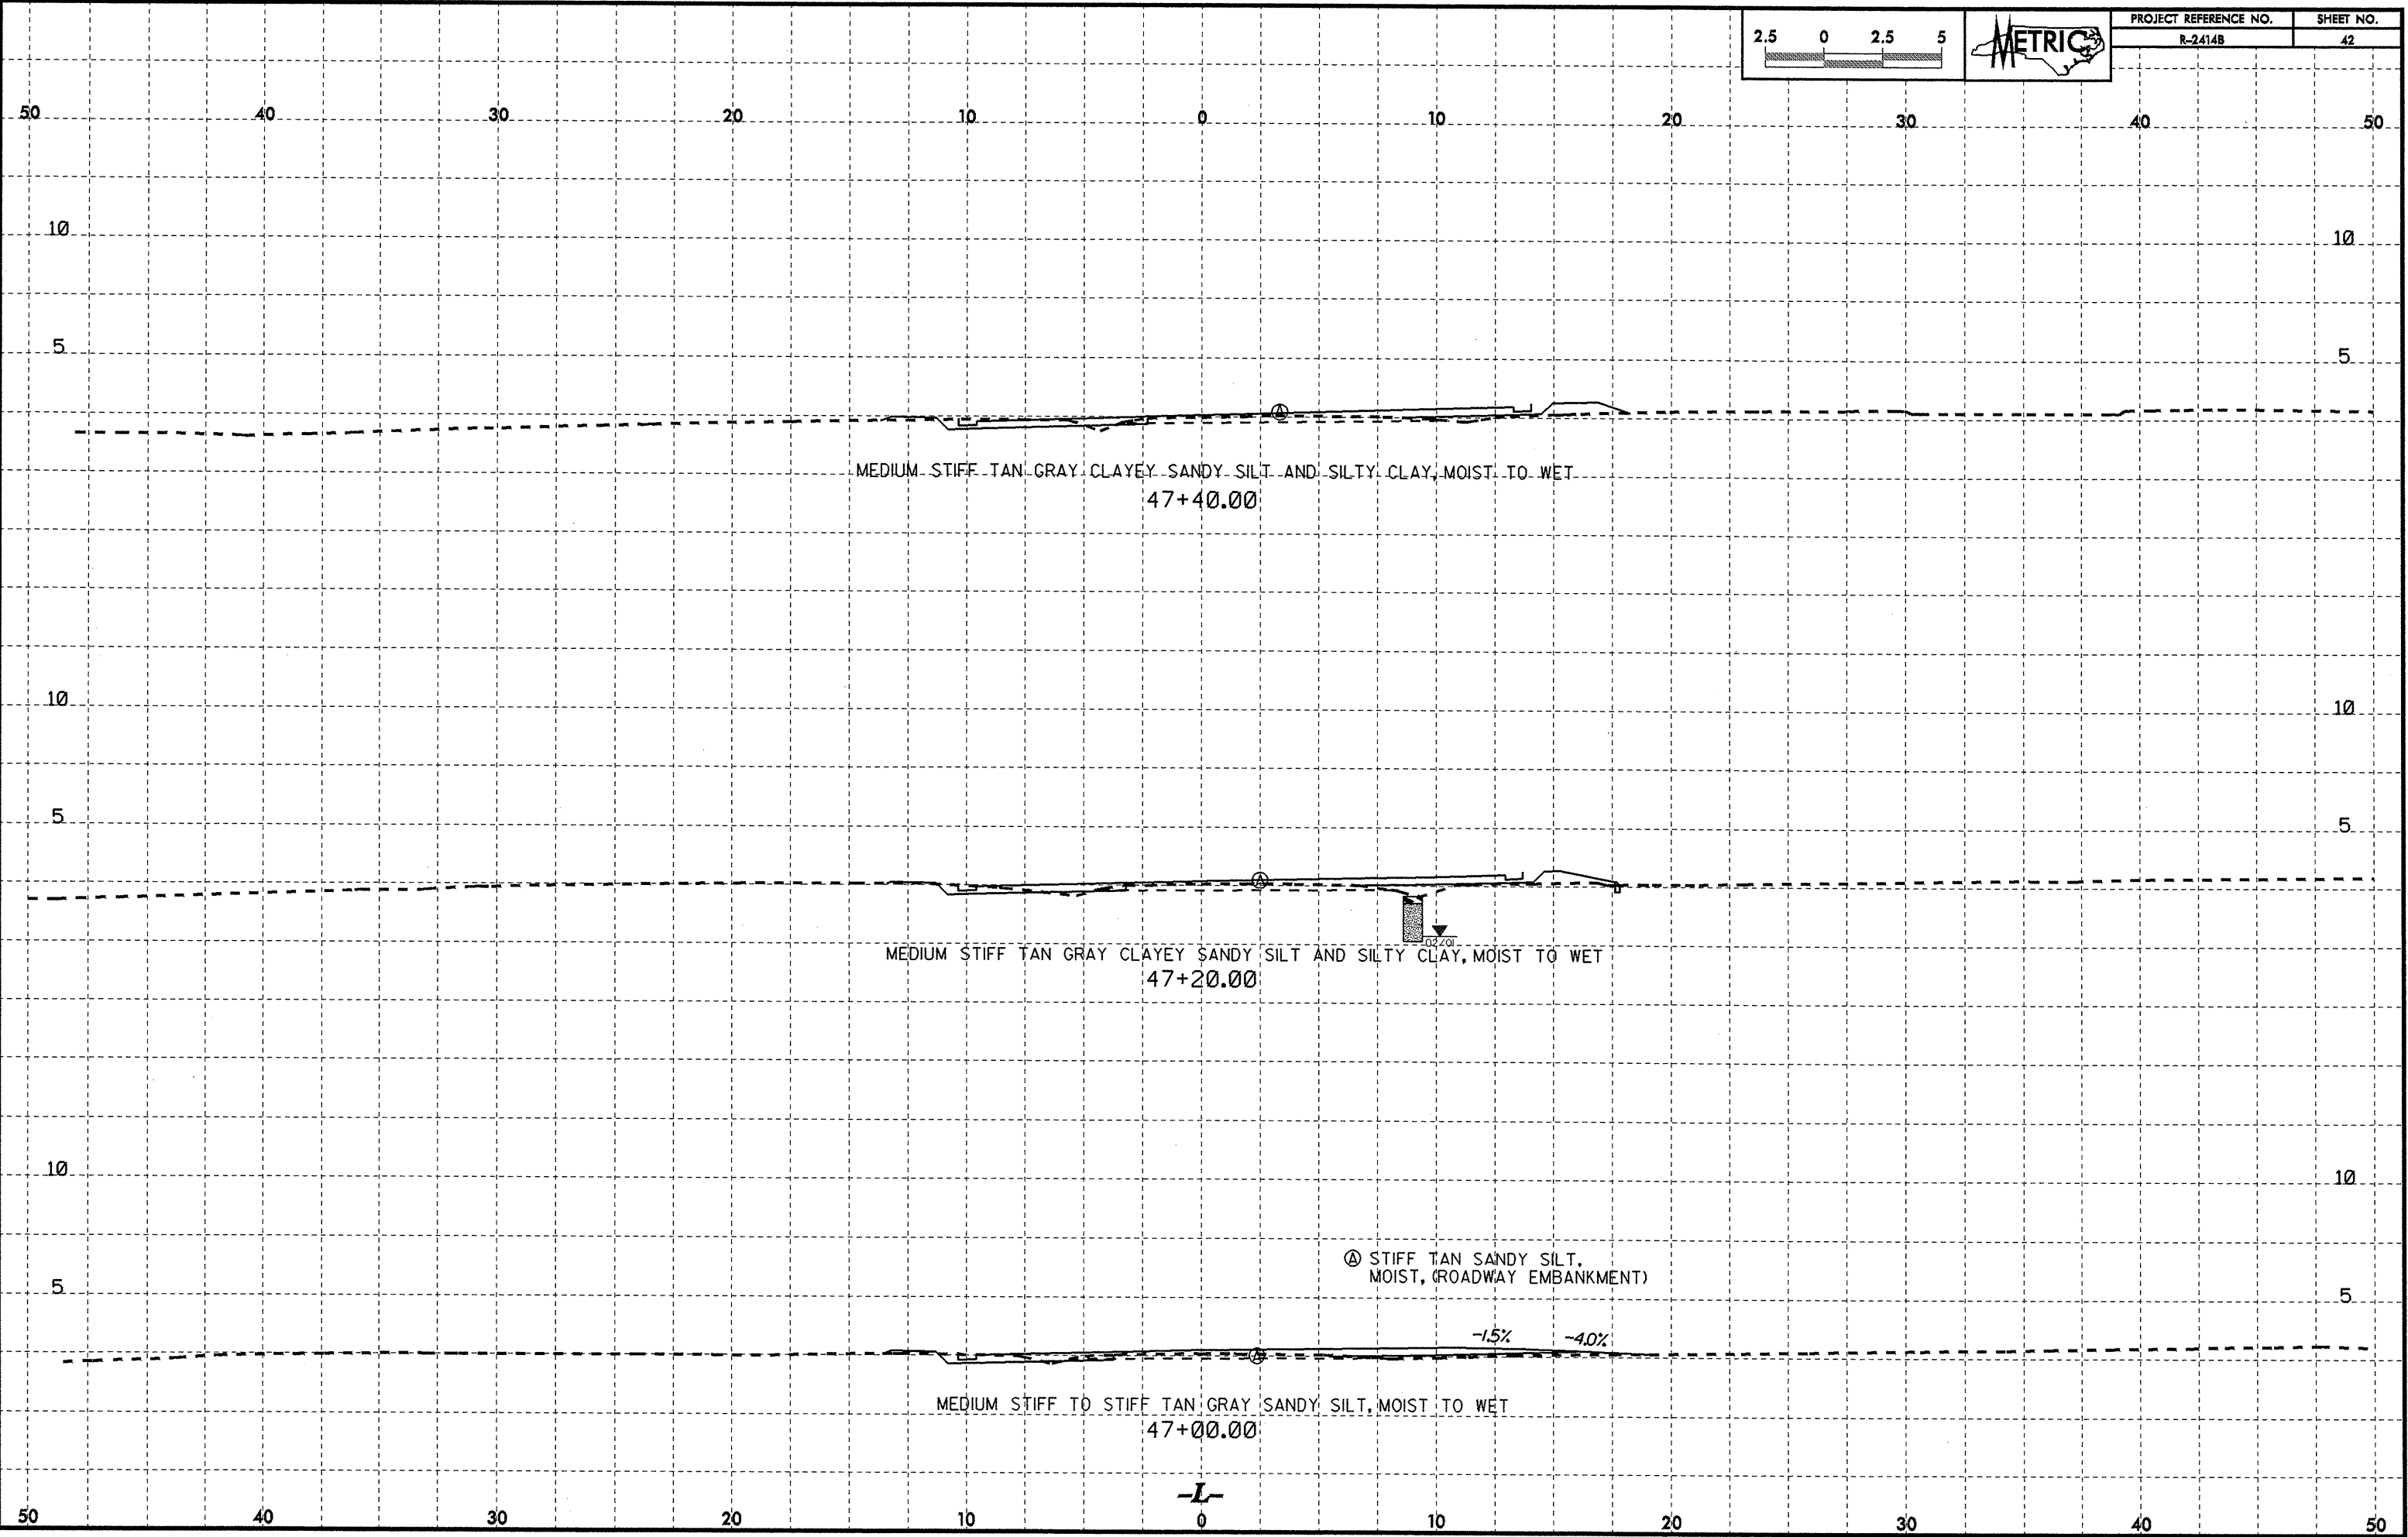

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
47+40.00

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
47+20.00


MEDIUM STIFF TO STIFF TAN GRAY SANDY SILT, MOIST TO WET
47+00.00

A STIFF TAN SANDY SILT,
MOIST, (ROADWAY EMBANKMENT)


-15% -40%

-L-
0

10/26/08
2014/11/20/08 14:56
I:\geotech\T11\2008\RDWY_REV2\CADD\GEO\TECH\RDWY_2414b_Rdy_xst_1.dgn
User: rdwy AT 08/24/08



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	45

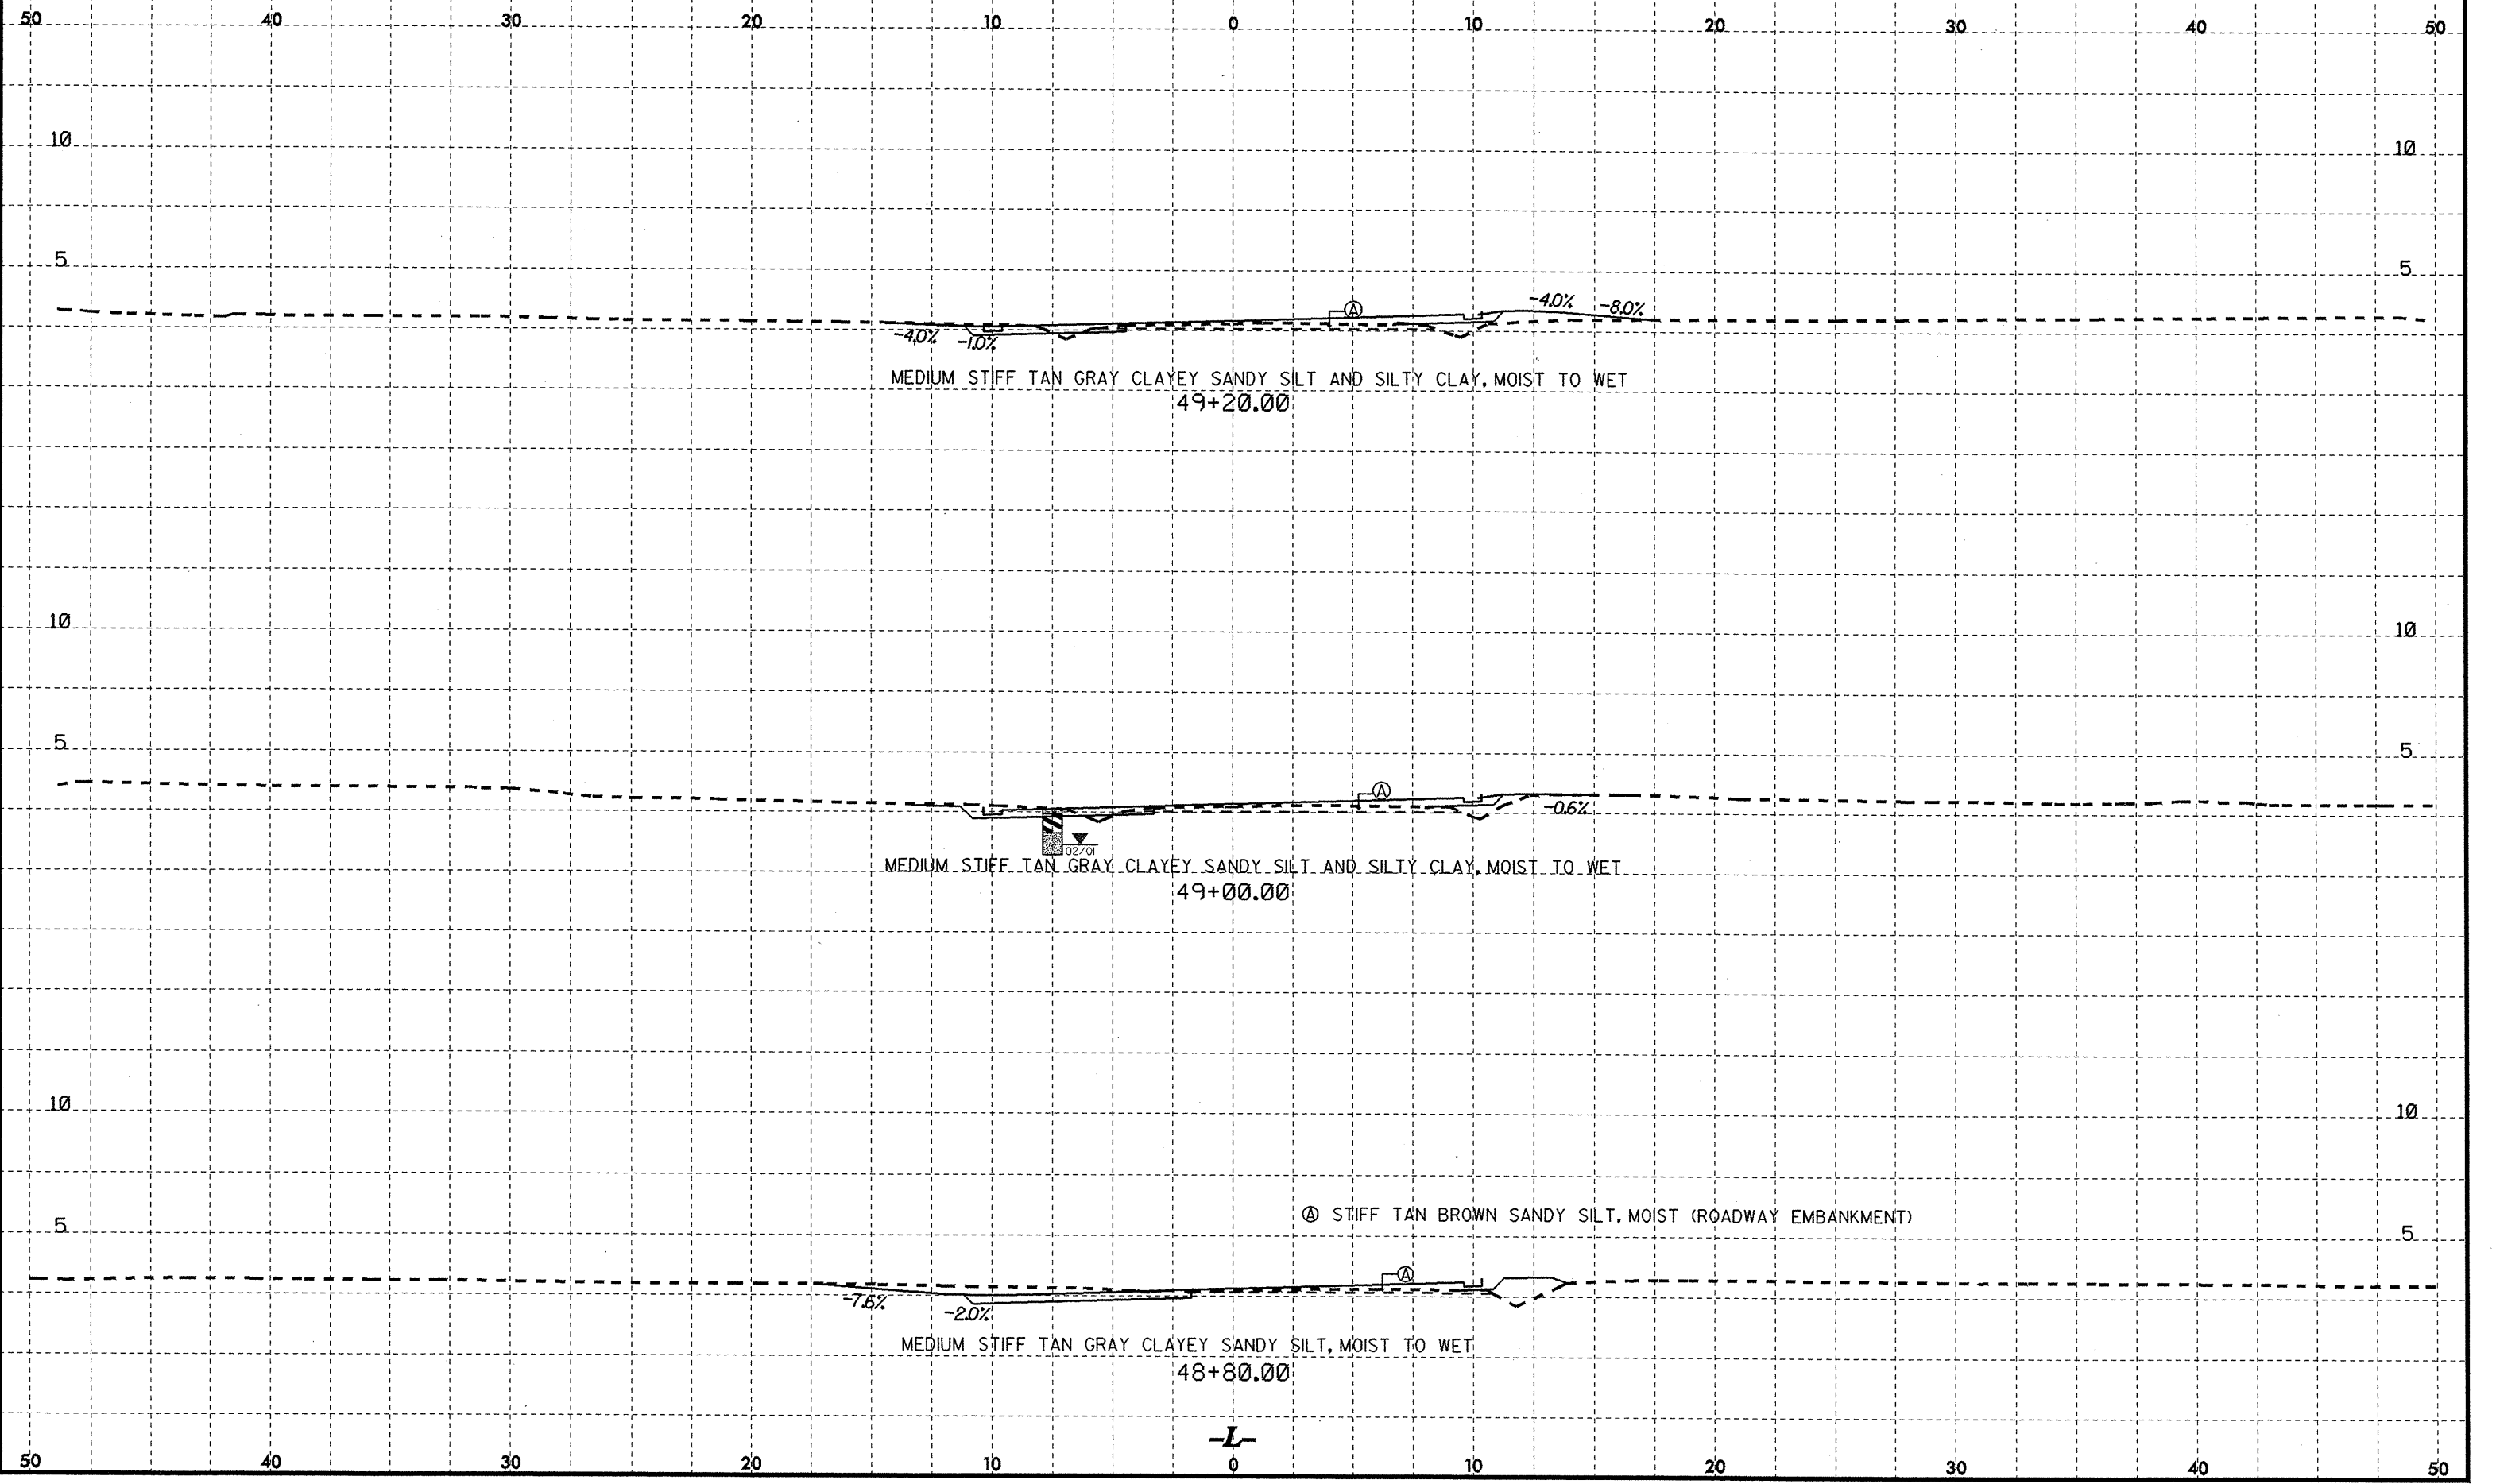

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
49+20.00


MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
49+00.00

Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)


MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT, MOIST TO WET
48+80.00

-L-

10/26/98



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	46

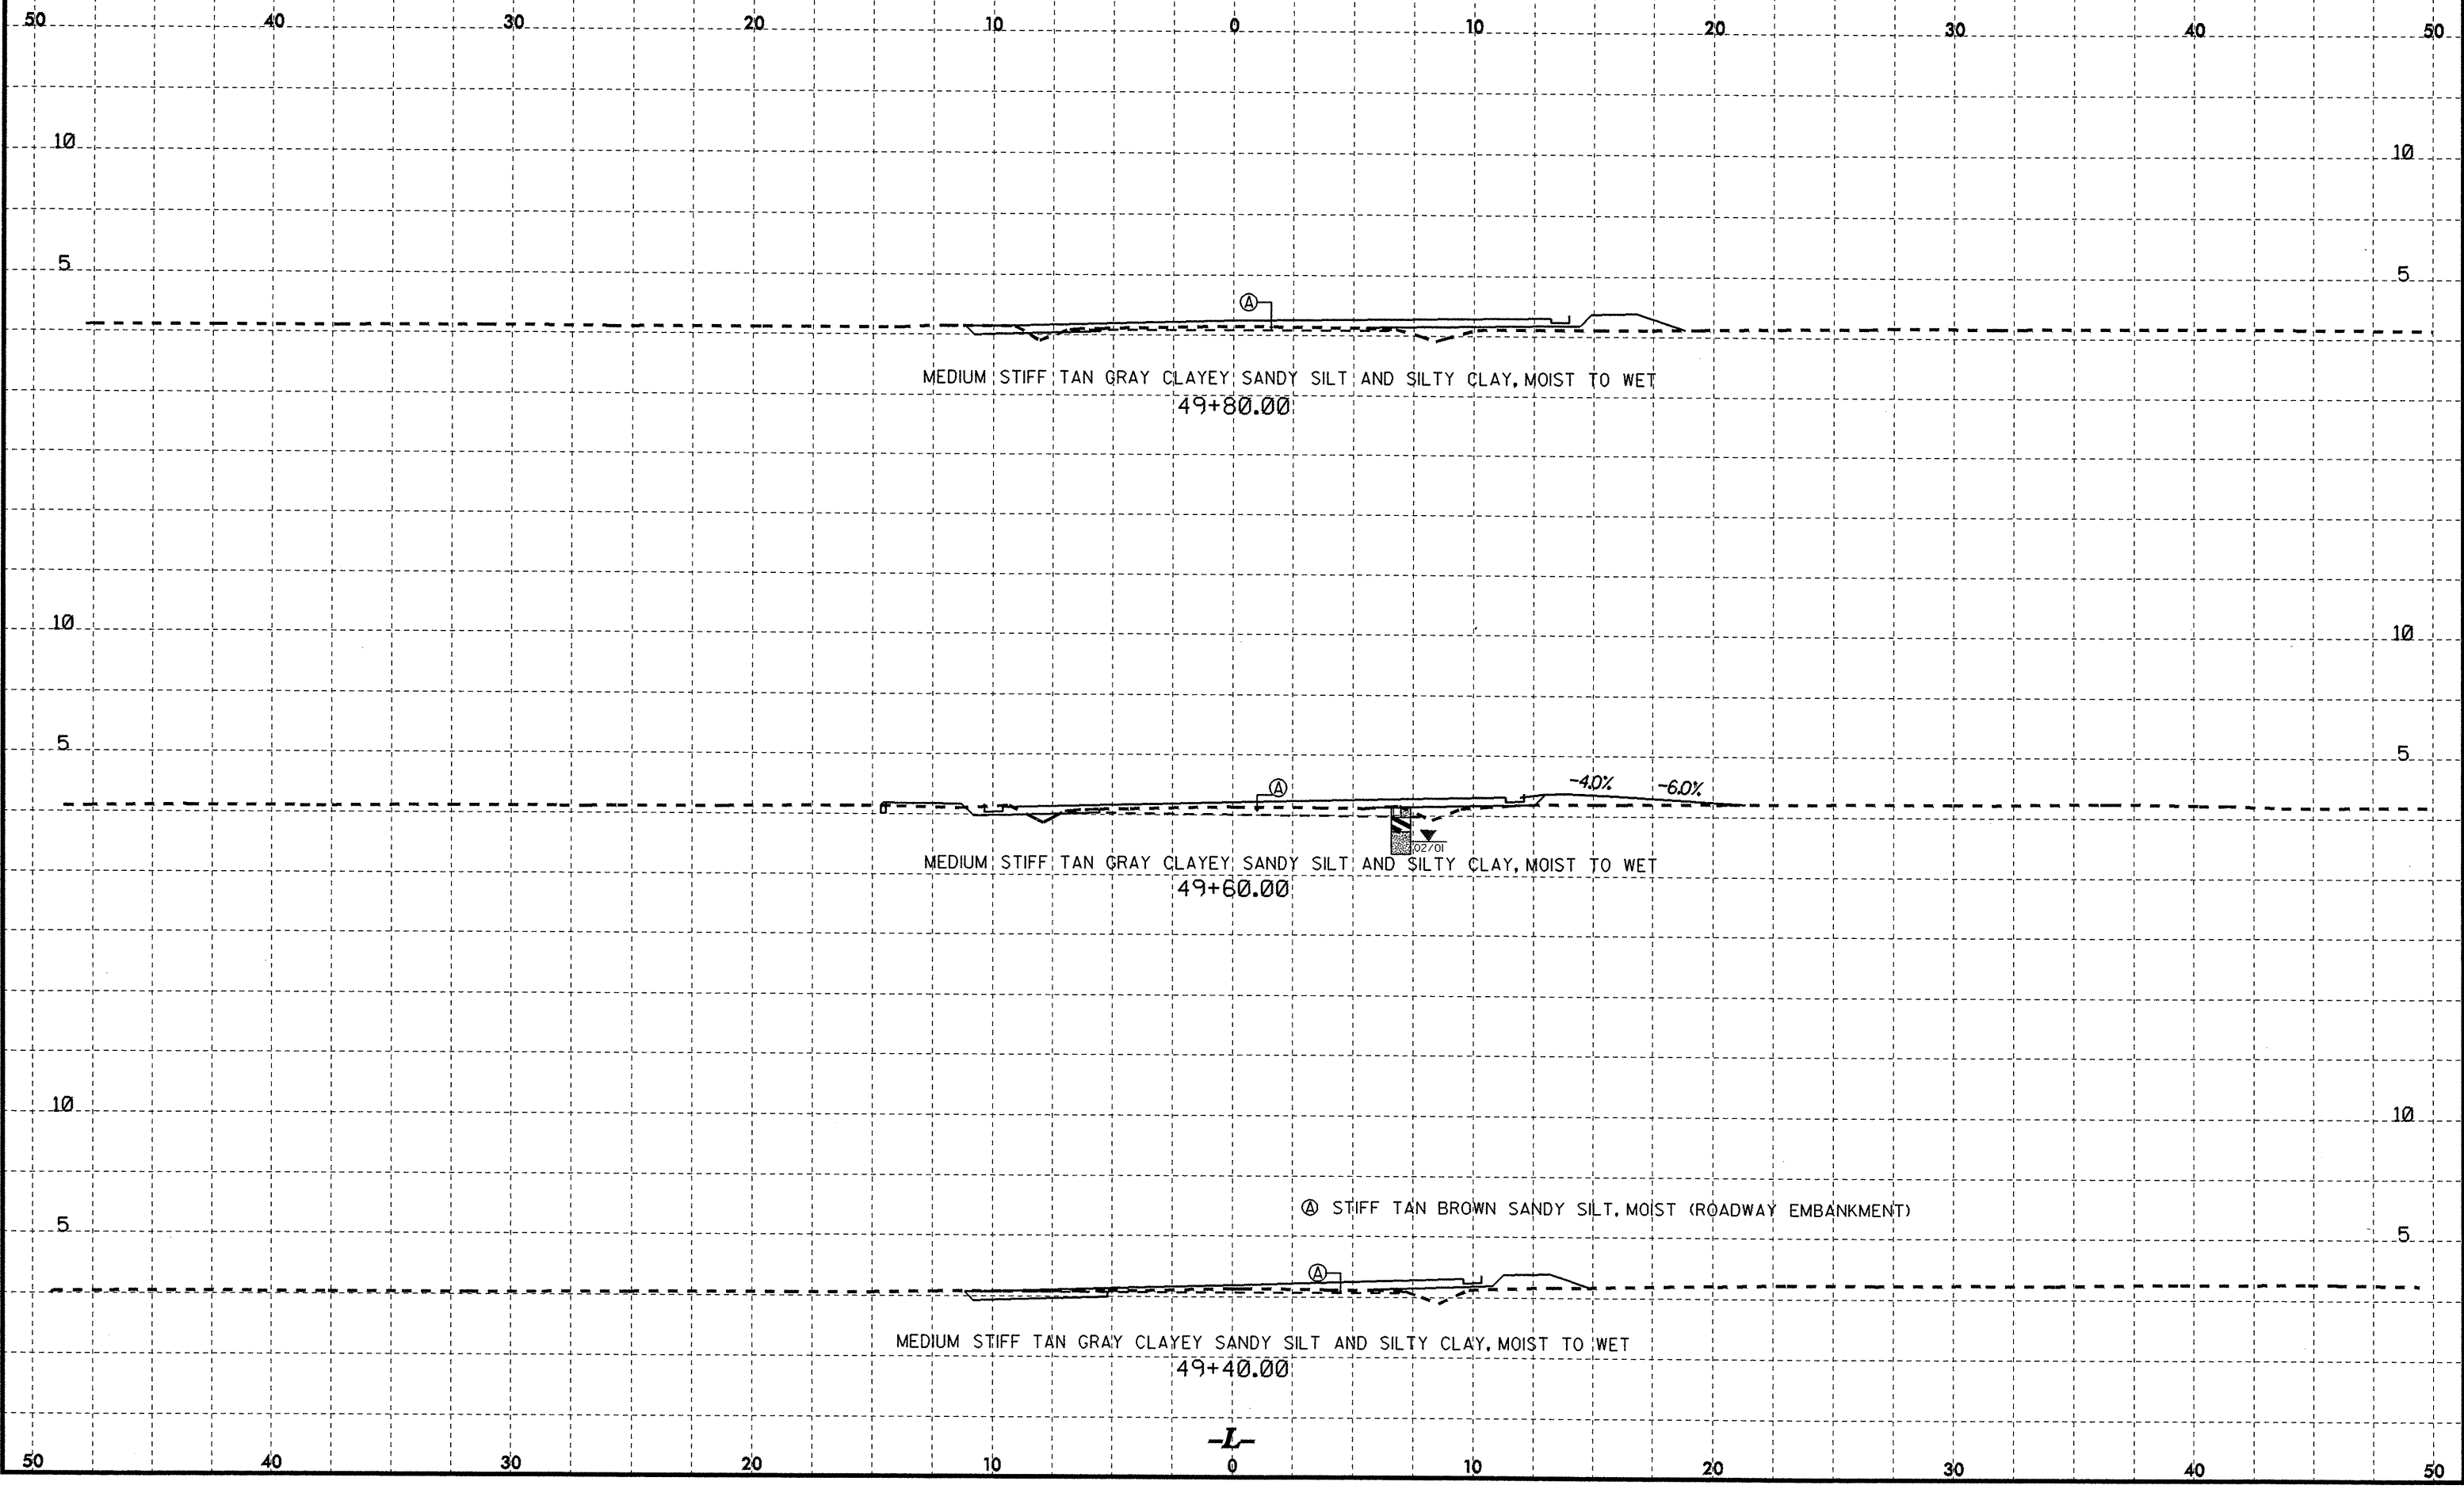

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
49+80.00

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
49+60.00


Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
49+40.00


-L-

10/26/98
 15:00
 R:\PROJECTS\2008\1500\BPNV\REV\G000\B00TECH\sec\2414b_Rdg_xst.dgn
 02/20/08
 11:21
 02/20/08

10/26/08
C:\Users\jstump\Documents\2008\10\10\ROADWAY\REV2\CADD\GEO\TECH\YSC\Y-2414b_RdL_xu_1.dgn





PROJECT REFERENCE NO.	SHEET NO.
R-2414B	50

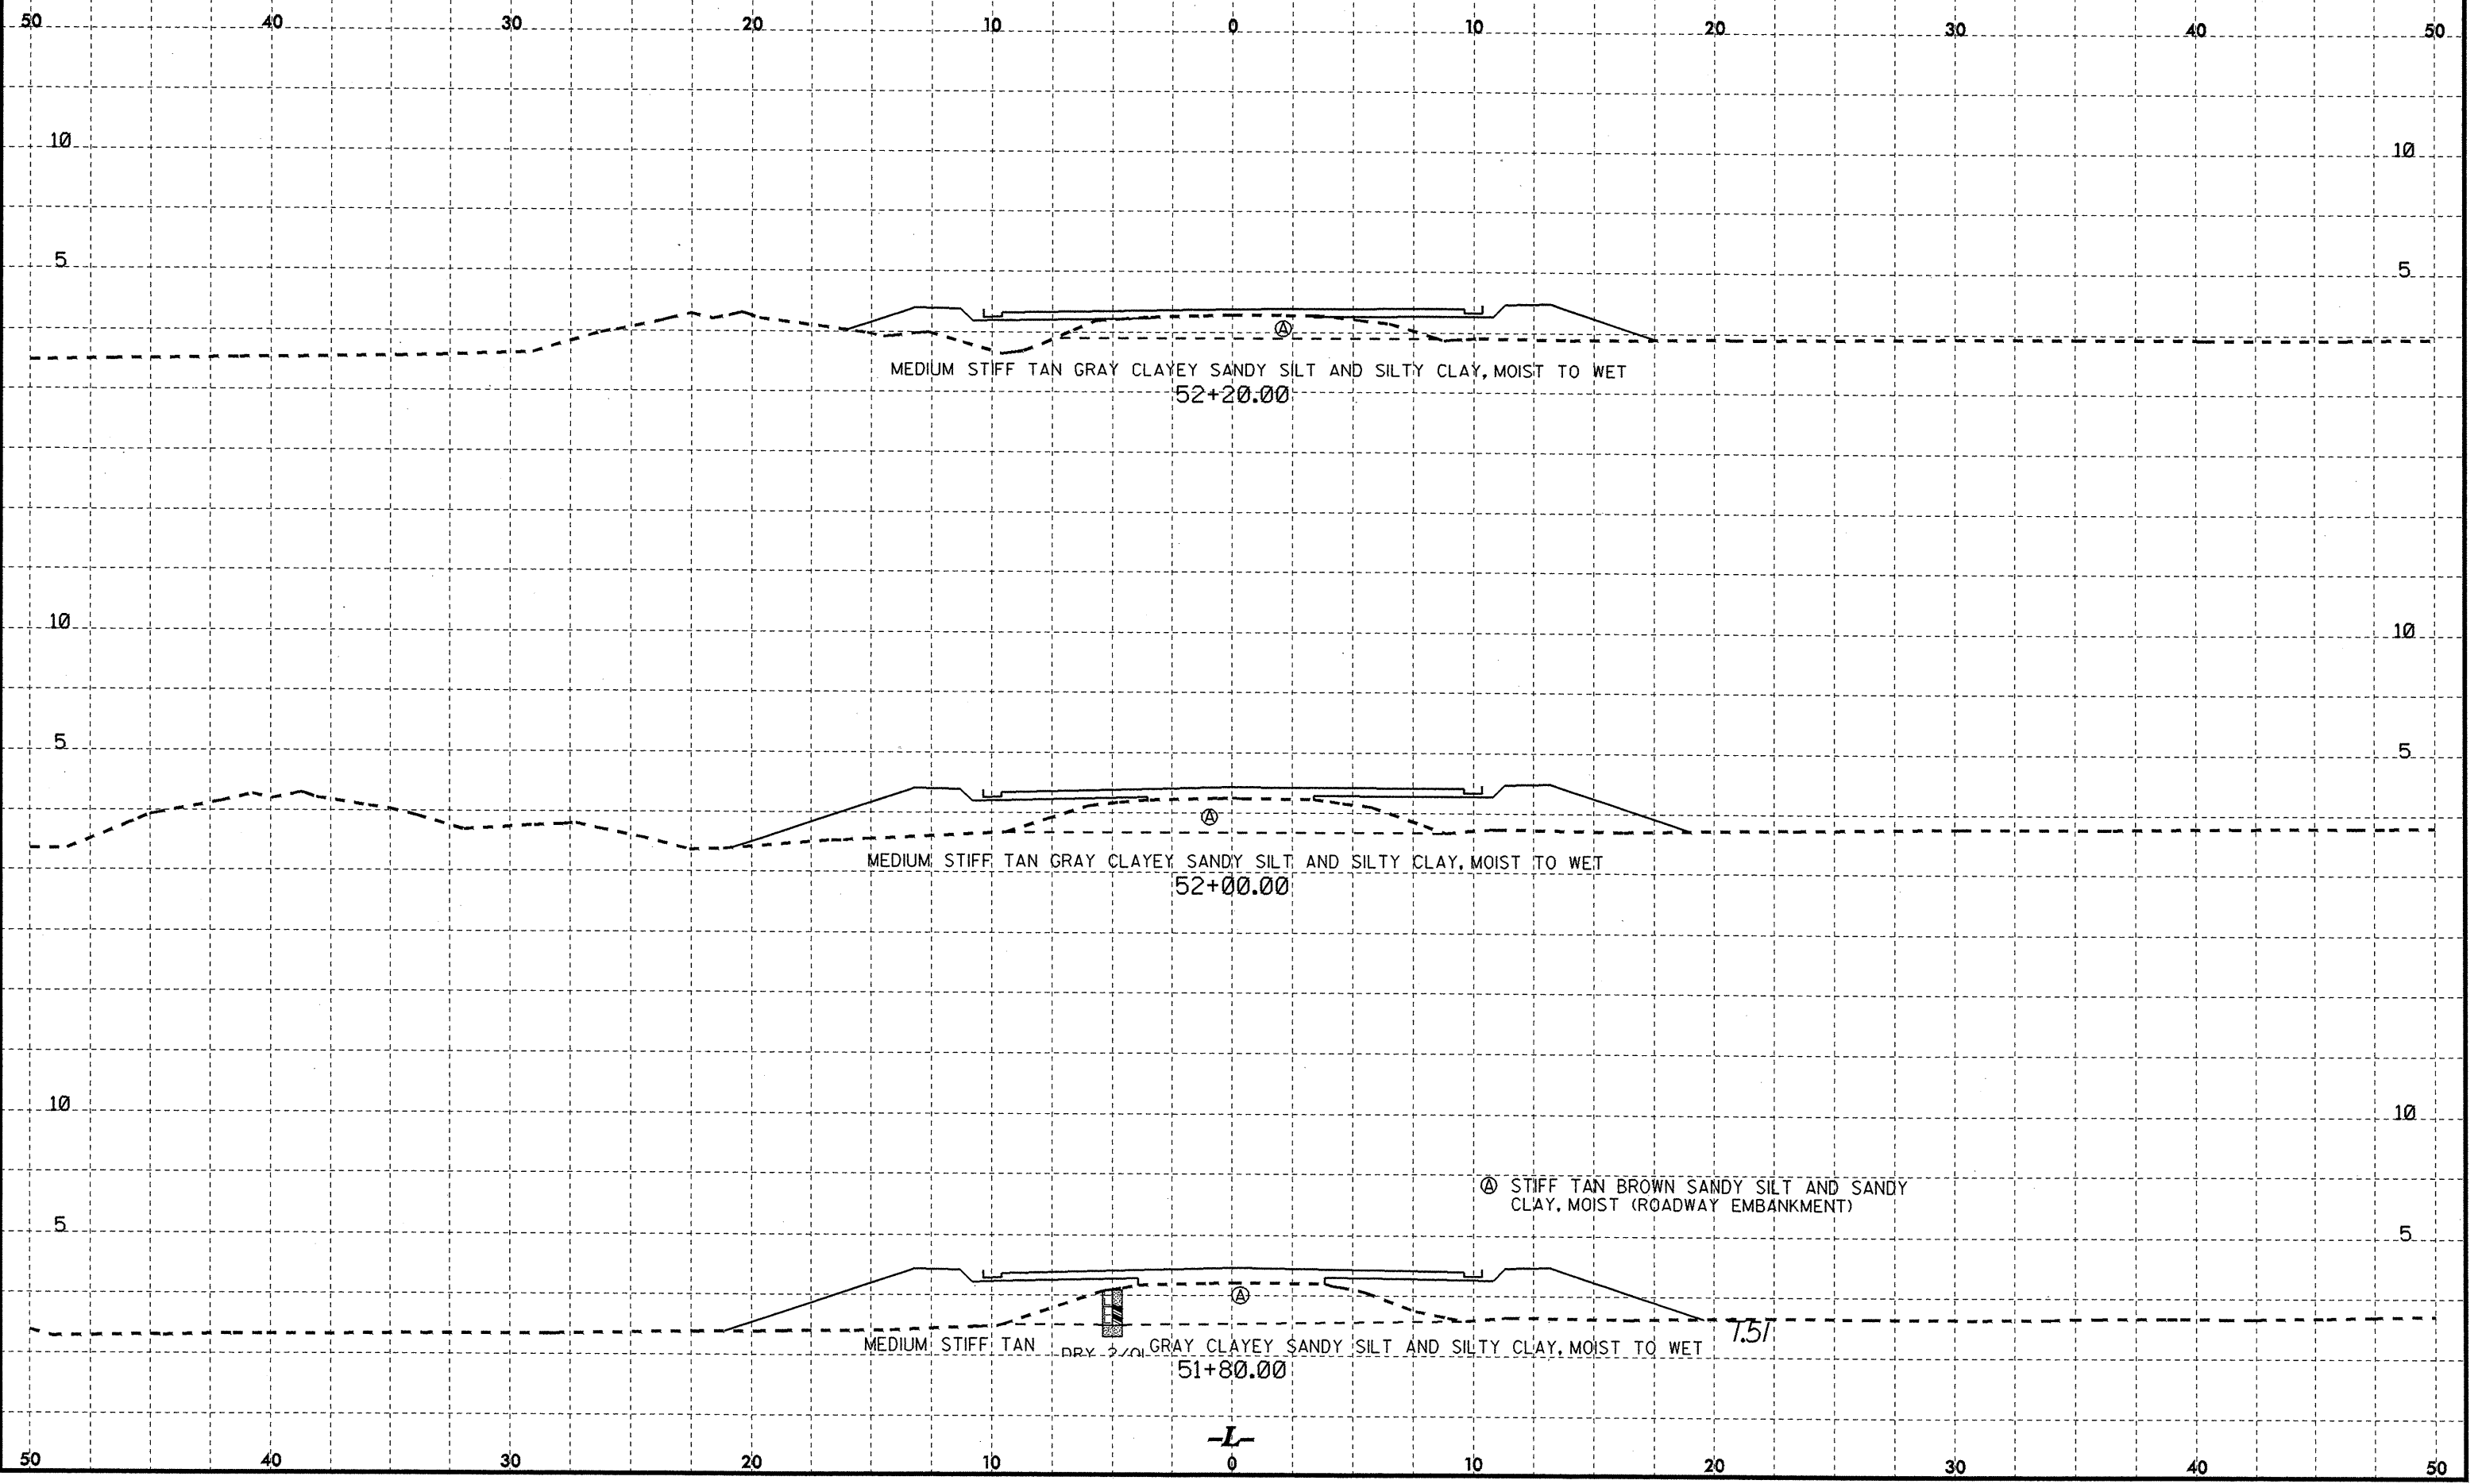

Ⓐ STIFF TAN BROWN SANDY SILT AND SANDY CLAY, MOIST (ROADWAY EMBANKMENT)

-L-
0

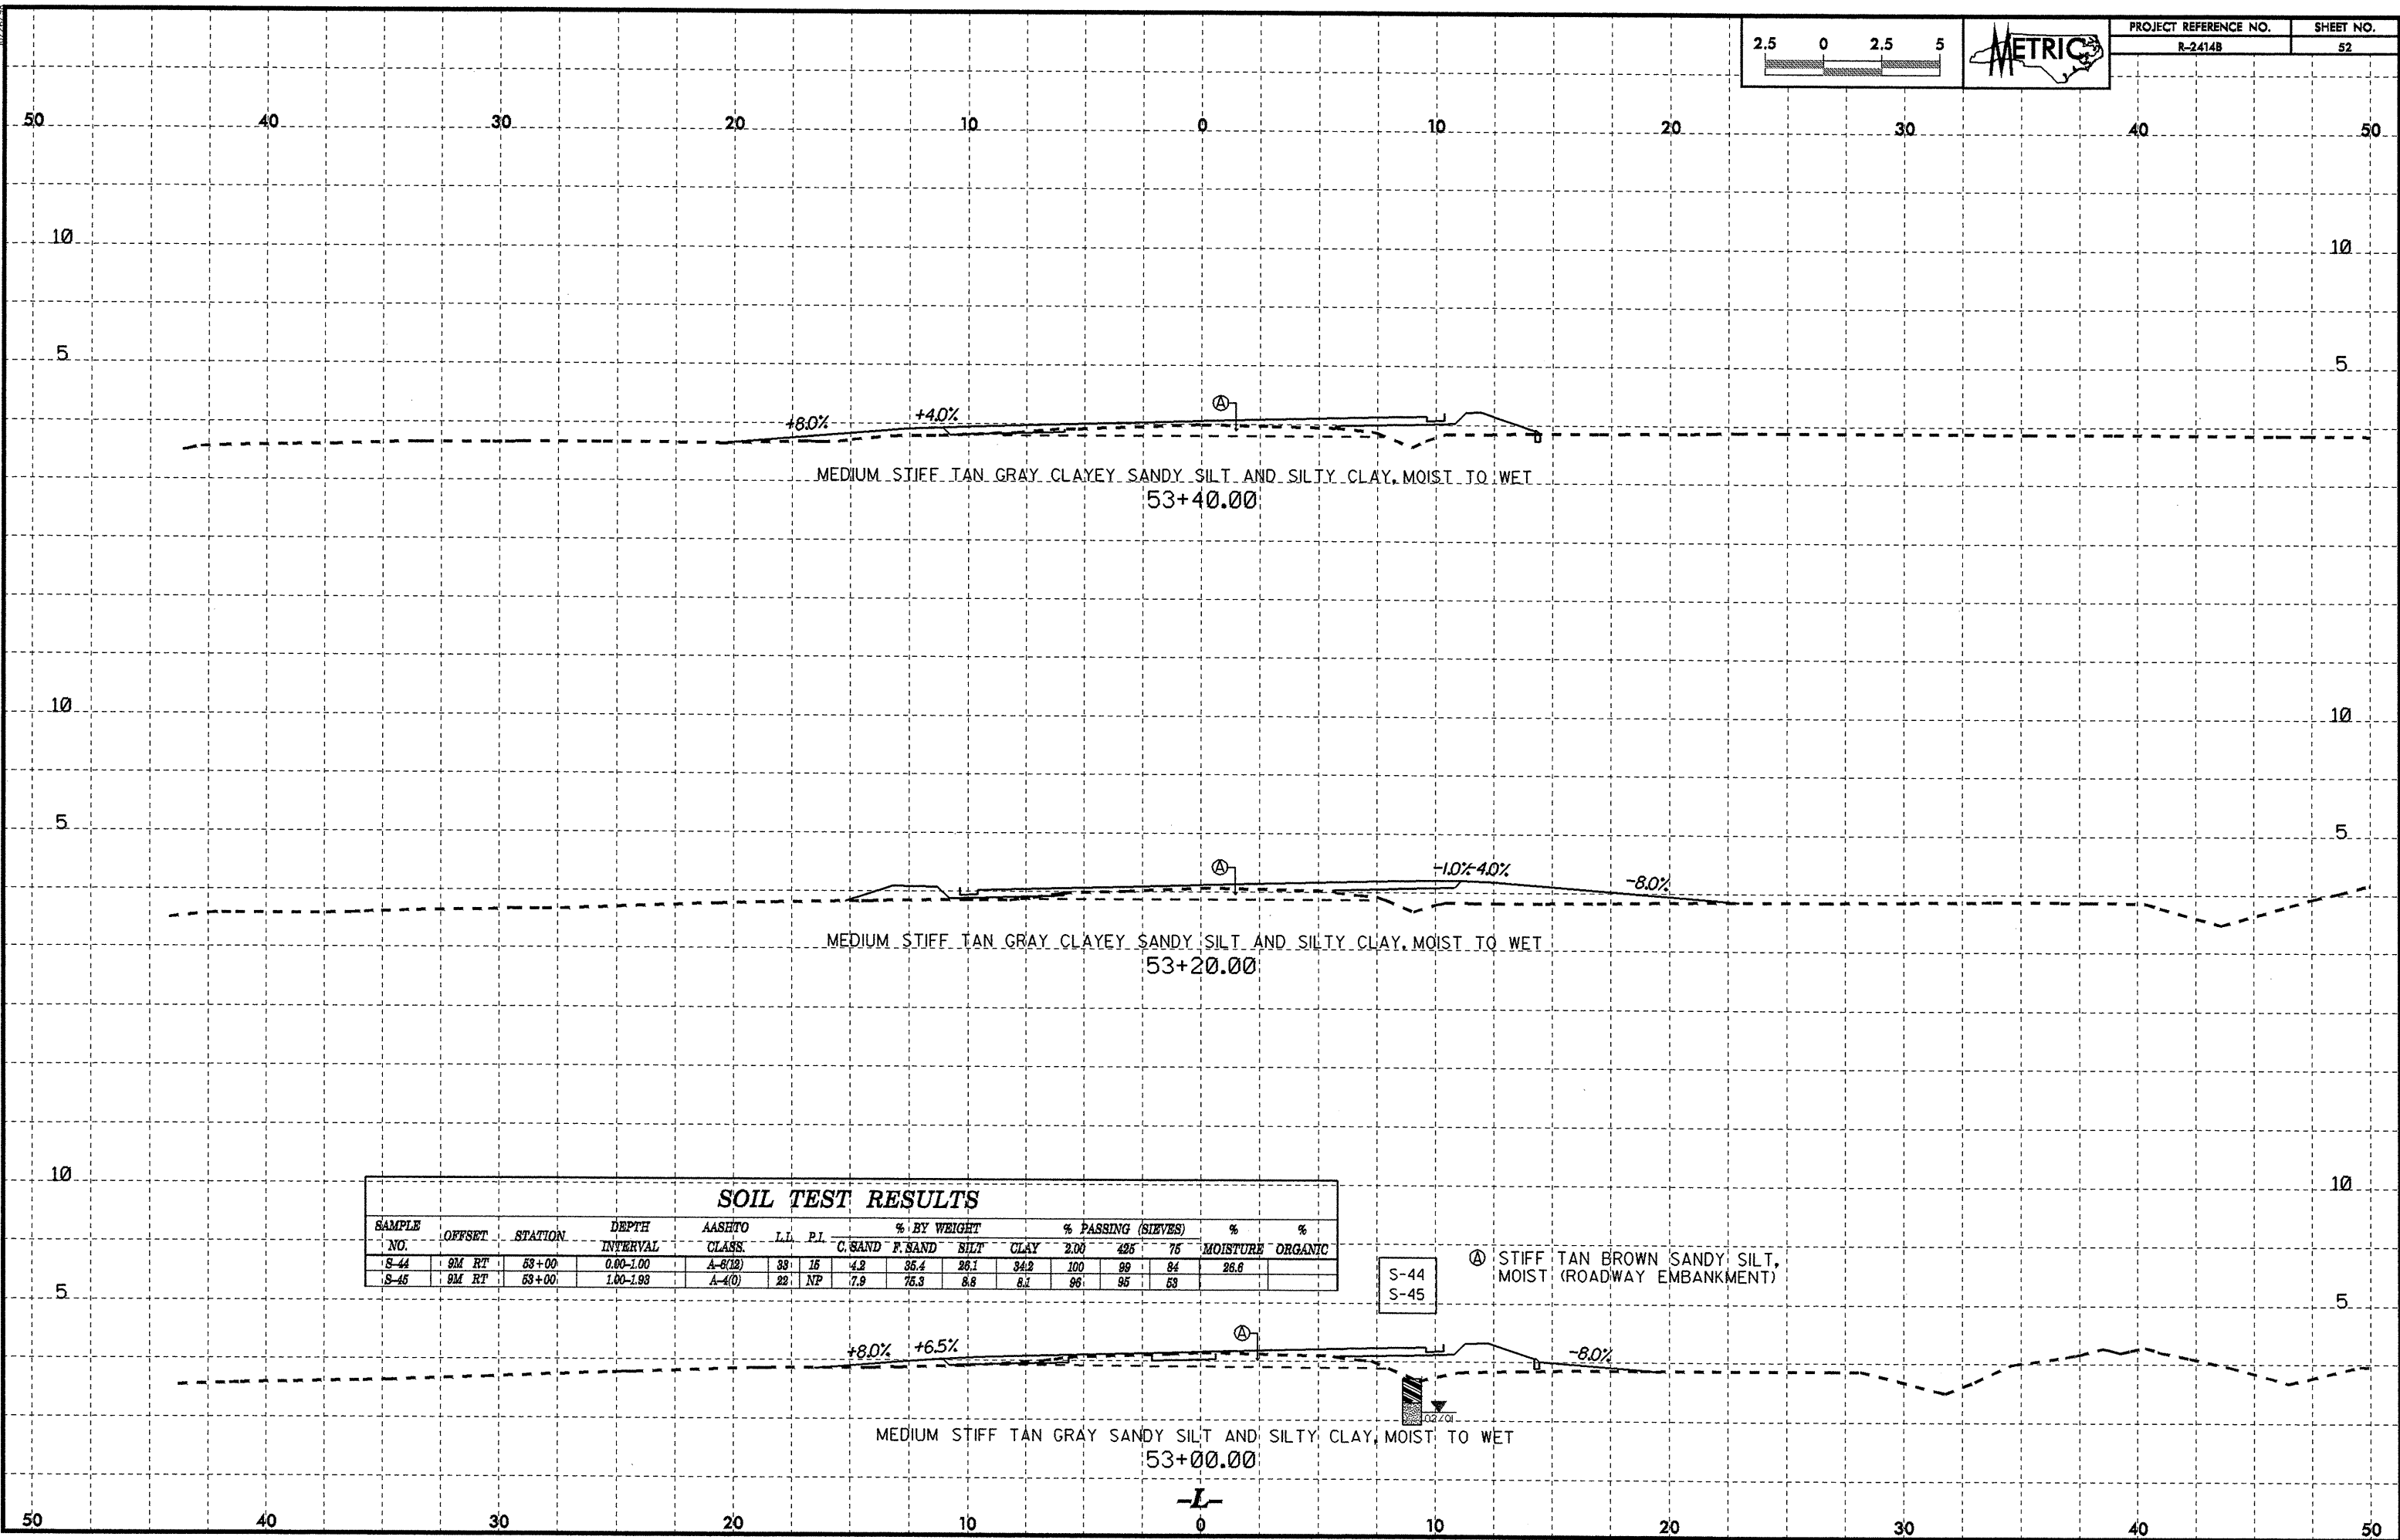

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
53+40.00

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
53+20.00


MEDIUM STIFF TAN GRAY SANDY SILT AND SILTY CLAY, MOIST TO WET
53+00.00

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	200	425	75		
S-44	9M RT	53+00	0.00-1.00	A-6(2)	33	15	4.2	35.4	26.1	34.2	100	99	84	26.8	
S-45	9M RT	53+00	1.00-1.98	A-4(0)	22	NP	7.9	75.3	8.8	8.1	96	95	53		


S-44
S-45
Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

10/26/09 10:00 AM 1580 BONY...REVISED...GEOTECH...2414b...Rdy...x.tl...l.dgn
 02/20/09 10:00 AM 1580 BONY...REVISED...GEOTECH...2414b...Rdy...x.tl...l.dgn
 02/20/09 10:00 AM 1580 BONY...REVISED...GEOTECH...2414b...Rdy...x.tl...l.dgn

10/26/08
20-MAY-2008 15:03
s:\projects\114\114271\114271.dwg
C:\Users\114271\Documents\114271.dwg



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	53

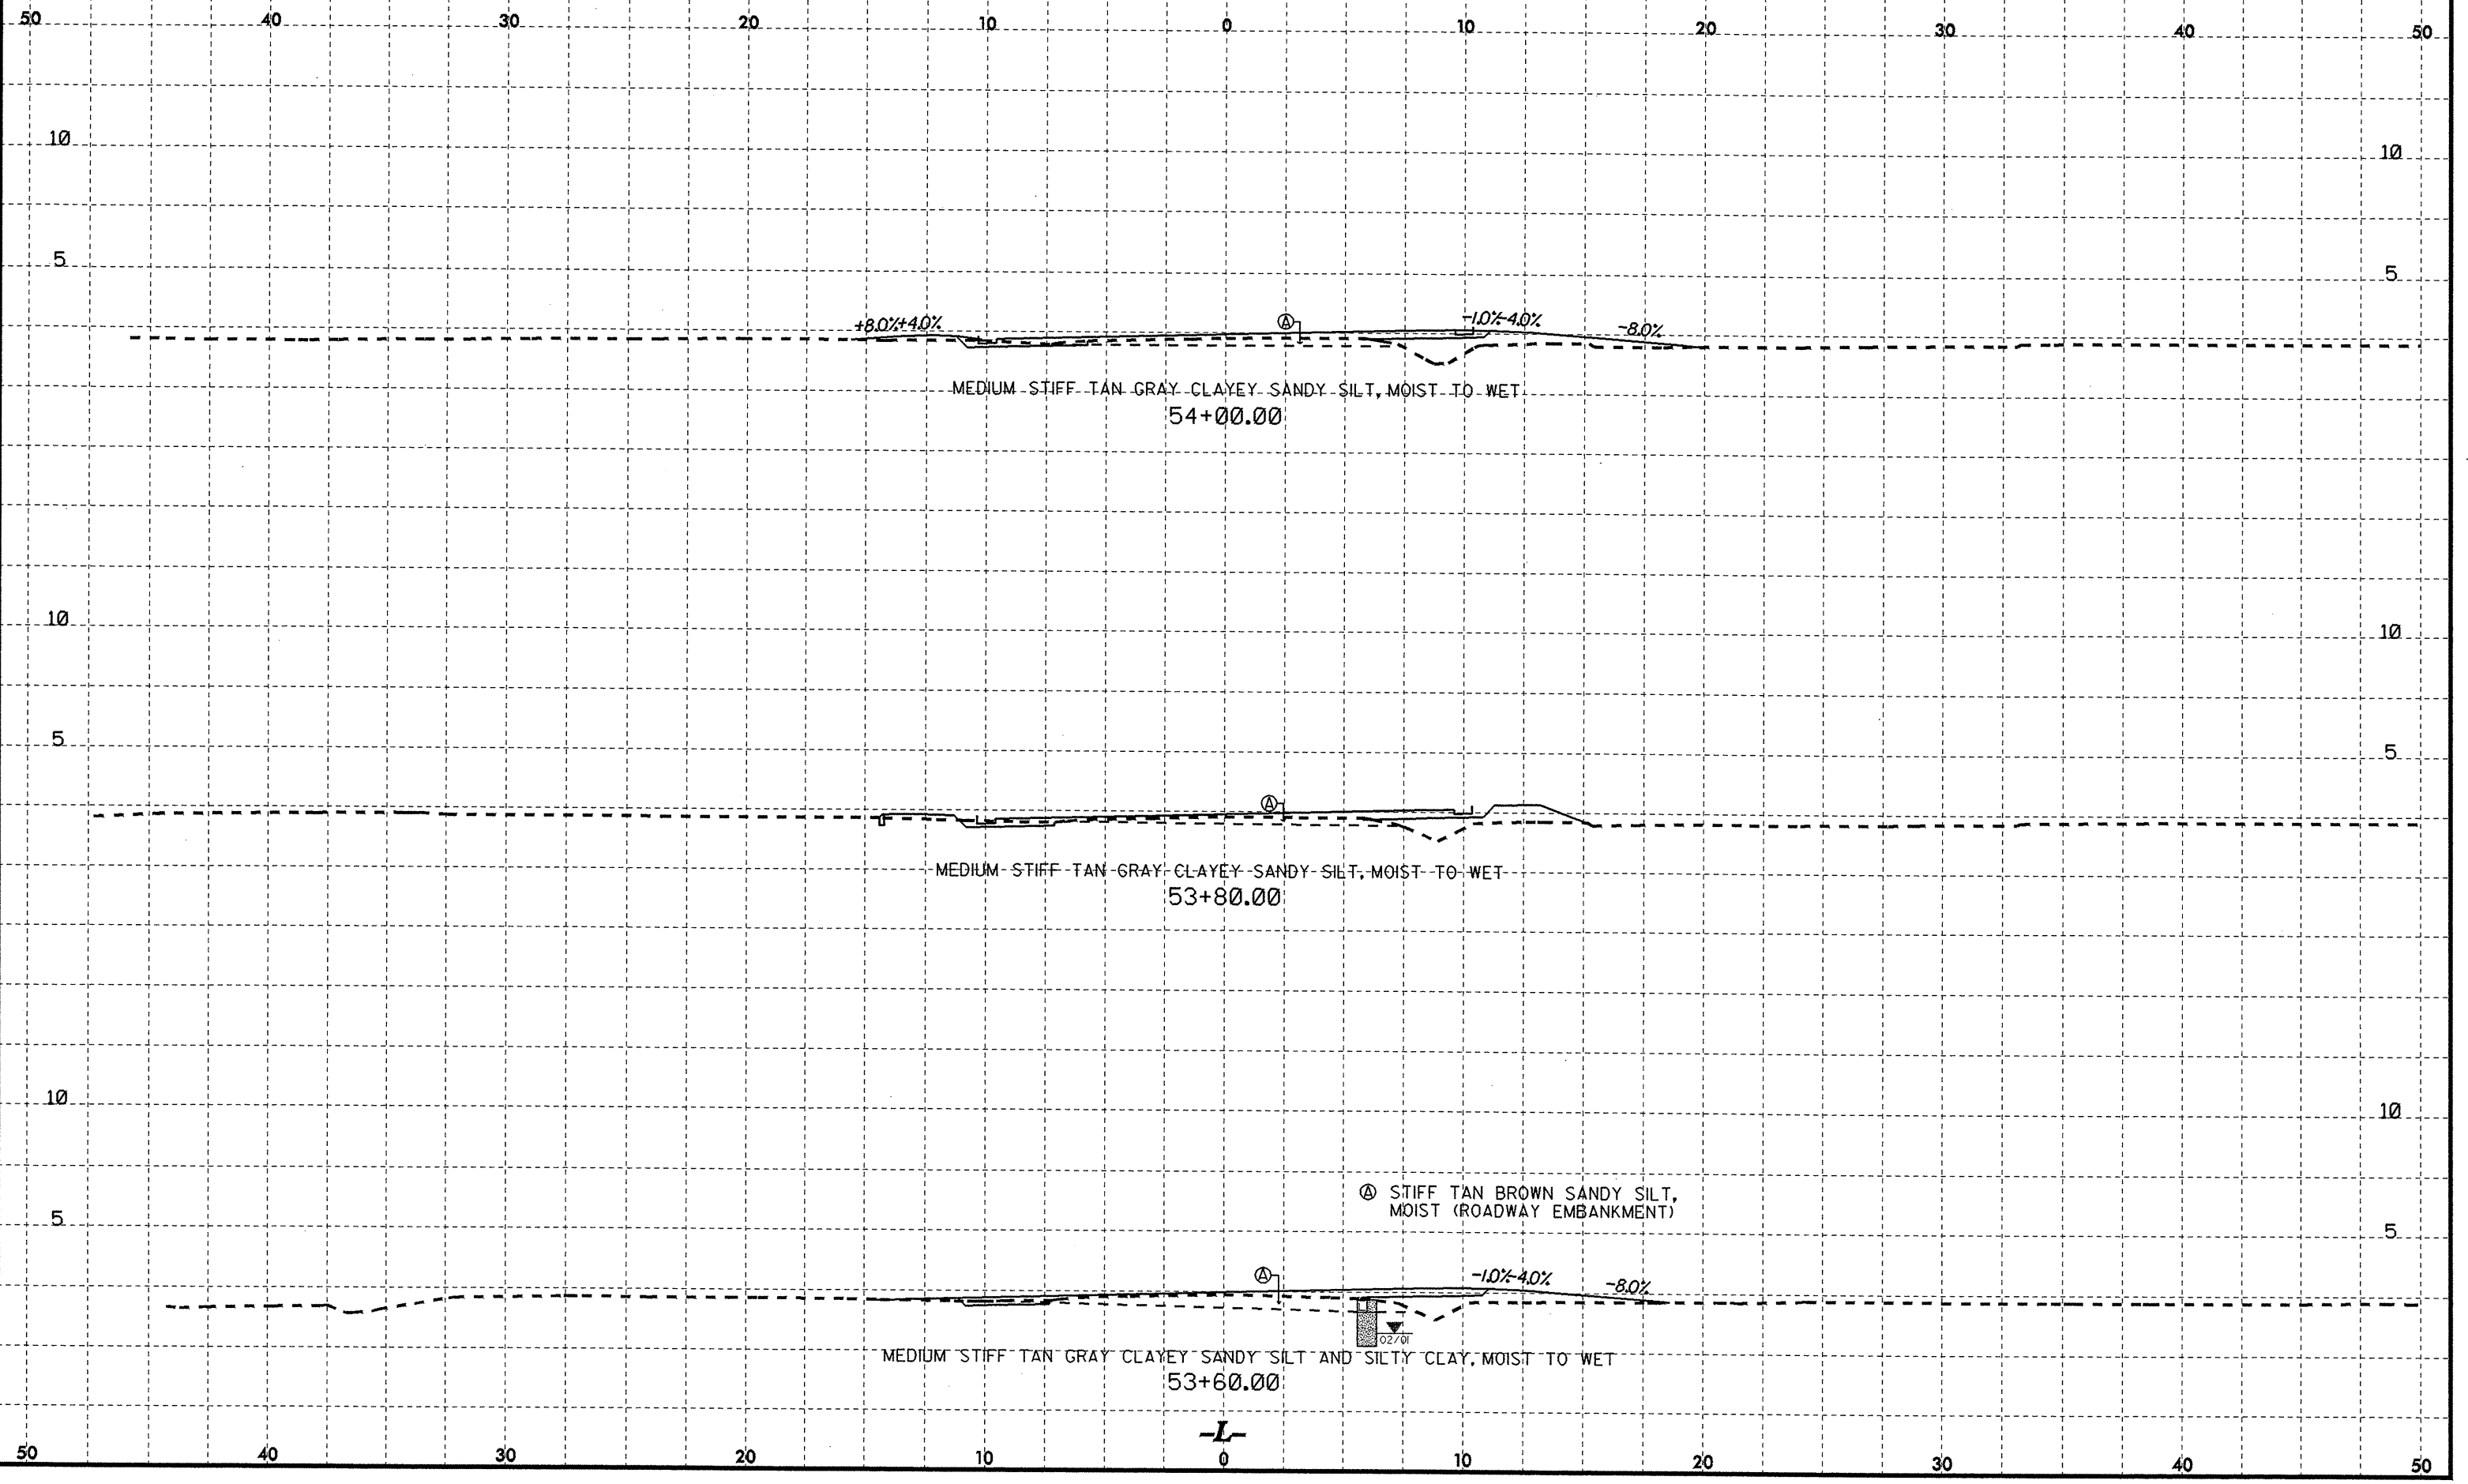

+8.0%/+4.0% A -10%/+4.0% -8.0%

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT, MOIST TO WET
54+00.00

MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT, MOIST TO WET
53+80.00


A STIFF TAN BROWN SANDY SILT,
MOIST (ROADWAY EMBANKMENT)

A -10%/+4.0% -8.0%


MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT AND SILTY CLAY, MOIST TO WET
53+60.00

L
0

20-MAY-2008 15:03
C:\projects\2008\1503\20-MAY-2008 15:03\20-MAY-2008 15:03.dwg
C:\projects\2008\1503\20-MAY-2008 15:03\20-MAY-2008 15:03.dwg



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	54

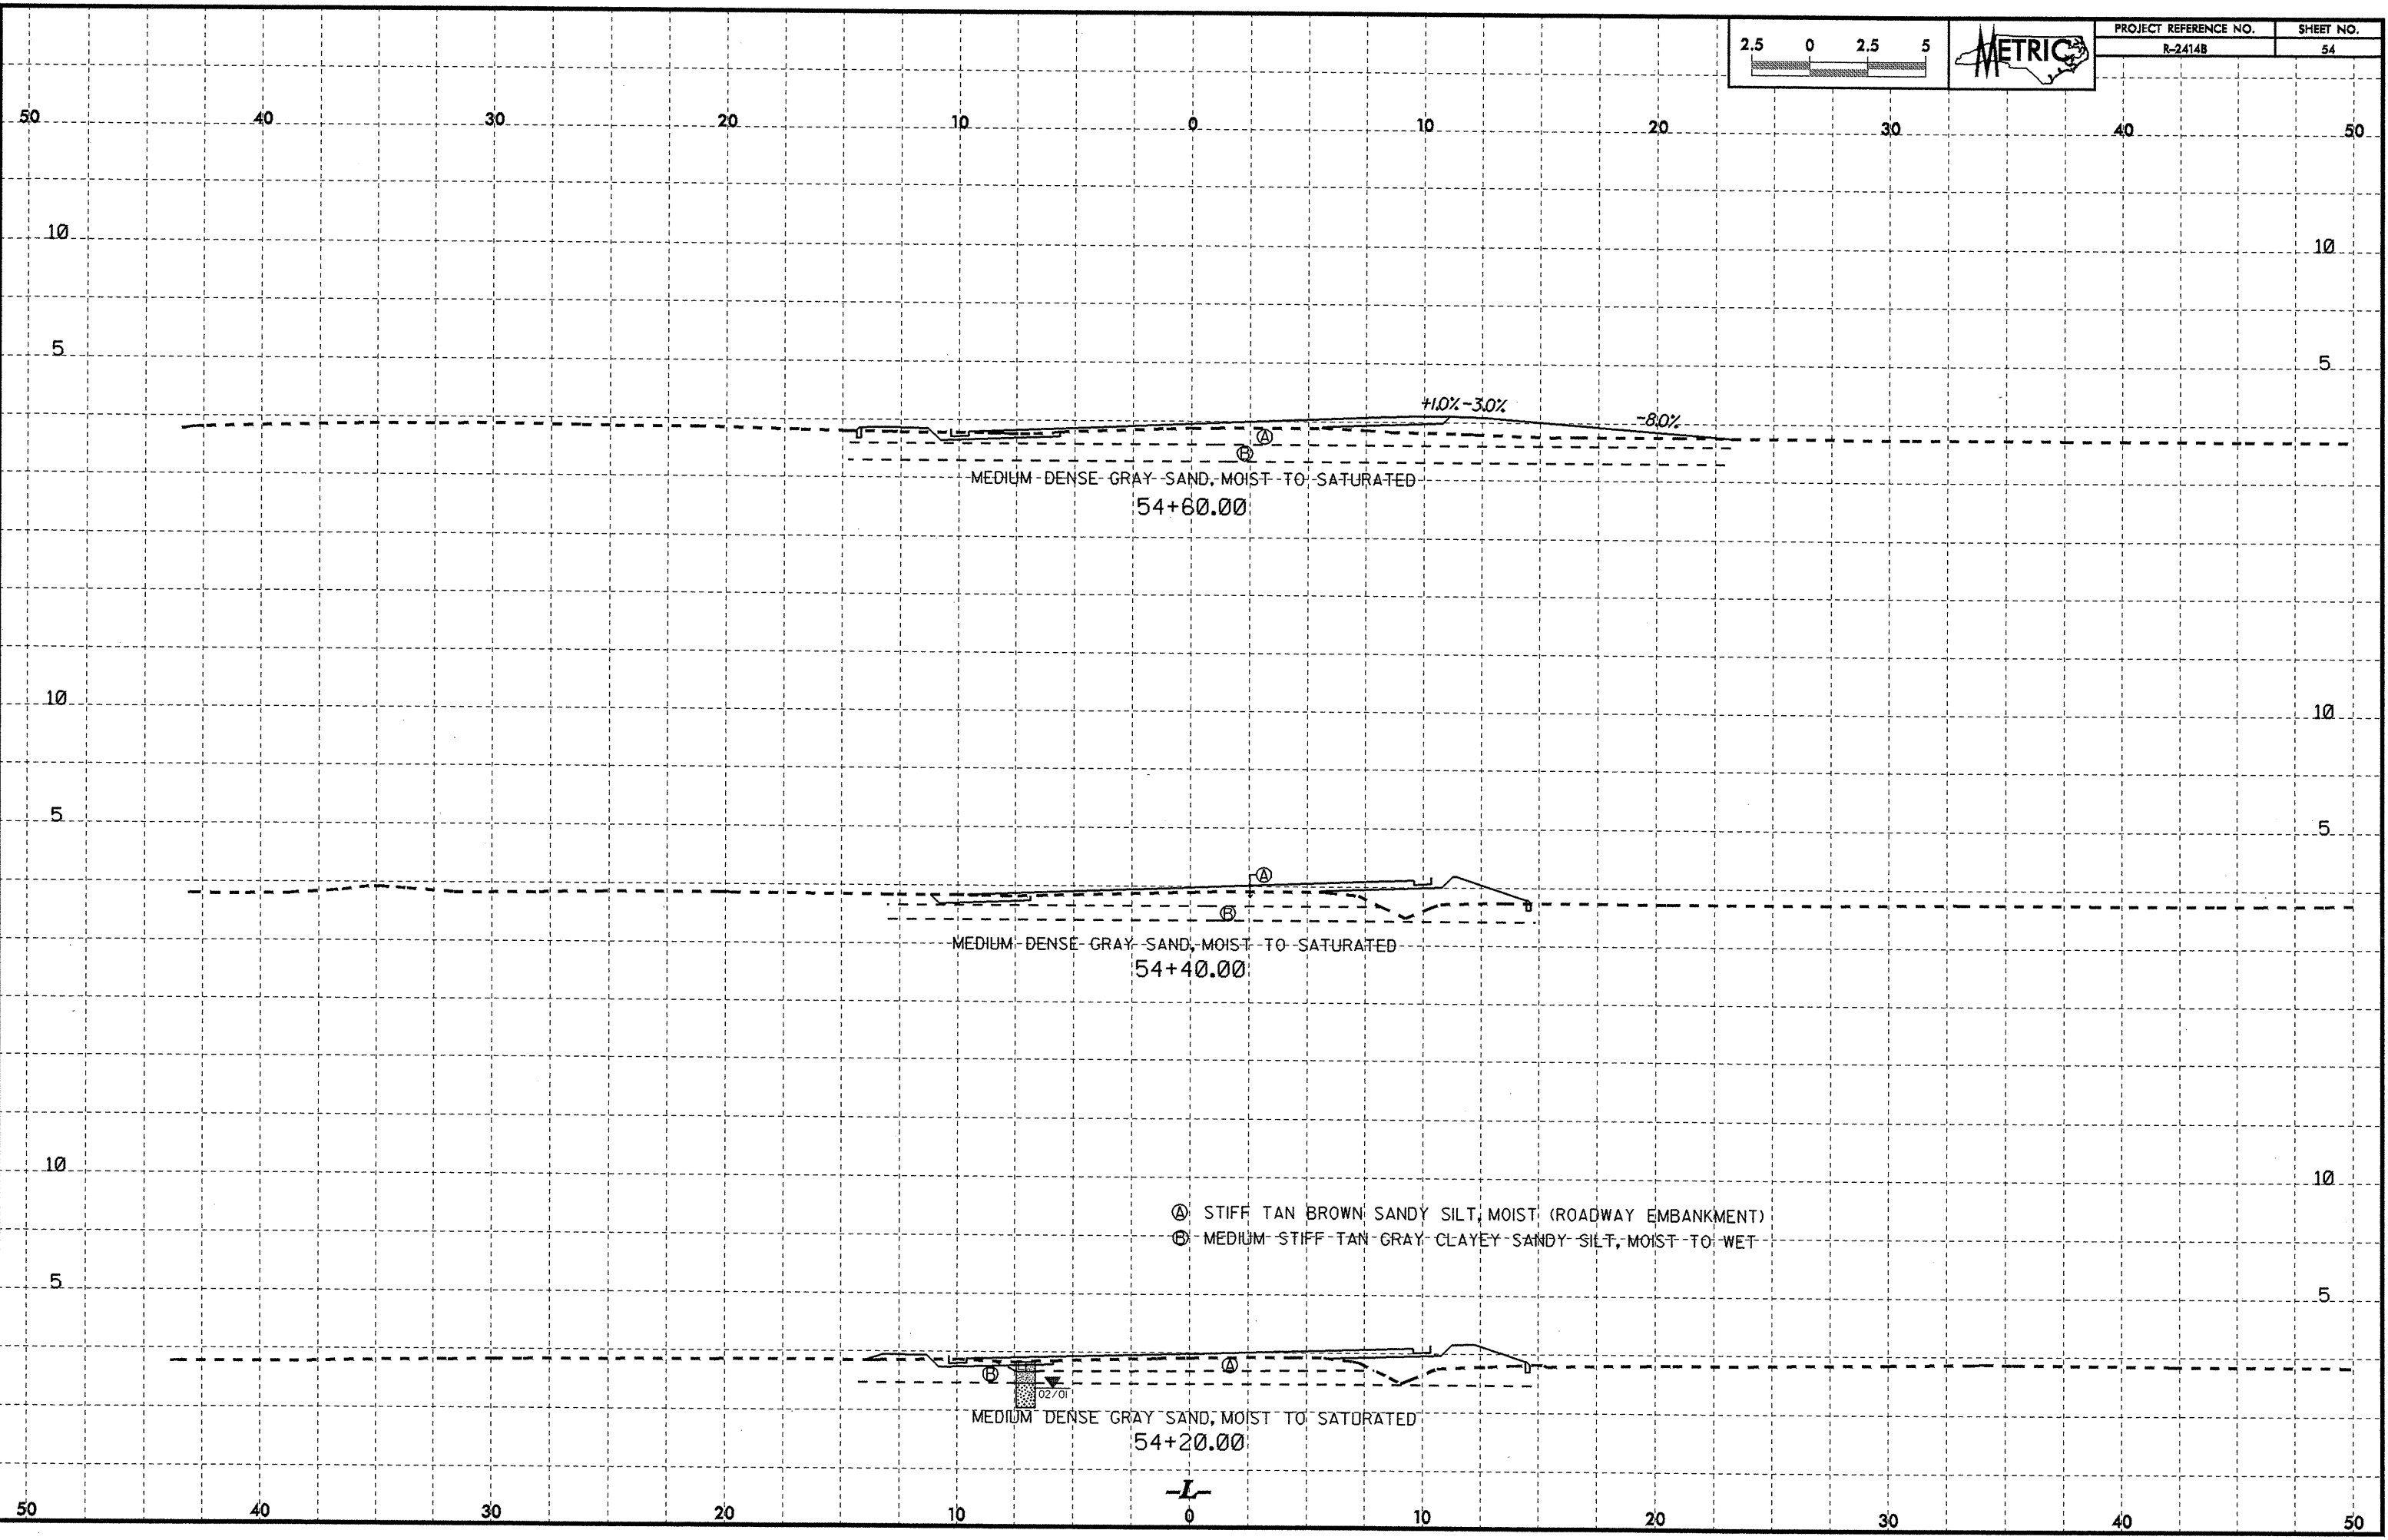

MEDIUM-DENSE GRAY SAND, MOIST-TO-SATURATED
54+60.00

+10% - 3.0%



-8.0%

MEDIUM-DENSE GRAY SAND, MOIST-TO-SATURATED
54+40.00

- Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)
- Ⓑ MEDIUM-STIFF TAN GRAY CLAYEY SANDY SILT, MOIST-TO-WET

MEDIUM-DENSE GRAY SAND, MOIST-TO-SATURATED
54+20.00

-L-

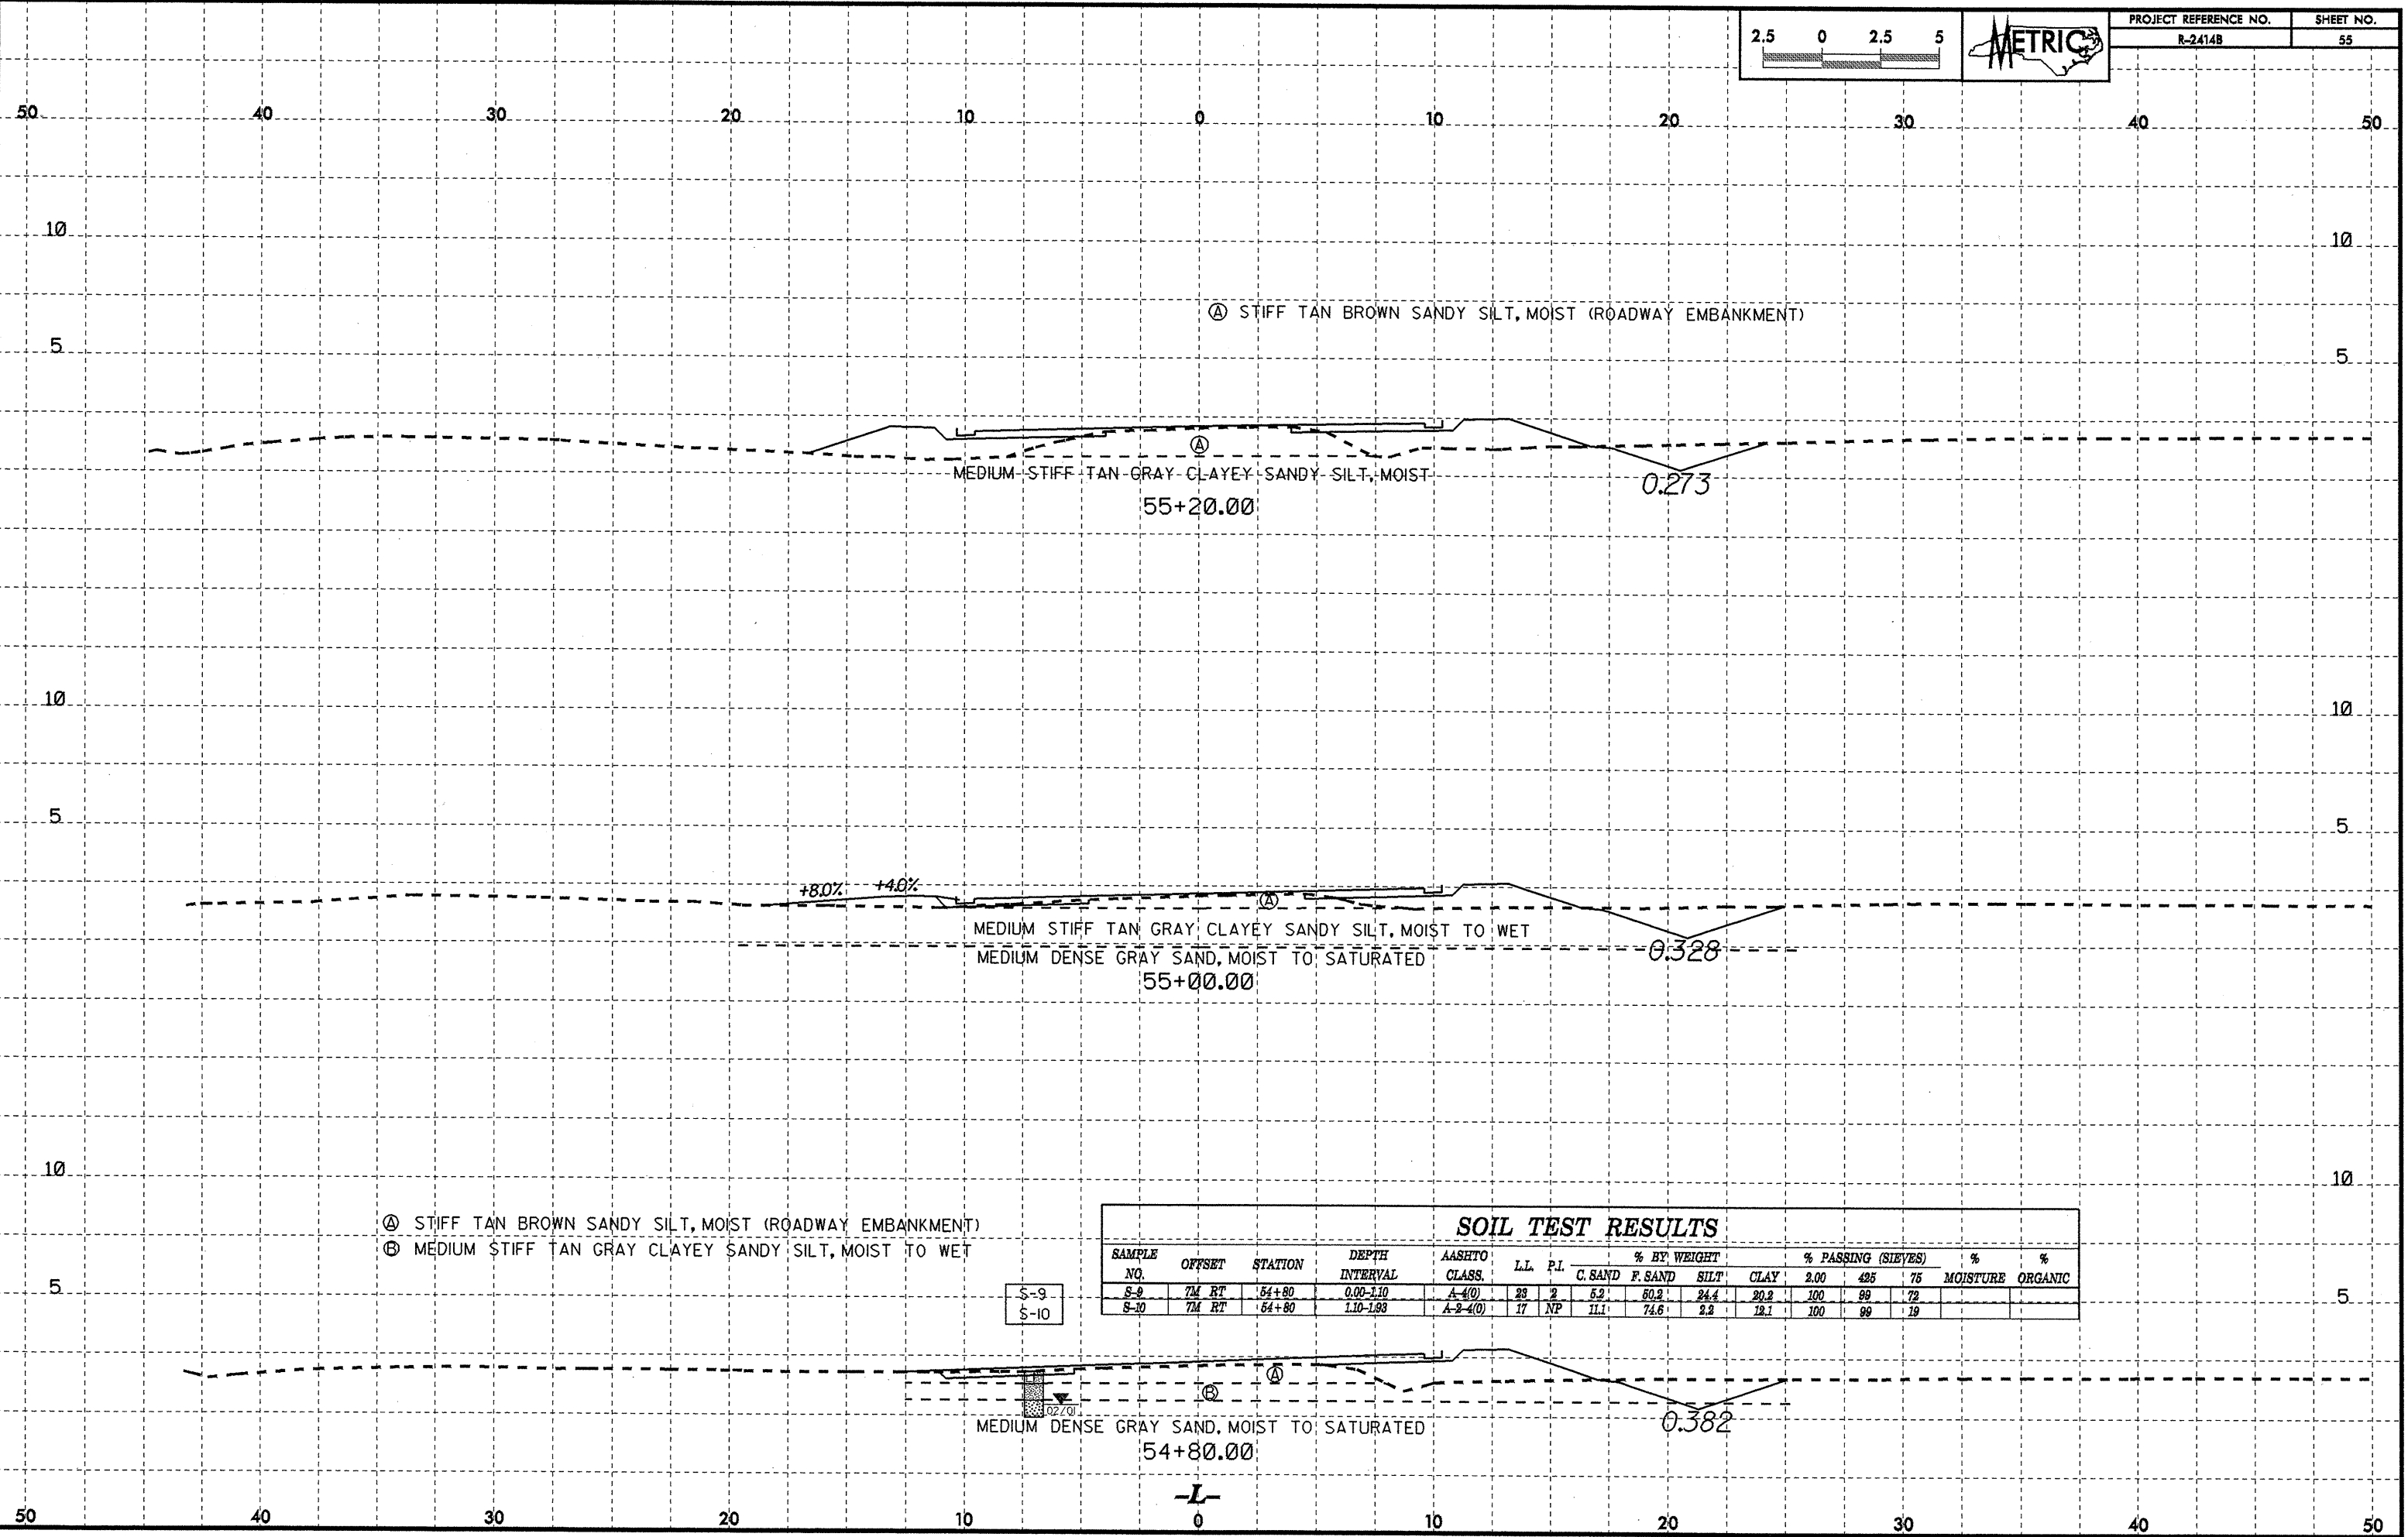

- Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)
- Ⓑ MEDIUM STIFF TAN GRAY CLAYEY SANDY SILT, MOIST TO WET


S-9
S-10

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE ORGANIC	
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75	MOISTURE	ORGANIC
S-9	7M RT	54+80	0.00-1.10	A-4(0)	23	2	5.2	60.2	24.4	20.2	100	89	72		
S-10	7M RT	54+80	1.10-1.93	A-2-4(0)	17	NP	11.1	74.6	2.2	12.1	100	99	19		

29-MAY-2008 15:03
 ags\ac\j\p\p\p\REV2\CADD\BOTECH\scv-2414b_Rdy_vx1.dgn
 User: j...

10/26/08
20-MAY-2008 15:02
C:\Users\j\Documents\2008\1502\20-MAY-2008 15:02\20-MAY-2008 15:02.dwg
C:\Users\j\Documents\2008\1502\20-MAY-2008 15:02\20-MAY-2008 15:02.dwg



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	56

50 40 30 20 10 0 10 20 30 40 50

10 10

5 5

0 0

- Ⓐ ASPHALT AND OLD CONCRETE ROAD BED
- Ⓑ STIFF TAN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)

VERY SOFT, MODERATELY ORGANIC SILT, WET


MEDIUM DENSE TO SATURATED

GRAY SAND, MOIST
55+40.00

35'

-L-

50 40 30 20 10 0 10 20 30 40 50




- Ⓐ ASPHALT AND OLD CONCRETE ROAD BED
- Ⓑ MEDIUM STIFF TO VERY STIFF TAN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)
- Ⓒ VERY SOFT GRAY SILTY CLAY, WET

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	LAB/TEST CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							G.BAND	F.BAND	SILT	CLAY	2.00	425	75		
SS-140	8W LT	55+60	5.58-6.03	A-7-5(26)	56	20	1.6	3.9	33.5	61.0	100	99	97	-	-
SS-141	8W LT	55+60	7.10-7.55	A-2-4(0)	19	NP	24.0	65.9	6.0	4.1	100	98	16	-	-
SS-142	8W LT	55+60	8.62-9.07	A-2-4(0)	25	NP	1.2	76.5	10.1	12.2	100	99	28	-	-
SS-143	8W LT	55+60	11.67-12.12	A-2-4(0)	22	NP	2.2	70.4	15.2	12.2	100	100	30	-	-
SS-144	8W LT	55+60	13.20-13.65	A-6(9)	33	13	3.1	39.1	29.4	28.5	100	98	73	-	-
SS-145	8W LT	55+60	14.72-15.17	A-7-6(18)	41	20	0.8	19.3	51.4	28.5	100	100	87	-	-
SS-146	8W LT	55+60	17.74-18.19	A-2-4(0)	19	NP	60.7	30.3	3.9	5.1	100	67	11	-	-
SS-147	8W LT	55+60	19.30-19.75	A-7-5(39)	65	33	0.6	4.9	29.4	65.1	100	100	97	-	-


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	LAB/TEST CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							G.BAND	F.BAND	SILT	CLAY	2.00	425	75		
SS-153	14W RT	55+60	7.07-7.52	A-4(0)	21	4	2.5	49.2	27.8	20.3	100	100	67	-	-
SS-154	14W RT	55+60	11.64-12.09	A-4(0)	25	4	0.2	68.2	17.4	14.2	100	100	51	-	-
SS-155	14W RT	55+60	14.69-15.14	A-6(9)	33	12	2.8	27.5	45.3	24.4	100	99	80	-	-
SS-156	14W RT	55+60	17.74-18.19	A-2-4(0)	22	NP	58.2	31.5	6.2	4.1	100	67	13	-	-
SS-157	14W RT	55+60	19.26-19.71	A-7-6(36)	59	31	0.6	5.9	34.5	59.0	100	100	97	-	-
SS-158	14W RT	55+60	20.79-21.14	A-2-4(0)	24	NP	22.0	63.5	8.4	6.1	100	97	19	-	-
ST-1	11W RT	55+60	0.45-0.91	A-4(1)	27	4	15.4	48.4	28.0	14.2	99	92	61	30	3.8
S-66	11W RT	55+60	-1.00-5.64	A-4(0)	22	NP	14.5	37.5	31.9	16.1	99	93	64	-	4.2

SS-140
SS-141
SS-142
SS-143
SS-144
SS-145
SS-146
SS-147

SS-153
SS-154
SS-155
SS-156
SS-157
SS-158
ST-1
S-66

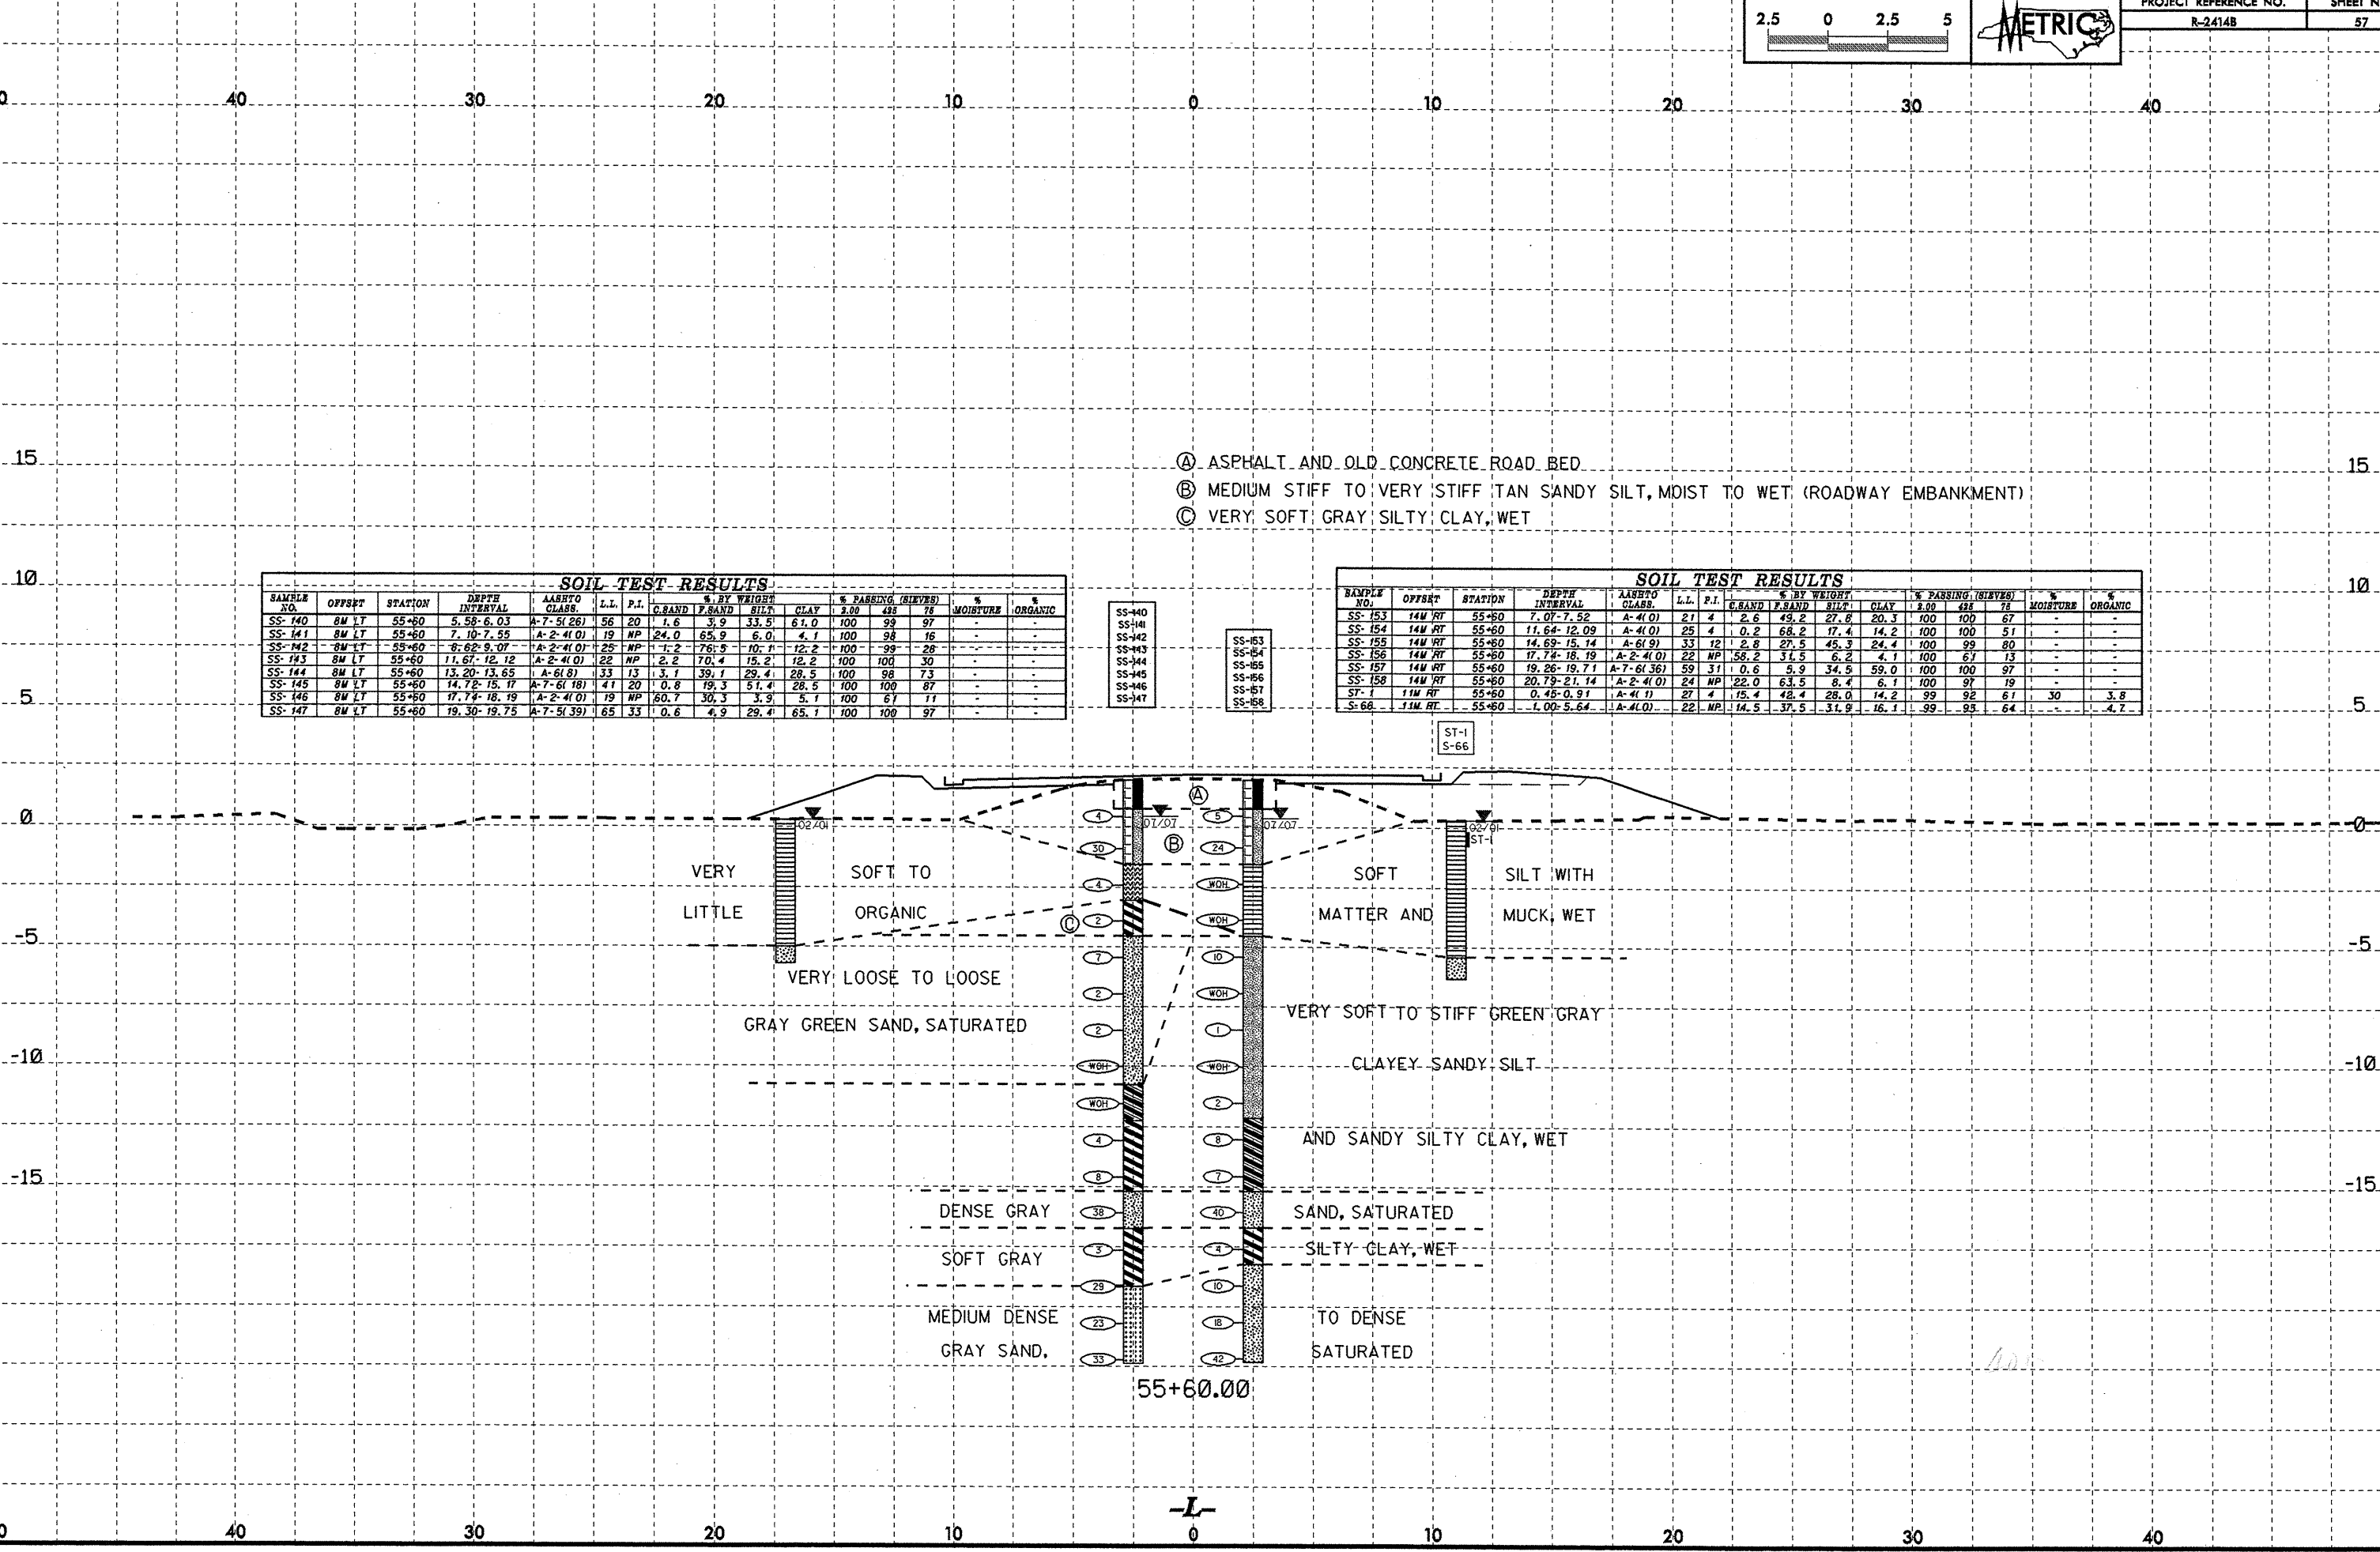

18-JUL-2008 14:10
g:\projects\2414b\2414b.dwg
R:\jws\1.dgn




50 40 30 20 10 0 10 20 30 40 50


- Ⓐ ASPHALT AND OLD CONCRETE ROAD BED
- Ⓑ VERY SOFT TO SOFT TAN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.L.	% BY WEIGHT			% PASSING (SIEVES)			% MOISTURE	% ORGANIC	
							G.SAND	F.SAND	SILT	-10	-40	-200			
SS-130	RM RT	55+87	1.19-1.64	A-4(0)	23	1	3.3	56.2	22.3	18.3	100	99	84	-	-
SS-131	RM LT	55+87	7.07-7.52	A-3(0)	21	NP	61.6	35.8	0.6	2.0	100	91	4	-	-
SS-132	RM LT	55+87	8.60-9.05	A-2-4(0)	23	NP	1.2	73.4	13.1	12.2	100	100	34	-	-
SS-133	RM LT	55+87	10.12-10.57	A-2-4(0)	24	2	1.4	69.6	14.8	14.2	100	99	31	-	-
SS-134	RM LT	55+87	13.16-13.61	A-6(5)	32	11	5.3	46.8	25.5	22.4	100	97	65	-	-
SS-135	RM LT	55+87	14.69-15.14	A-7-6(27)	51	26	4.9	7.9	52.6	34.6	100	97	92	-	-
SS-136	RM LT	55+87	17.74-18.19	A-3(0)	20	NP	62.6	30.4	4.0	3.1	100	60	9	-	-
SS-137	RM LT	55+87	19.26-19.71	A-7-6(33)	54	30	2.4	4.3	38.4	54.9	100	98	96	-	-
SS-138	RM LT	55+87	22.30-22.75	A-3(0)	20	NP	62.7	32.9	2.4	2.0	100	80	7	-	-
SS-139	RM LT	55+87	26.87-27.32	A-4(0)	21	2	2.6	60.8	22.3	14.2	100	99	48	-	-

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.L.	% BY WEIGHT			% PASSING (SIEVES)			% MOISTURE	% ORGANIC	
							G.SAND	F.SAND	SILT	-10	-40	-200			
SS-111	14 RT	55+76	1.22-1.67	A-4(4)	25	6	1.4	52.9	25.4	20.3	100	99	86	-	-
SS-112	14 RT	55+76	2.56-2.95	A-4(3)	25	5	3.0	54.1	22.6	20.3	100	99	83	-	-
SS-115	14 RT	55+76	7.07-7.52	A-2-4(0)	21	NP	8.5	78.3	9.1	4.1	100	100	25	-	-
SS-116	14 RT	55+76	10.12-10.57	A-4(0)	23	NP	0.6	74.4	12.9	12.2	100	100	40	-	-
SS-117	14 RT	55+76	13.17-13.62	A-6(7)	33	13	1.4	46.0	30.3	22.3	100	99	70	-	-
SS-118	14 RT	55+76	14.69-15.14	A-7-6(22)	44	24	2.6	21.1	45.9	30.4	100	99	87	-	-
SS-119	14 RT	55+76	17.74-18.19	A-3(0)	19	NP	63.6	28.6	3.7	4.1	99	62	9	-	-
SS-120	14 RT	55+76	19.26-19.71	A-7-6(37)	61	35	3.4	6.9	41.0	48.7	100	99	92	-	-
SS-121	14 RT	55+76	20.78-21.23	A-7-6(11)	41	14	1.6	37.5	32.5	28.4	100	99	76	-	-
SS-122	14 RT	55+76	22.31-22.76	A-3(0)	19	NP	70.2	25.5	2.3	2.0	100	81	6	-	-
SS-123	14 RT	55+76	VALUE!	A-4(0)	23	NP	3.0	61.9	20.9	14.2	99	97	42	-	-

- SS-130
- SS-131
- SS-132
- SS-133
- SS-134
- SS-135
- SS-136
- SS-137
- SS-138
- SS-139

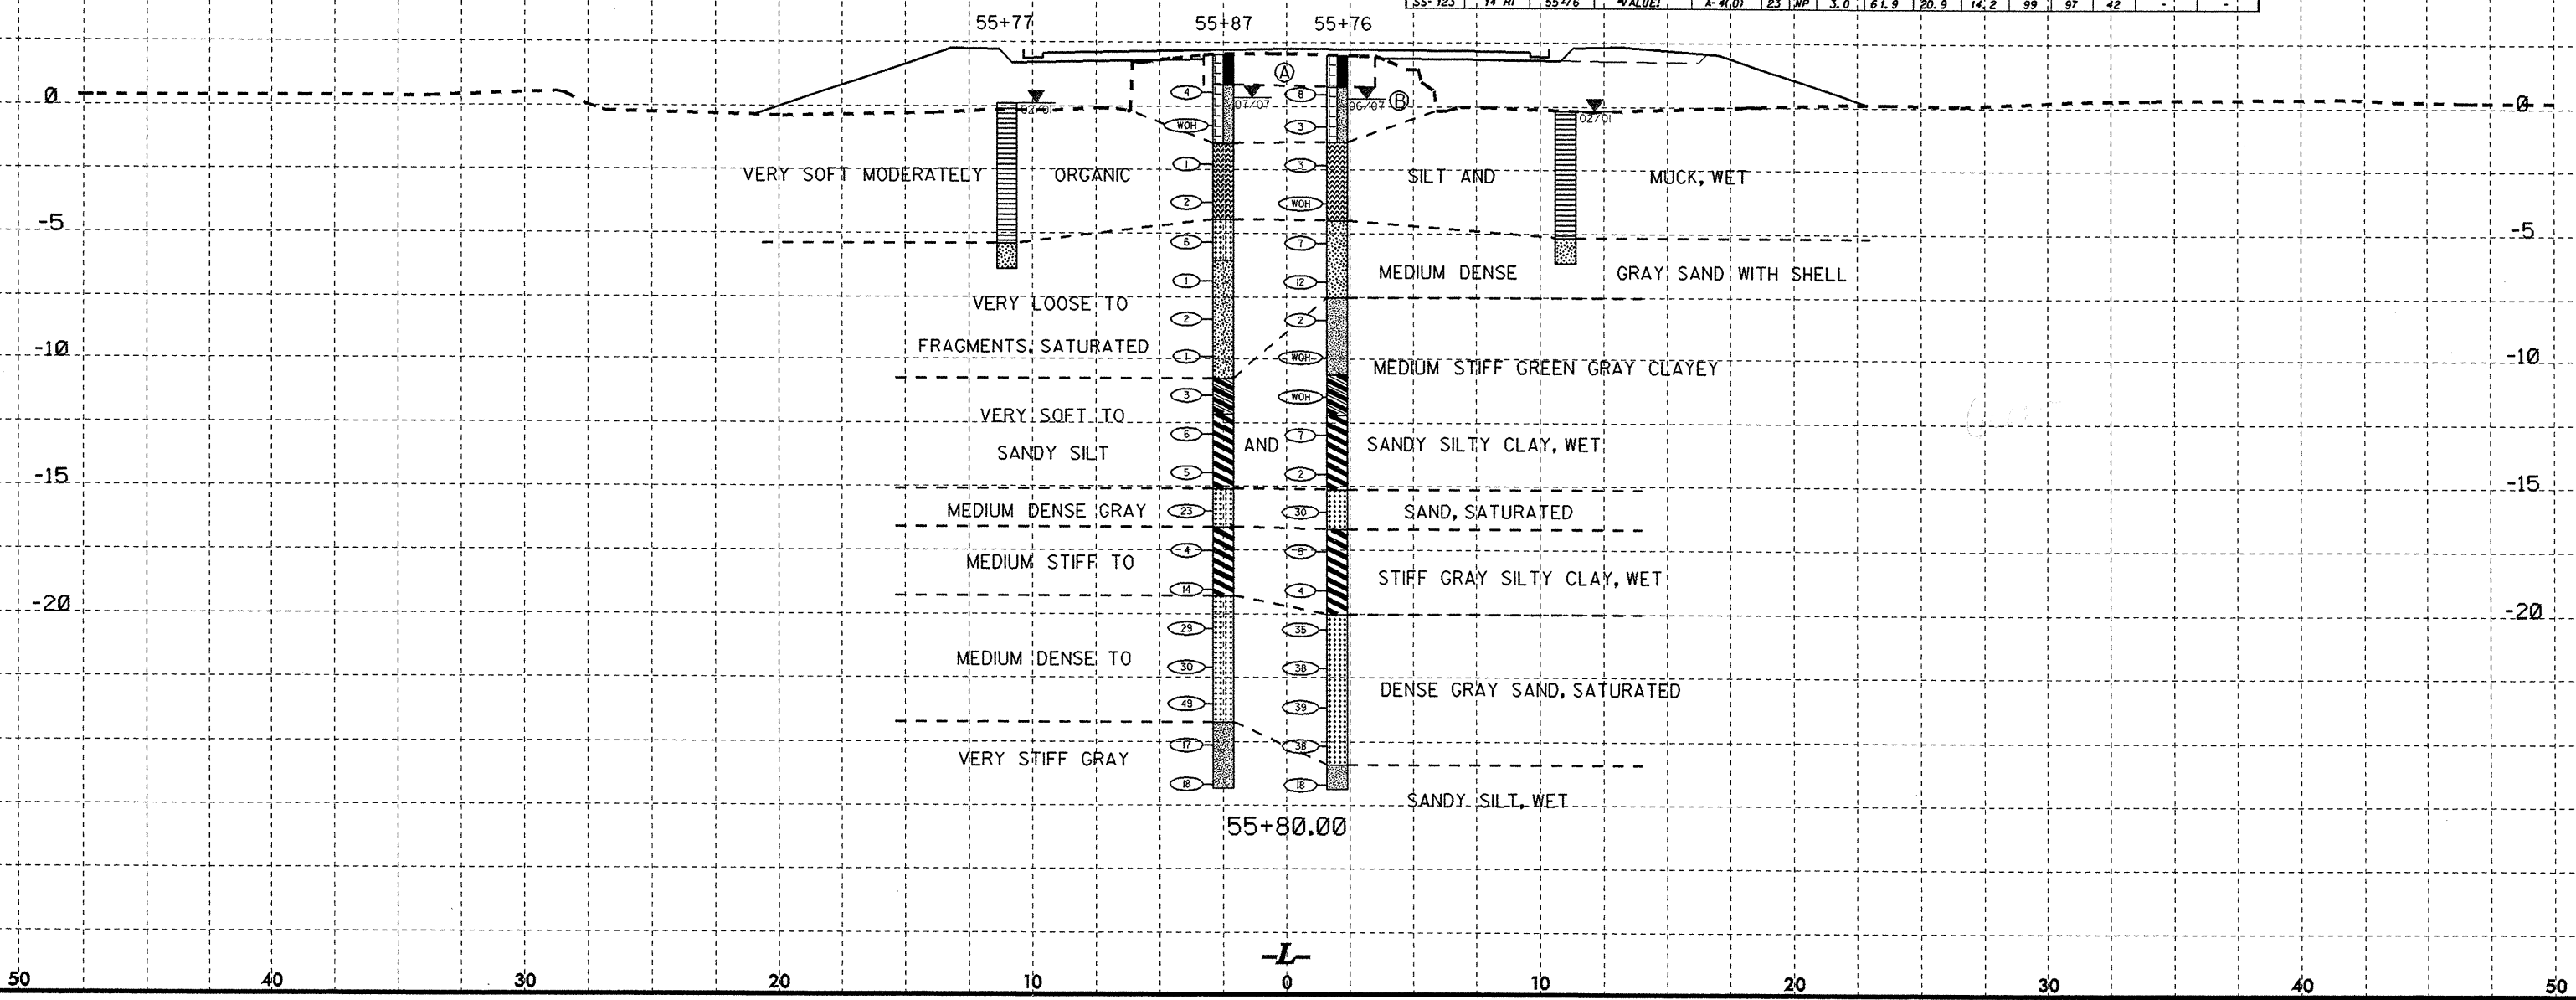





SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C SAND	F SAND	SILT	CLAY	10	40	200		
SS-148	RM LT	56+00	4.19-4.64	A-4(0)	23	2	5.7	56.2	18.8	19.3	98	95	73	-	-
SS-149	RM RT	56+00	4.02-4.47	A-4(0)	23	2	0.0	0.0	0.0	0.0	0	0	0	434.6	-
SS-150	RM LT	56+00	14.69-15.14	A-7(61)	41	19	2.2	16.9	52.4	28.5	100	99	90	-	-
SS-151A	RM LT	56+00	17.74-18.19	A-2(40)	19	NP	52.6	36.5	5.8	5.1	100	67	14	-	-
SS-151	RM LT	56+00	19.26-19.71	A-7(61)	54	26	2.6	8.1	30.2	59.0	100	99	93	-	-
SS-152	RM LT	56+00	20.79-21.24	A-3(0)	17	NP	37.9	61.8	4.6	2.0	100	93	9	-	-

- Ⓐ ASPHALT AND OLD CONCRETE ROAD BED
- Ⓑ VERY SOFT TO SOFT TAN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C SAND	F SAND	SILT	CLAY	10	40	200		
SS-124	RM RT	56+00	4.02-4.47	A-5(6)	133	NP	45.0	16.1	40.8	8.1	97	57	49	-	-
SS-125	RM RT	56+00	10.12-10.57	A-4(0)	24	1	1.0	72.1	12.7	14.2	100	99	37	-	-
SS-126	RM RT	56+00	13.19-13.62	A-6(6)	31	12	2.6	47.0	28.1	22.3	100	98	67	-	-
SS-127	RM RT	56+00	14.69-15.14	A-7(61)	45	22	1.8	17.7	58.1	32.4	100	99	92	-	-
SS-128	RM RT	56+00	19.26-19.71	A-7(61)	67	38	0.8	15.9	32.5	60.8	100	100	97	-	-
SS-129	RM RT	56+00	20.79-21.24	A-2(40)	22	NP	22.6	68.7	6.7	2.0	100	93	12	-	-

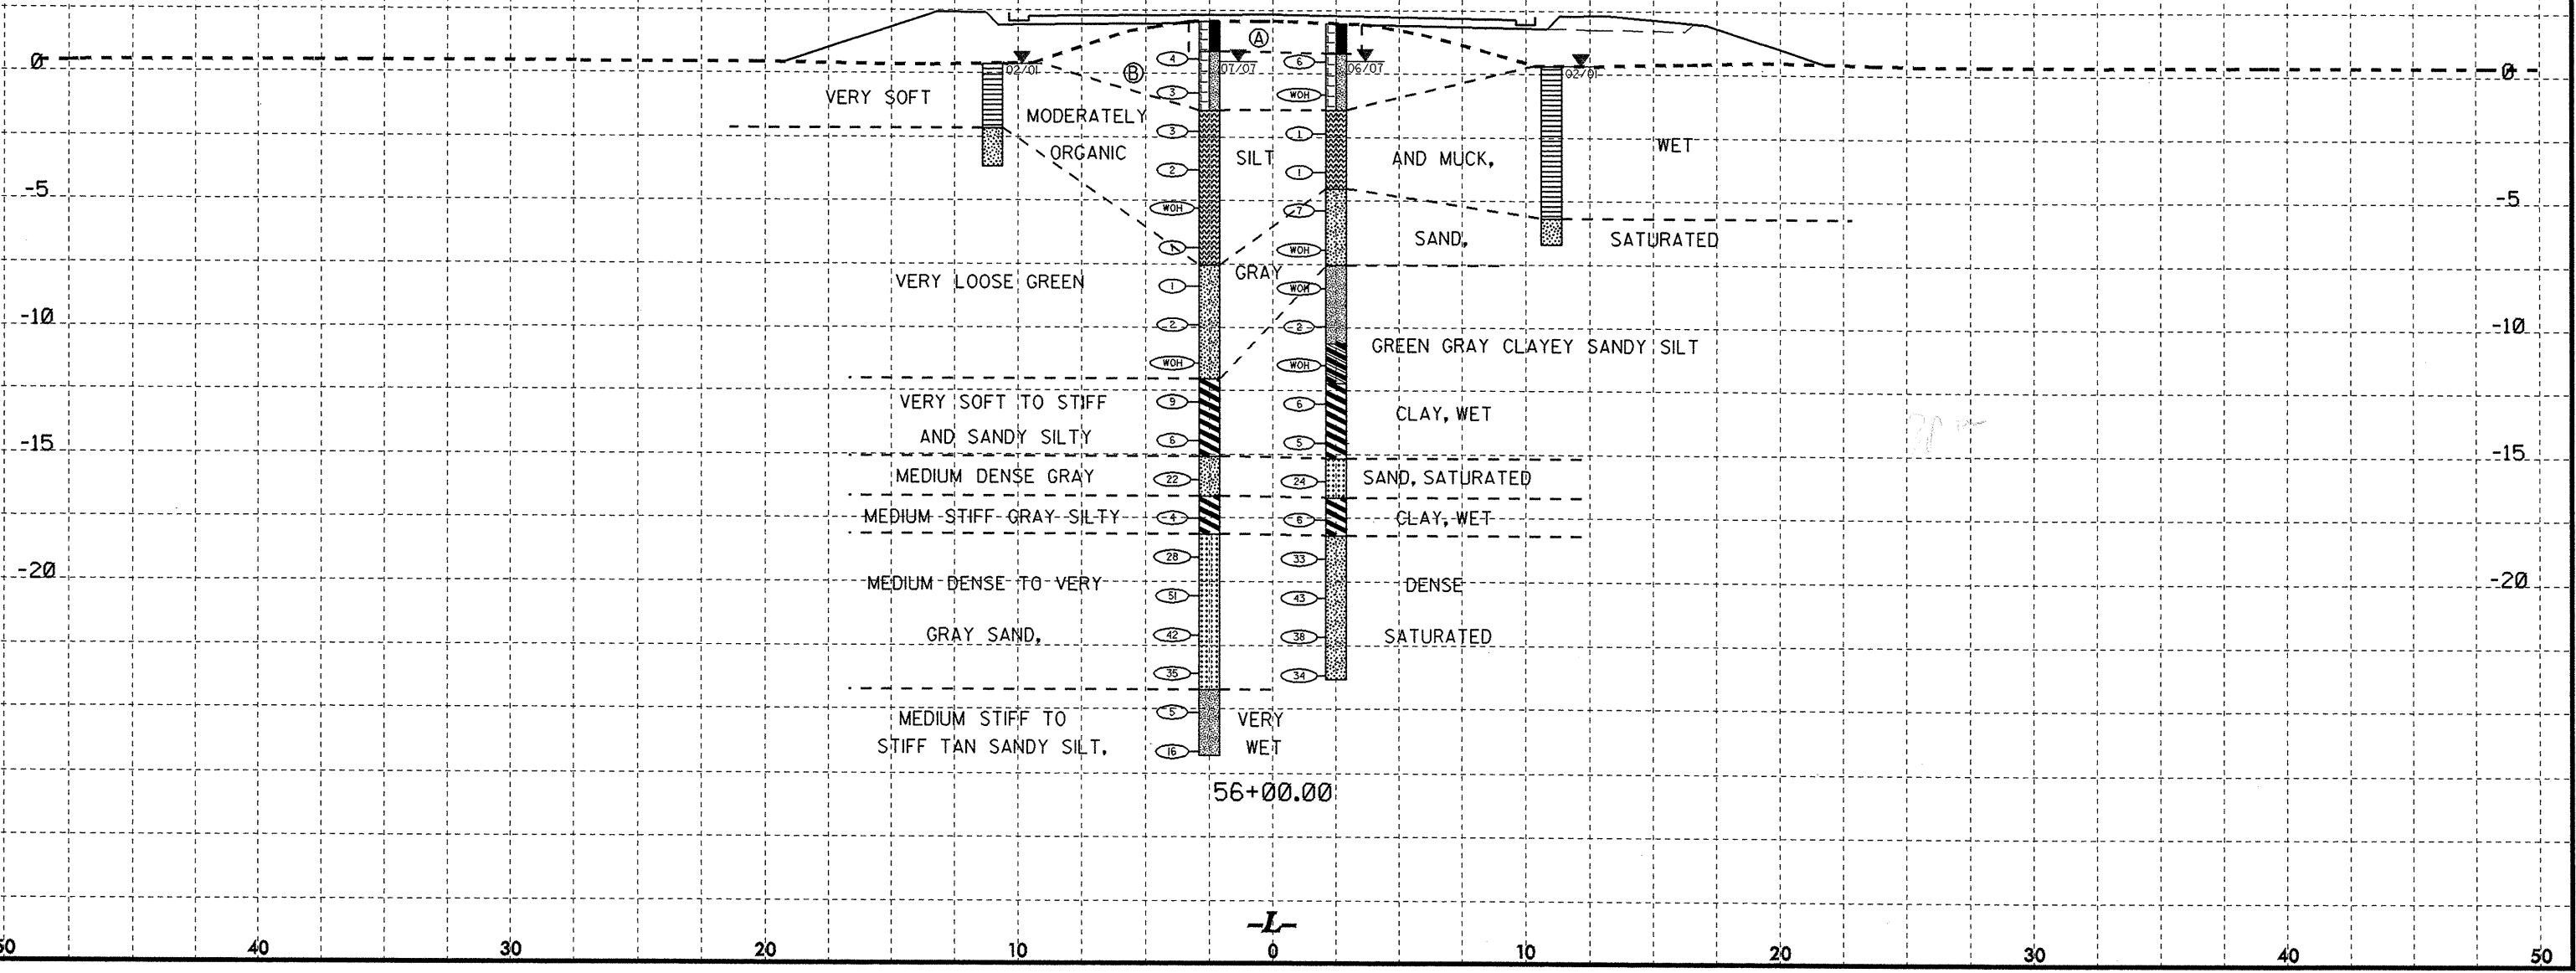



20:14:23 2008 15:00 00001 REV12.CADD.GEOTECH.vsc A-2414b_Rdy.vst 1.dgn
 C:\Users\jth\Documents\2008 15:00 00001 REV12.CADD.GEOTECH.vsc A-2414b_Rdy.vst 1.dgn



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	61

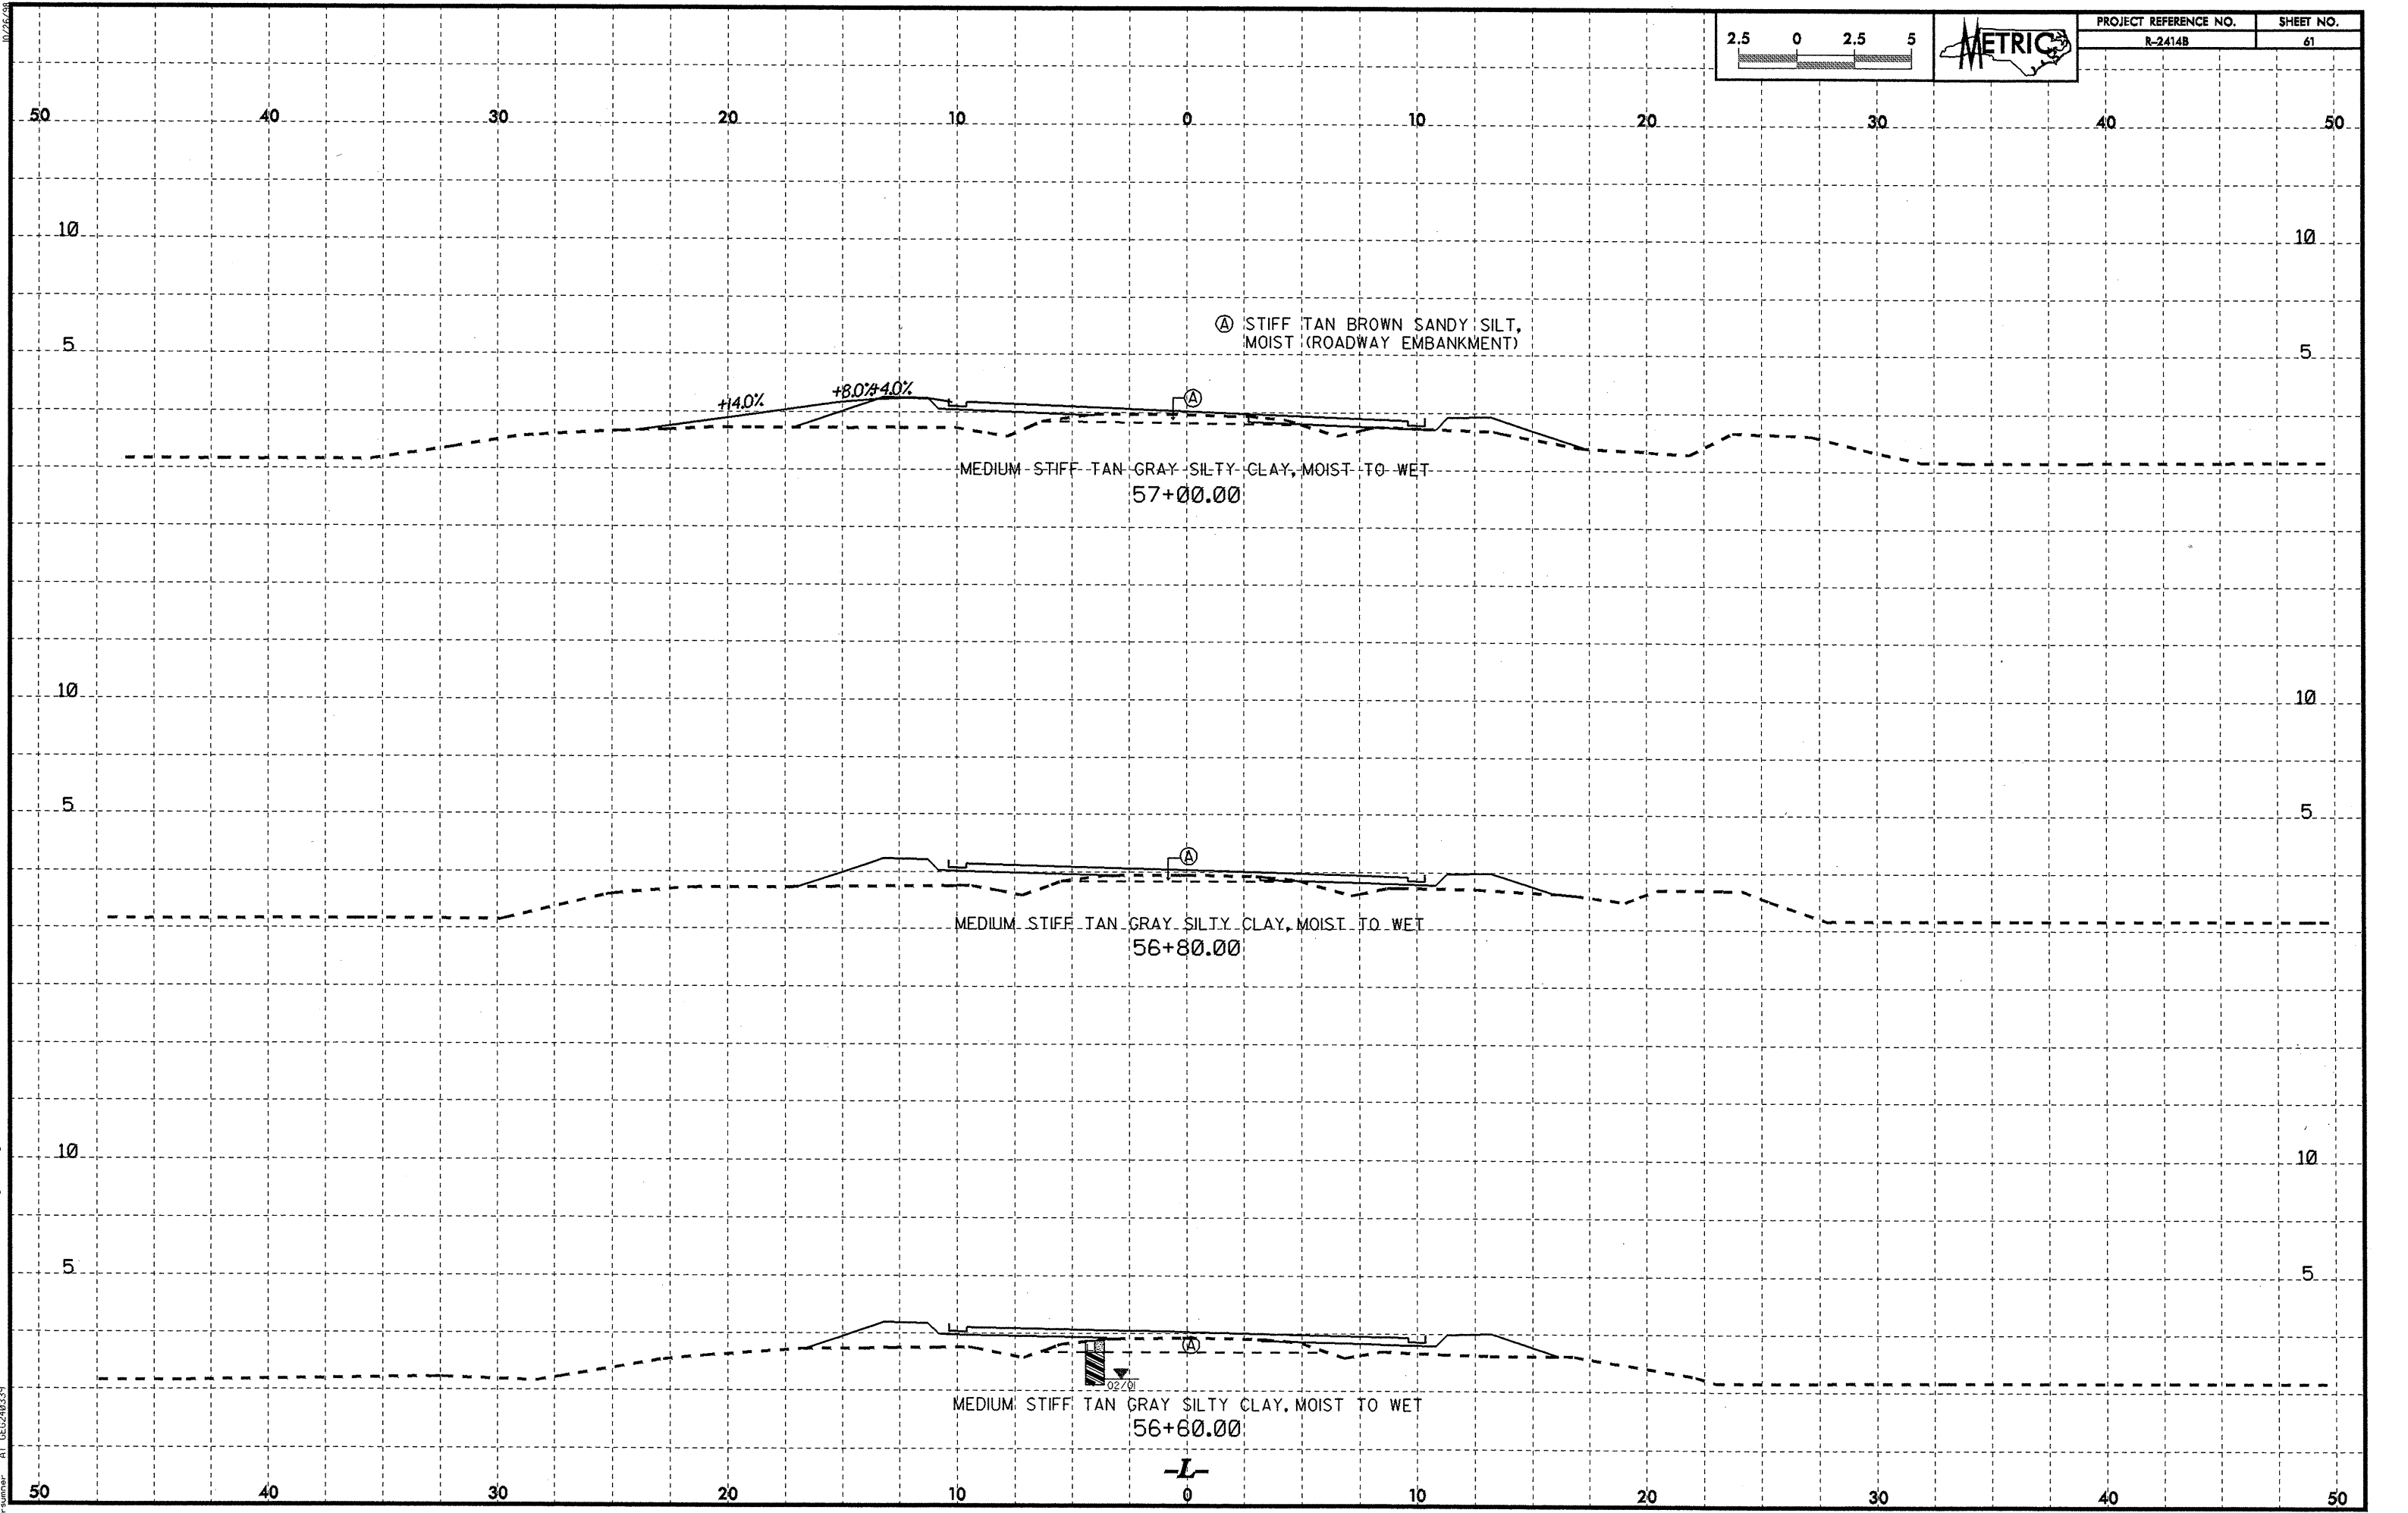

20-MAY-2008 15:06
 I:\station\TX\2414B\2414B-05\0503.dwg
 User: AT_0521053

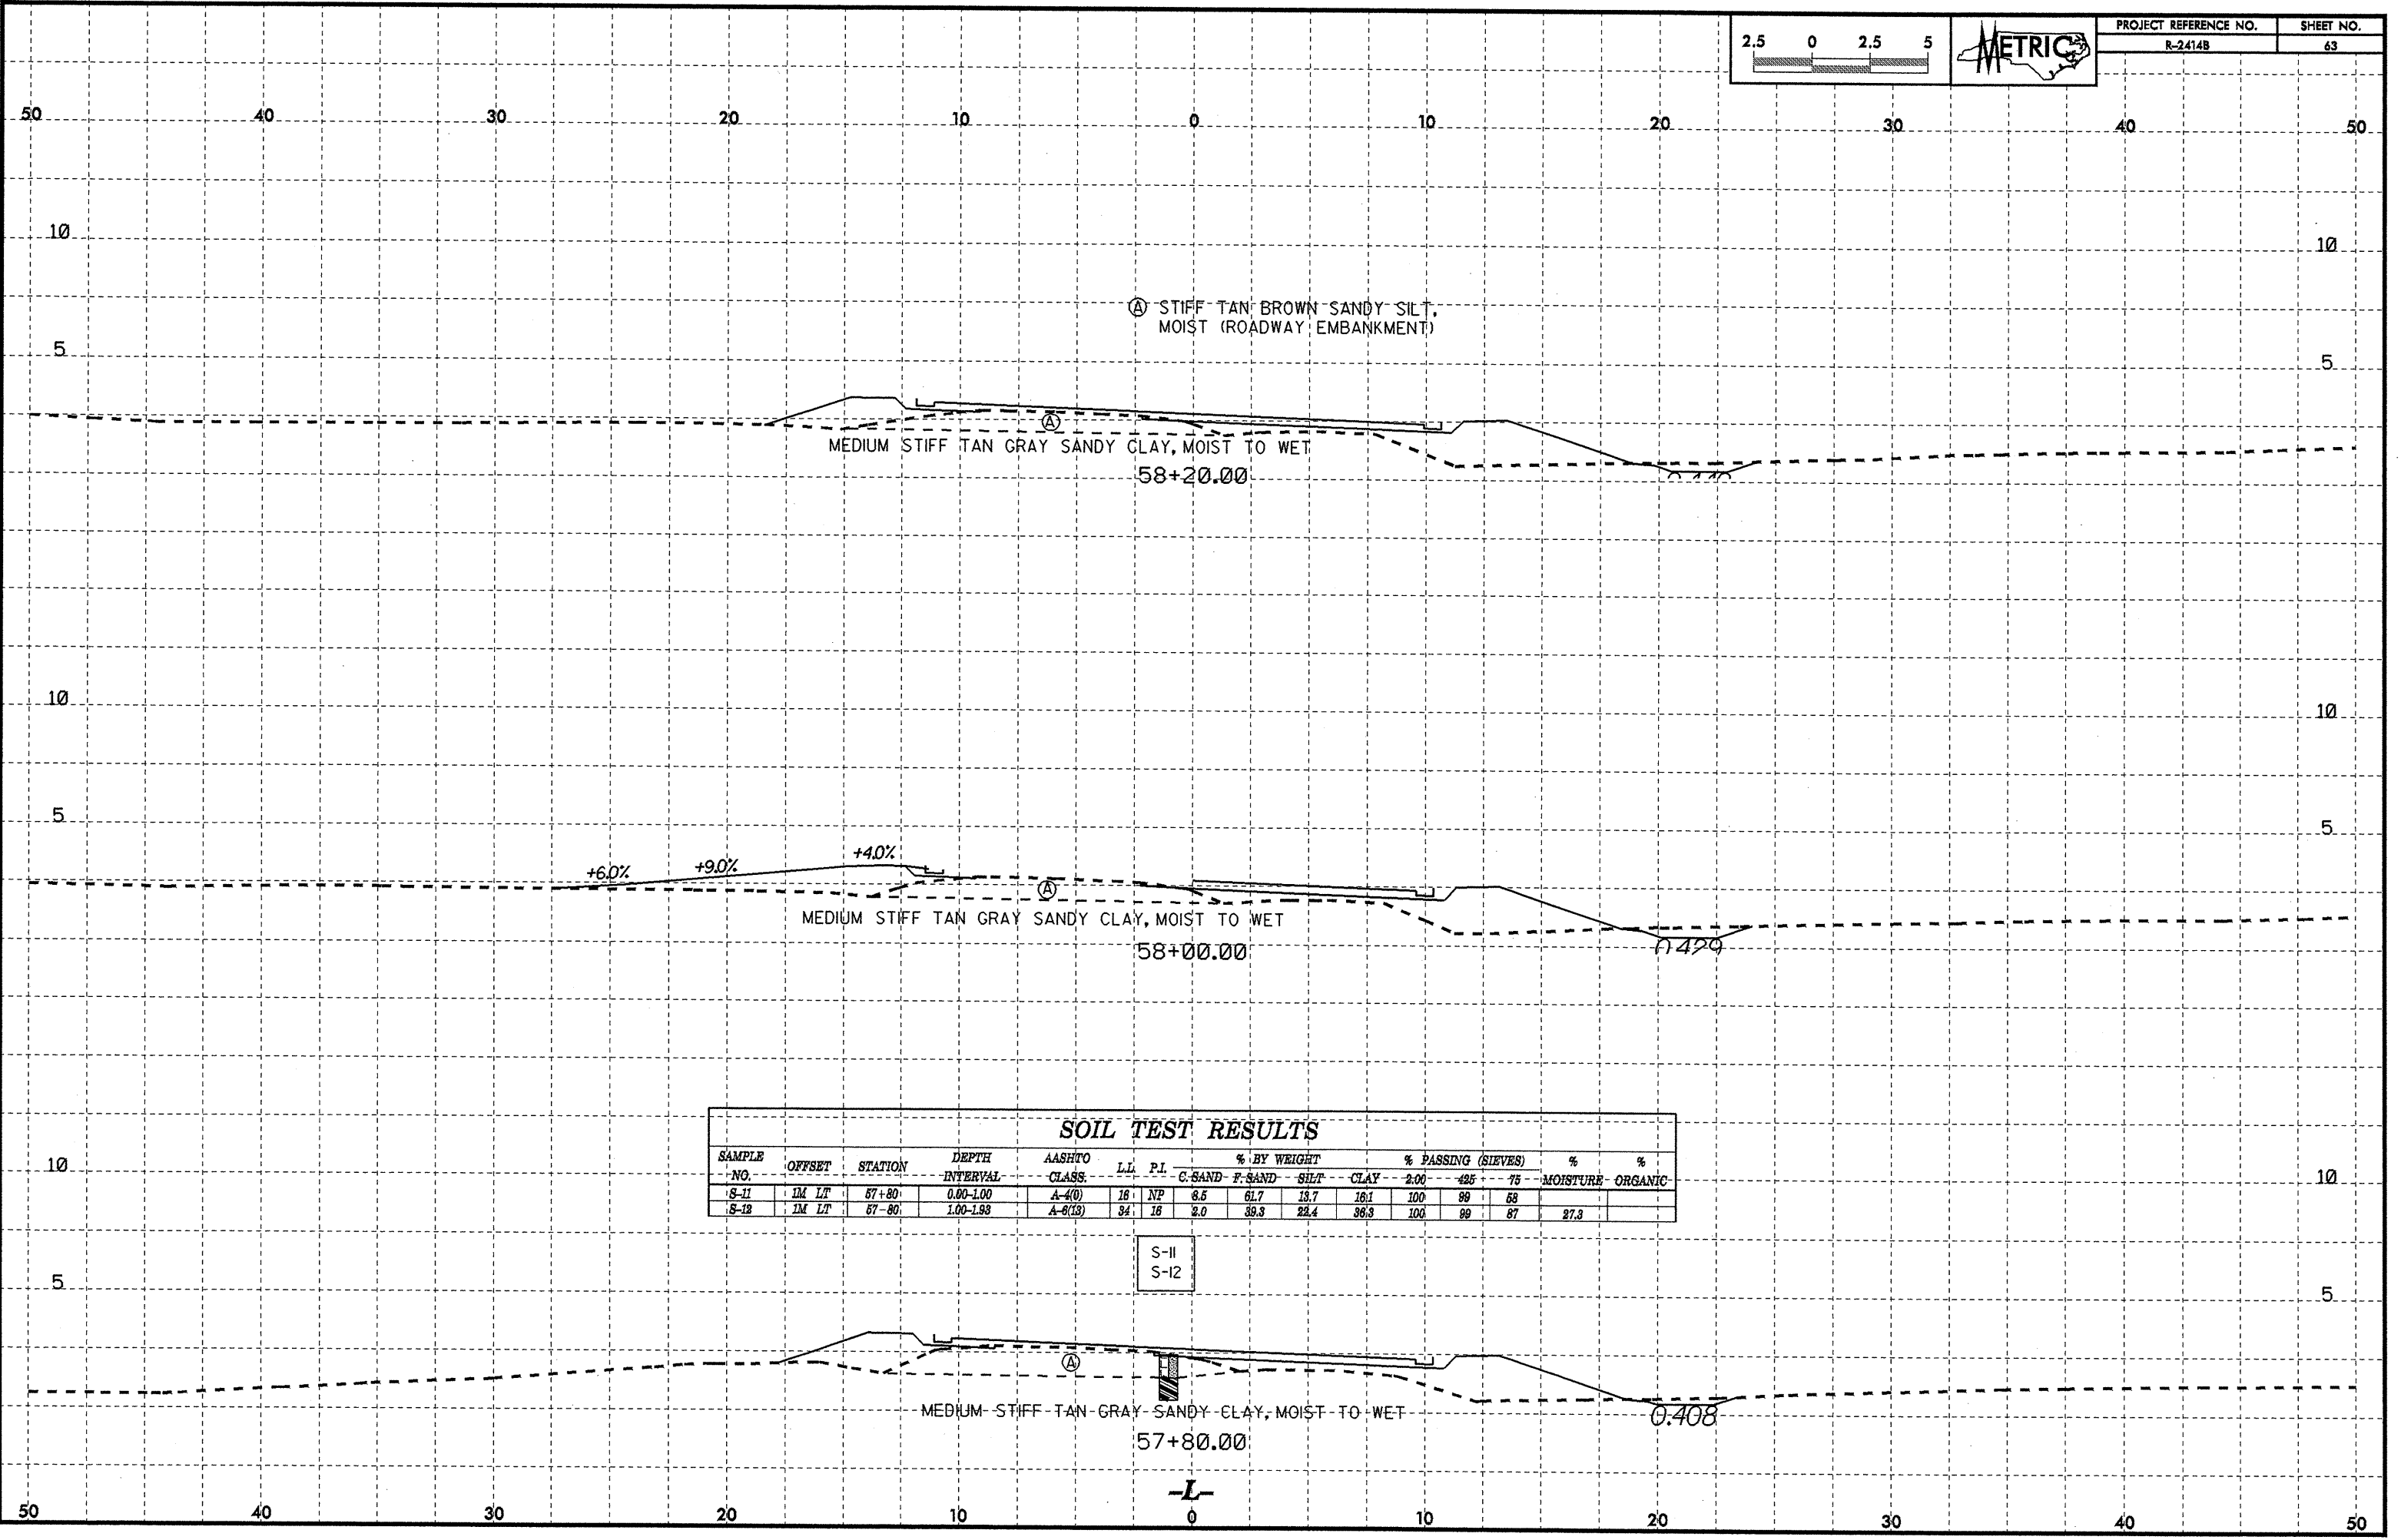


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-11	1M LT	57+80	0.00-1.00	A-4(0)	16	NP	8.5	61.7	13.7	16.1	100	99	88		
S-12	1M LT	57+80	1.00-1.93	A-8(13)	34	16	2.0	39.3	22.4	36.3	100	99	87	27.3	


S-II
S-12

2024 MAY 22 09:15:06
 agoston\11717\2414B\DWY_REV2\CADD_GEO\TECH\502414b_Rdy_xat_1.dgn
 02/26/24

10/26/98
C:\MSD\PROJECTS\2008\15606\ROADWAY\REV2\CADD\GEOTECH\SSC\R-2414B.RDW_rta_1.dgn
08/27/08
AT 08:24:03



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	64

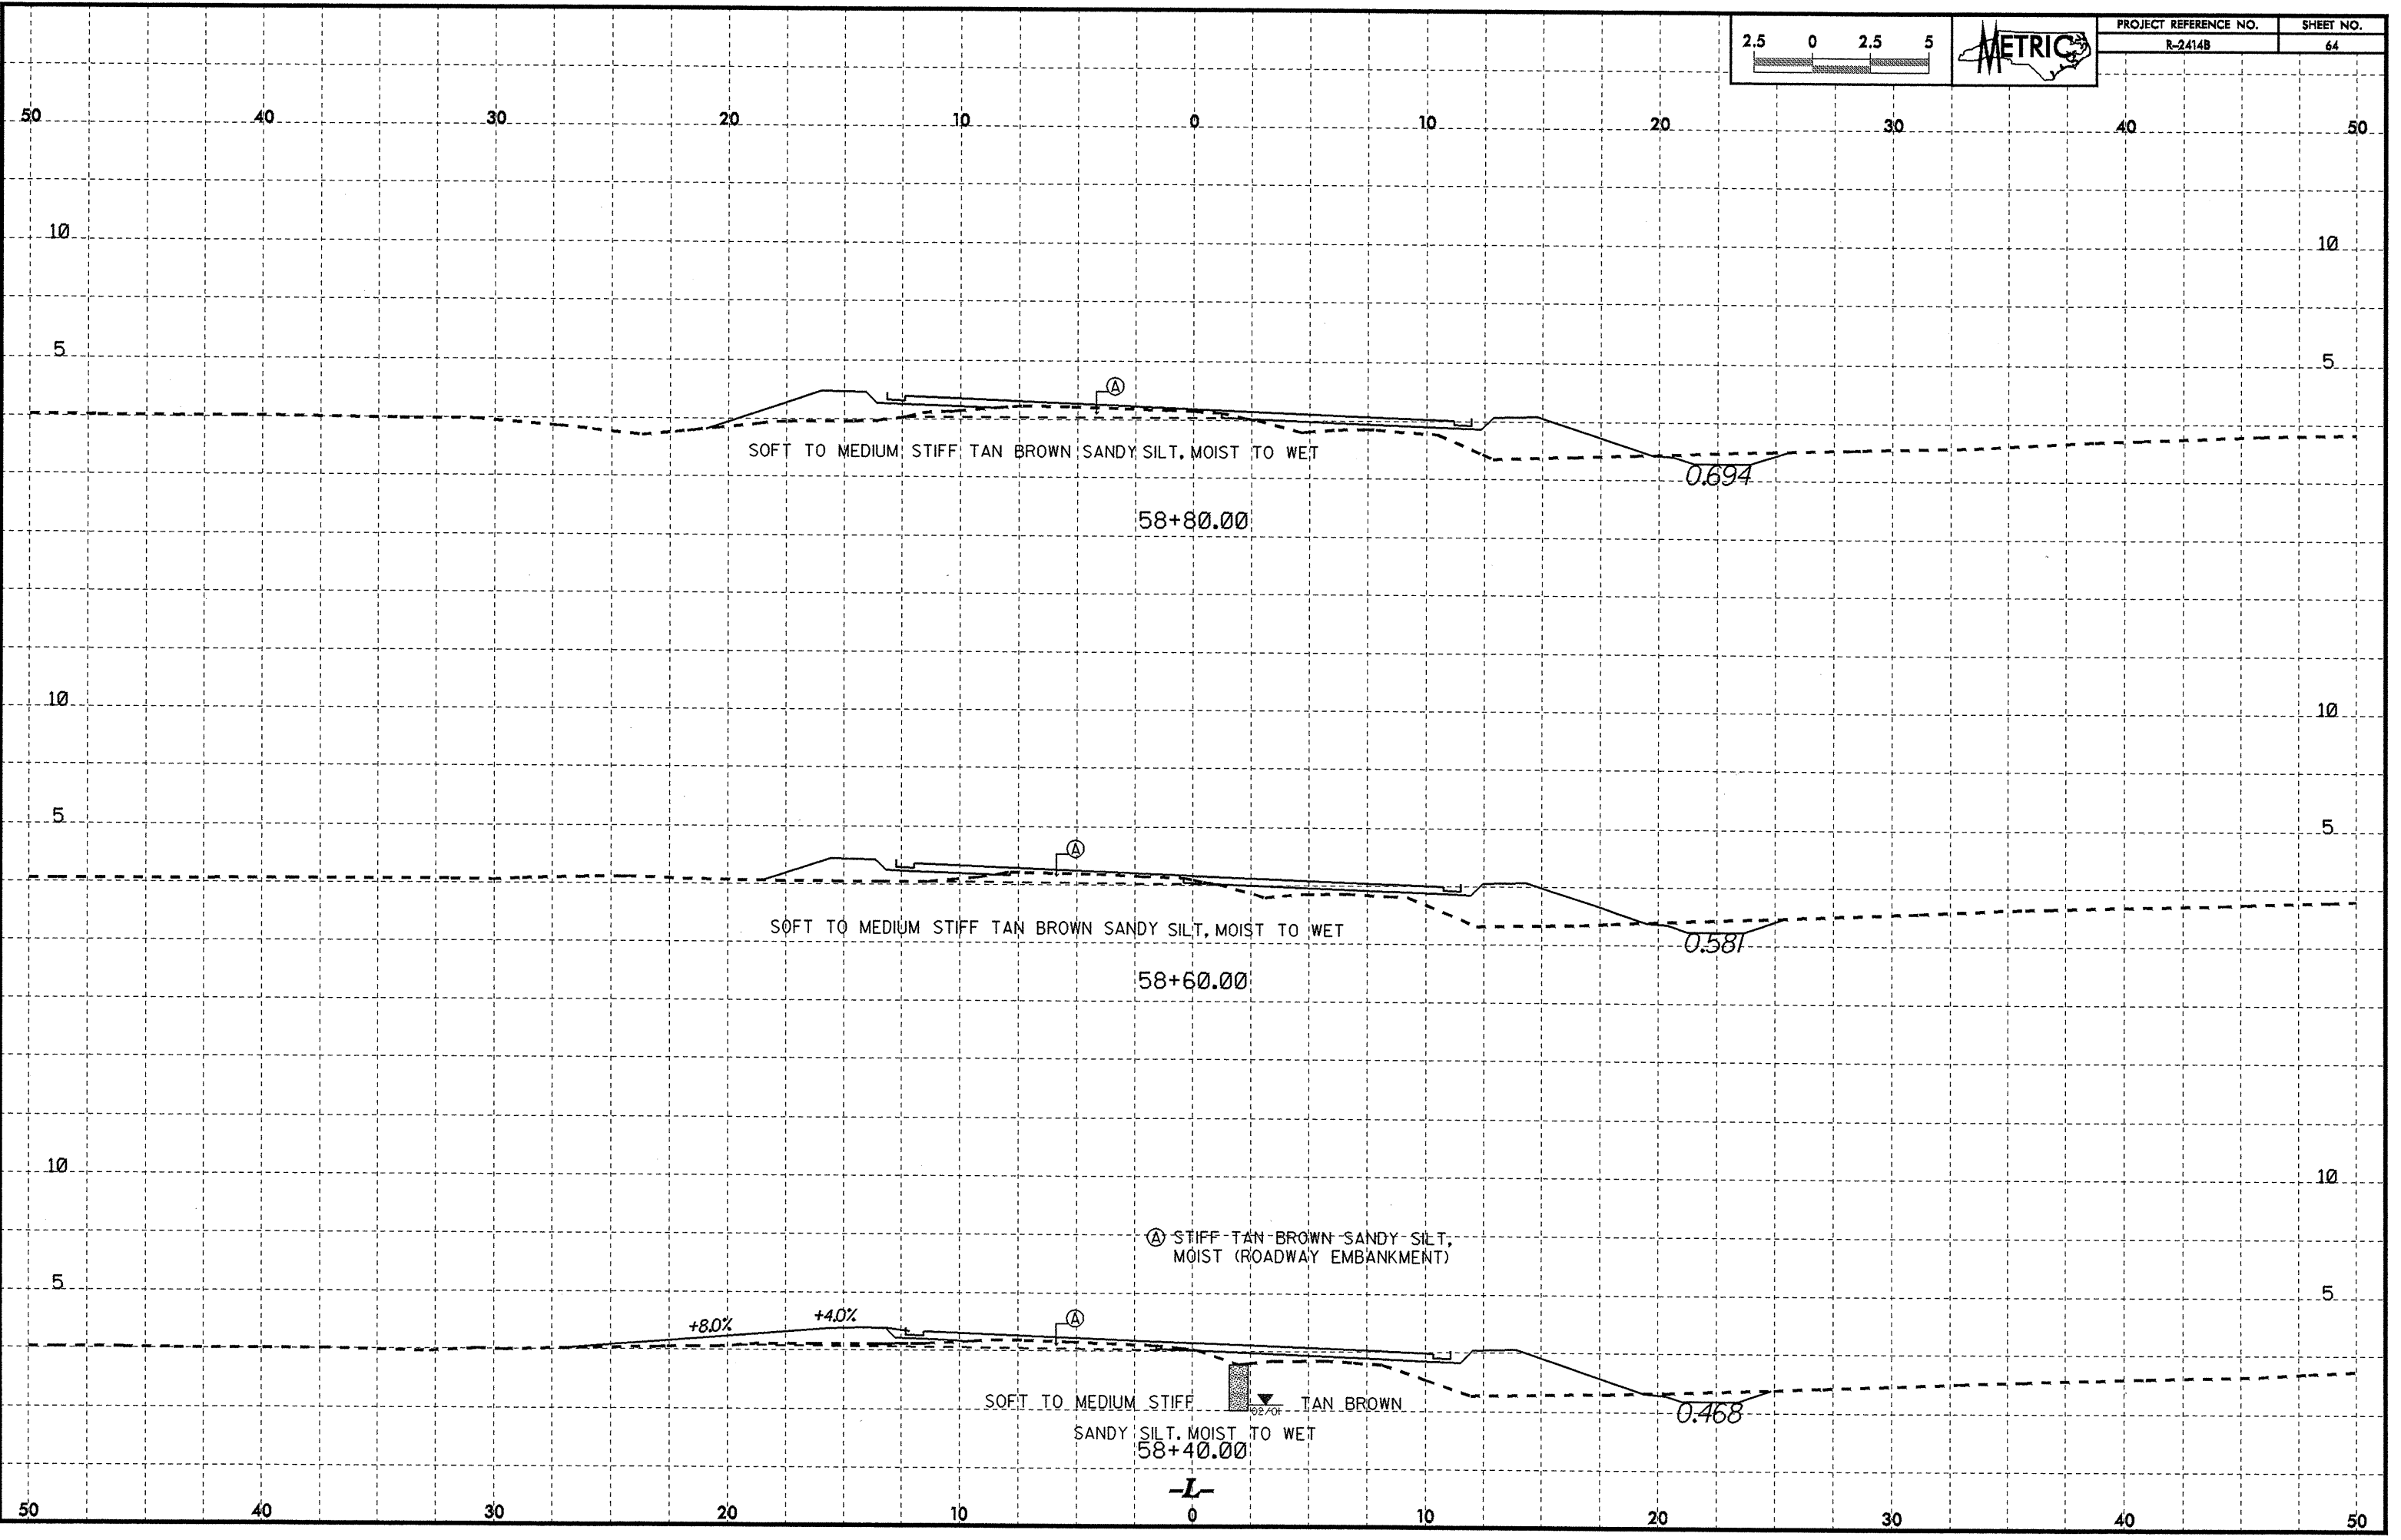

SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT, MOIST TO WET

58+80.00

0.694

SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT, MOIST TO WET

58+60.00

0.581

Ⓐ STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

+8.0%

+4.0%


SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT, MOIST TO WET

58+40.00


0.2701

0.468

-L-



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	65

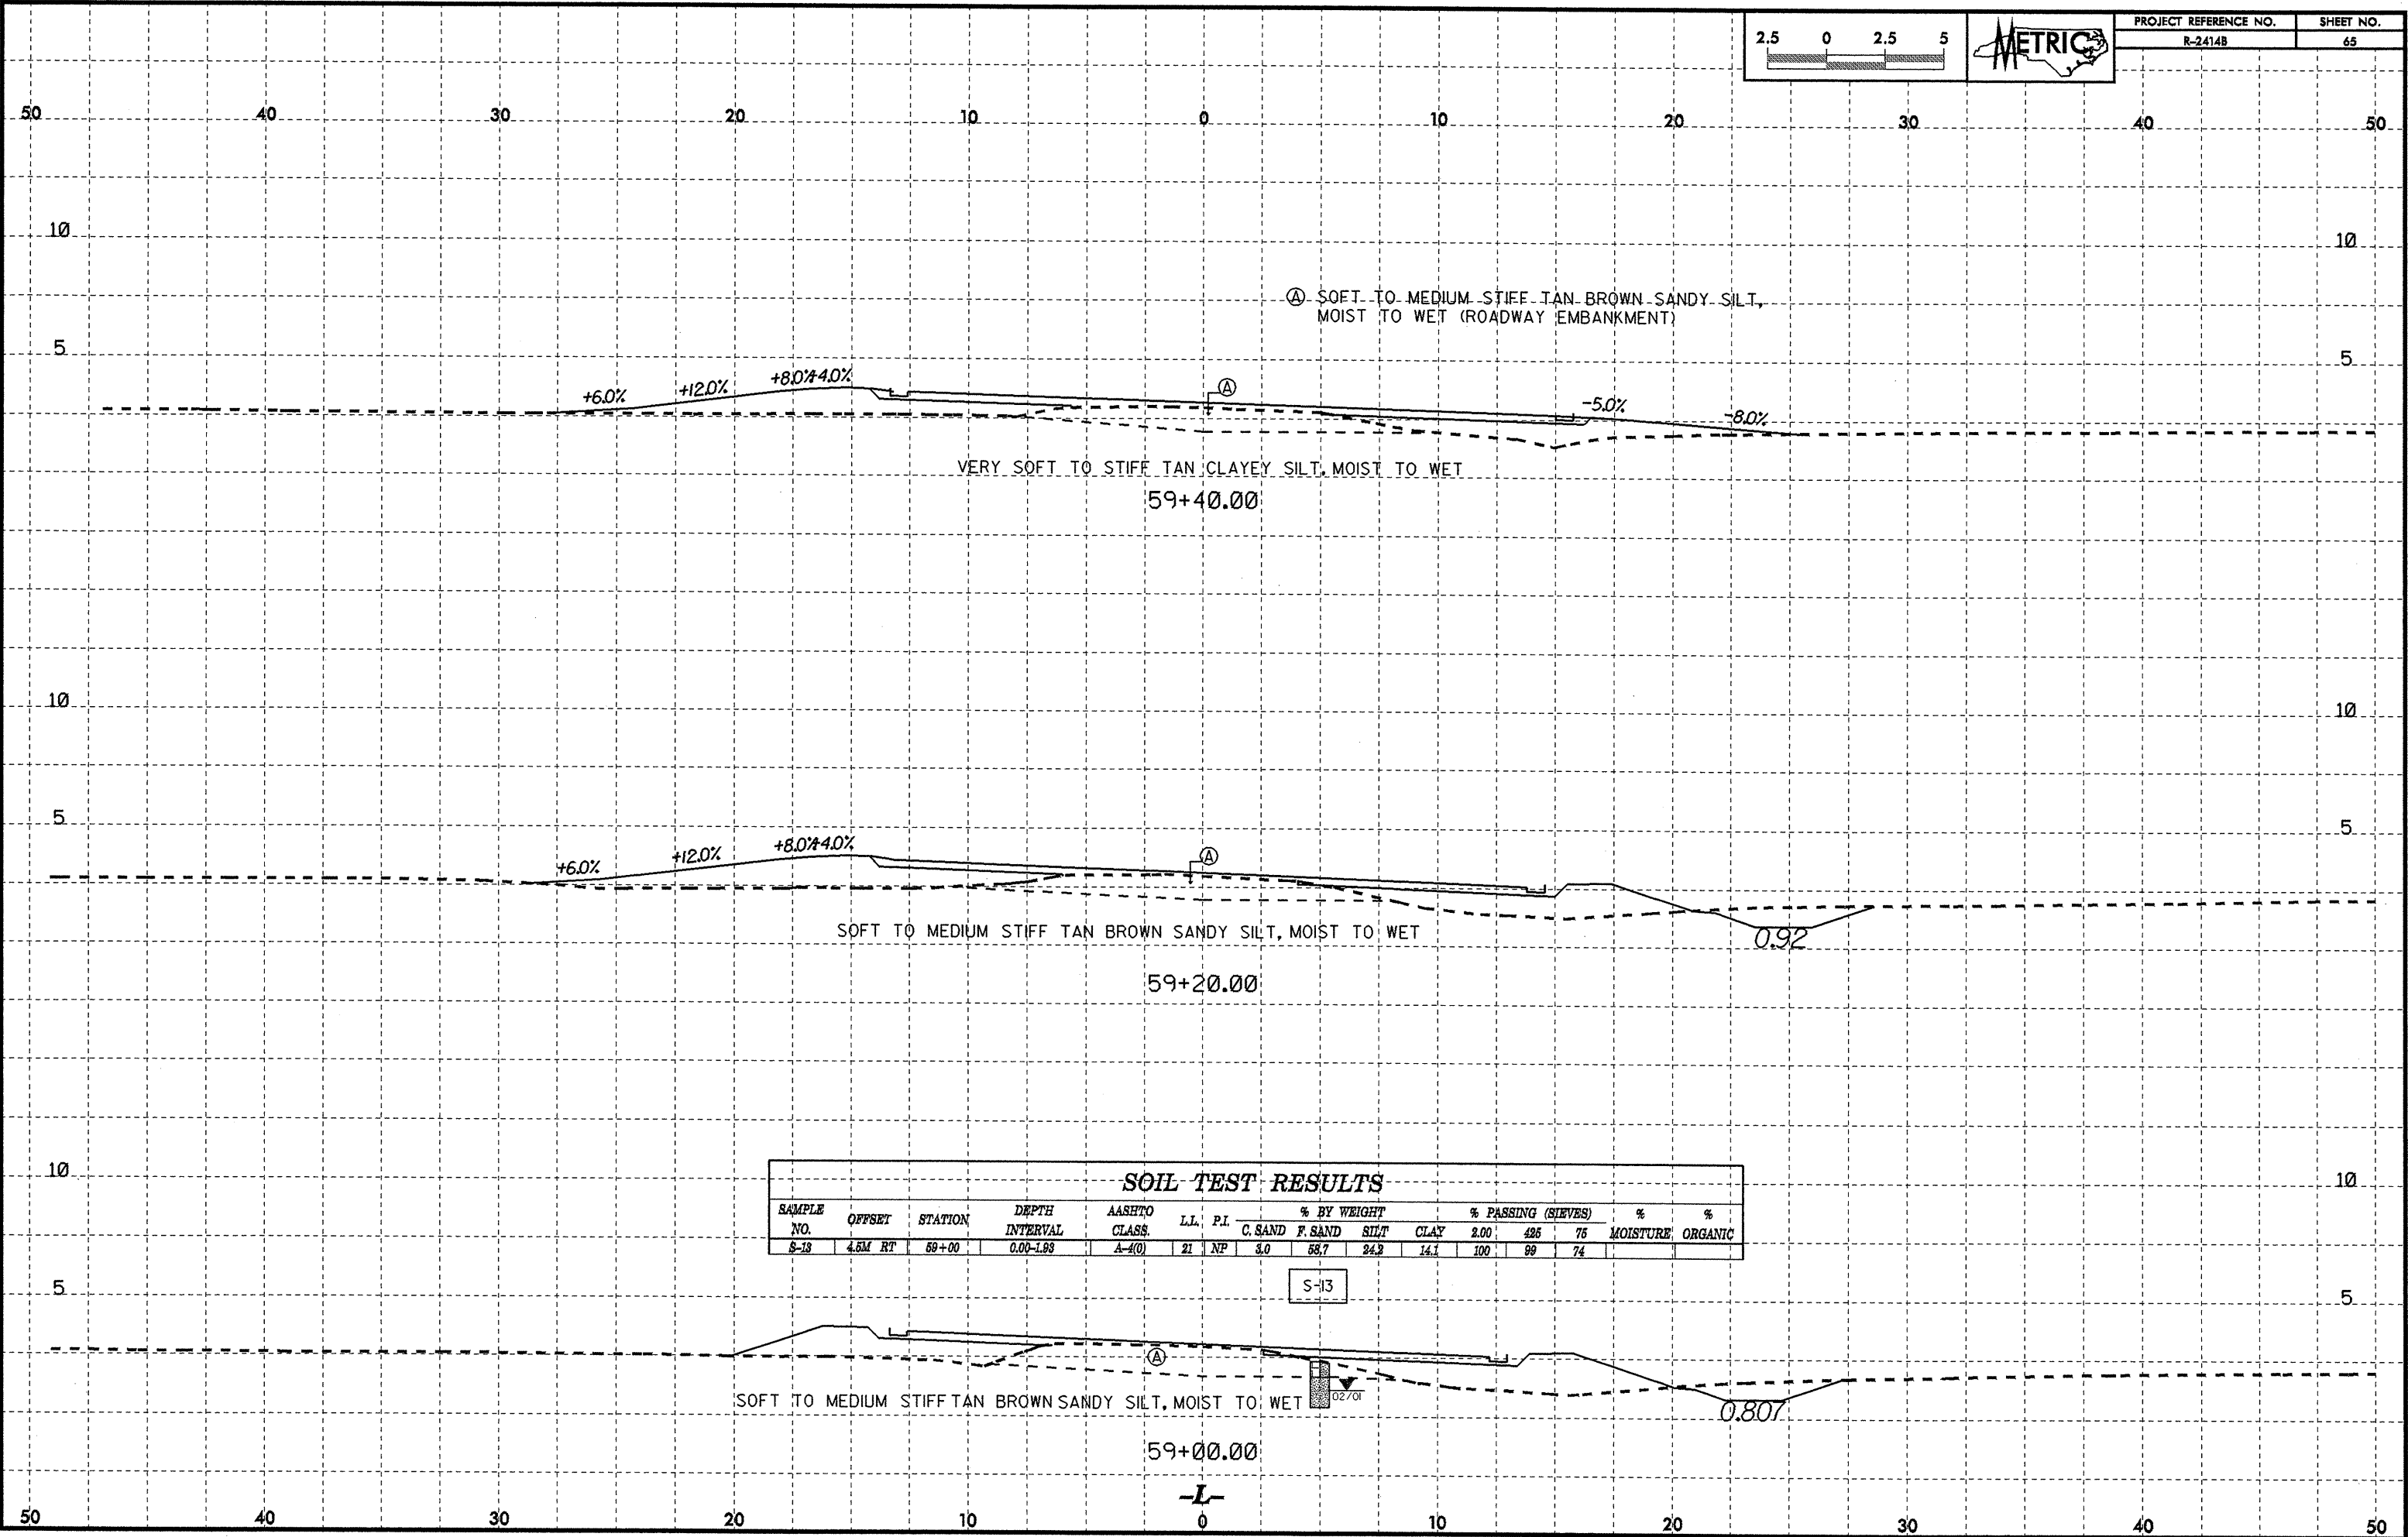

SOIL TEST RESULTS


SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-13	4.5M RT	59+00	0.00-1.93	A-4(0)	21	NP	3.0	68.7	24.3	14.1	100	99	74		

S-13

0.807

I:\projects\2008\15000\BODY_REV2\CADD\GEOTECH\sec\2414b_rdy_xst_1.dgn
 10/26/08 11:06 AM
 AT 08:02:38


10/26/2009 15:00 R:\PROJECTS\2009\REV2\CADD\GEOTECH\SS-V2414B_Rdy_vst_1.dgn
 2009/10/26 15:00 R:\PROJECTS\2009\REV2\CADD\GEOTECH\SS-V2414B_Rdy_vst_1.dgn
 10/26/2009 15:00 R:\PROJECTS\2009\REV2\CADD\GEOTECH\SS-V2414B_Rdy_vst_1.dgn
 10/26/2009 15:00 R:\PROJECTS\2009\REV2\CADD\GEOTECH\SS-V2414B_Rdy_vst_1.dgn



SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
SS-5	9M RT	60+00	0.0-0.45	A-2-4(0)	28	2	33.6	42.7	9.8	14.1	87	71	30		
SS-6	9M RT	60+00	0.76-1.21	A-4(4)	26	9	3.4	61.6	20.8	24.2	99	88	69	26.8	


Ⓐ SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT AND VERY LOOSE SAND, MOIST TO WET (ROADWAY EMBANKMENT)

SS-5
SS-6

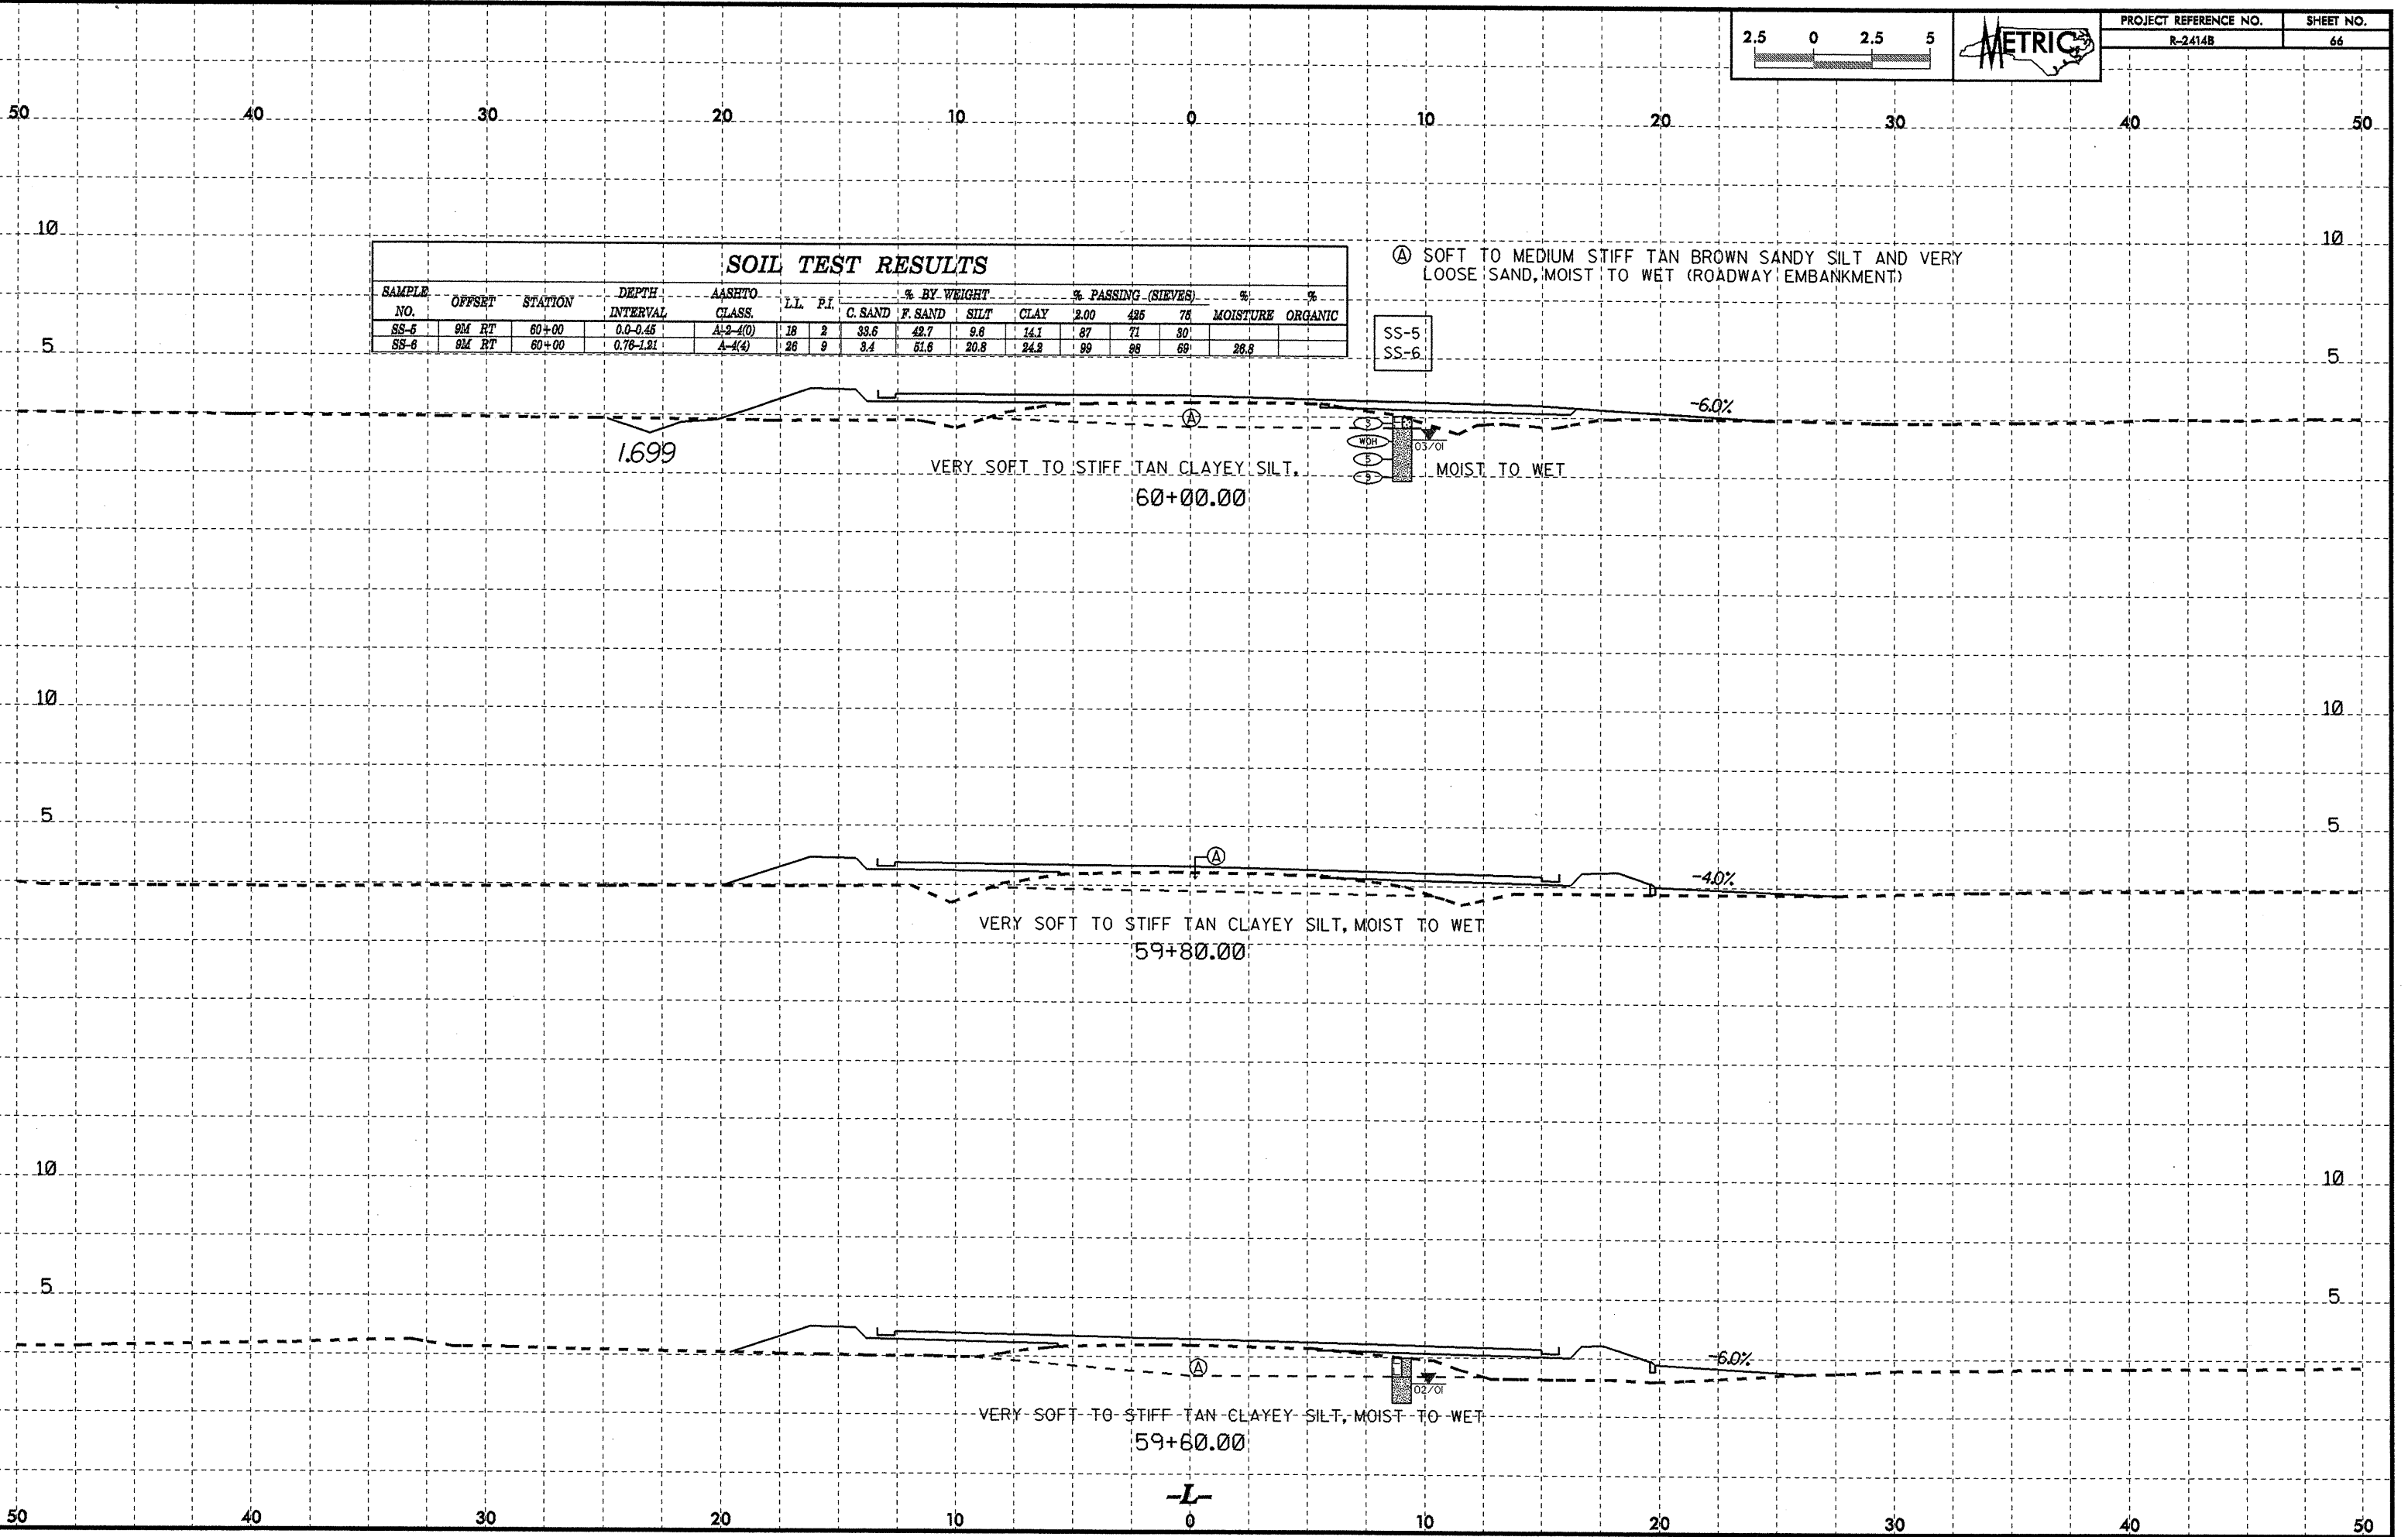


-L-

10/26/98




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	67

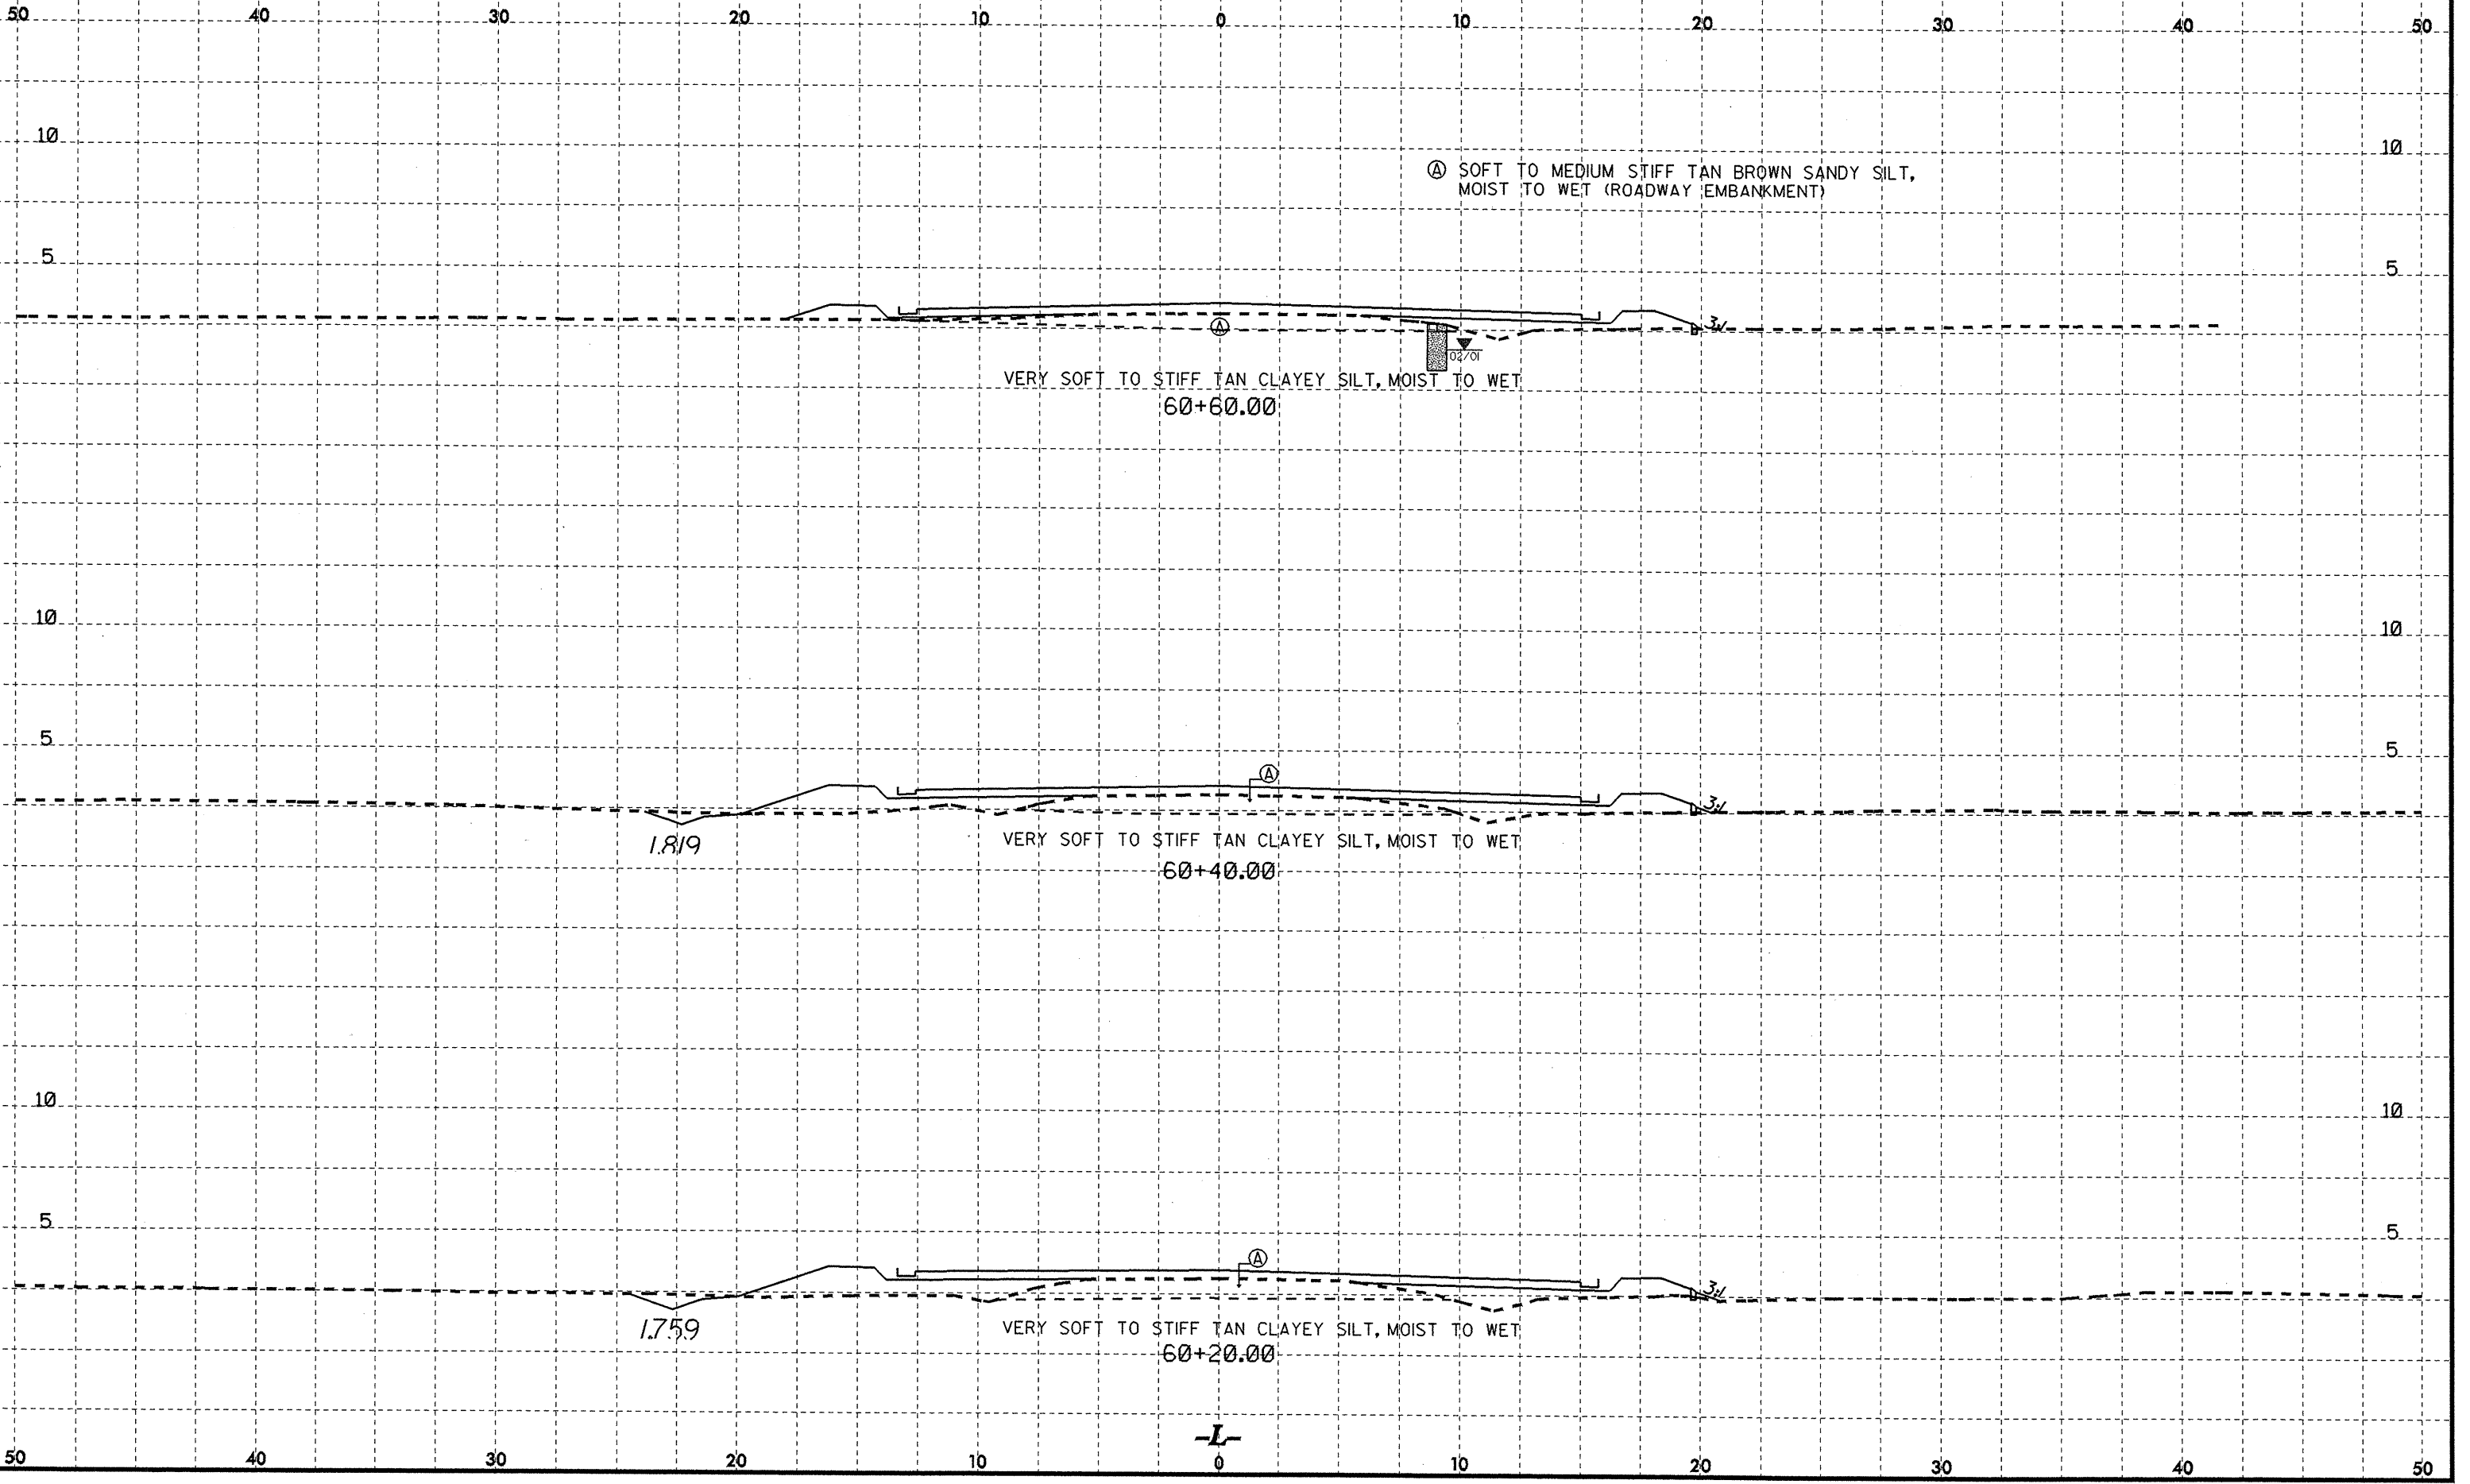


29-MAY-2008 15:08
igaton\T\p\2414B\67.dwg
D:\sumner AT 08262005

10/26/99
C:\MSD\PROJECTS\2144B\REV2\CADD\GEOTECH\Spec\2144b_Rdy_xa_1.dgn
20:11:47 15/08/99
Printer: AT 02/04/99



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	68

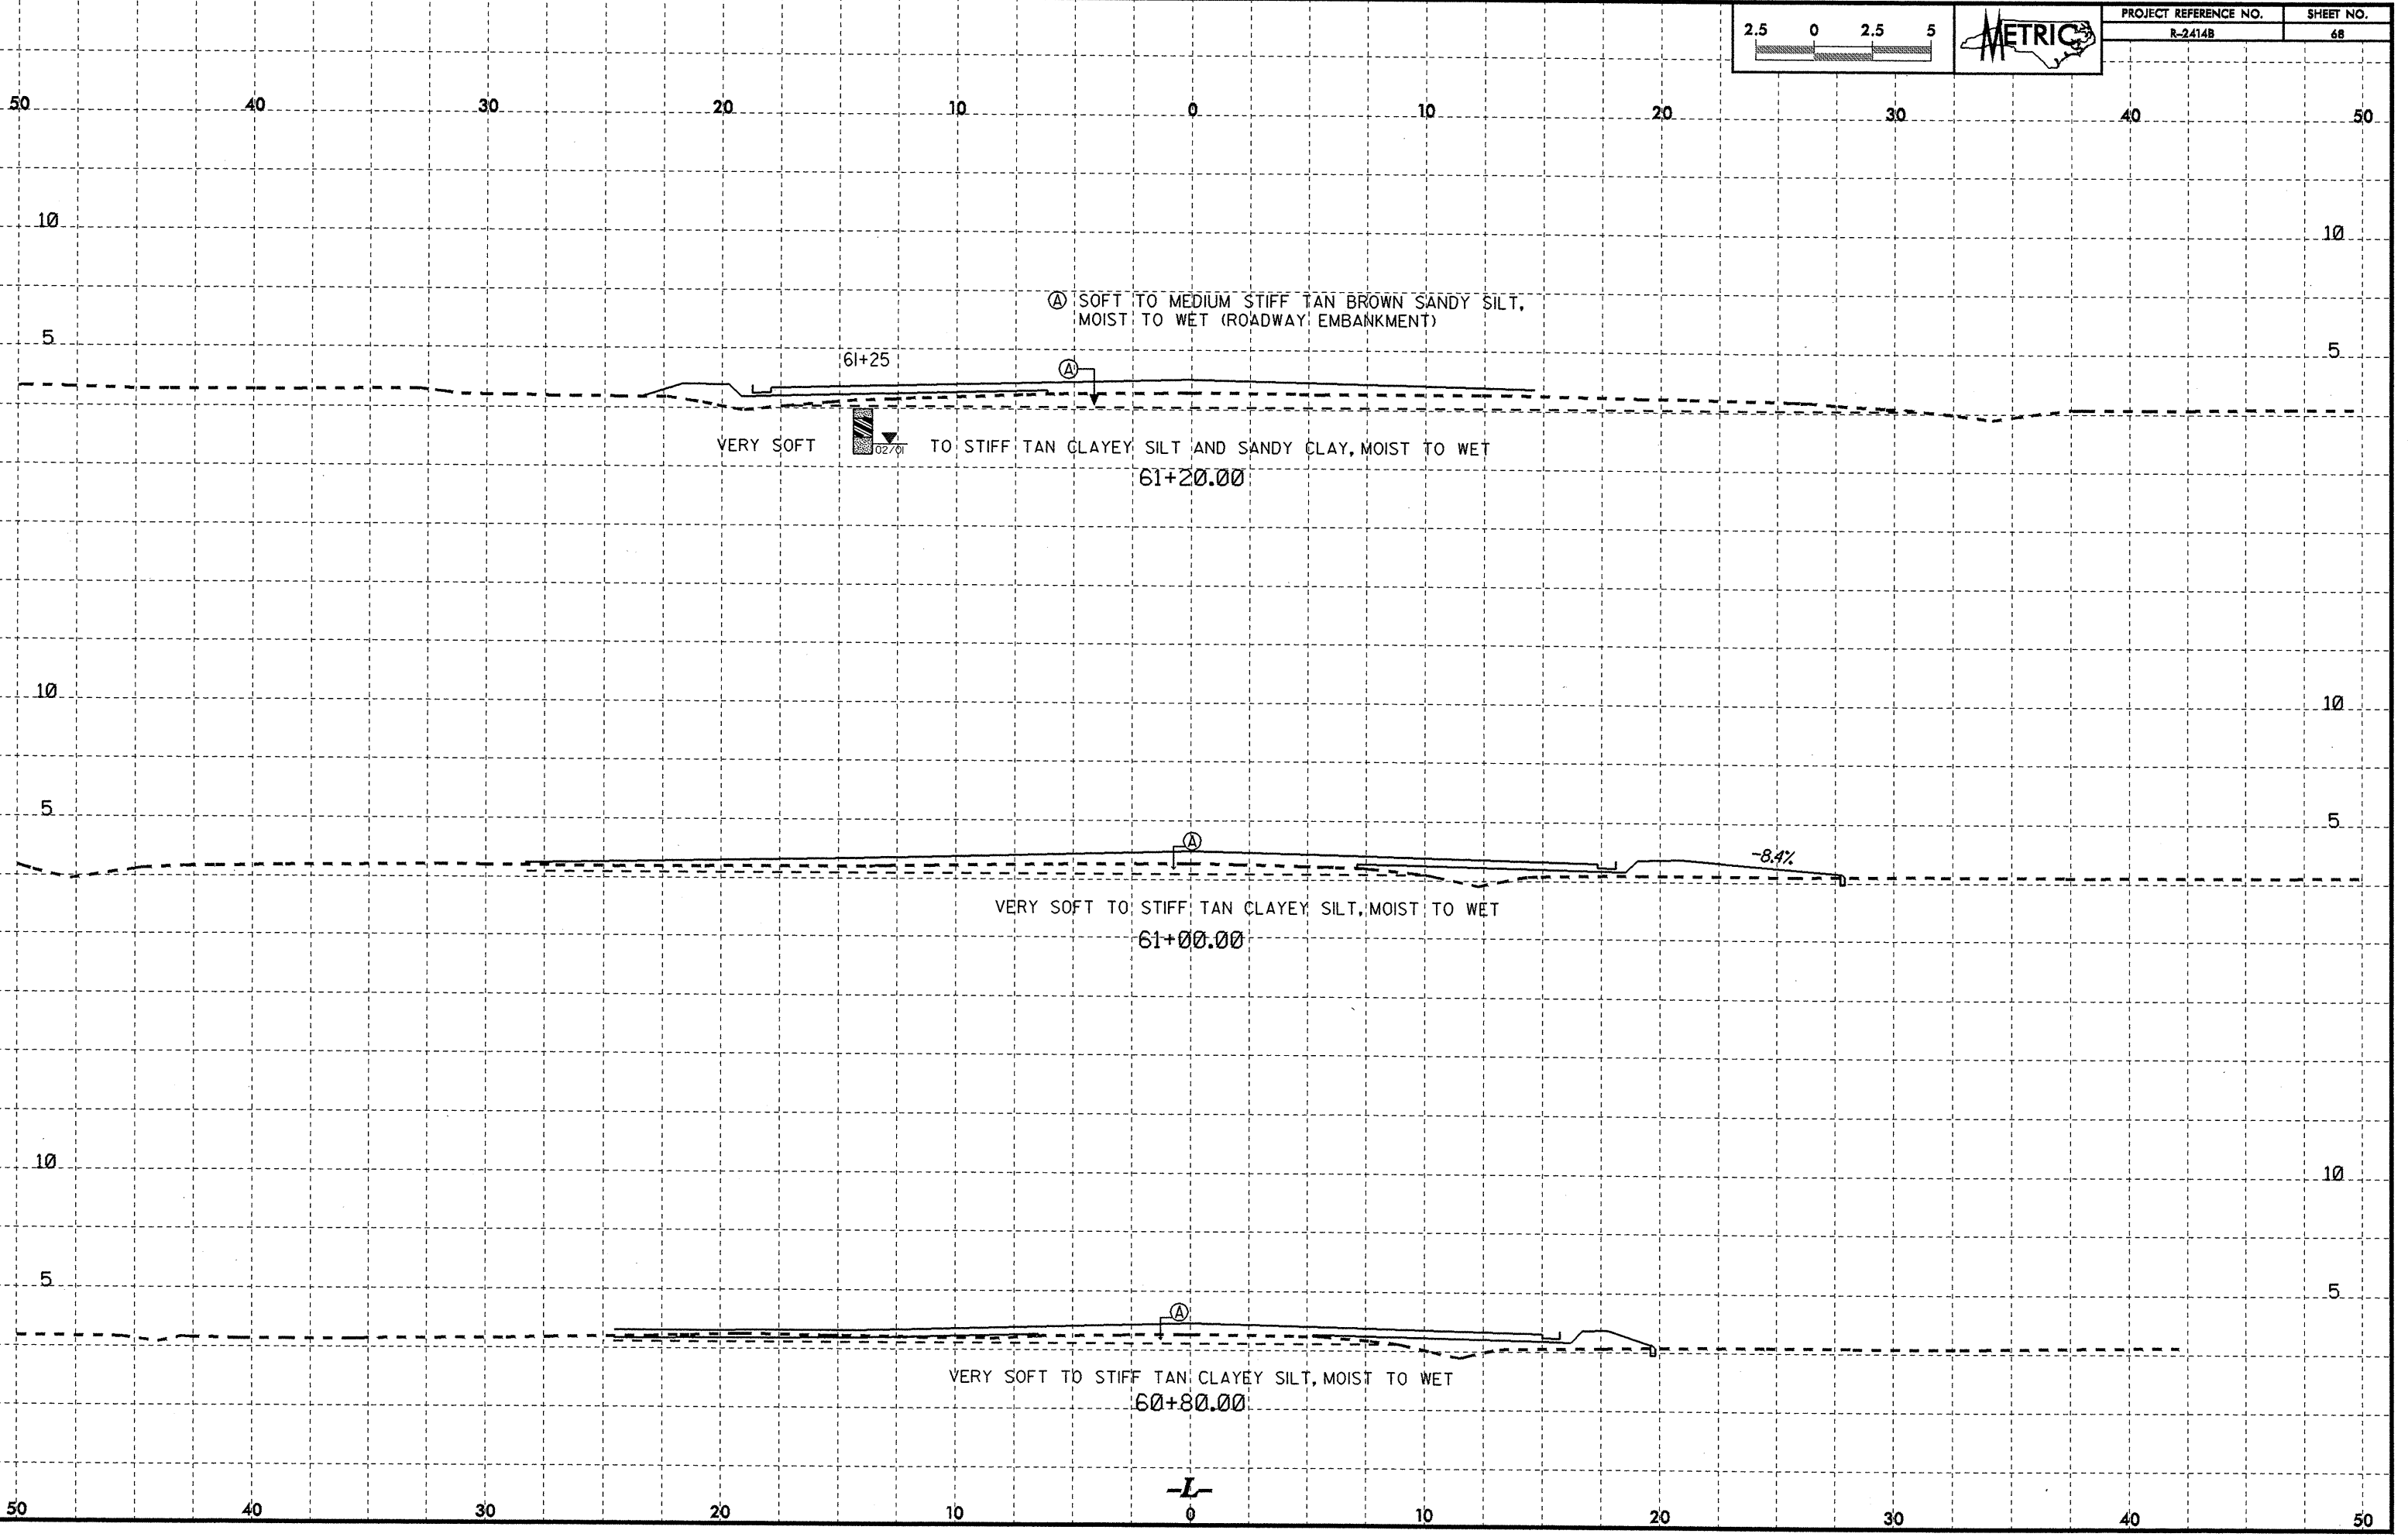


A SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)

61+25
VERY SOFT TO STIFF TAN CLAYEY SILT AND SANDY CLAY, MOIST TO WET
61+20.00

A
VERY SOFT TO STIFF TAN CLAYEY SILT, MOIST TO WET
61+00.00
-8.4%

A
VERY SOFT TO STIFF TAN CLAYEY SILT, MOIST TO WET
60+80.00
-L-

10/26/08 10:26:08 1580 BDMY_REV2\CADD\GEOTECH\sec\2414b_Rdy_xxx.dgn




50 40 30 20 10 0 10 20 30 40 50

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			MOISTURE %	ORGANIC %
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-14	EM RT	61+80	0.60-1.00	A-6(9)	31	13	1.4	44.0	22.4	32.3	100	100	88		
S-16	EM RT	61+80	1.00-1.83	A-4(0)	28	NP	7.1	76.3	10.1	6.0	100	99	82		



Ⓐ SOFT TO MEDIUM STIFF TAN BROWN SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)

S-14
S-15

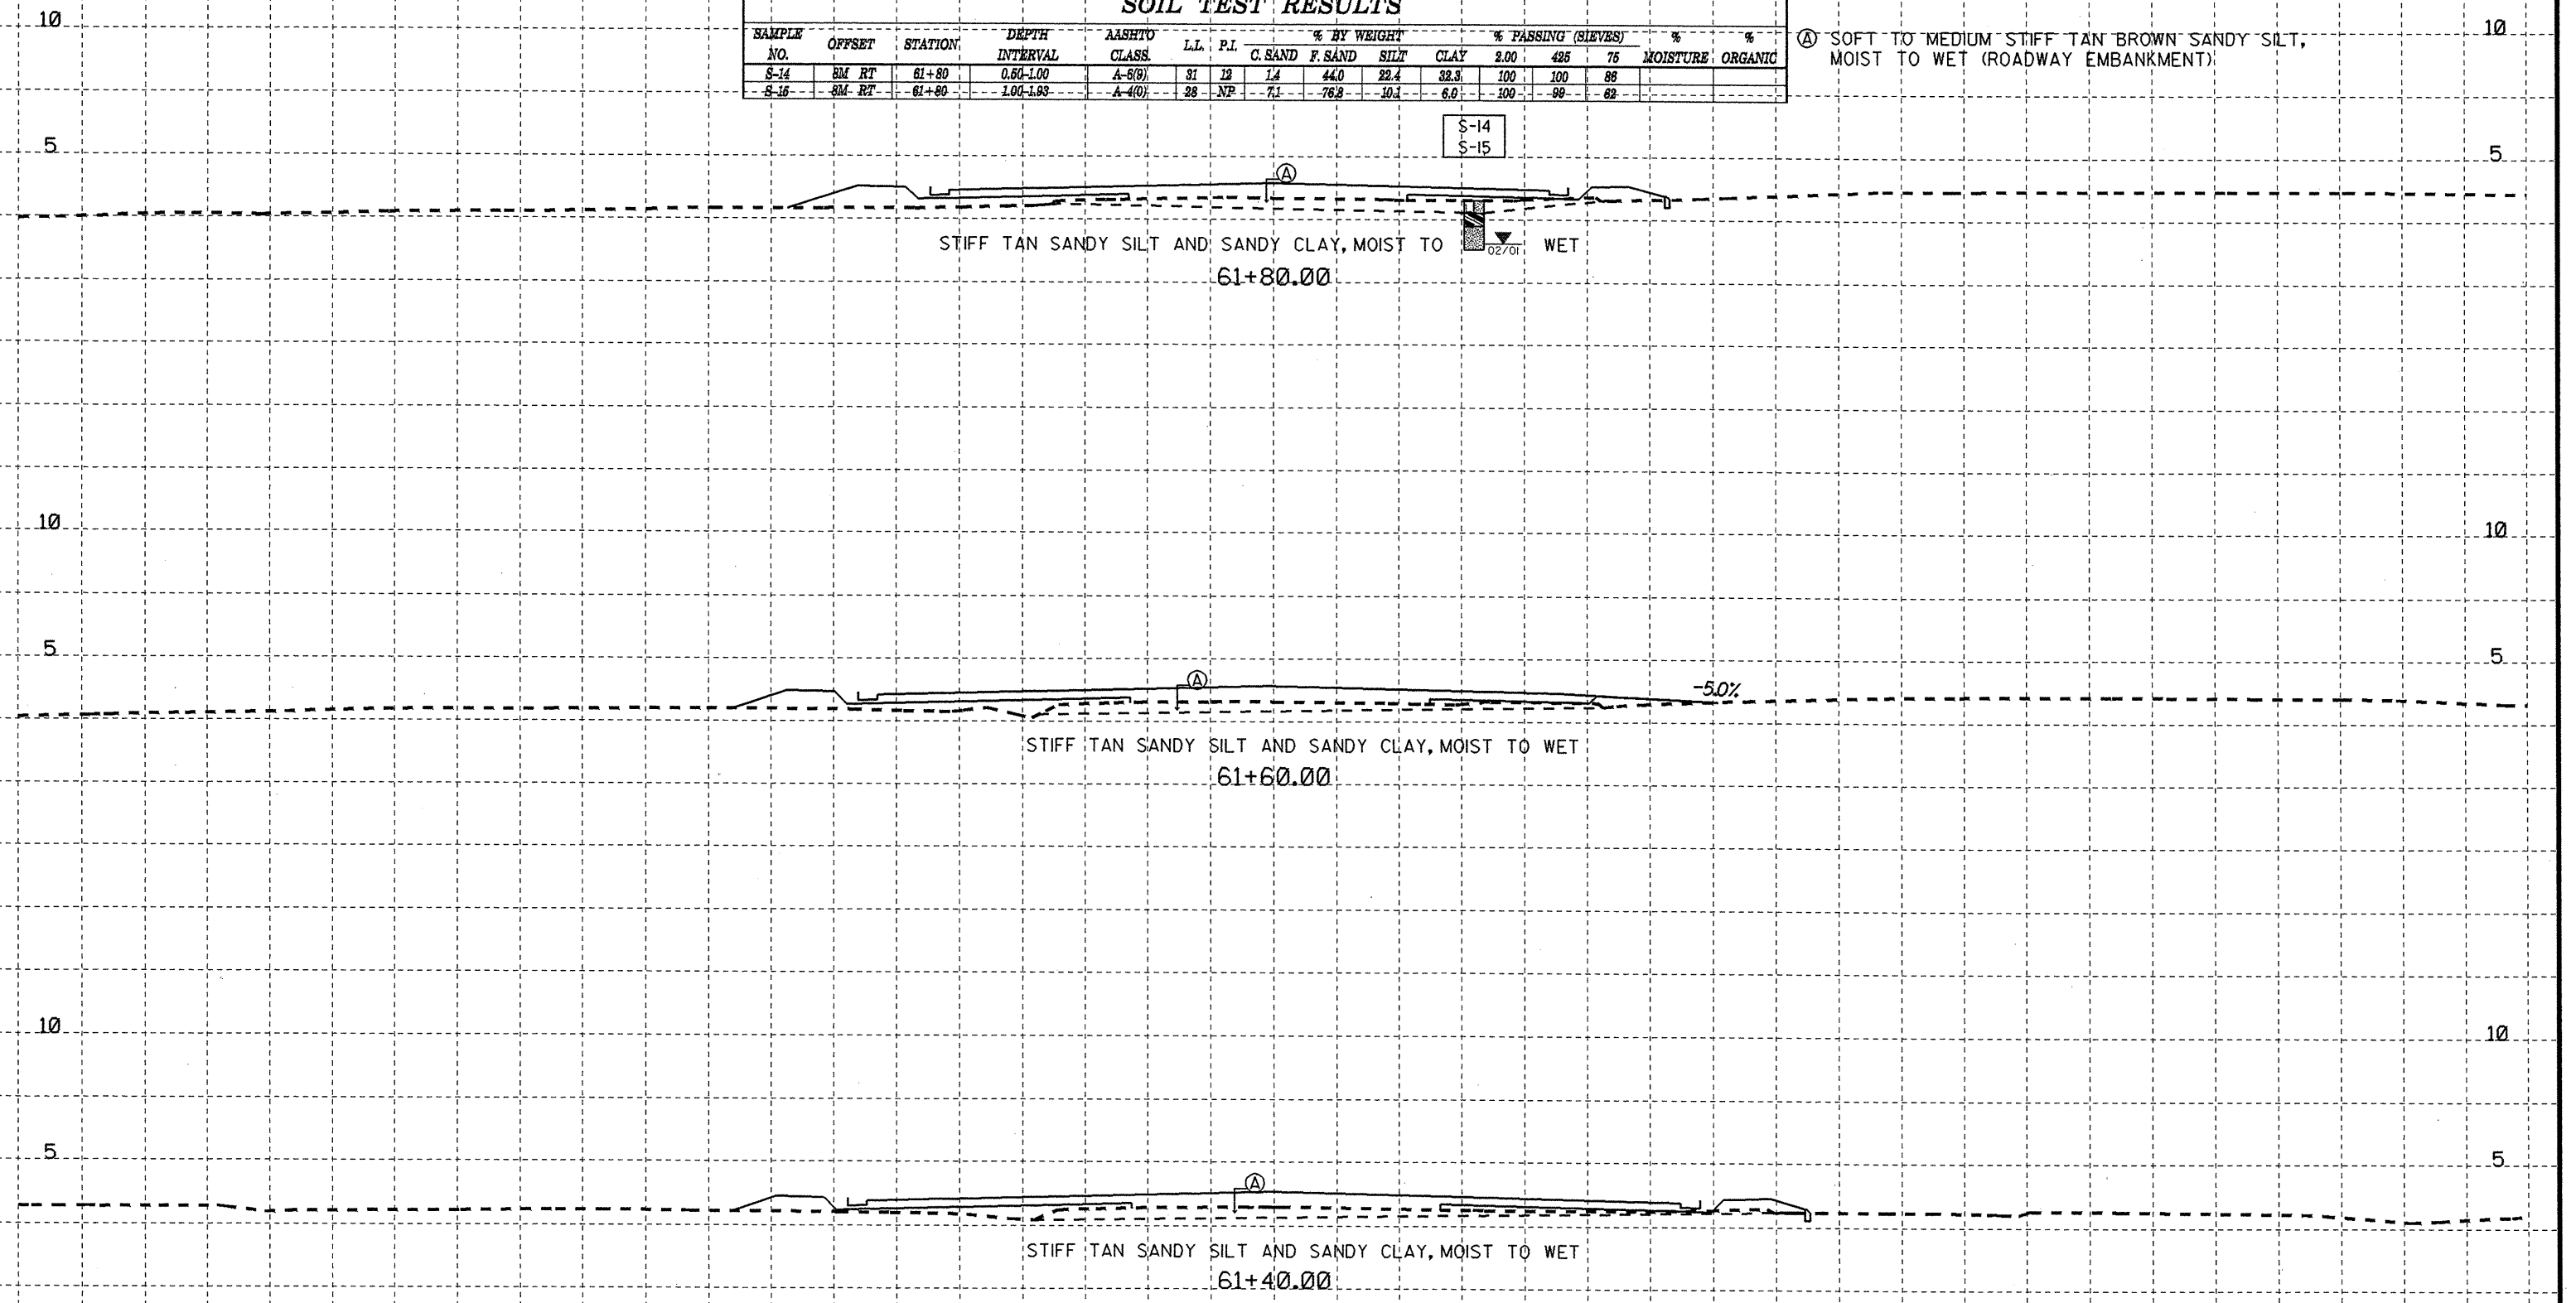

-L-

50 40 30 20 10 0 10 20 30 40 50

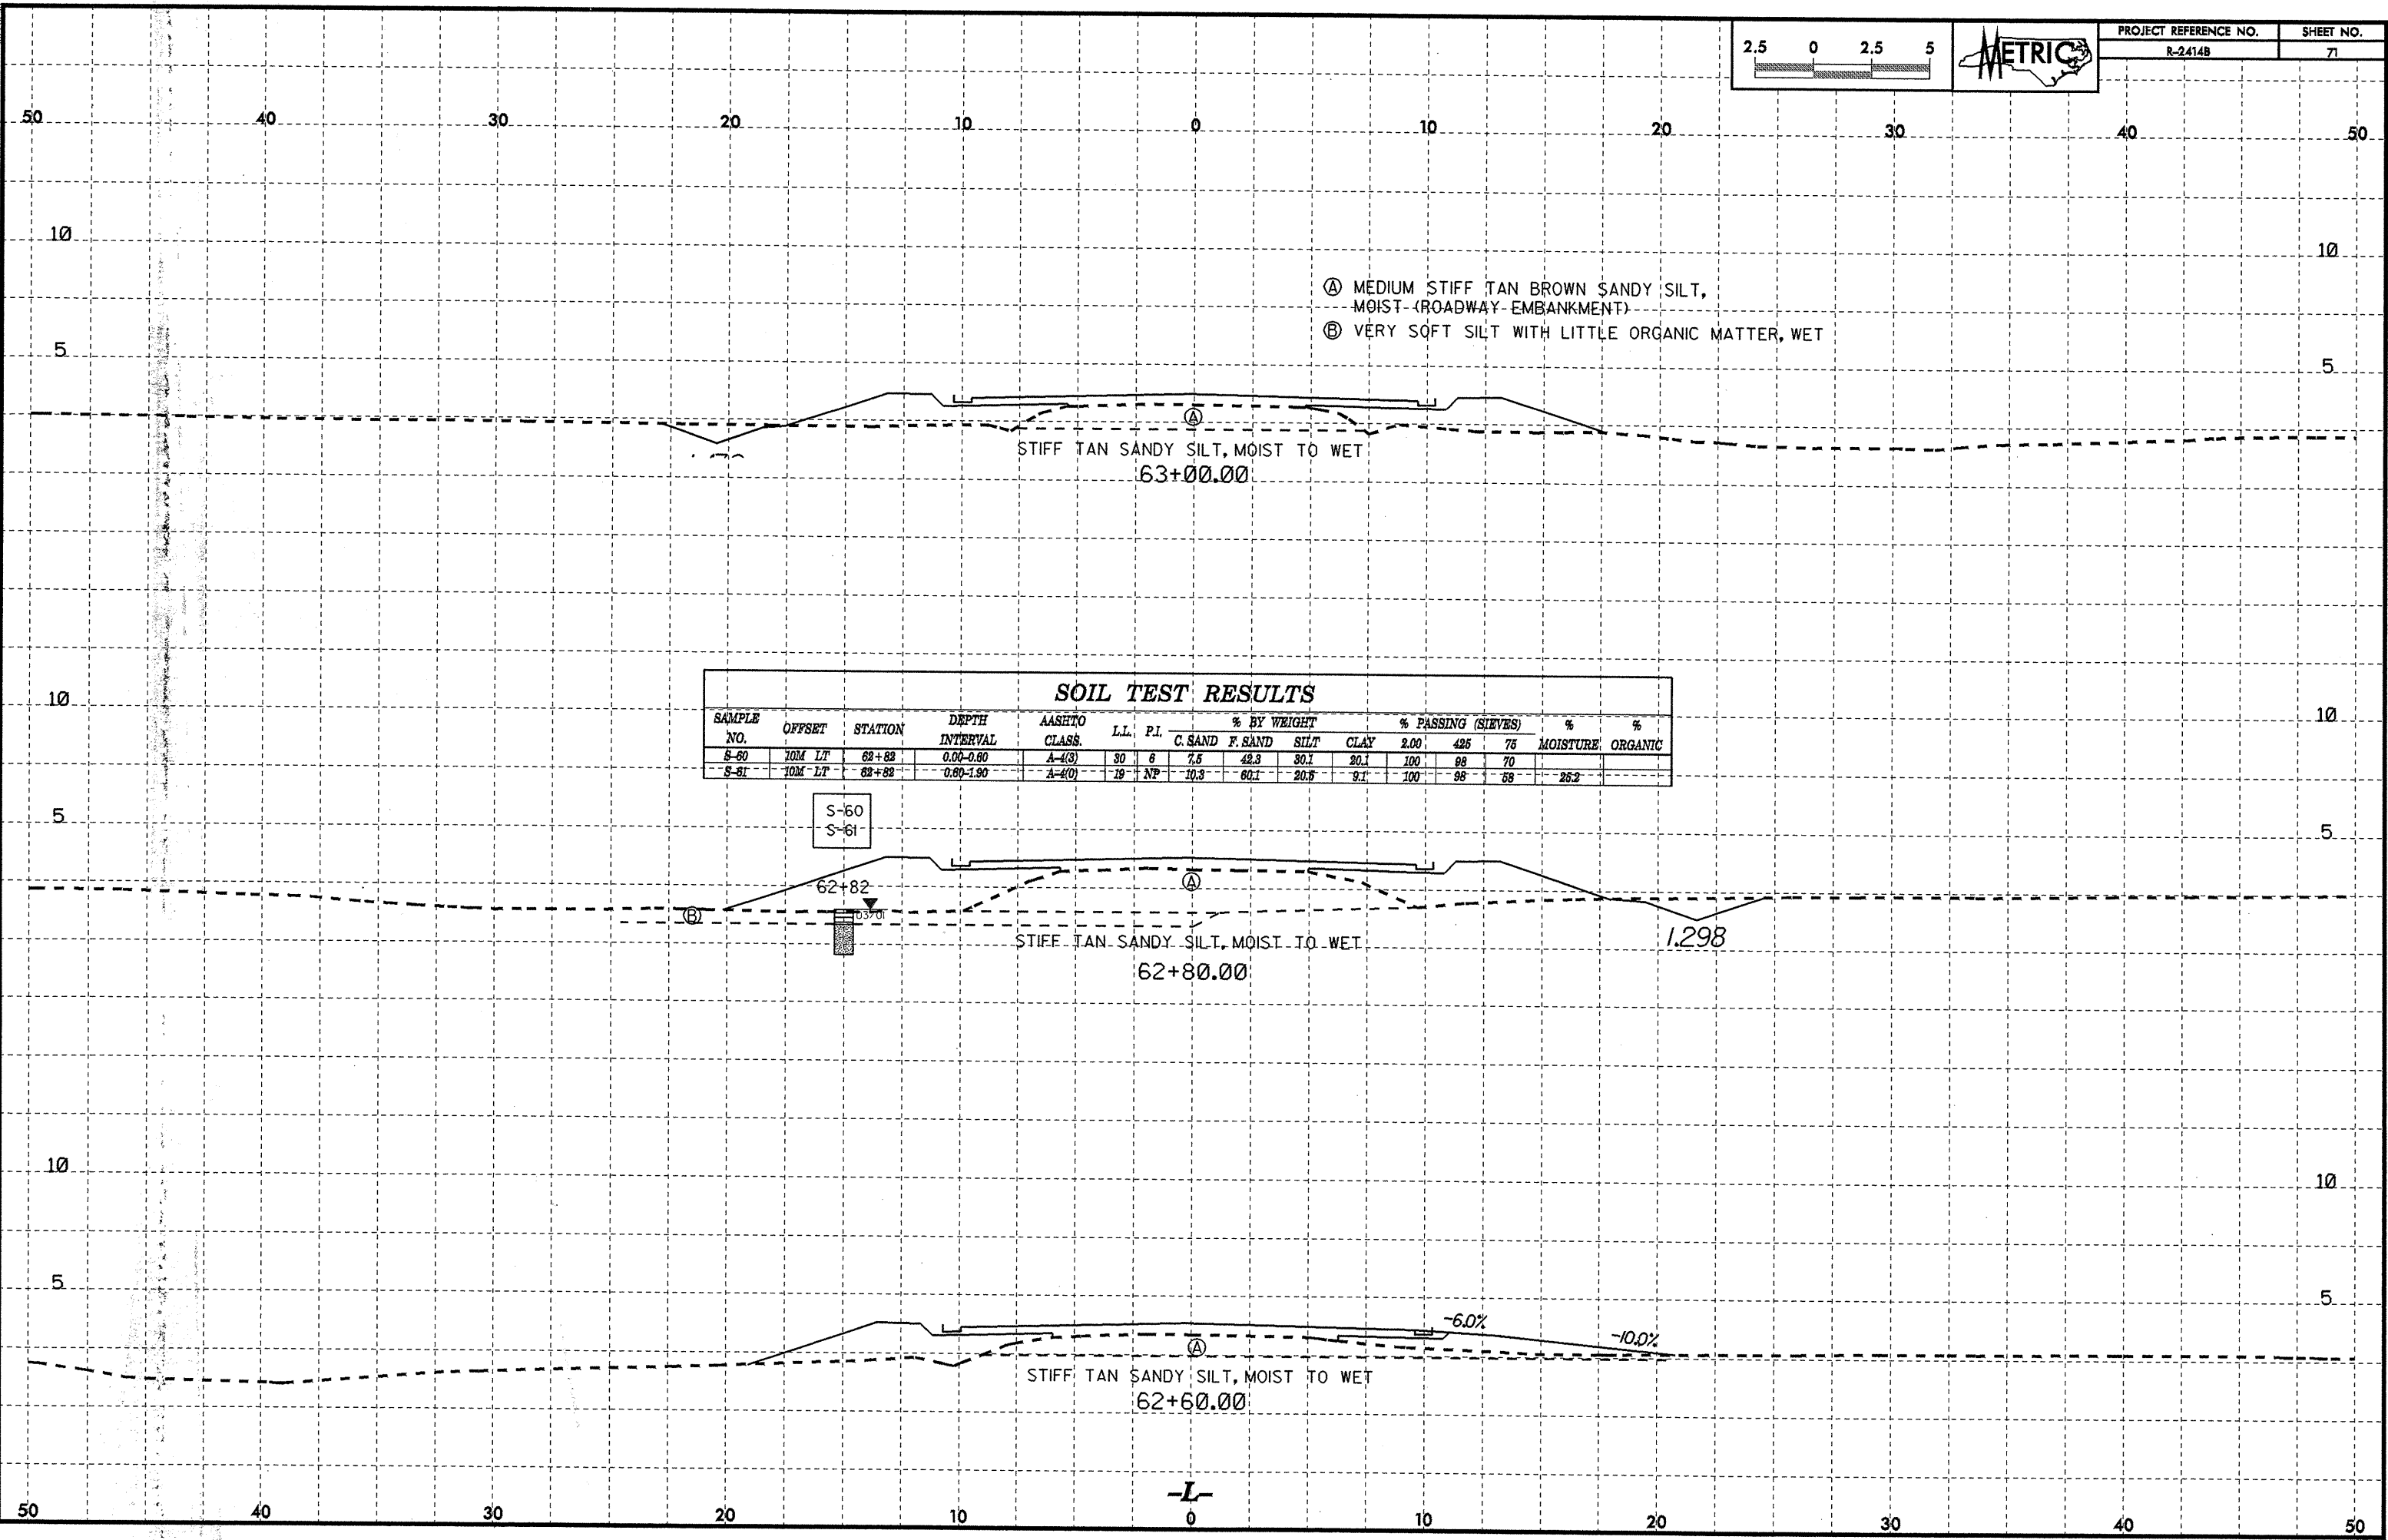

- Ⓐ MEDIUM STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)
- Ⓑ VERY SOFT SILT WITH LITTLE ORGANIC MATTER, WET

STIFF TAN SANDY SILT, MOIST TO WET
63+00.00

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-60	10M LT	62+82	0.00-0.60	A-4(3)	30	6	7.5	42.3	30.1	20.1	100	98	70		
S-61	10M LT	62+82	0.60-1.90	A-4(0)	19	NP	10.3	60.1	20.8	9.1	100	98	58	25.2	


S-60
S-61

STIFF TAN SANDY SILT, MOIST TO WET
62+80.00


STIFF TAN SANDY SILT, MOIST TO WET
62+60.00

20-MAY-2008 15:10
 C:\Users\jg\Documents\2008\2414B\2414B.dwg
 2414B.dwg
 2414B.dwg

10/26/09




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	72

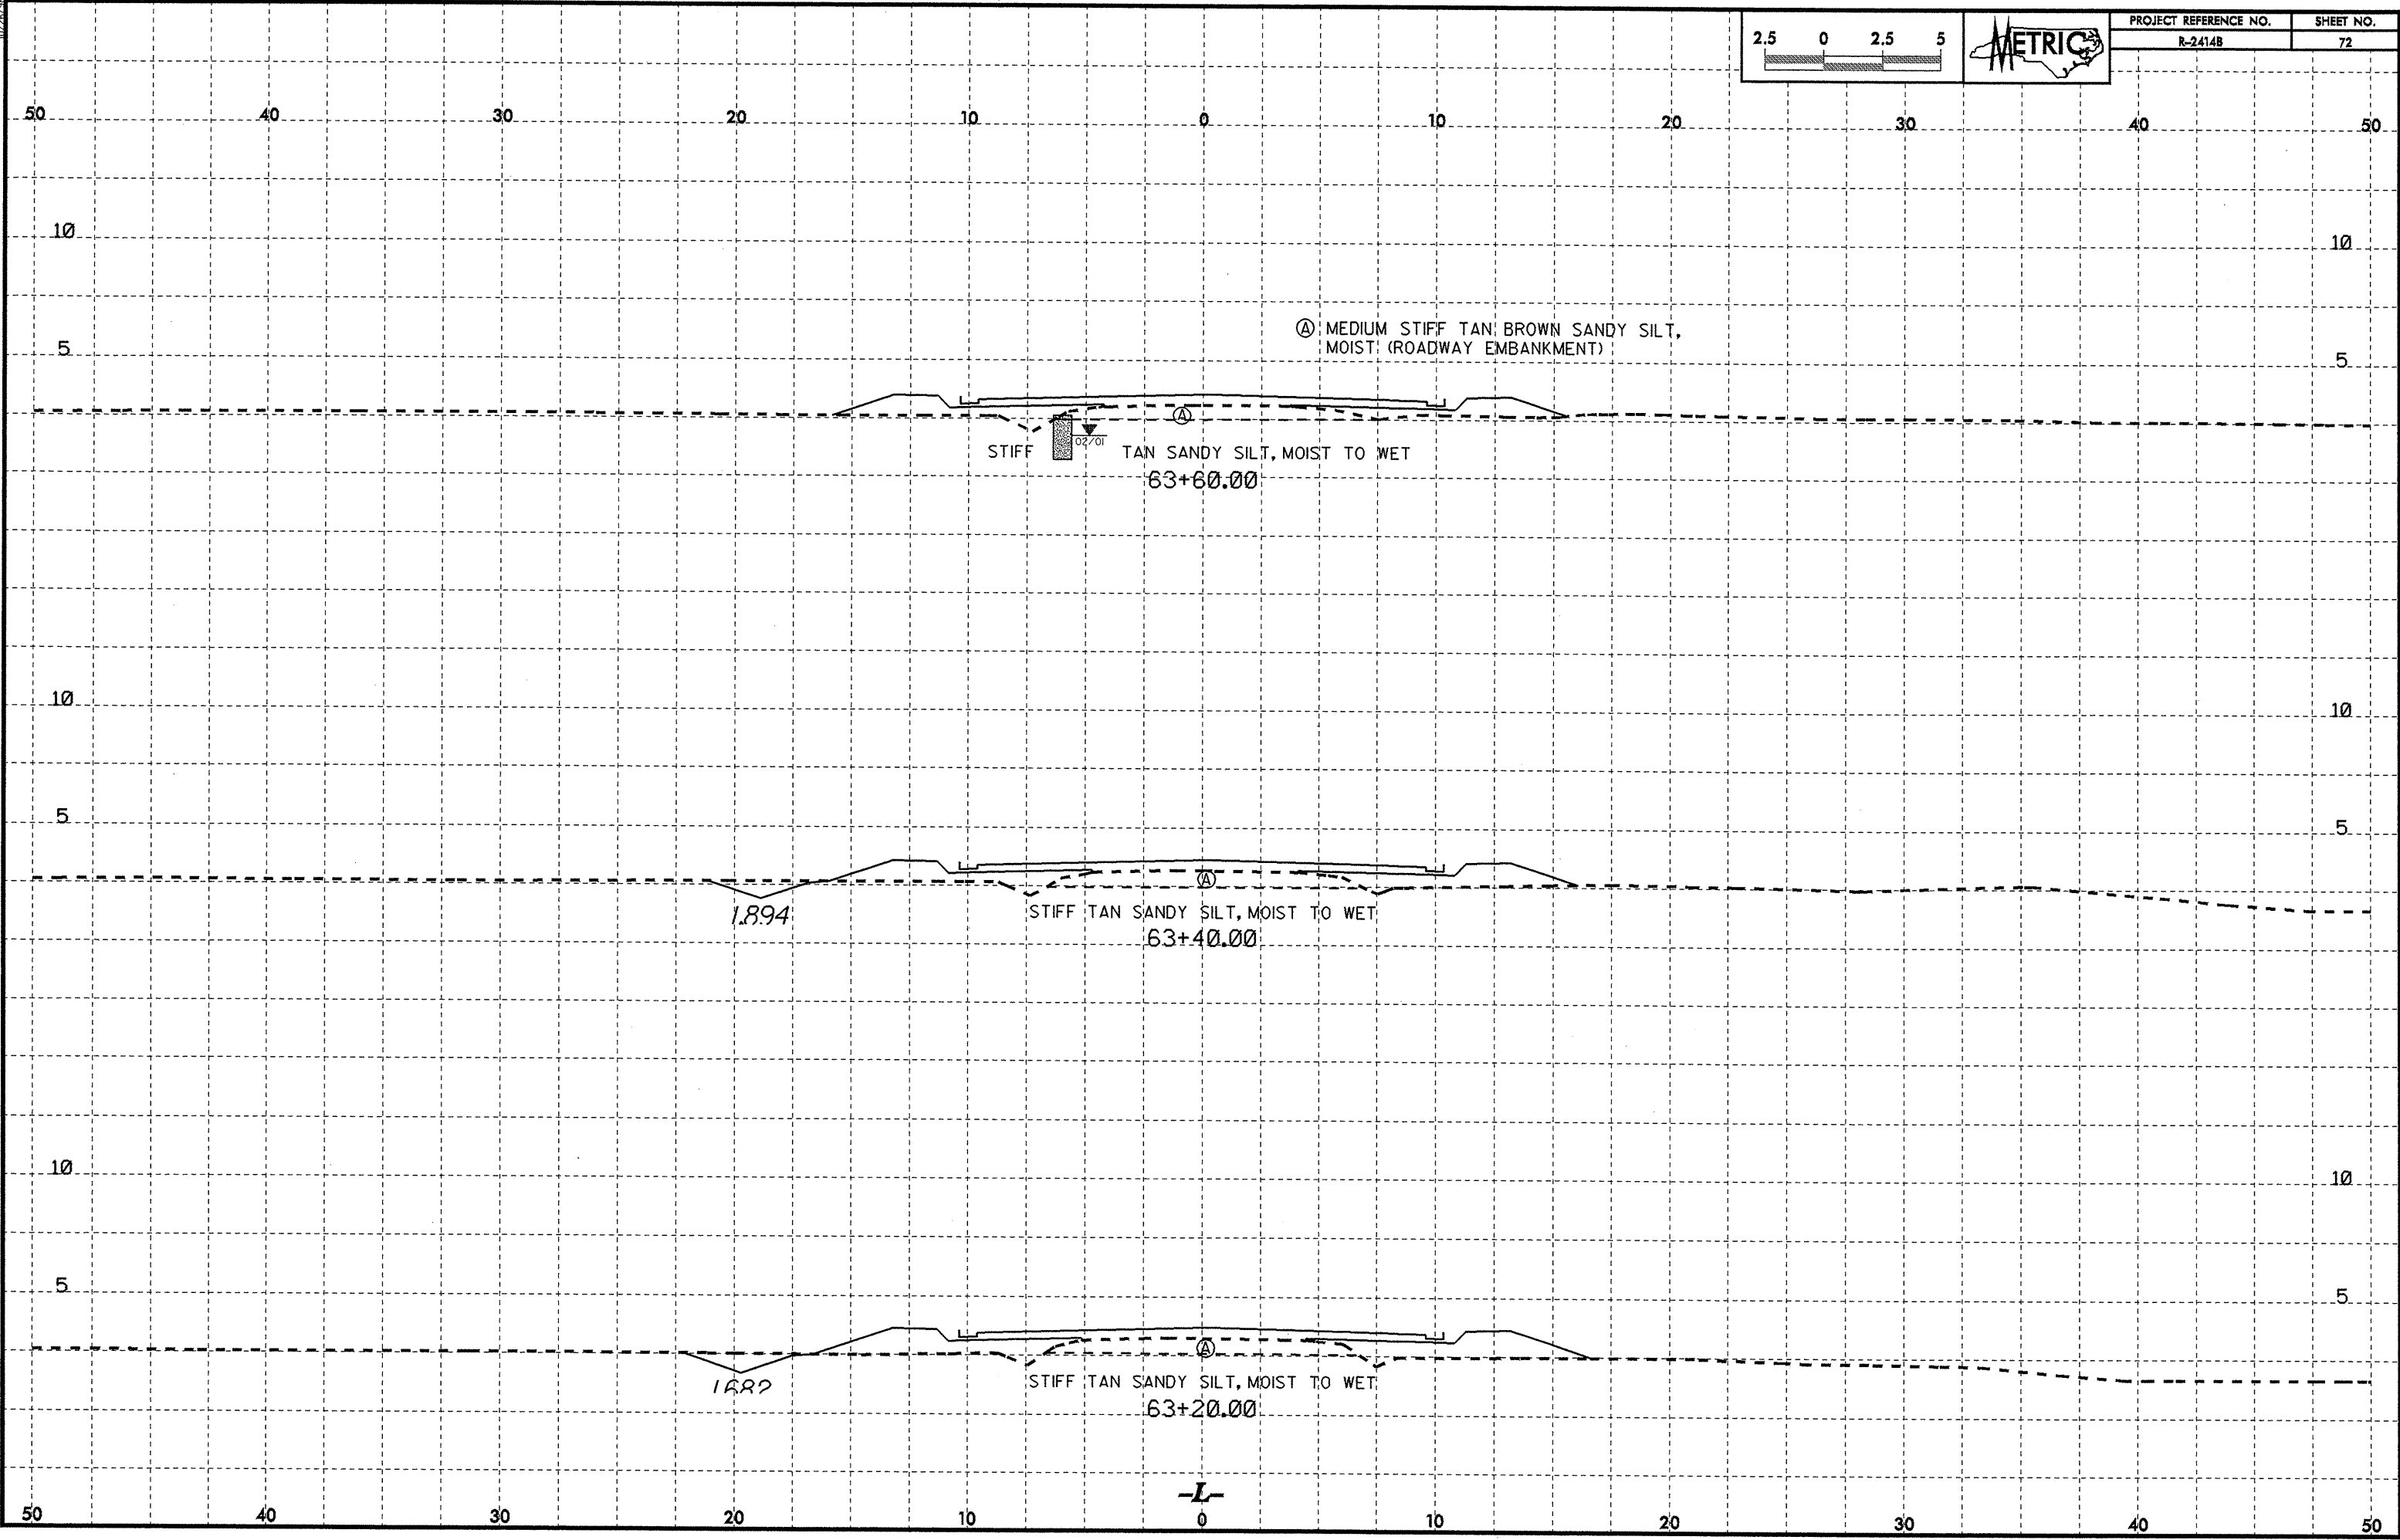

23 JUL 2009 15:46
 g:\projects\2009\1546\1546.dwg
 g:\projects\2009\1546\1546.dwg
 g:\projects\2009\1546\1546.dwg

10/26/08



PROJECT REFERENCE NO. R-24148	SHEET NO. 73
----------------------------------	-----------------

50 40 30 20 10 0 10 20 30 40 50

10 10

5 5

Ⓐ MEDIUM-STIFF TAN-BROWN SANDY SILT,
MOIST (ROADWAY EMBANKMENT)

STIFF TAN SANDY SILT,
64+20.00

MOIST TO WET



10 10

5 5

STIFF TAN SANDY SILT, MOIST TO WET
64+00.00

10 10

5 5


STIFF TAN SANDY SILT, MOIST TO WET
63+80.00

-L-

50 40 30 20 10 0 10 20 30 40 50

20-MAY-2008 15:10
 sptloc\TIP\24148\DWG\REV2\CG000_GEOTECH\ssc\24148_Rdy_xst_1.dgn
 02/01

10/26/09



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	76

50 40 30 20 10 0 10 20 30 40 50


10 10

SOIL TEST RESULTS														
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)		% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425		
S-48	5.5M LT	66+00	0.00-1.93	A-4(0)	16	NP	14.9	64.8	16.2	14.1	100	97	46	

Ⓐ MEDIUM STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

S-48


5 5

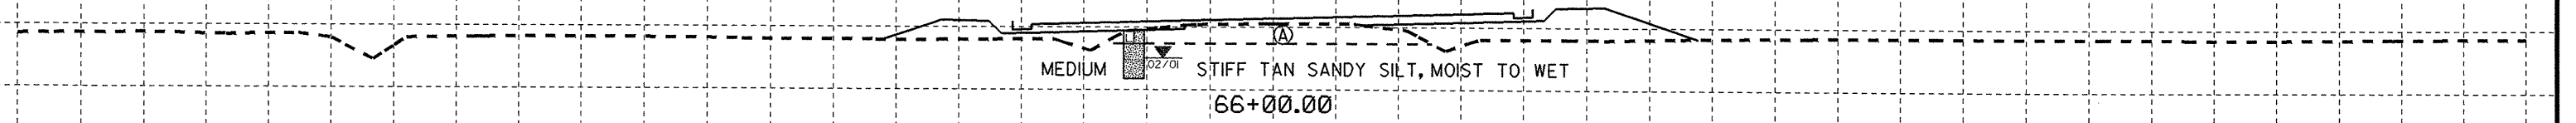

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
66+00.00

10 10


5 5

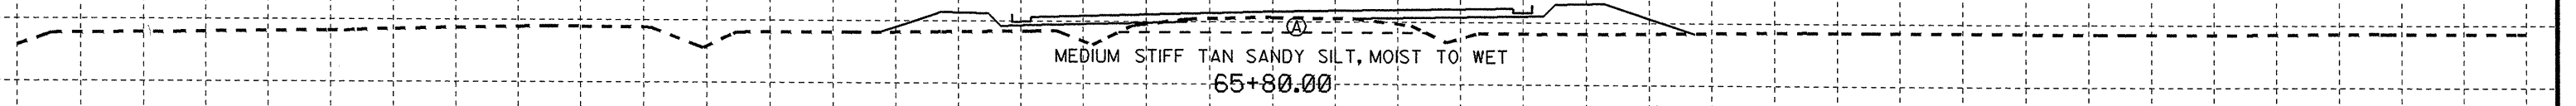

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
65+80.00

10 10

5 5

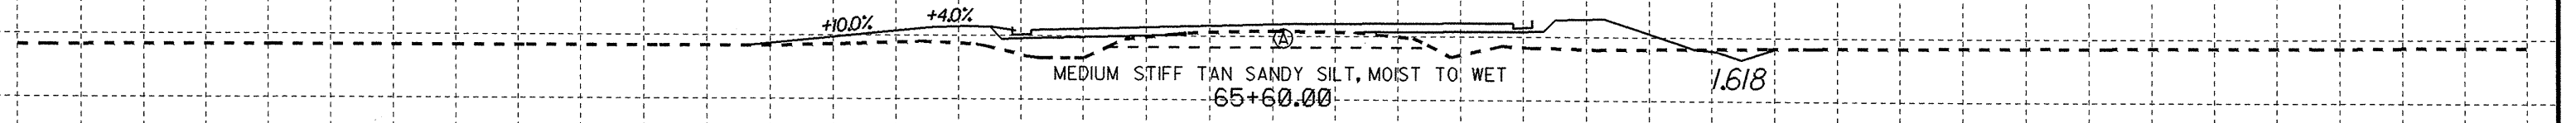


+10.0% +4.0%
MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
65+60.00 1.618

-L-

50 40 30 20 10 0 10 20 30 40 50

20 MAY 2008 15:11 BRYN_REV2\CADD\BODTECH\sec\2414b_Rdy_sx1.dgn
 02/01
 02/01

10/26/98



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	77

50 40 30 20 10 0 10 20 30 40 50

10 10

5 5

(A) MEDIUM STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
66+60.00

10 10

5 5

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
66+40.00

10 10

5 5


MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
66+20.00

50 40 30 20 10 0 10 20 30 40 50


-L-

C:\HWY\2414B\REV\ROADWAY\REV\CAADD\GEO\TECH\sec\2414b_Rdy_xst_1.dgn
 10/26/98
 10:26 AM
 AT 66250033

10/26/98




PROJECT REFERENCE NO. R-2414B	SHEET NO. 78
----------------------------------	-----------------

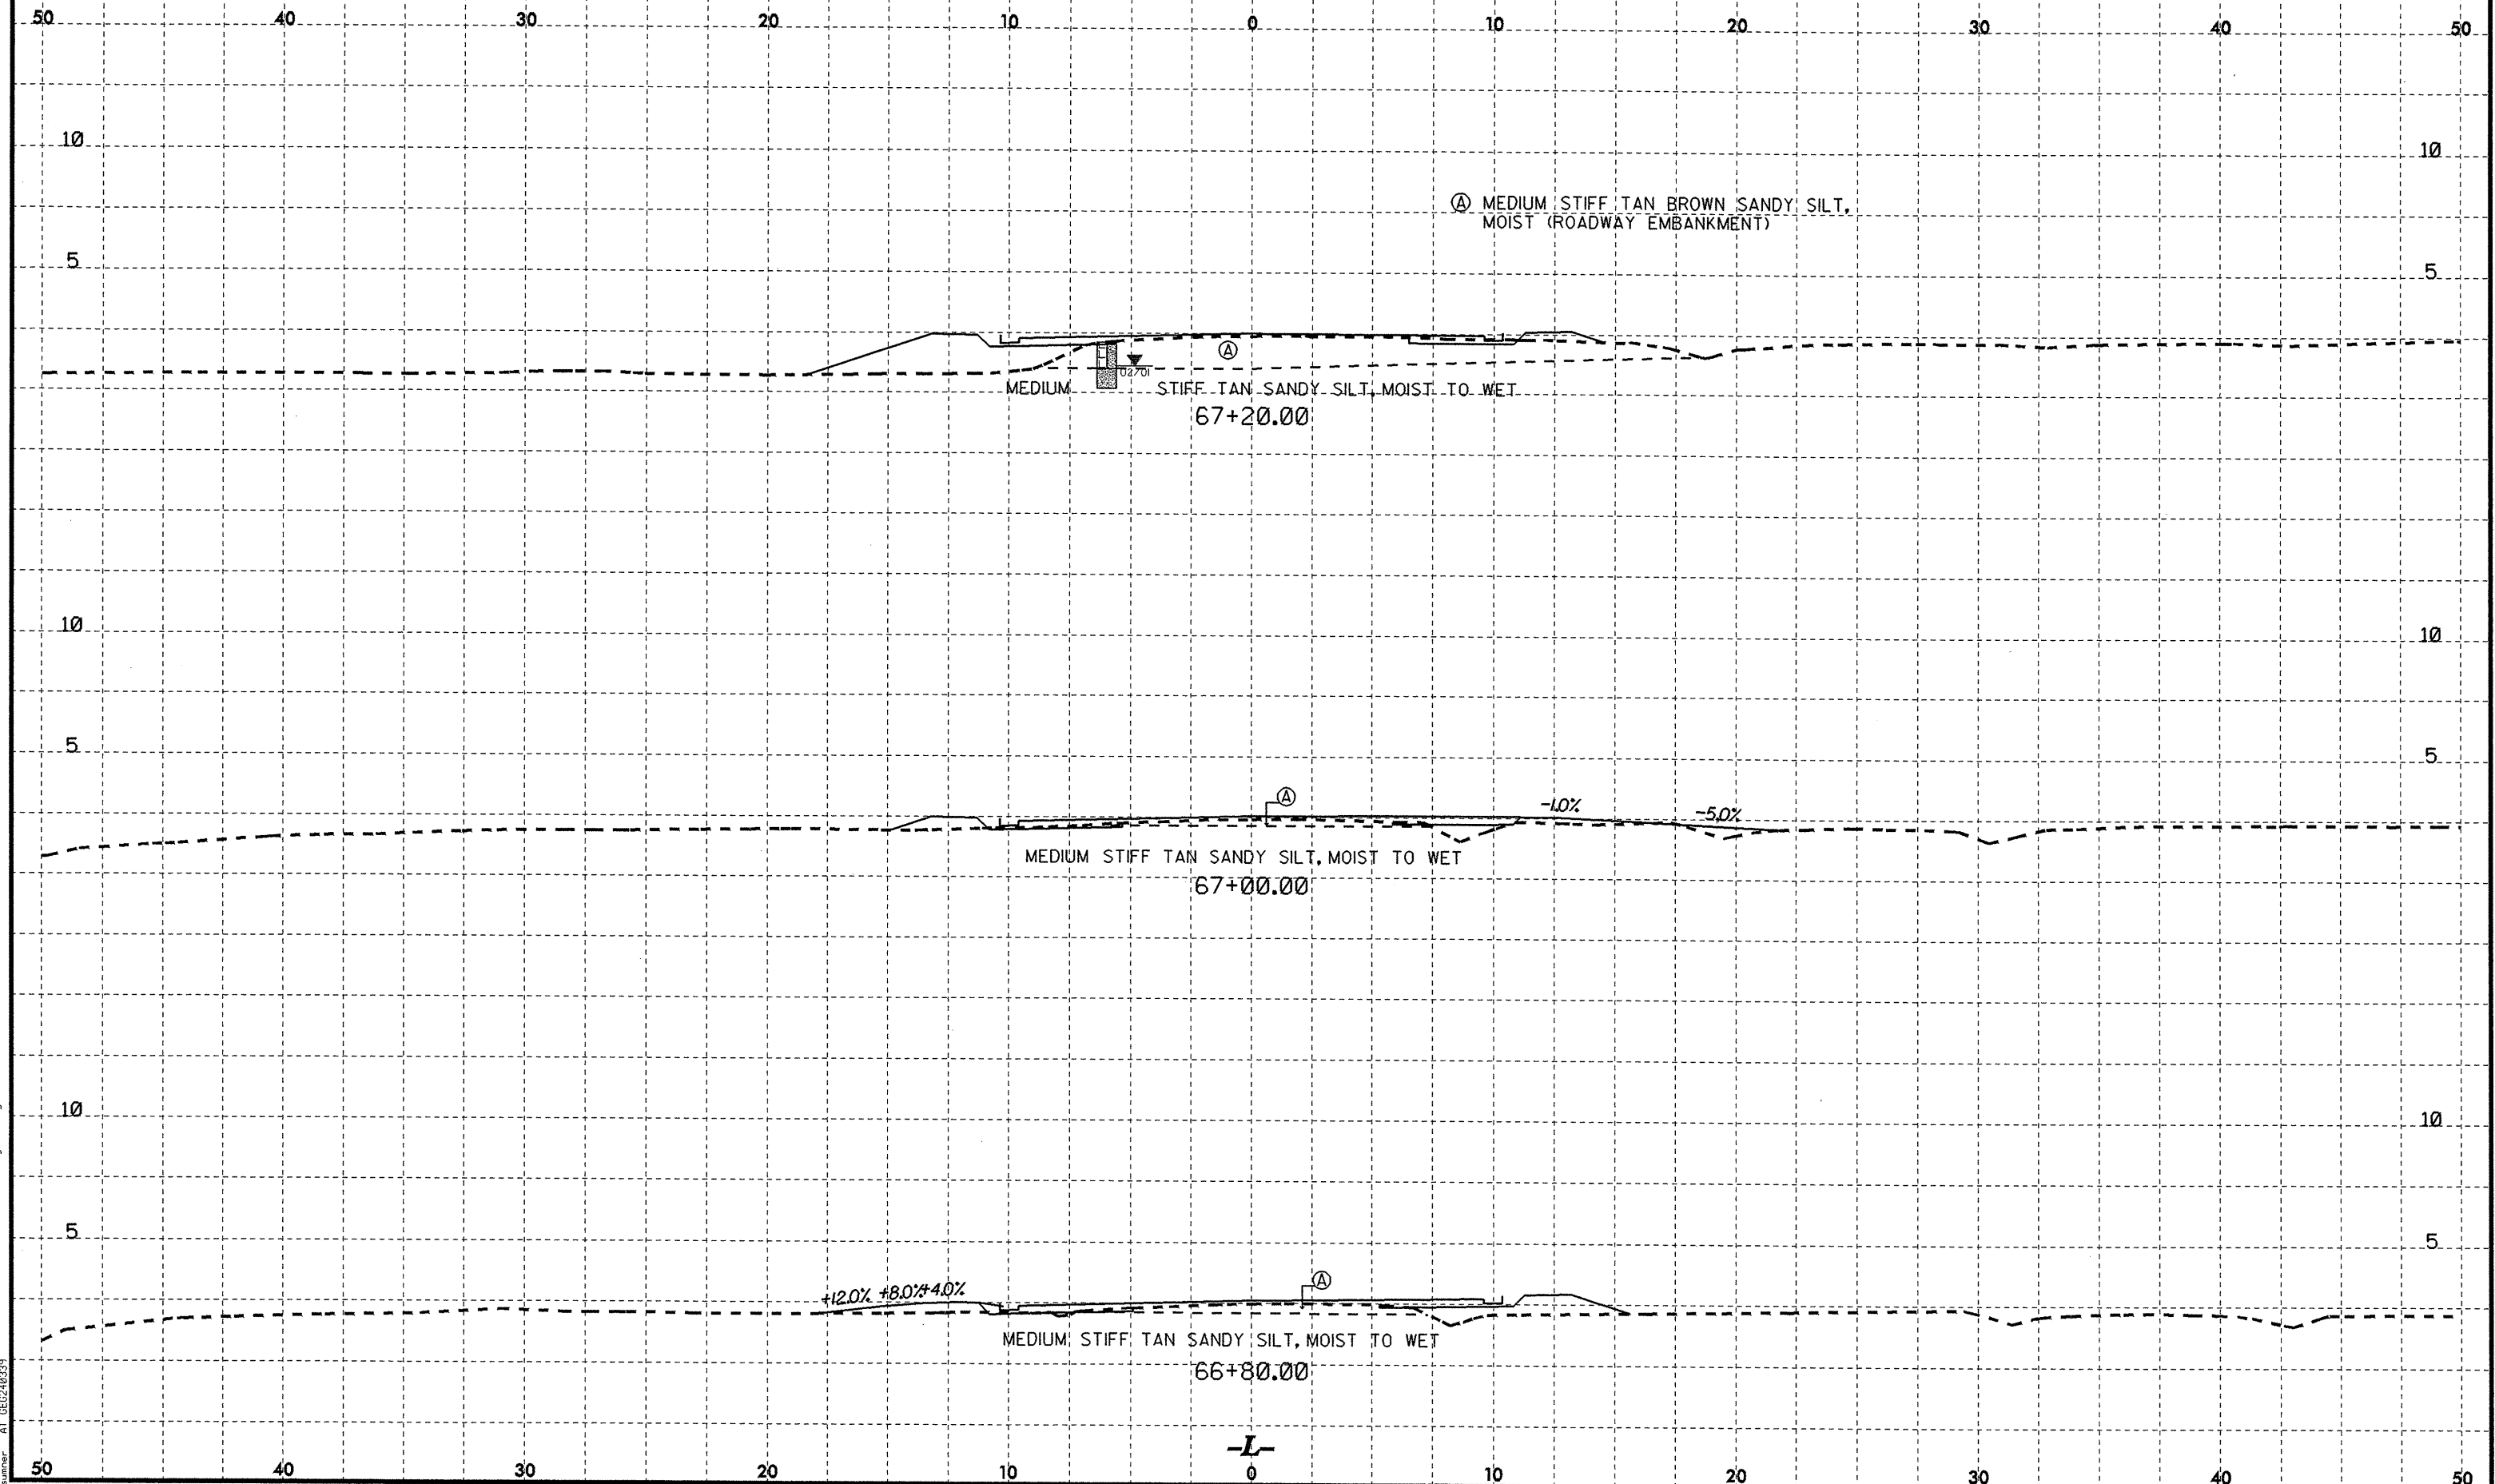


26 MAY 2008 15:10
g:\station\11\11\2008\1510\RDWY_REV2\CADD\BDETECH\vac\2414b_rdy_xxx_1.dgn
Grummer AT 06262008

10/26/09
I:\projects\2008\1112\RDWY...REV2\CADD\BEGTECH\vac\2414b_Rdy...x.tl.dgn





PROJECT REFERENCE NO. R-2414B	SHEET NO. 80
----------------------------------	-----------------

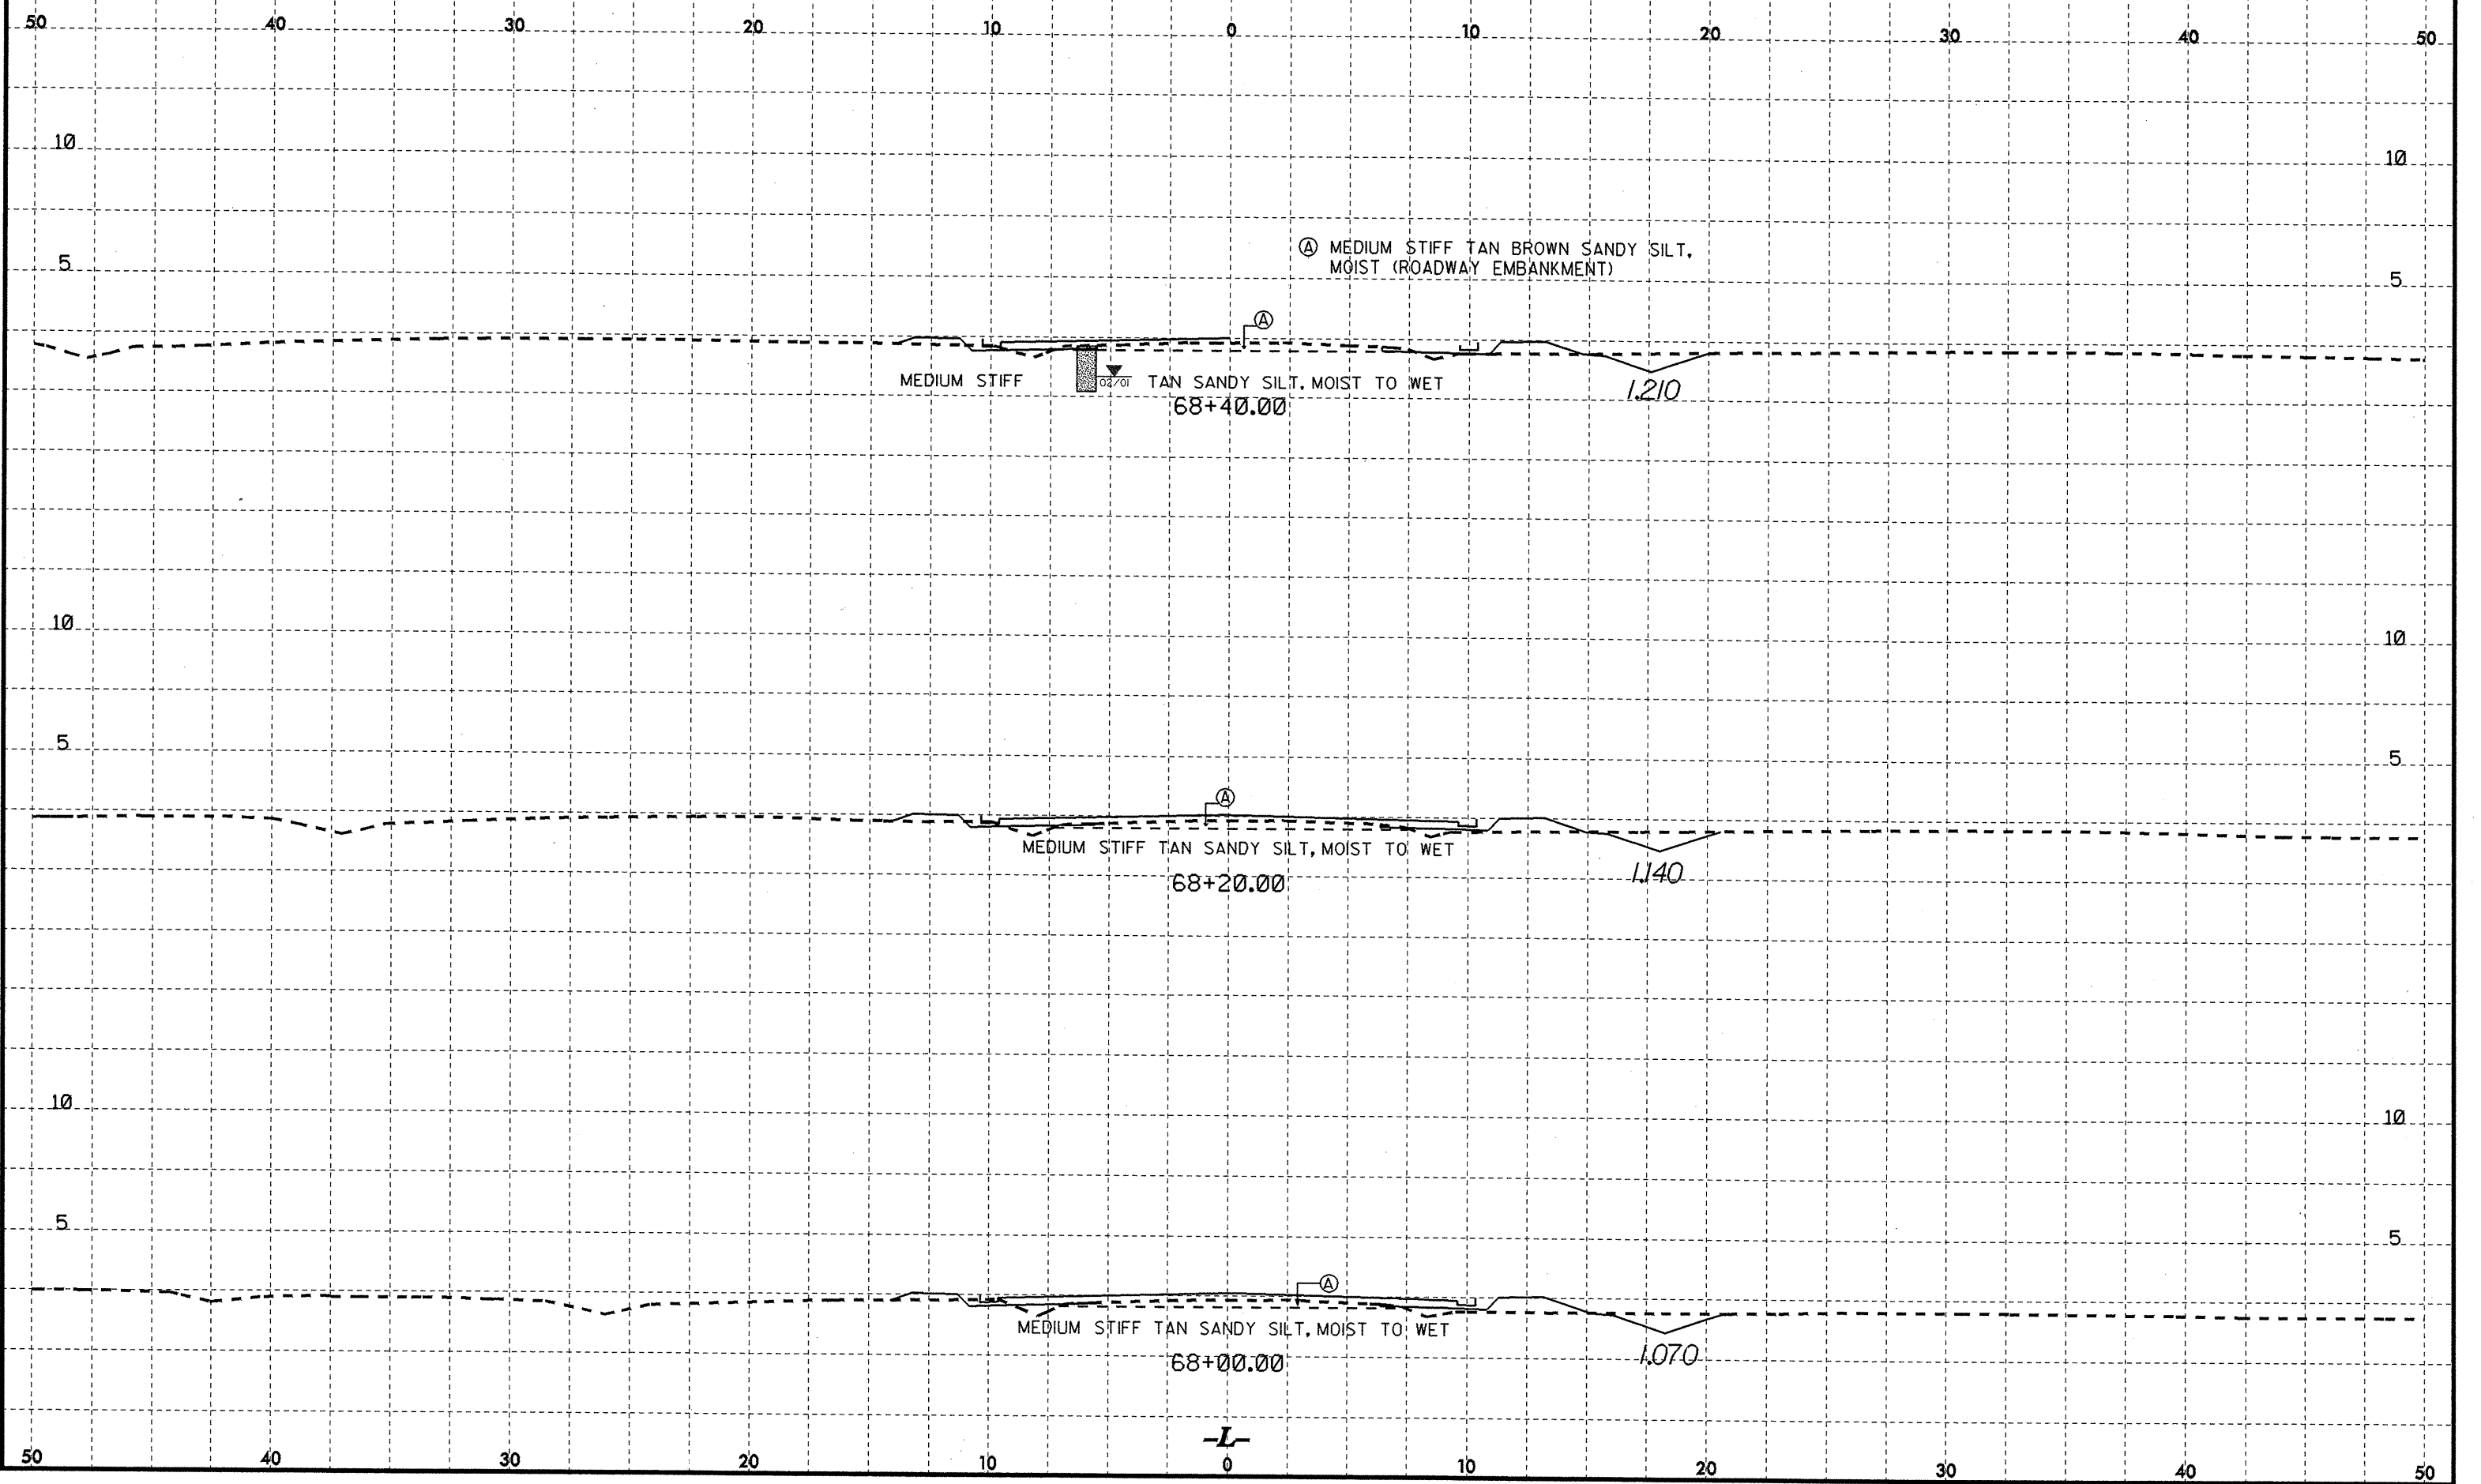

-L-


10/26/09
20:44:2008 LE10
g:\station\TIP\142188\LE10\RDWY_REV2\CADD\GEOTECH\sec\2414b_Rdwy_xsi_1.dgn
User: sumner AT 08/22/08 3:51

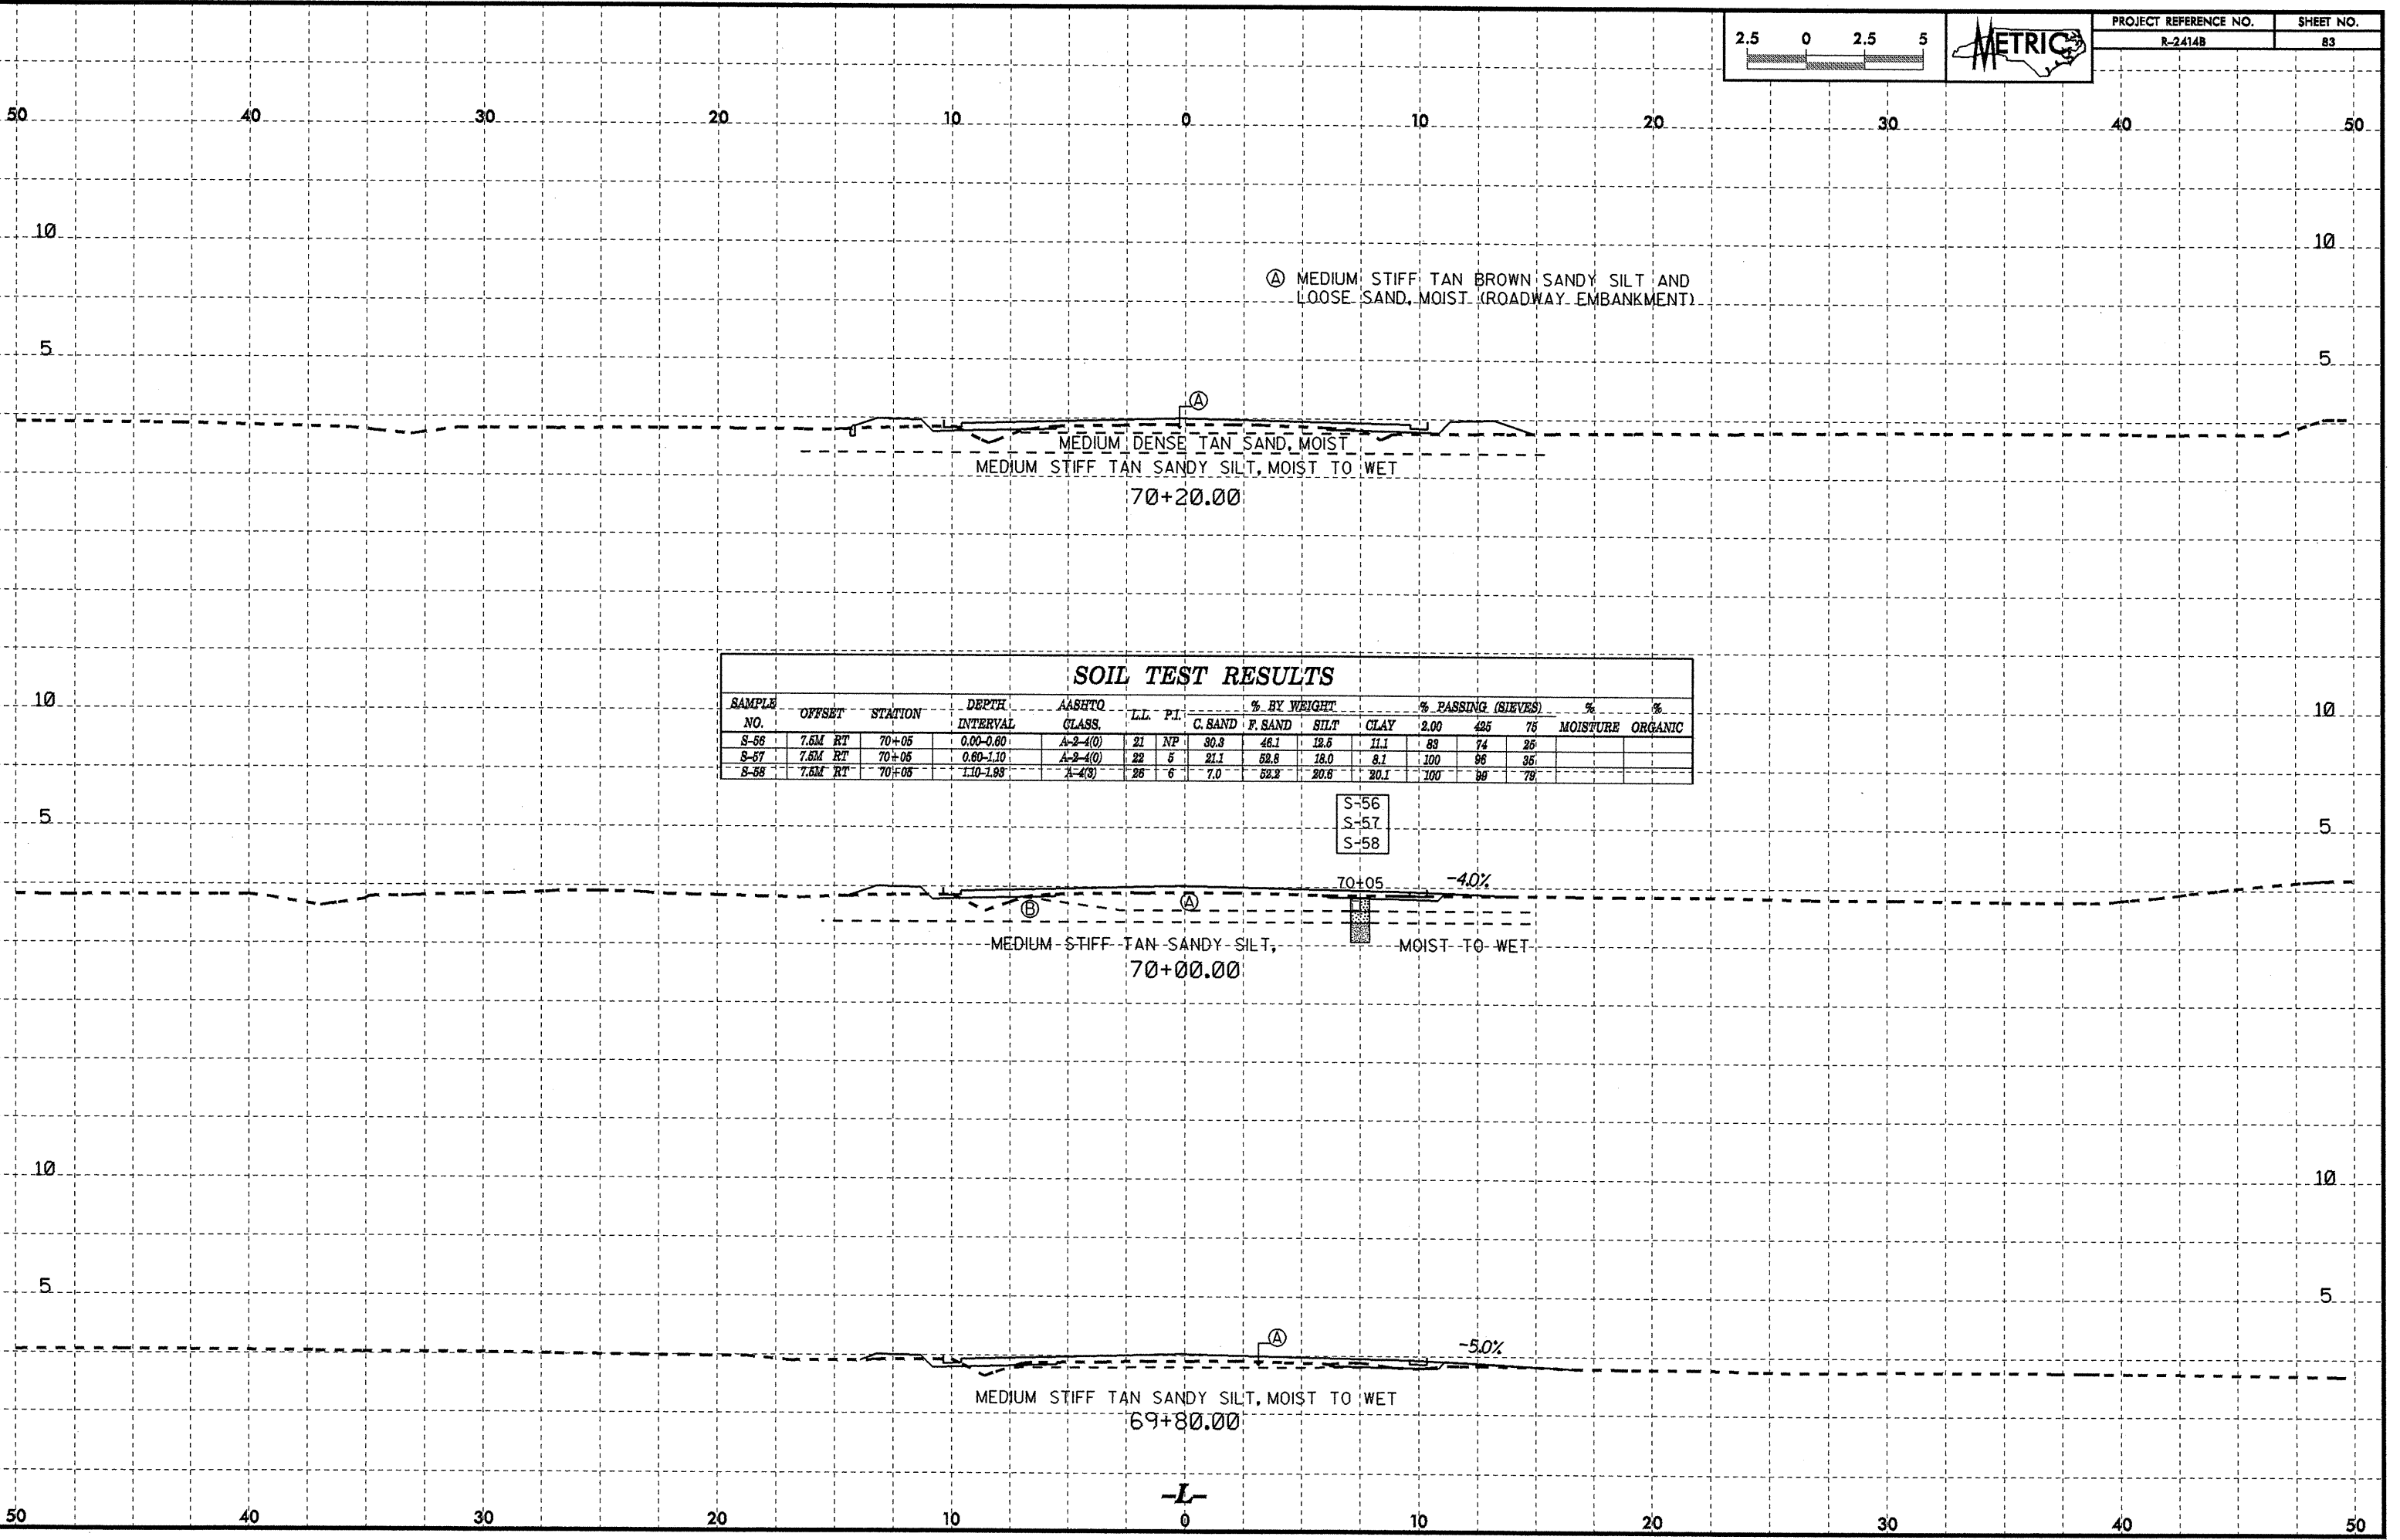


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-56	7.5M RT	70+05	0.00-0.60	A-2-4(0)	21	NP	80.8	46.1	12.6	11.1	83	74	25		
S-57	7.5M RT	70+05	0.60-1.10	A-2-4(0)	22	5	21.1	52.8	18.0	8.1	100	96	35		
S-58	7.5M RT	70+05	1.10-1.93	A-4(3)	26	6	7.0	52.2	20.6	20.1	100	89	78		

10/26/09
20 MAY 2006 15:13
C:\Users\TJH\My Documents\2006\1513\BRWY_REV2\CADD\BOTECH\sec\A-2414b_Rdy_xst_1.dgn



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	84

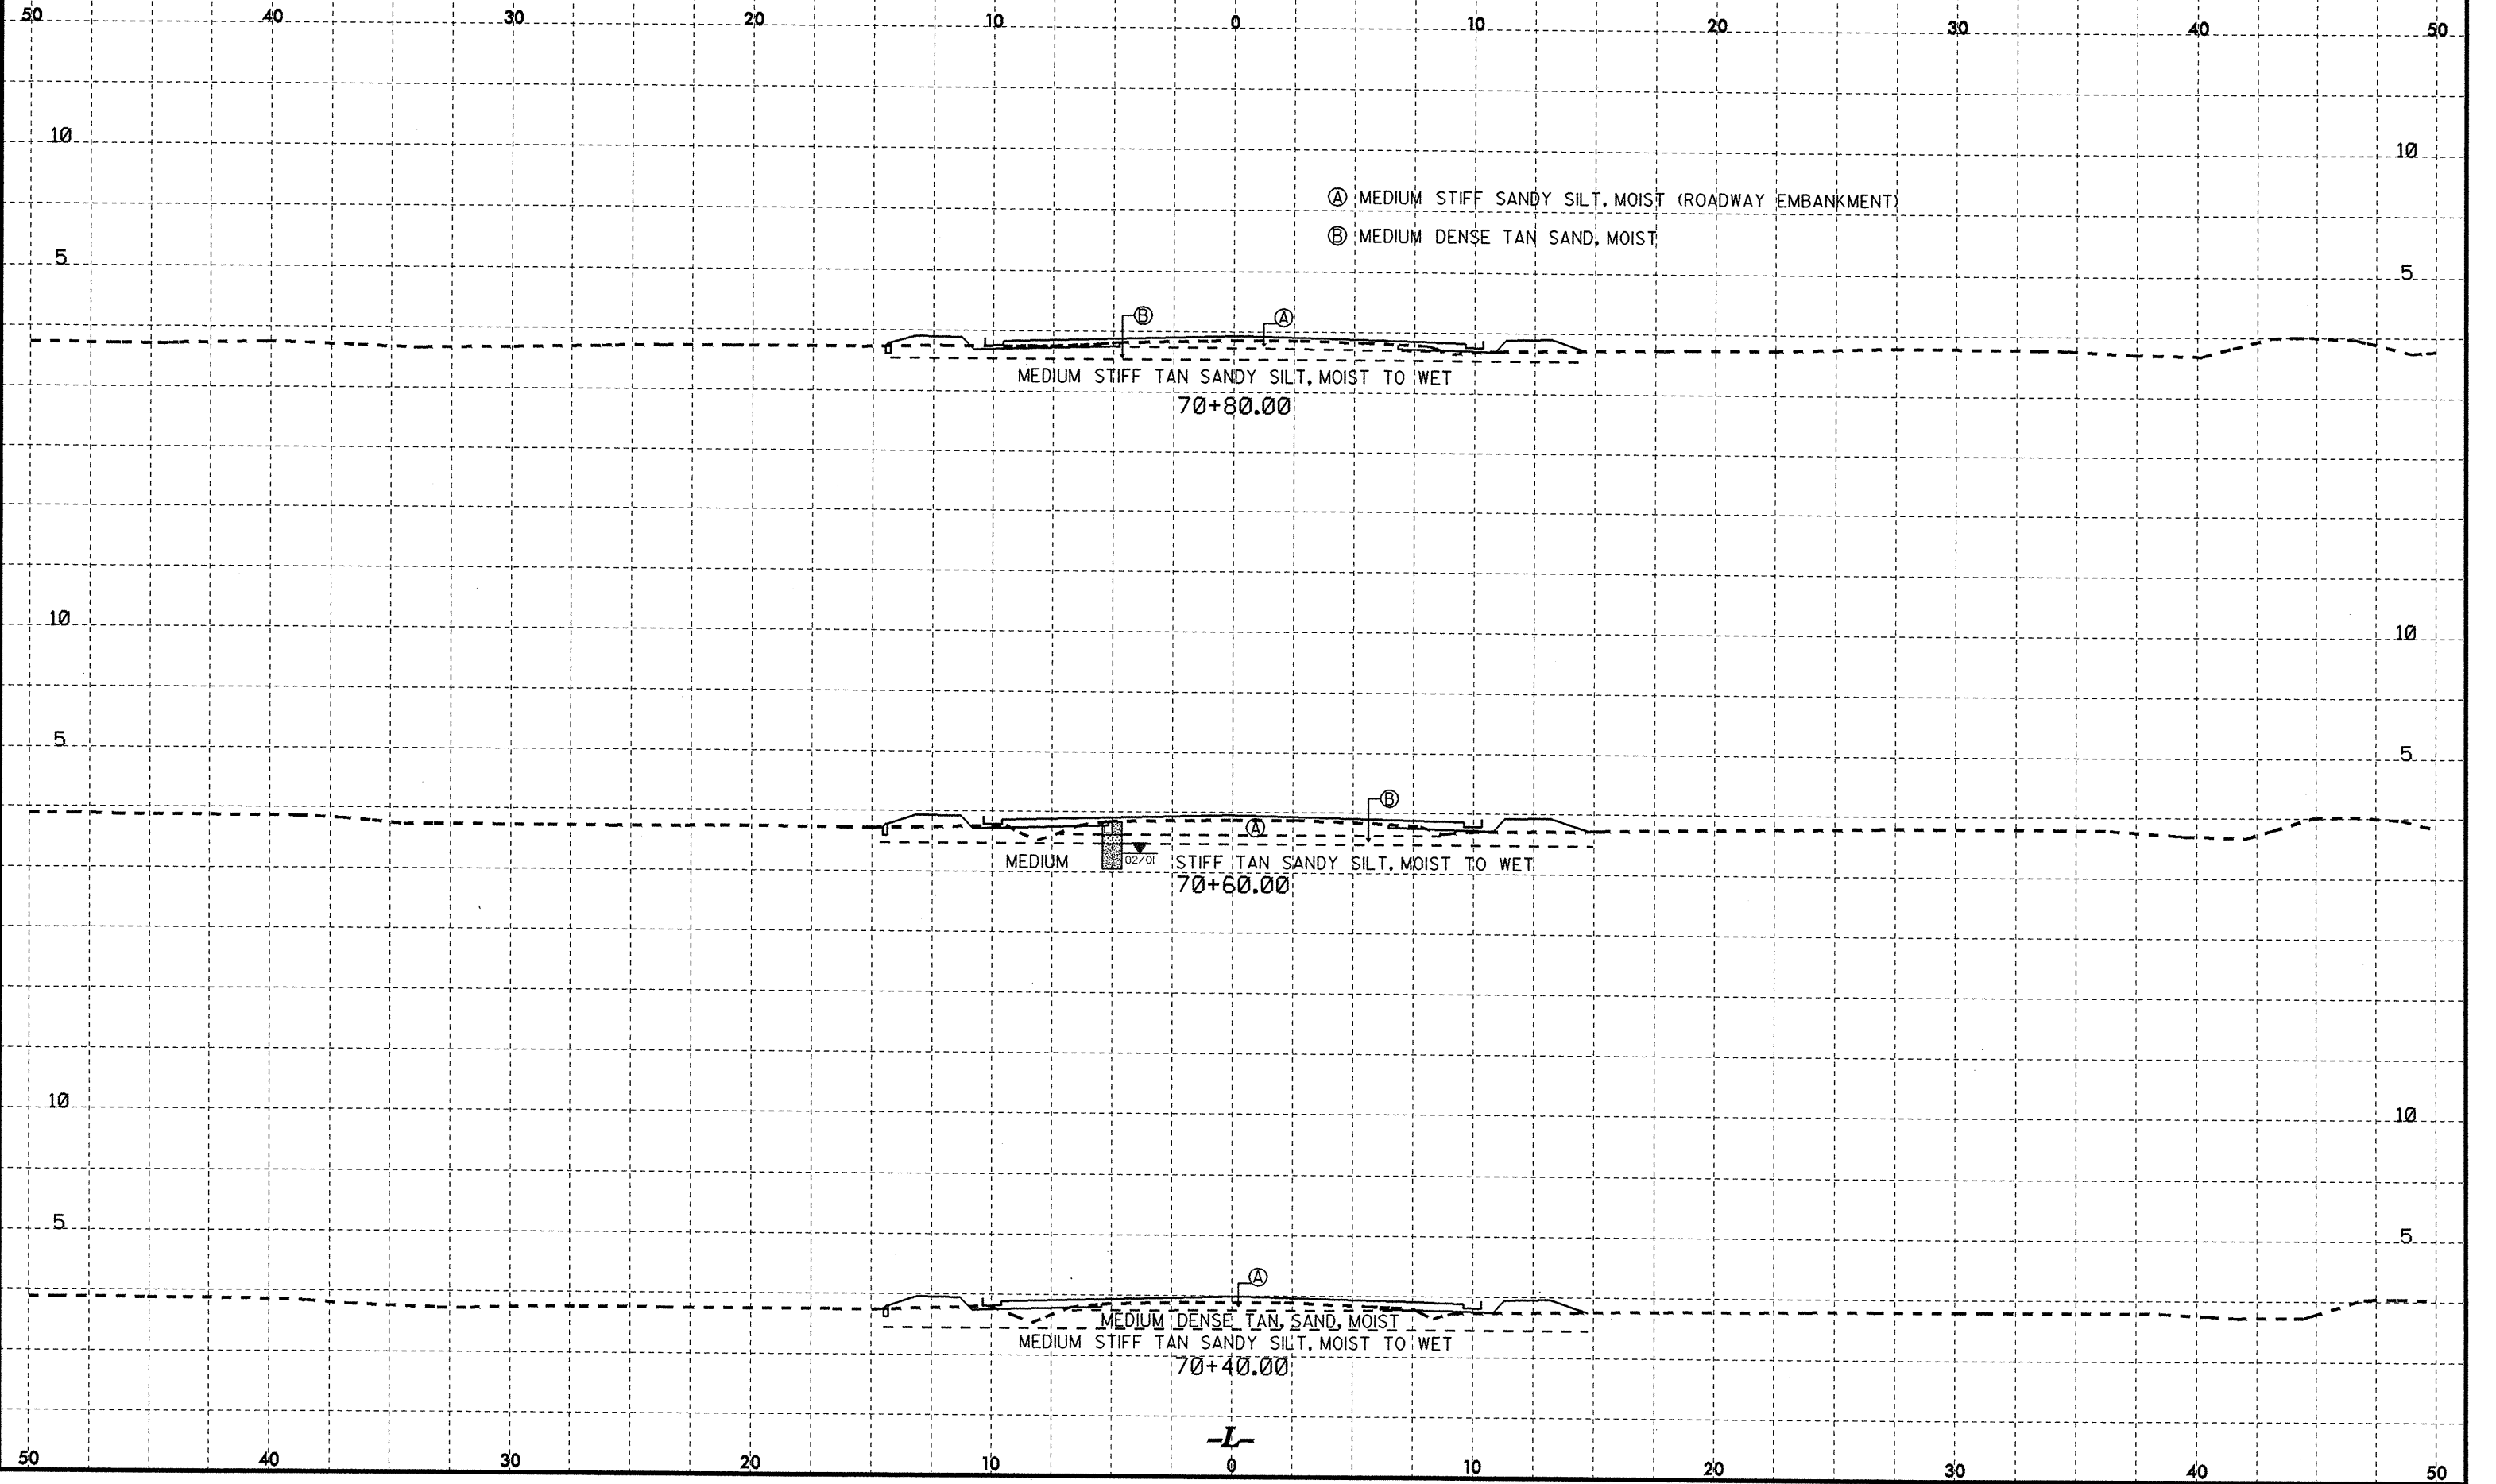

- Ⓐ MEDIUM STIFF SANDY SILT, MOIST (ROADWAY EMBANKMENT)
- Ⓑ MEDIUM DENSE TAN SAND, MOIST


MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
70+80.00

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
70+60.00


MEDIUM DENSE TAN SAND, MOIST
MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
70+40.00

-L-

10/26/09





PROJECT REFERENCE NO.	SHEET NO.
R-2414B	85

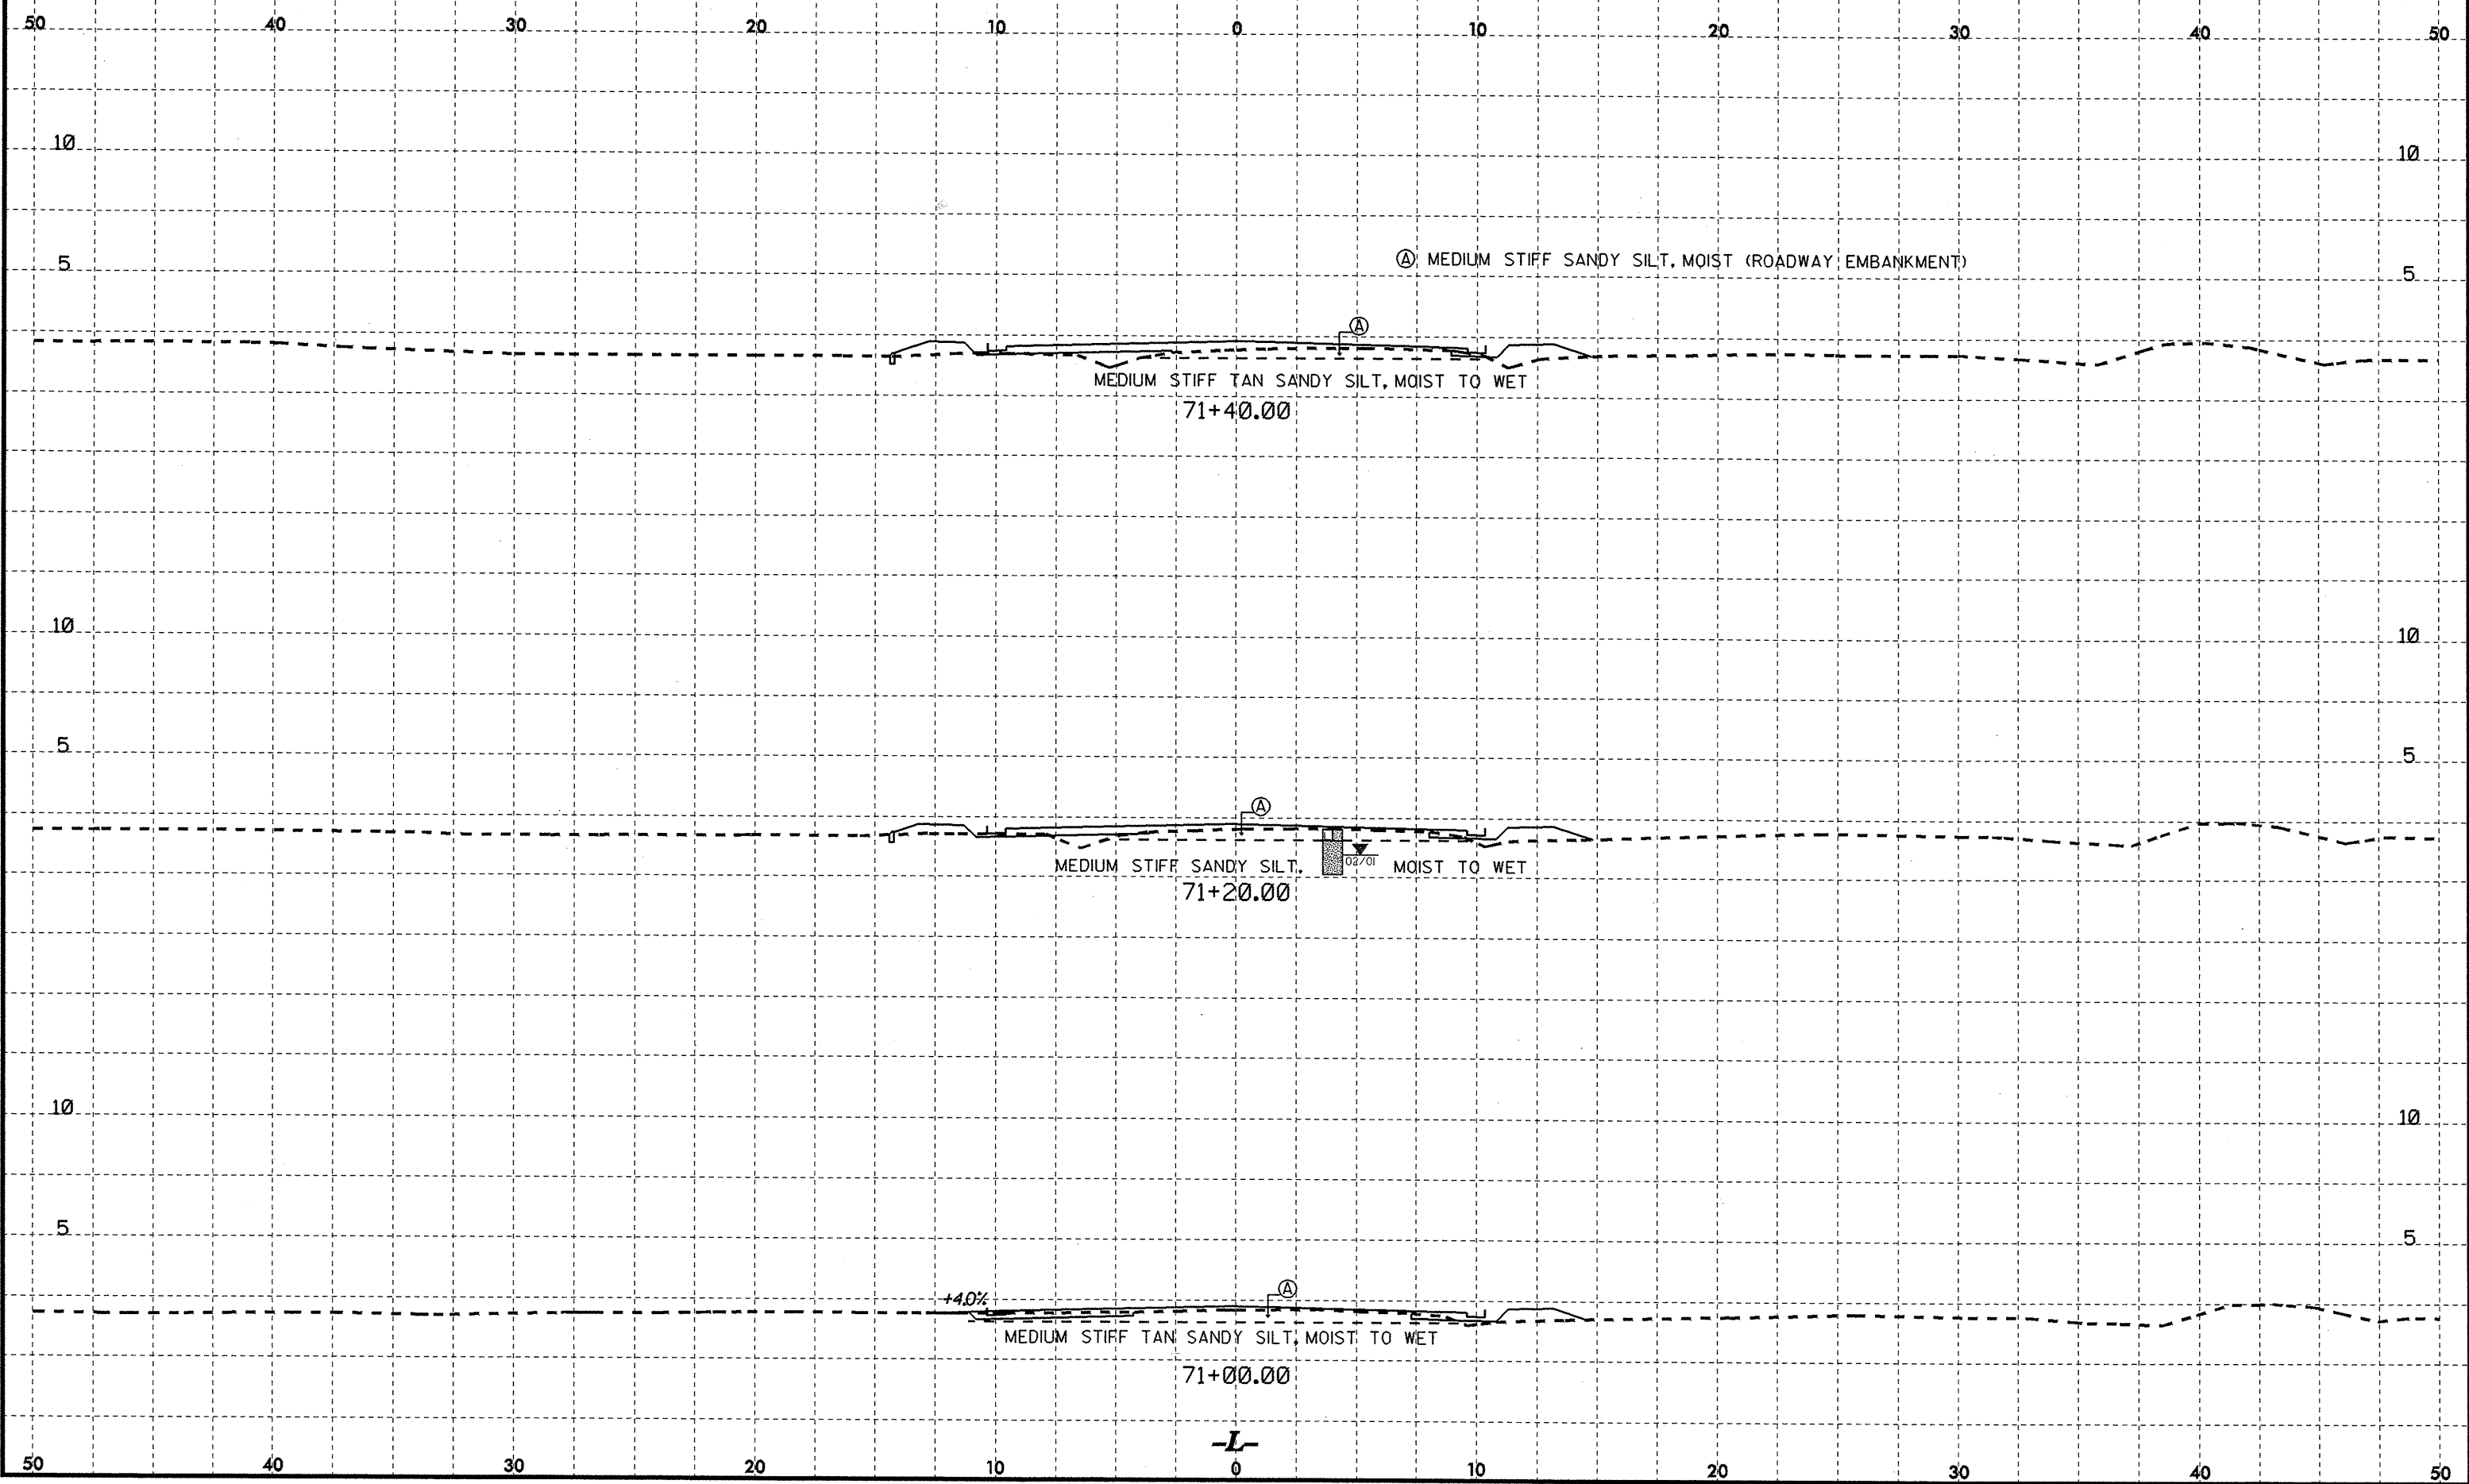

s:\projects\1414\1414_0000\REV2\CADD\BENTON\2414b_Rdg_xxx.dgn
 10/26/09 10:26:09 AM
 User: jay


02 MAY 2008 15:15
 R:\PROJECTS\2008\1515\ROADWAY\REV2\CADD\GEOTECH\SSR\2414b.Fgd_rvt1.dgn
 Per: runner AT 02/04/08

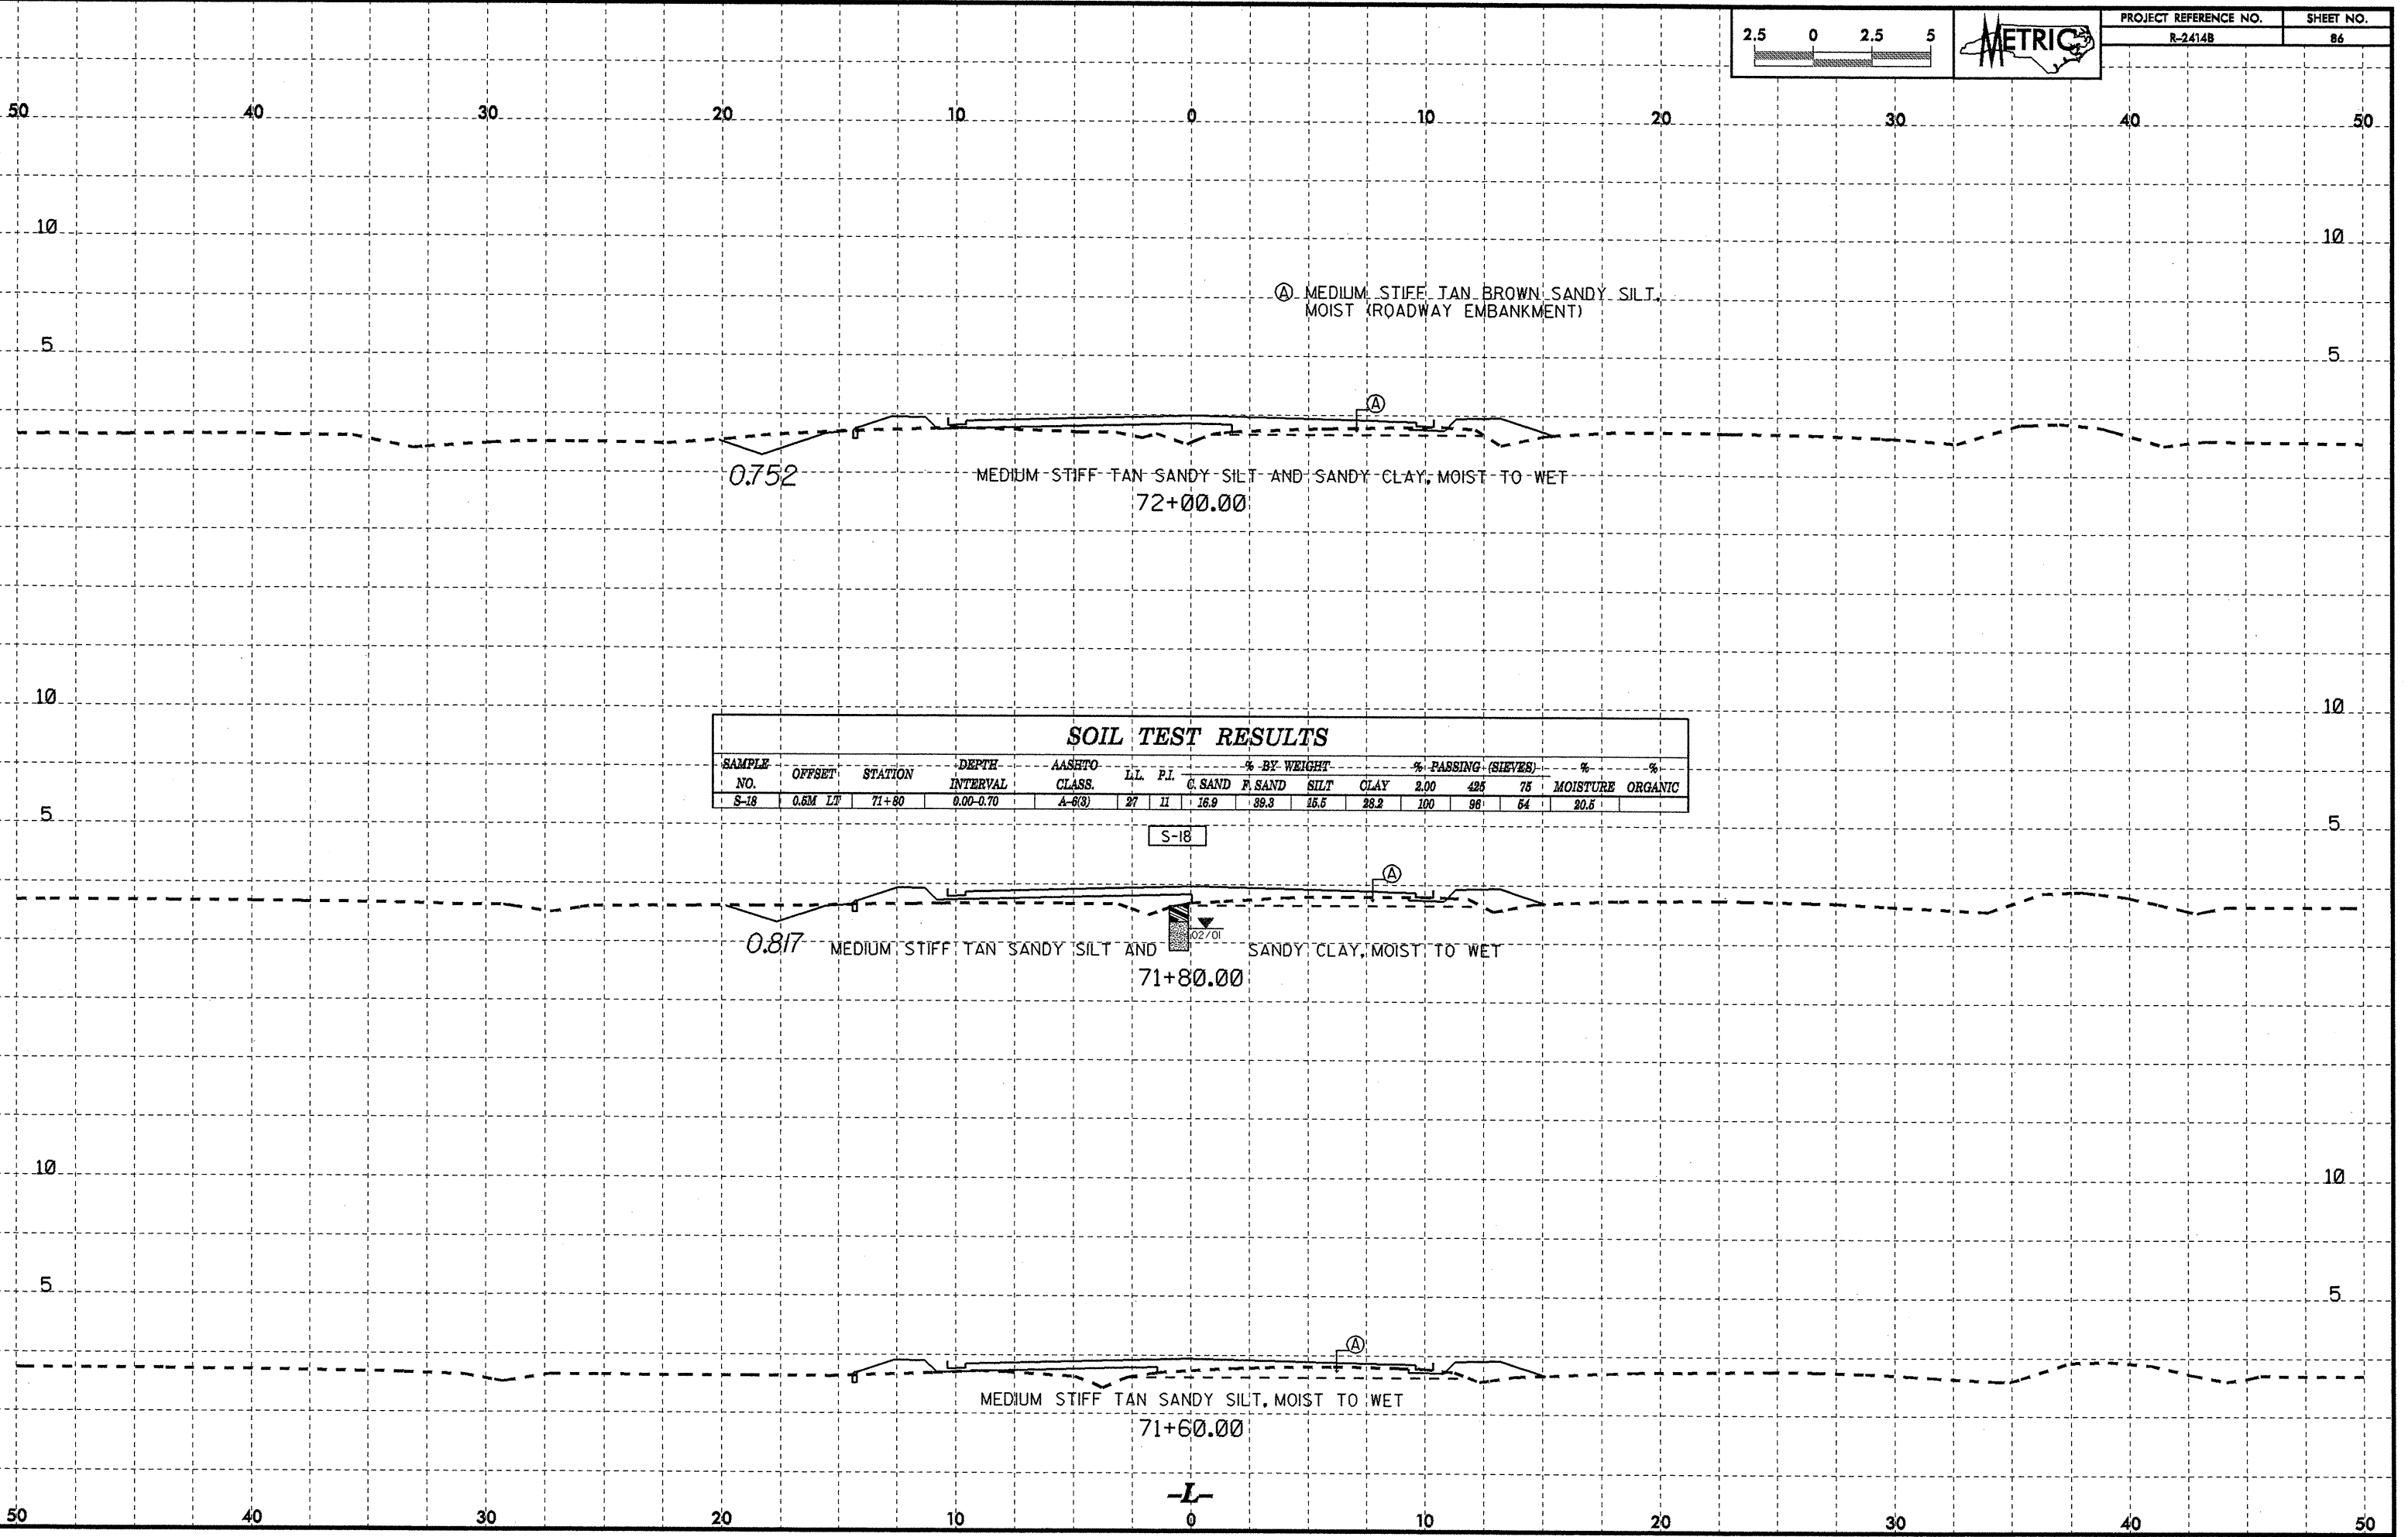

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							G. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-18	0.6M LF	71+80	0.00-0.70	A-8(3)	27	11	16.9	39.3	15.5	28.2	100	98	64	20.5	

S-18

-L-



SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	LABORATORY CLASS.	L.L.	P.F.	% BY WEIGHT				% PASSING (SIEVES)		% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	#20	#40		
SS-100	CL	73+20	1.07-1.52	A-4(0)	20	NP	11.6	57.4	18.9	12.2	100	97	68	-
SS-101	CL	73+20	5.55-6.00	A-2-4(0)	24	NP	17.4	76.8	5.8	0.0	100	100	11	-
SS-102	CL	73+20	7.07-7.52	A-4(0)	25	2	0.6	68.5	16.7	14.2	100	100	43	-
SS-103	CL	73+20	11.64-12.09	A-4(0)	23	1	1.0	70.5	14.3	14.2	100	100	42	-
SS-104	CL	73+20	14.69-15.14	A-7-6(29)	53	35	0.8	25.1	37.6	36.5	100	100	82	-
SS-105	CL	73+20	16.21-16.66	A-4(0)	24	6	1.2	64.2	16.3	18.2	100	100	37	-
SS-106	CL	73+20	19.26-19.71	A-7-6(54)	76	49	2.0	7.3	29.9	60.8	100	99	95	-
SS-107	CL	73+20	20.79-21.24	A-4(0)	21	1	10.7	54.9	20.2	14.2	100	99	48	-
SS-108	CL	73+20	22.31-22.76	A-4(6)	28	10	1.6	34.7	37.4	28.3	100	100	77	-
SS-109	CL	73+20	23.84-24.29	A-1-b(0)	21	NP	74.6	19.8	3.6	2.0	90	44	6	-
SS-110	CL	73+20	29.93-30.38	A-1-b(0)	20	NP	76.7	18.0	3.2	2.0	88	47	6	-
ST-2	12M RT	73+20	0.30-0.85	A-4(1)	33	NP	6.1	46.5	33.3	14.2	99	97	74	145
S-51	12M RT	73+20	1.00-4.40	A-7-5(26)	80	22	11.3	10.1	42.4	36.3	98	90	80	77.4

SOIL TEST RESULTS


SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	LABORATORY CLASS.	L.L.	P.F.	% BY WEIGHT				% PASSING (SIEVES)		% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	#20	#40		
SS-53	4M RT	73+20	2.04-2.49	A-4(0)	20	3	16.6	42.6	22.4	18.3	100	96	59	-
SS-54	4M RT	73+20	4.02-4.47	-	-	-	-	-	-	-	-	-	-	357.0
SS-55	4M RT	73+20	5.55-6.00	A-4(0)	22	NP	14.8	63.8	17.4	4.1	100	98	38	3.9
SS-56	4M RT	73+20	7.07-7.52	A-4(0)	24	3	1.0	69.2	24.6	6.1	100	100	43	-
SS-57	4M RT	73+20	13.17-13.62	A-4(2)	28	6	0.6	50.6	34.6	14.2	100	100	62	-
SS-58	4M RT	73+20	16.21-16.66	A-2-4(0)	21	2	2.6	75.1	12.1	10.2	100	100	24	-
SS-59	4M RT	73+20	19.26-19.71	A-7-6(38)	68	39	8.5	6.1	24.5	60.9	100	96	86	91.8
SS-60	4M RT	73+20	20.79-21.24	A-4(0)	22	NP	4.1	57.1	30.8	8.1	100	99	59	-
SS-61	4M RT	73+20	22.31-22.76	A-4(7)	28	10	1.2	30.7	45.8	24.4	100	100	82	-
SS-62	4M RT	73+20	25.36-25.81	A-1-b(0)	19	NP	75.1	20.1	3.8	1.0	98	47	6	-
SS-63	4M RT	73+20	29.92-30.37	A-1-b(0)	19	NP	75.8	16.8	5.4	2.0	96	46	9	-

VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
73+20	9m LT	0.4	9.8	-
73+20	9m LT	0.6	5.3	-
73+20	9m LT	0.8	4.5	-
73+20	9m LT	1.0	<2.4	-
73+20	9m LT	1.2	<2.4	-
73+20	9m LT	1.4	5.3	-
73+20	9m LT	1.6	2.7	-
73+20	9m LT	1.8	5.3	-
73+20	9m LT	2.2	11.5	-
73+20	9m LT	2.4	9.8	-
73+20	9m LT	2.6	16.9	-
73+20	9m LT	3.0	15.9	-
73+20	9m LT	3.2	16.9	-

VANE SHEAR TESTS

STATION	OFFSET	DEPTH	S (kPa)	SR (kPa)
73+20	14m RT	0.0	<2.4	-
73+20	14m RT	0.5	6.2	-
73+20	14m RT	0.7	10.6	-
73+20	14m RT	0.9	14.2	-
73+20	14m RT	1.1	7.9	-
73+20	14m RT	1.3	14.2	-
73+20	14m RT	1.5	11.1	-
73+20	14m RT	1.9	18.6	-
73+20	14m RT	2.1	22.2	-
73+20	14m RT	2.3	21.3	-
73+20	14m RT	2.5	20.4	-

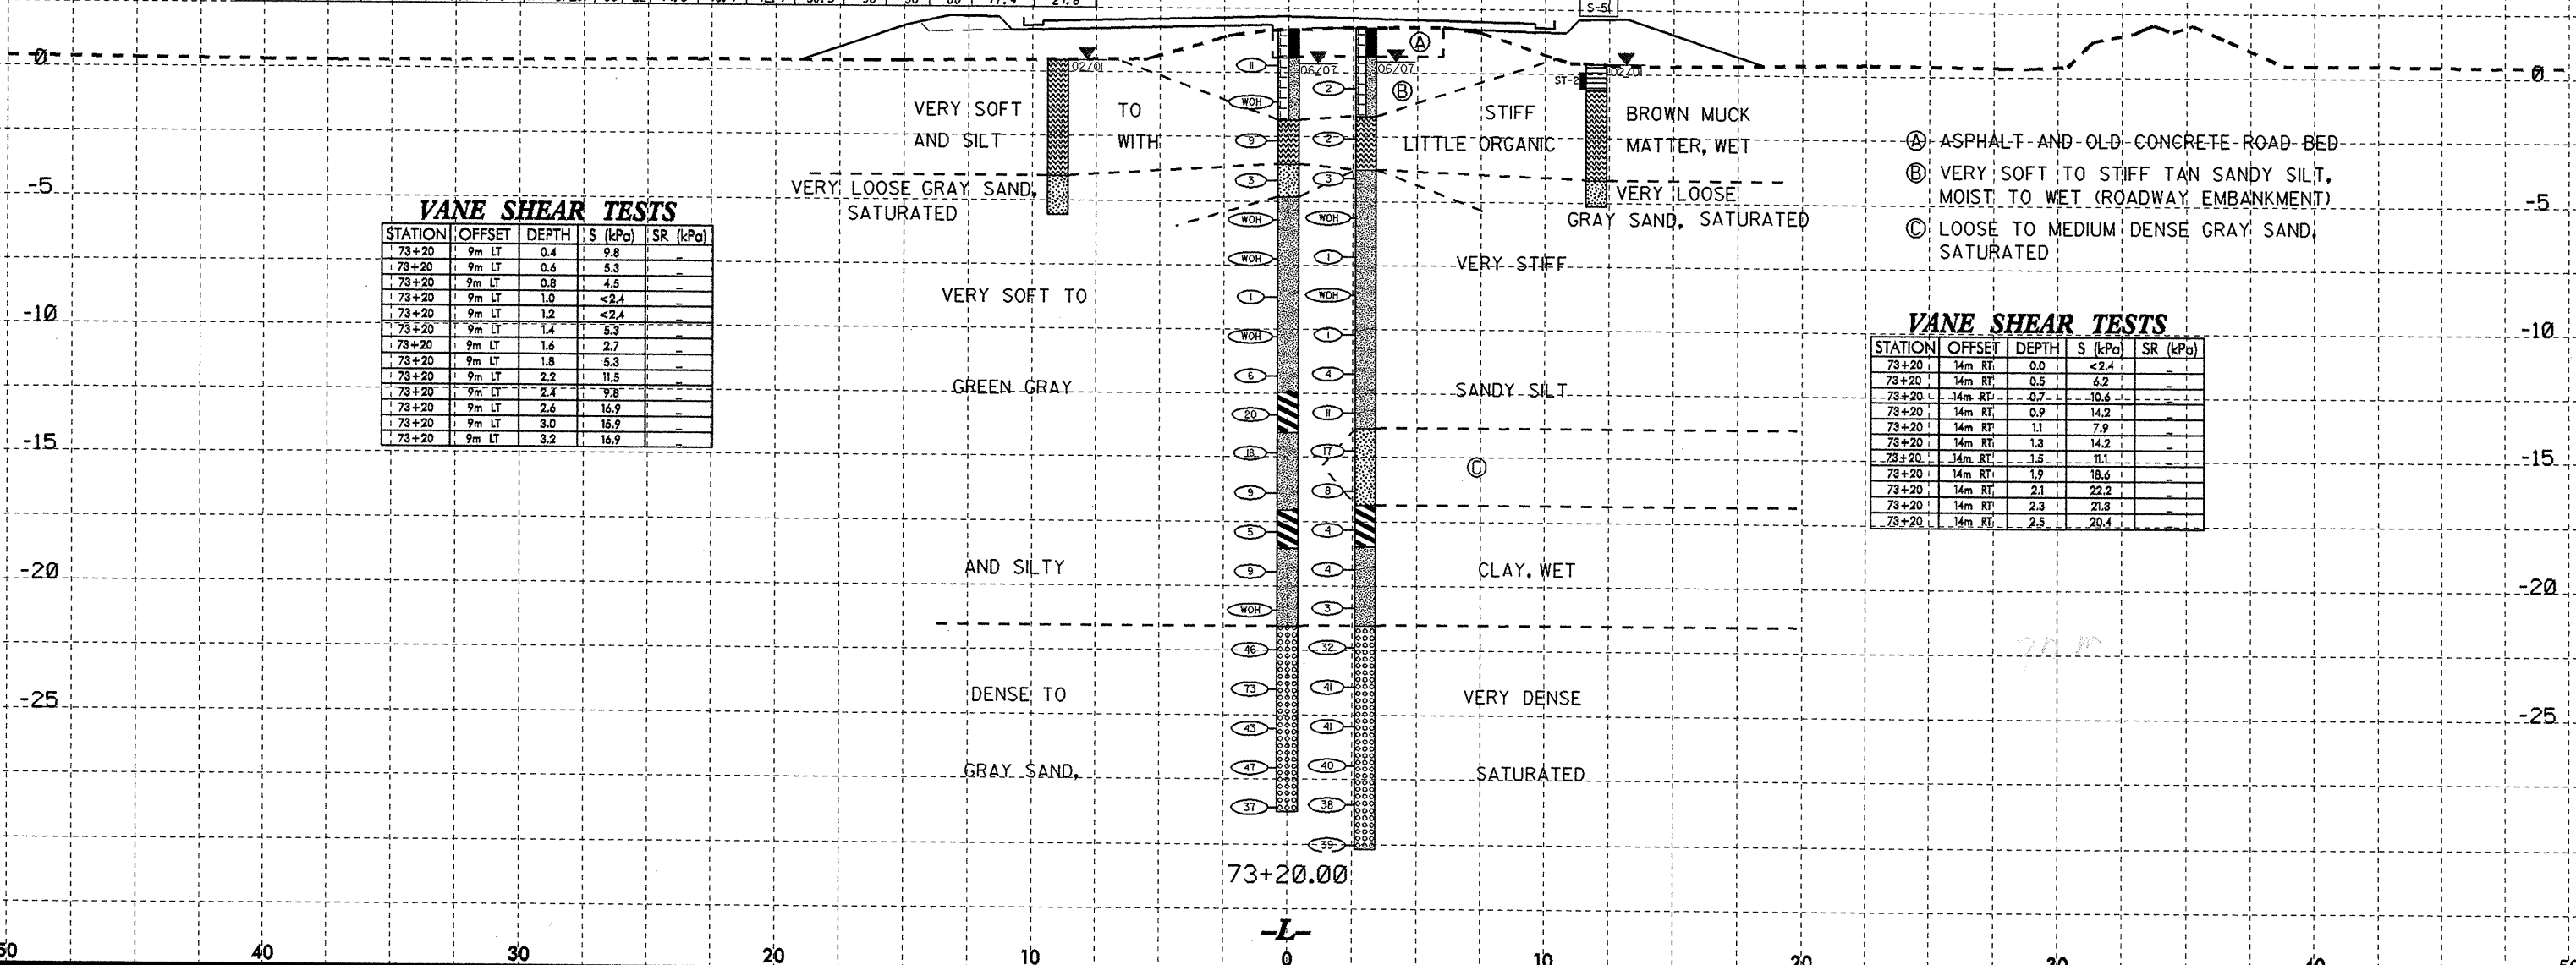


10/26/08
 13:26
 R:\Users\j...
 ...
 ...





- Ⓐ ASPHALT AND OLD CONCRETE ROAD BED
- Ⓑ STIFF CLAYEY SANDY SILT, MOIST TO WET (ROADWAY EMBANKMENT)

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	LABORATORY	L.L.	P.L.	C.SAND	F.SAND	SILT	CLAY	% PASSING (SIEVES)	% MOISTURE	% ORGANIC		
S-53	10M LT	73+60	0.00-3.00	A-5(2)	63	7	2.7	30.2	40.0	20.1	100	93	78	32.9	16.9

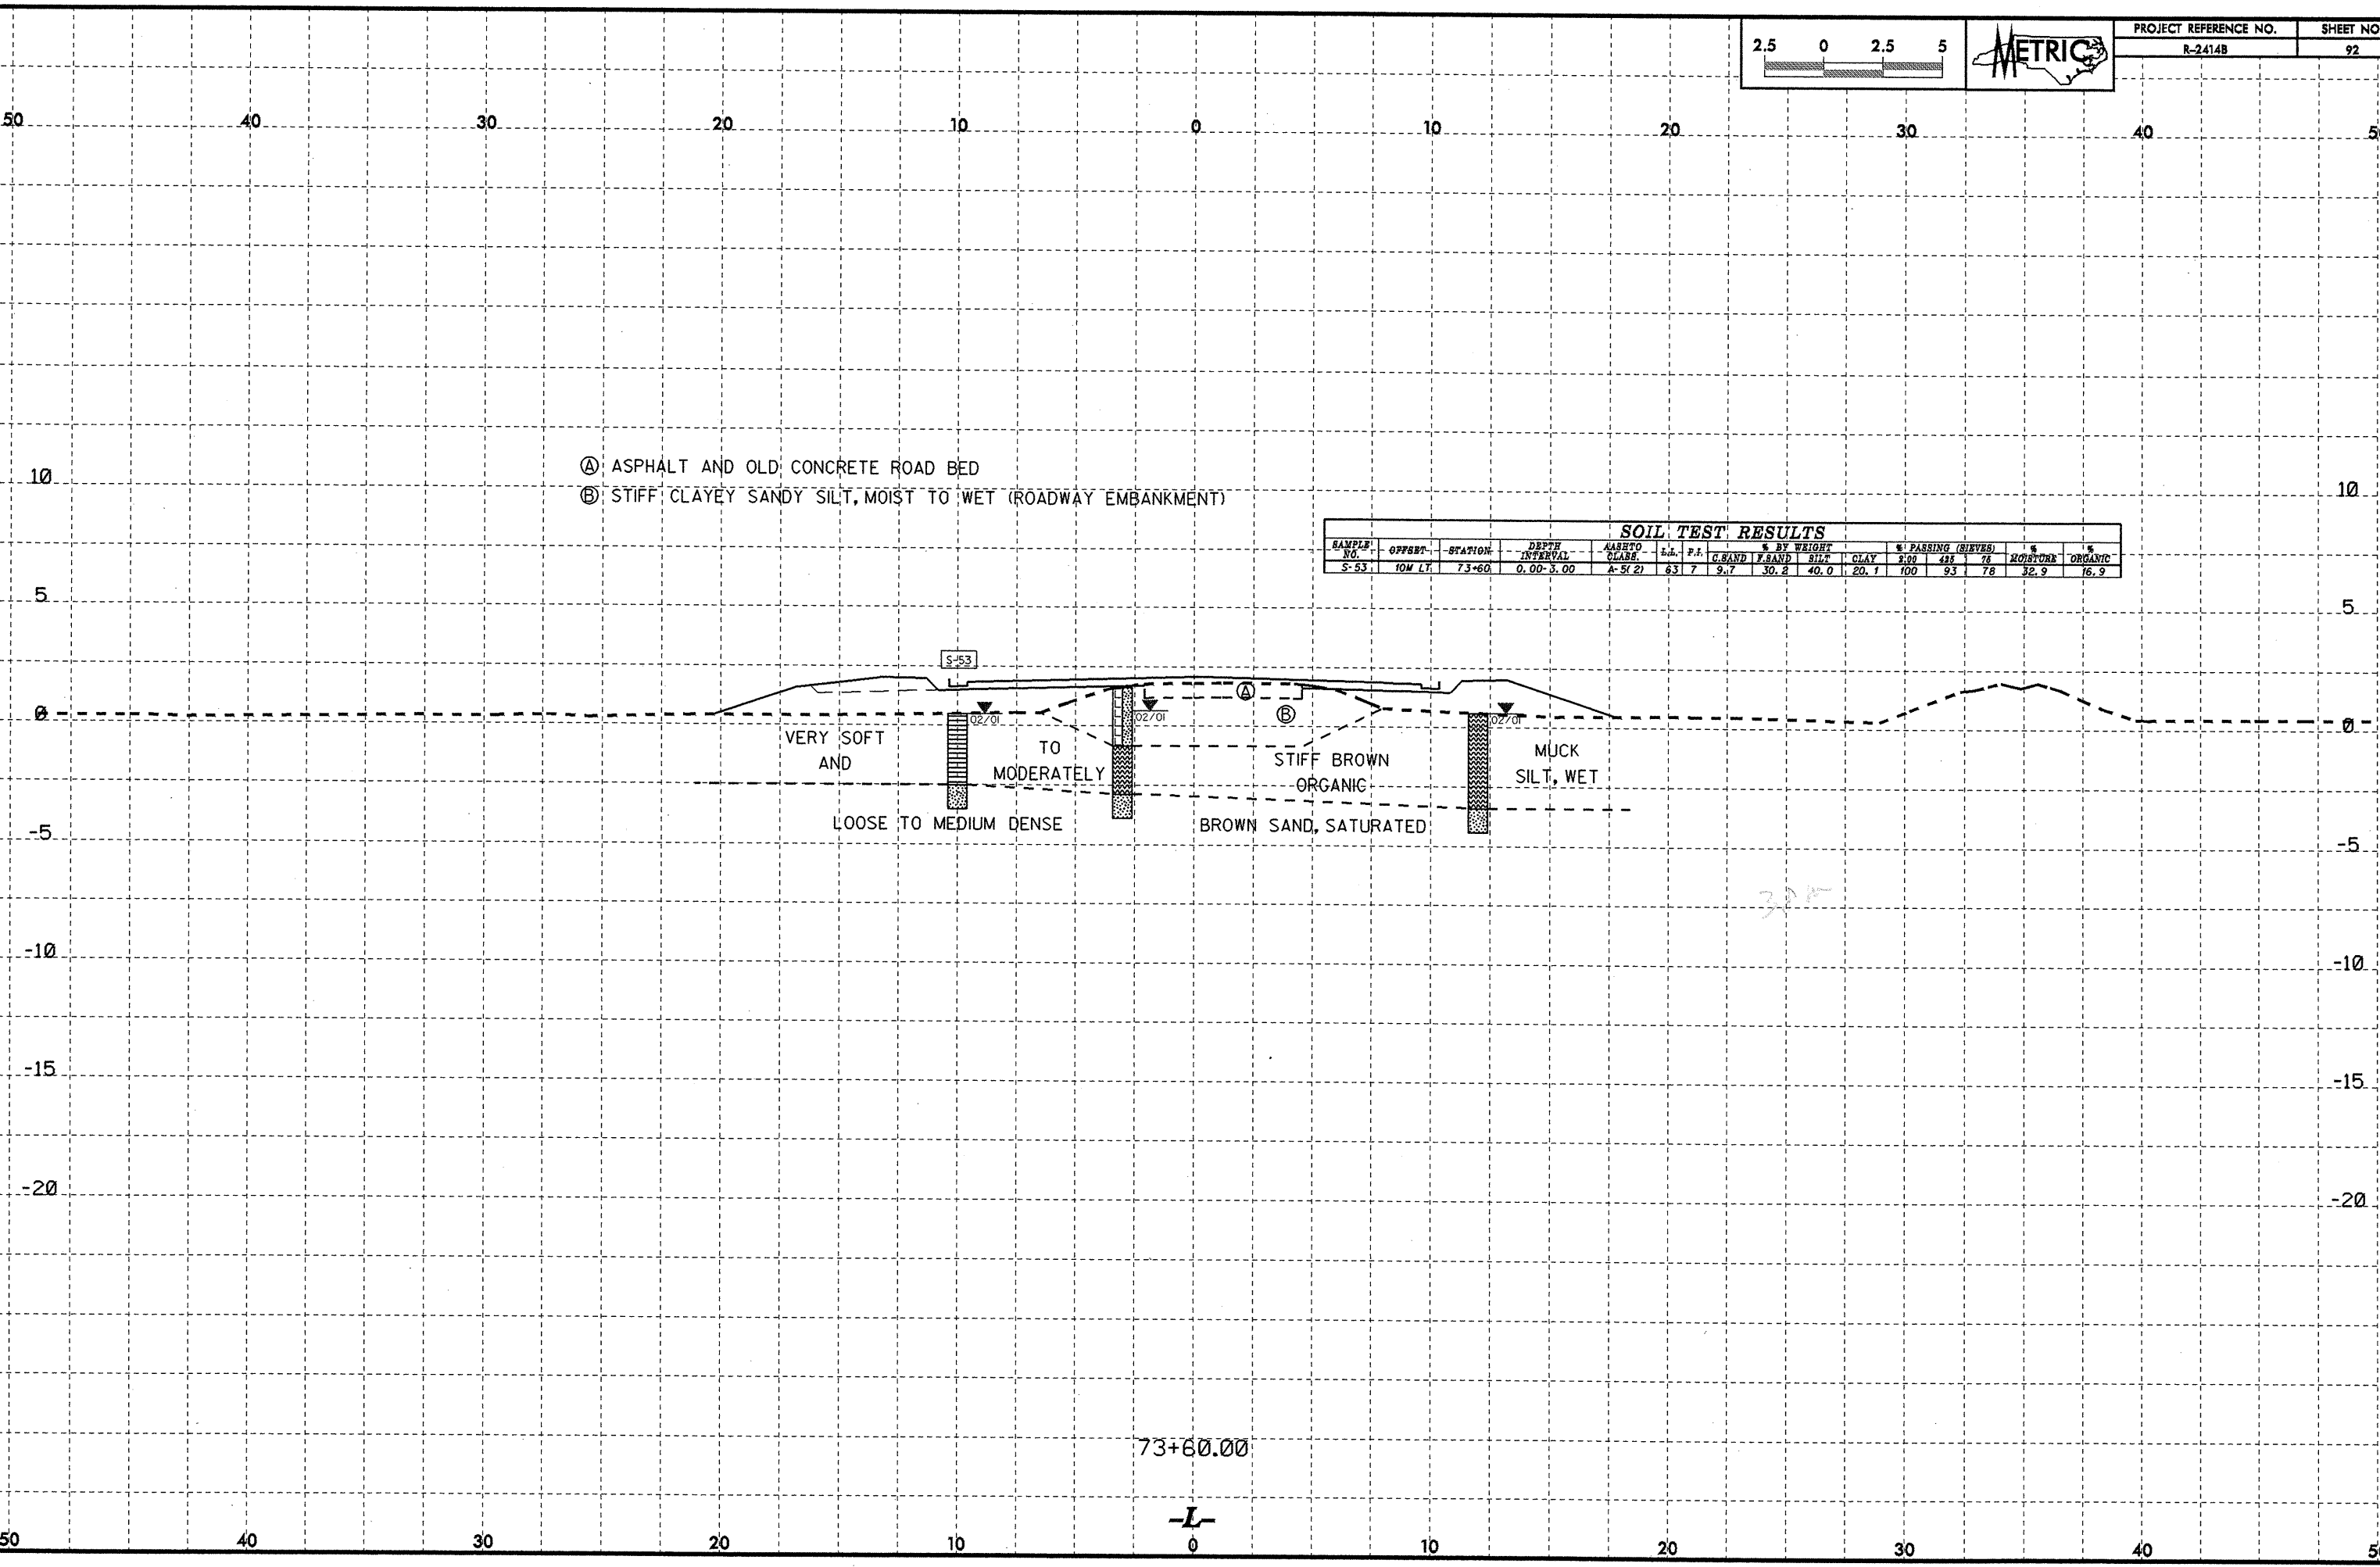


18-JUL-2008 13:24
 ags\m...
 ags\m...

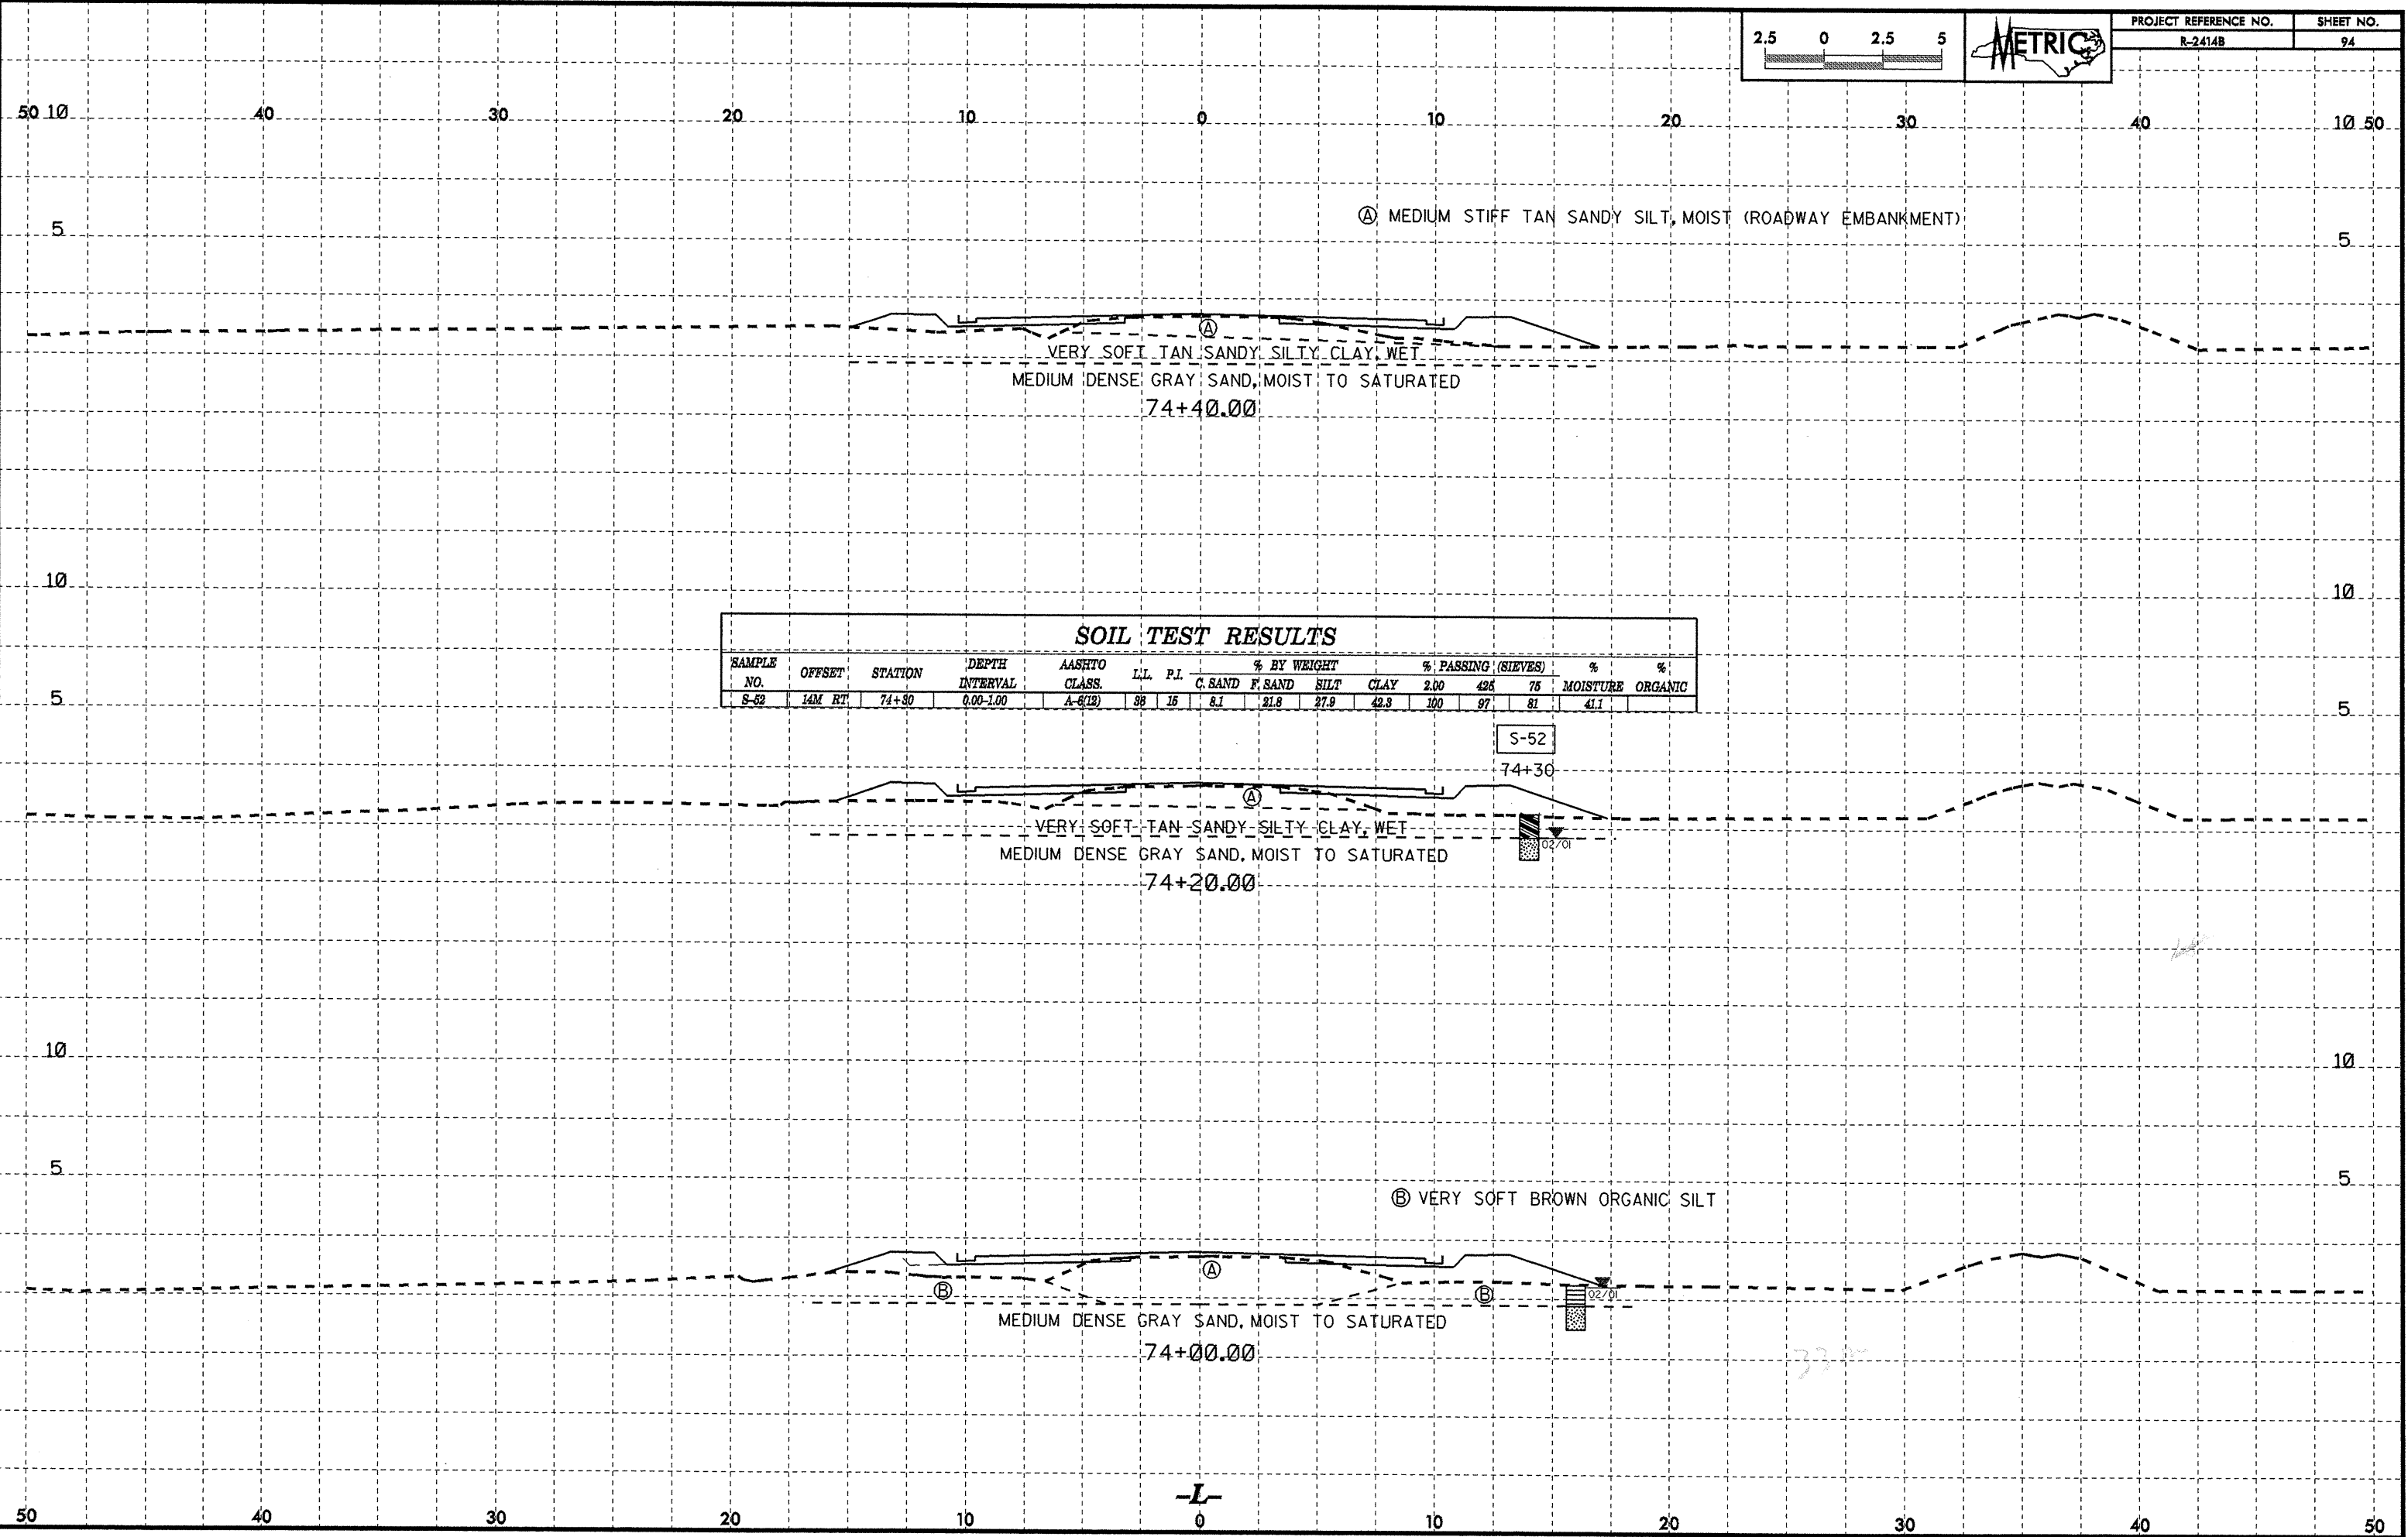


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-52	14M RT	74+30	0.00-1.00	A-6(12)	38	15	8.1	21.8	27.9	42.3	100	97	81	41.1	

29-MAY-2008 15:18
 s:\projects\2414B\REV2\CR000_060TECH\sec\2414b_Rdy_xst.dgn
 02/01

10/26/08



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	95

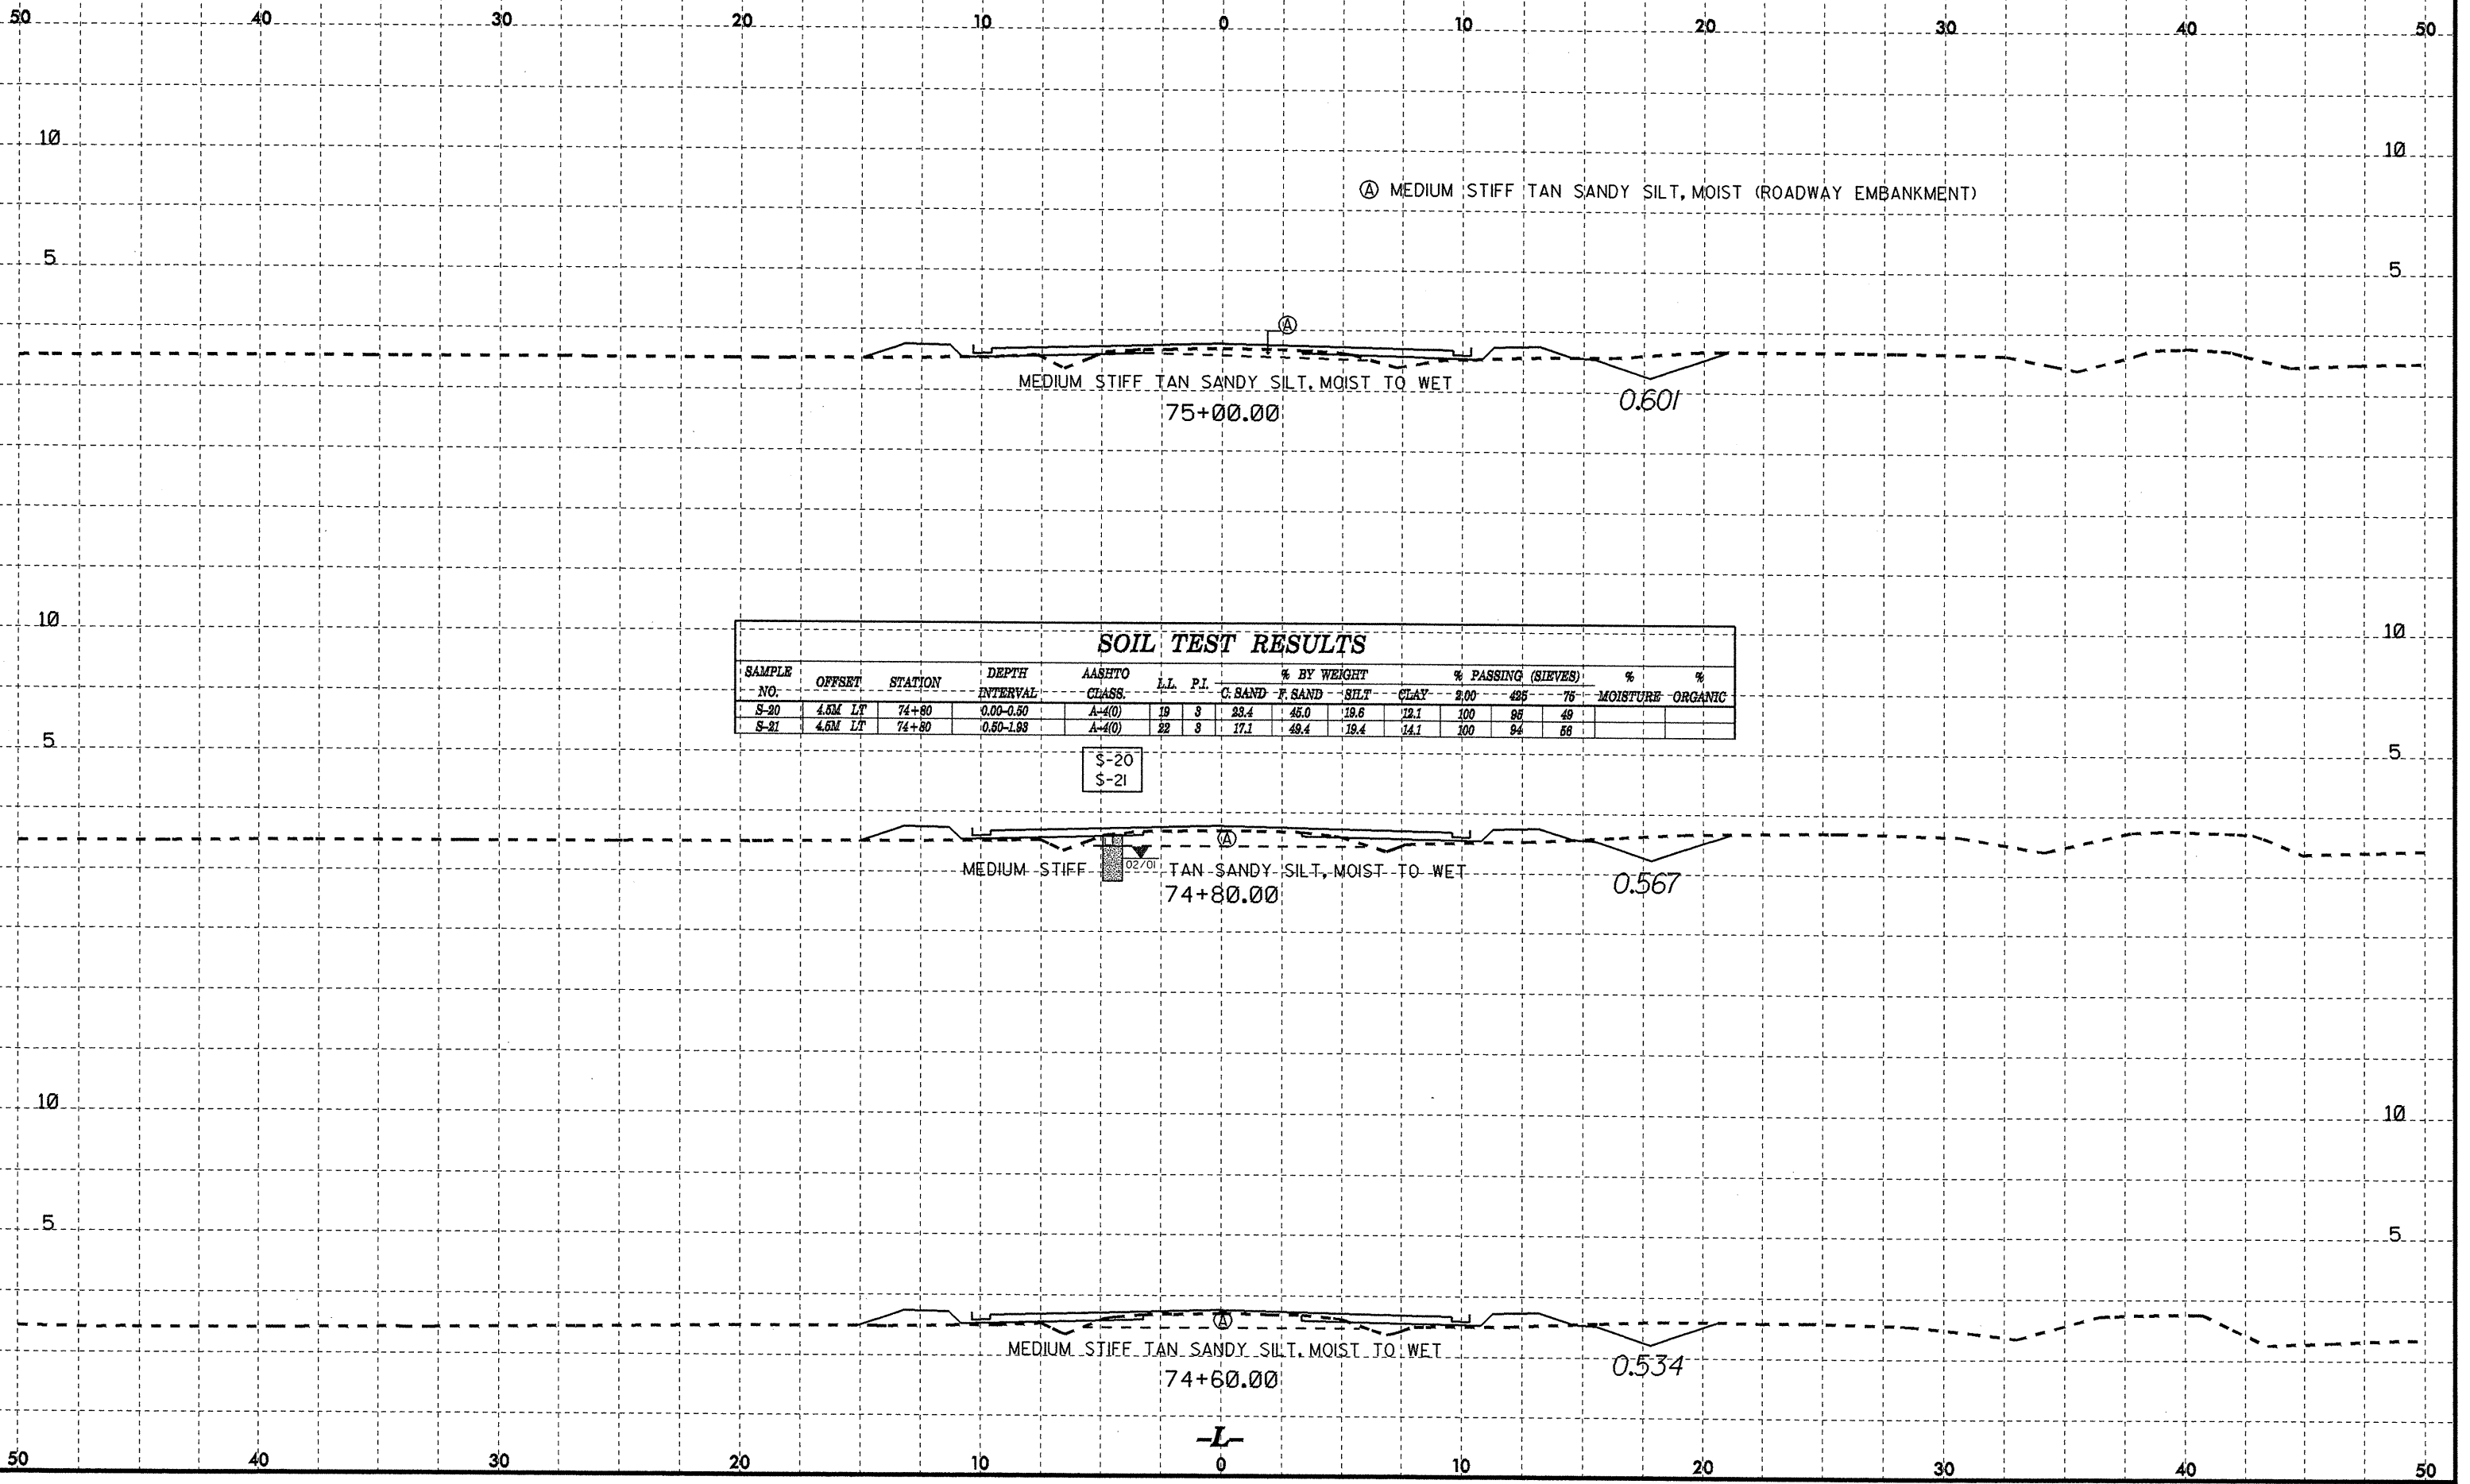

Ⓐ MEDIUM STIFF TAN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

Ⓐ MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
75+00.00
0.601

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)		% MOISTURE ORGANIC		
							C. SAND	F. SAND	SILT	CLAY	200	425	75		
S-20	4.5M LT	74+80	0.00-0.50	A-4(0)	19	8	88.4	45.0	19.6	12.1	100	96	49		
S-21	4.5M LT	74+80	0.50-1.93	A-4(0)	22	8	17.1	49.4	19.4	14.1	100	94	58		

S-20
S-21


Ⓐ MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
74+80.00
0.567

Ⓐ MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
74+60.00
0.534


-L-

C:\HAY\2414B_H18_RDMY_REV2\CADD_GEO\TECH\sec\2414b_Rdy_xst_1.dgn
 10/26/08 11:18 AM
 User: jg
 Plot Number: AT 06250535


10/26/99
R:\HWY\214B\1516\RDWY\REV2\GADD_GEDTECH\sec\2414b_Rdw_xst_1.dgn
prummer AT 08/28/99




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	96

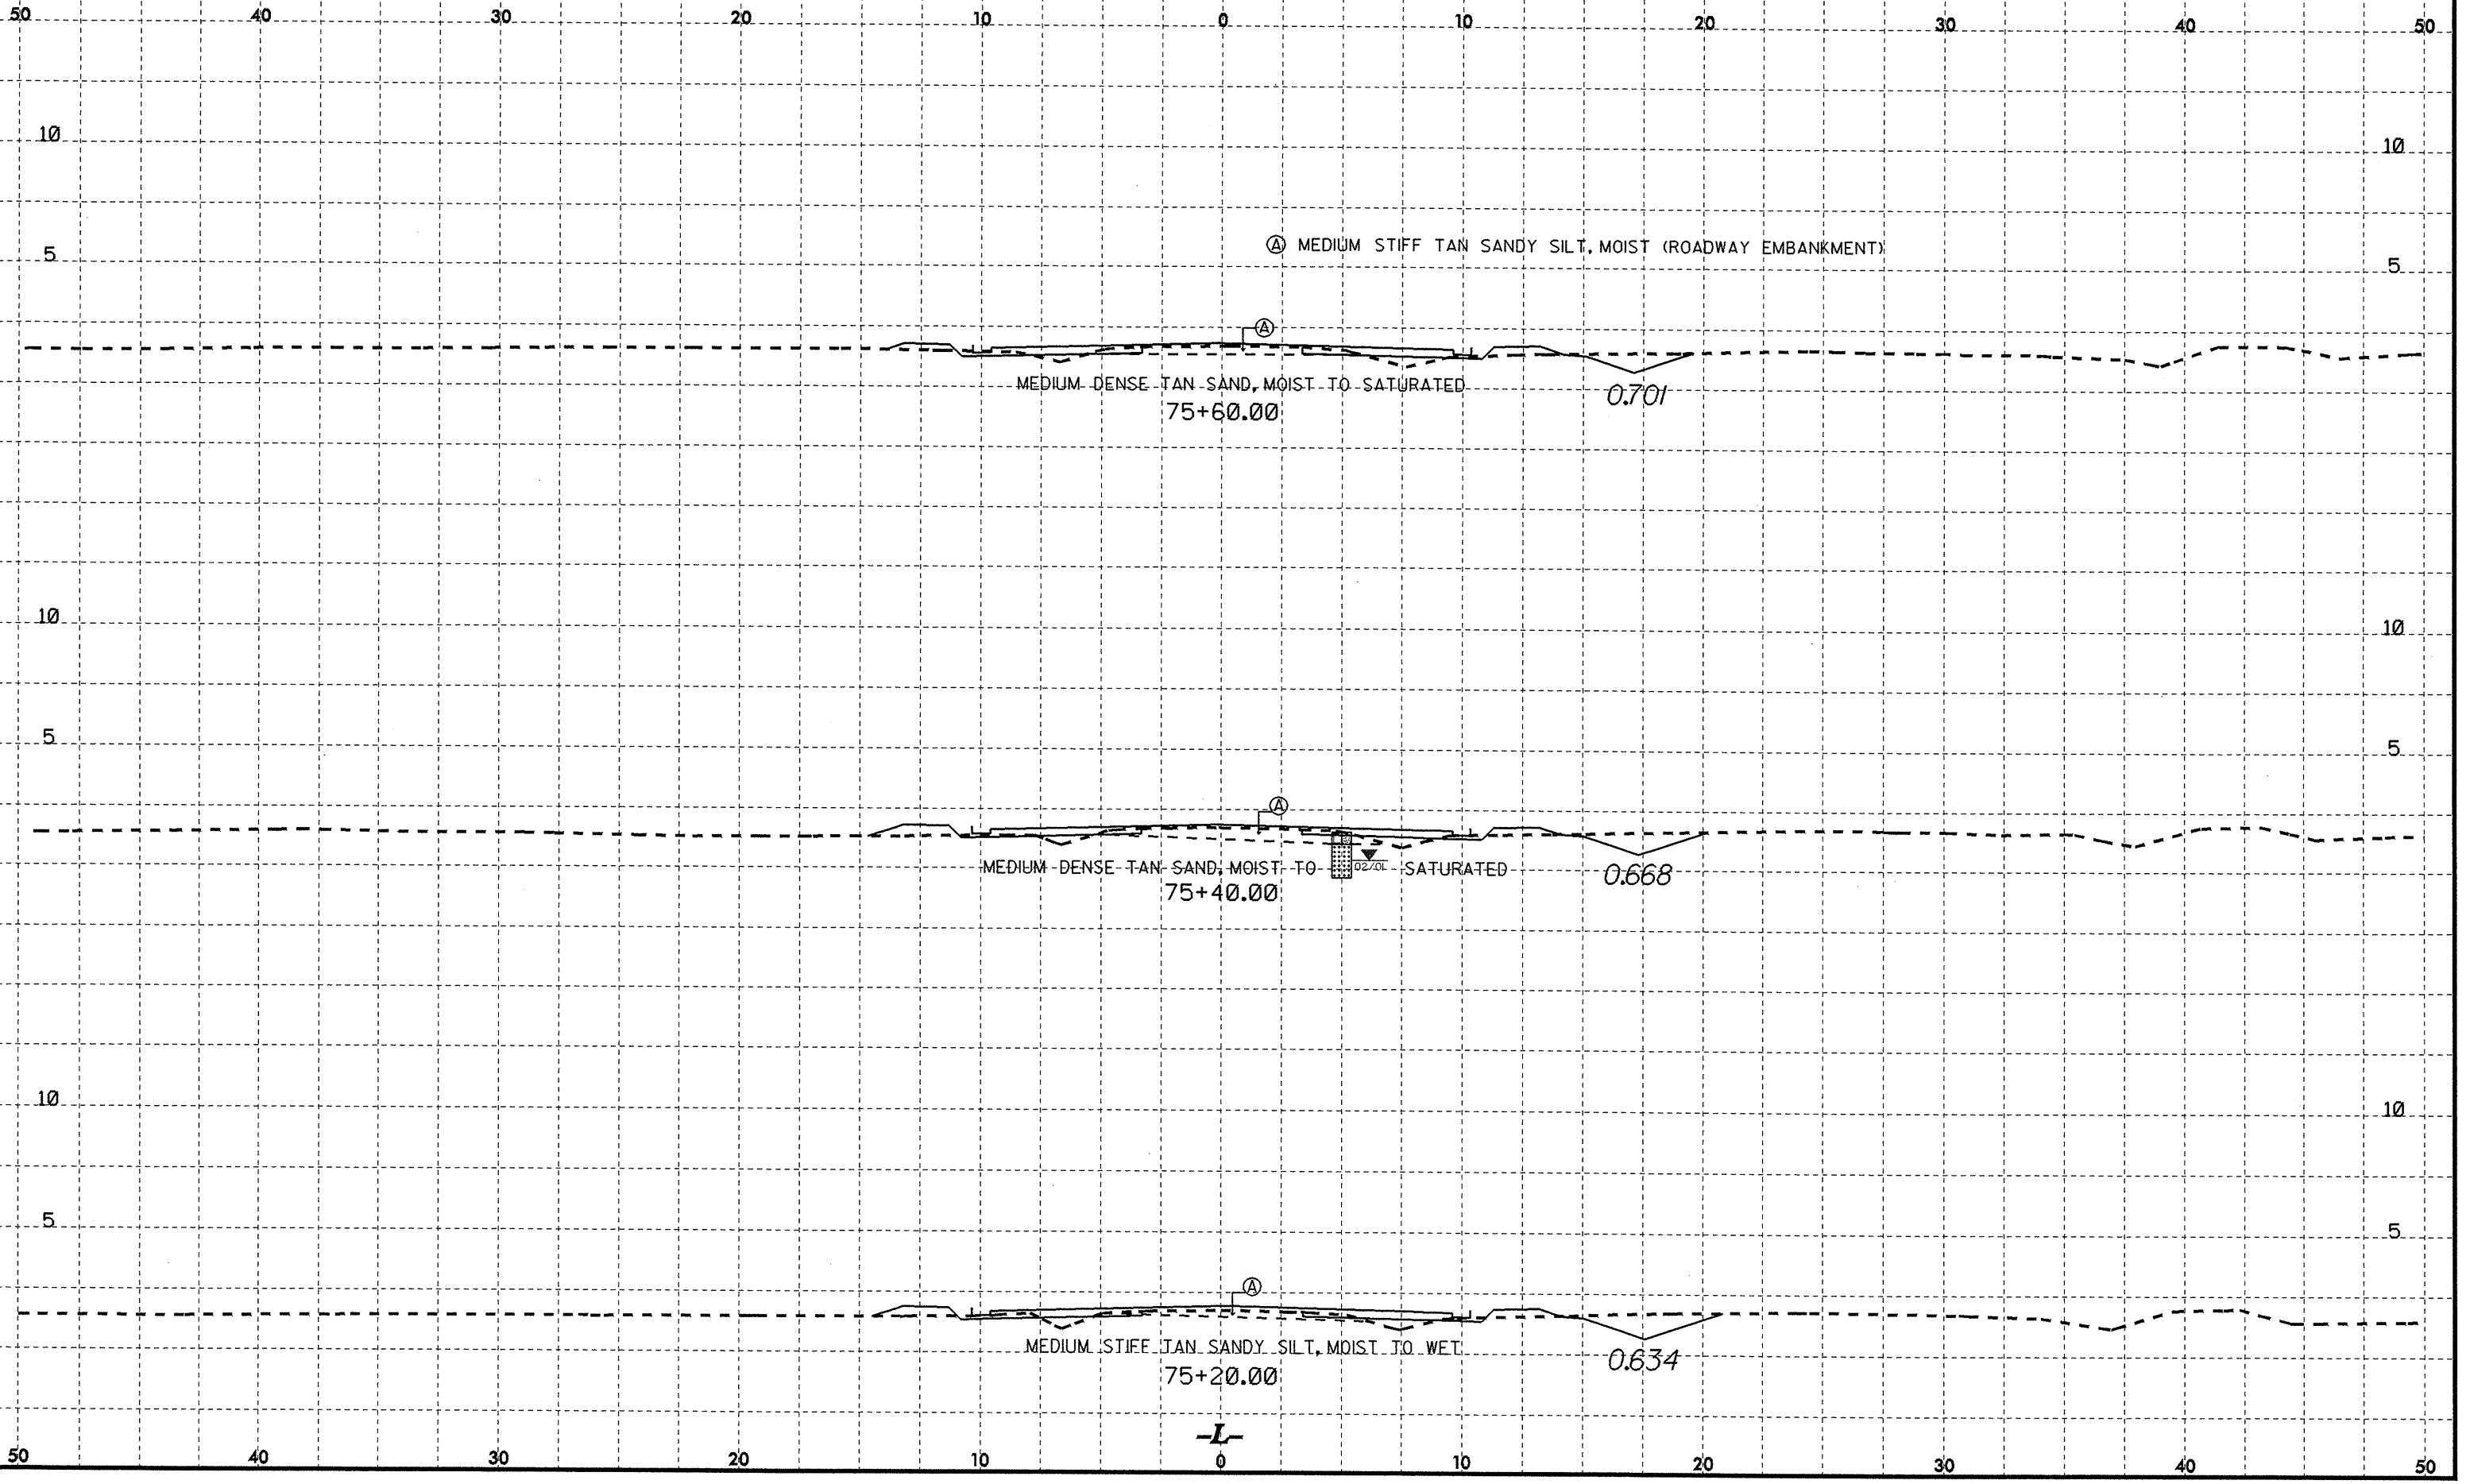

-L-




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	99

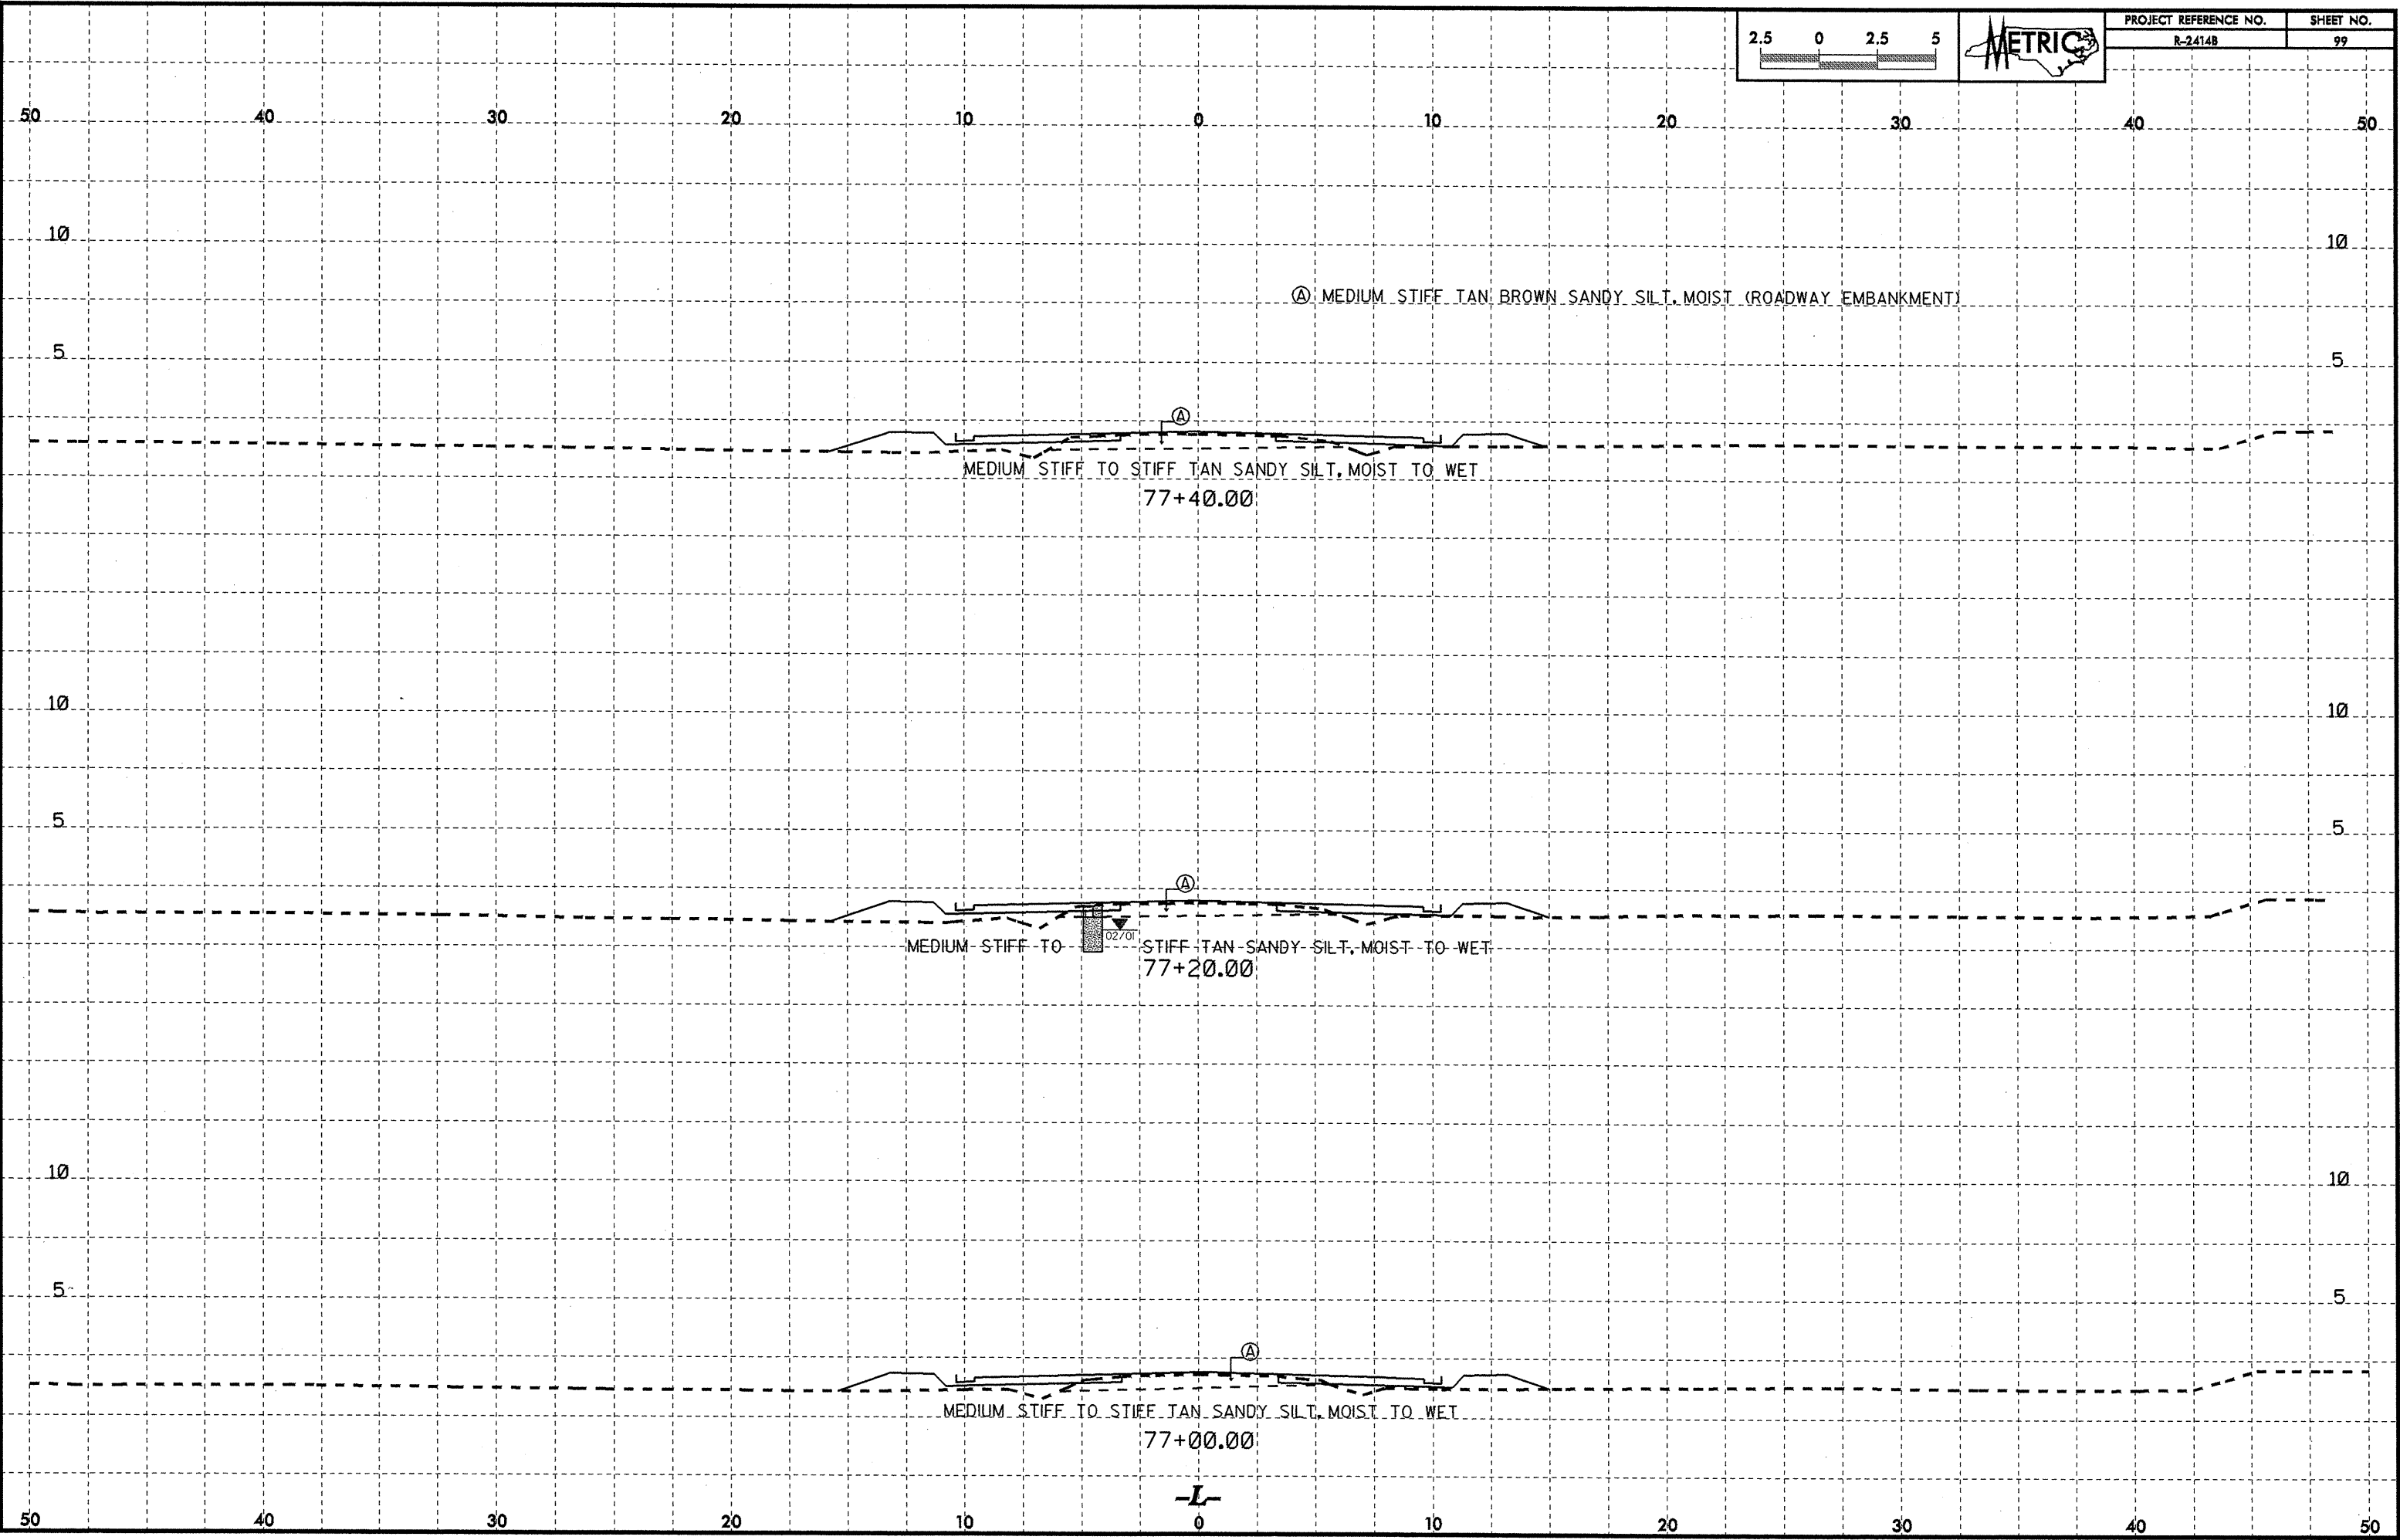


2014/11/27 15:00
 agston\jv\2014\1500\RDY\REV2\CADD\GEOTECH\sec\2414b_rdy_xa_1.dgn
 jvrunner AT 08/02/2014

10/26/08
 C:\Users\jg\Documents\2008\1500\ROADWAY\REV2\CADD\GEO\TECH\SS-V-2414b-RdL-xa-1.dgn
 jg
 11/27/08
 11/27/08
 11/27/08




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	100

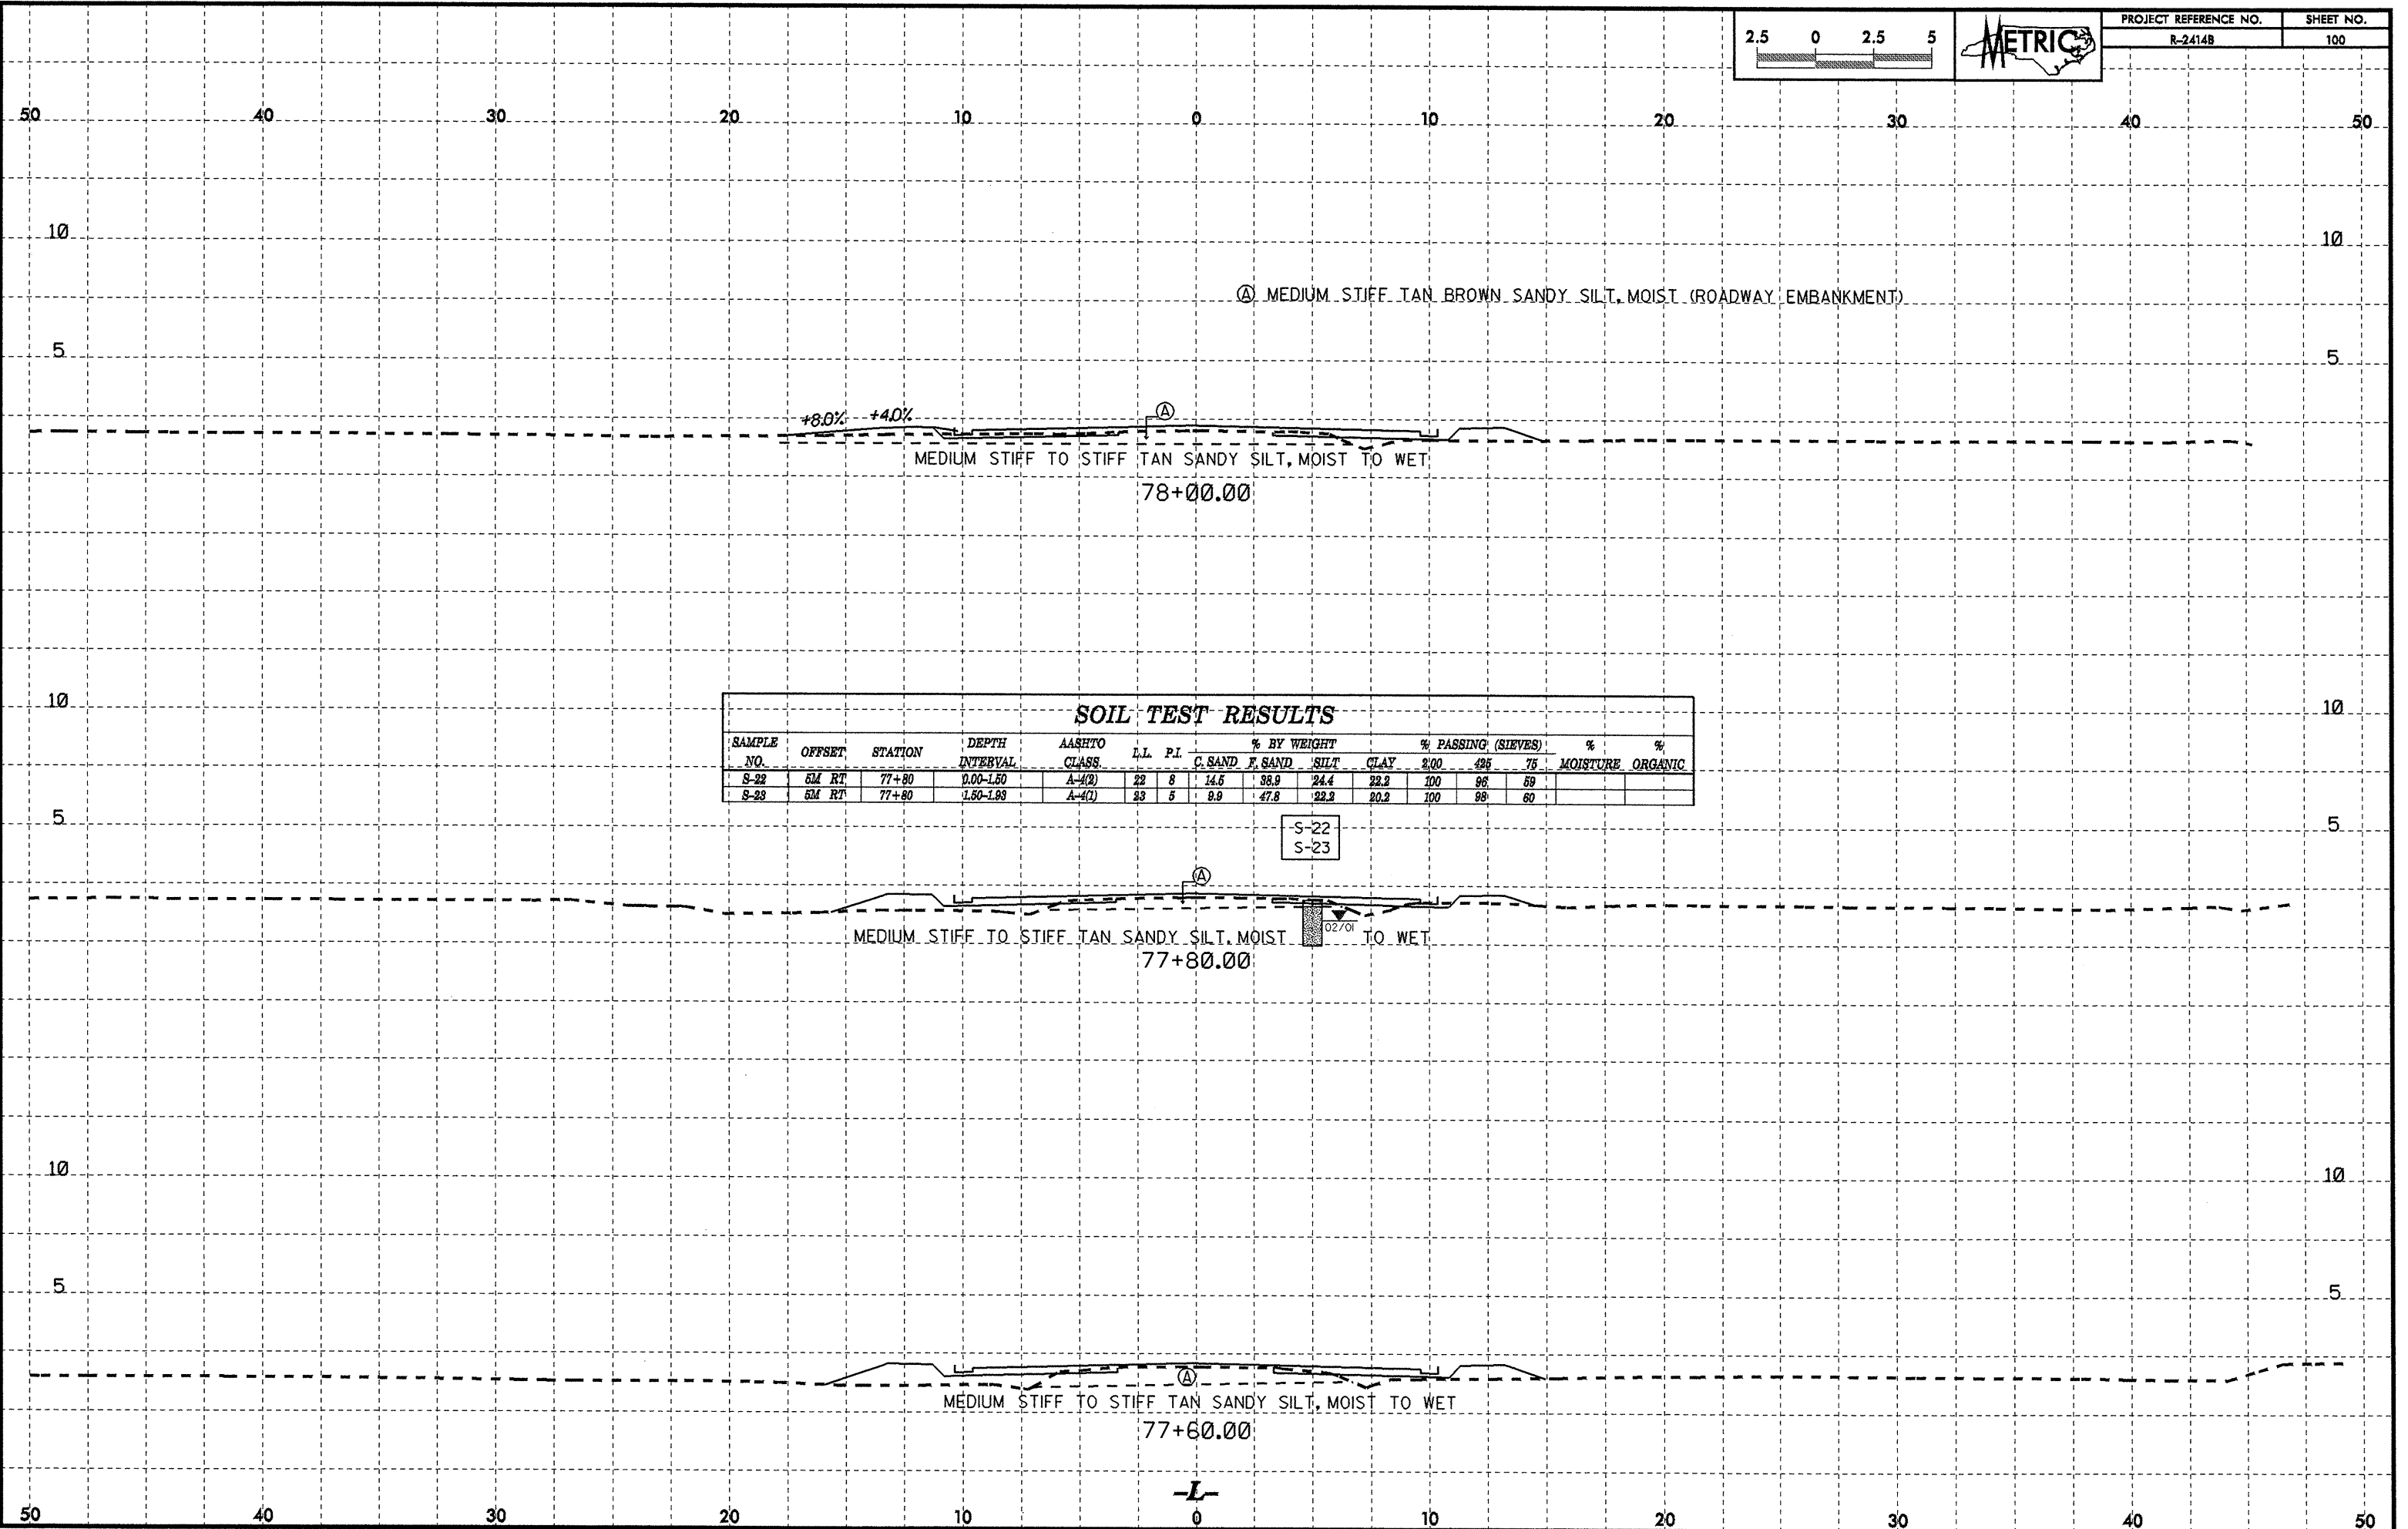


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE ORGANIC	
							C. SAND	F. SAND	SILT	CLAY	200	425	75		
S-22	5M RT	77+80	0.00-1.50	A-4(2)	22	8	14.5	38.9	24.4	22.2	100	96	59		
S-23	5M RT	77+80	1.50-1.93	A-4(2)	23	5	9.9	47.8	22.2	20.2	100	98	60		



-L-

10/26/98
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	102

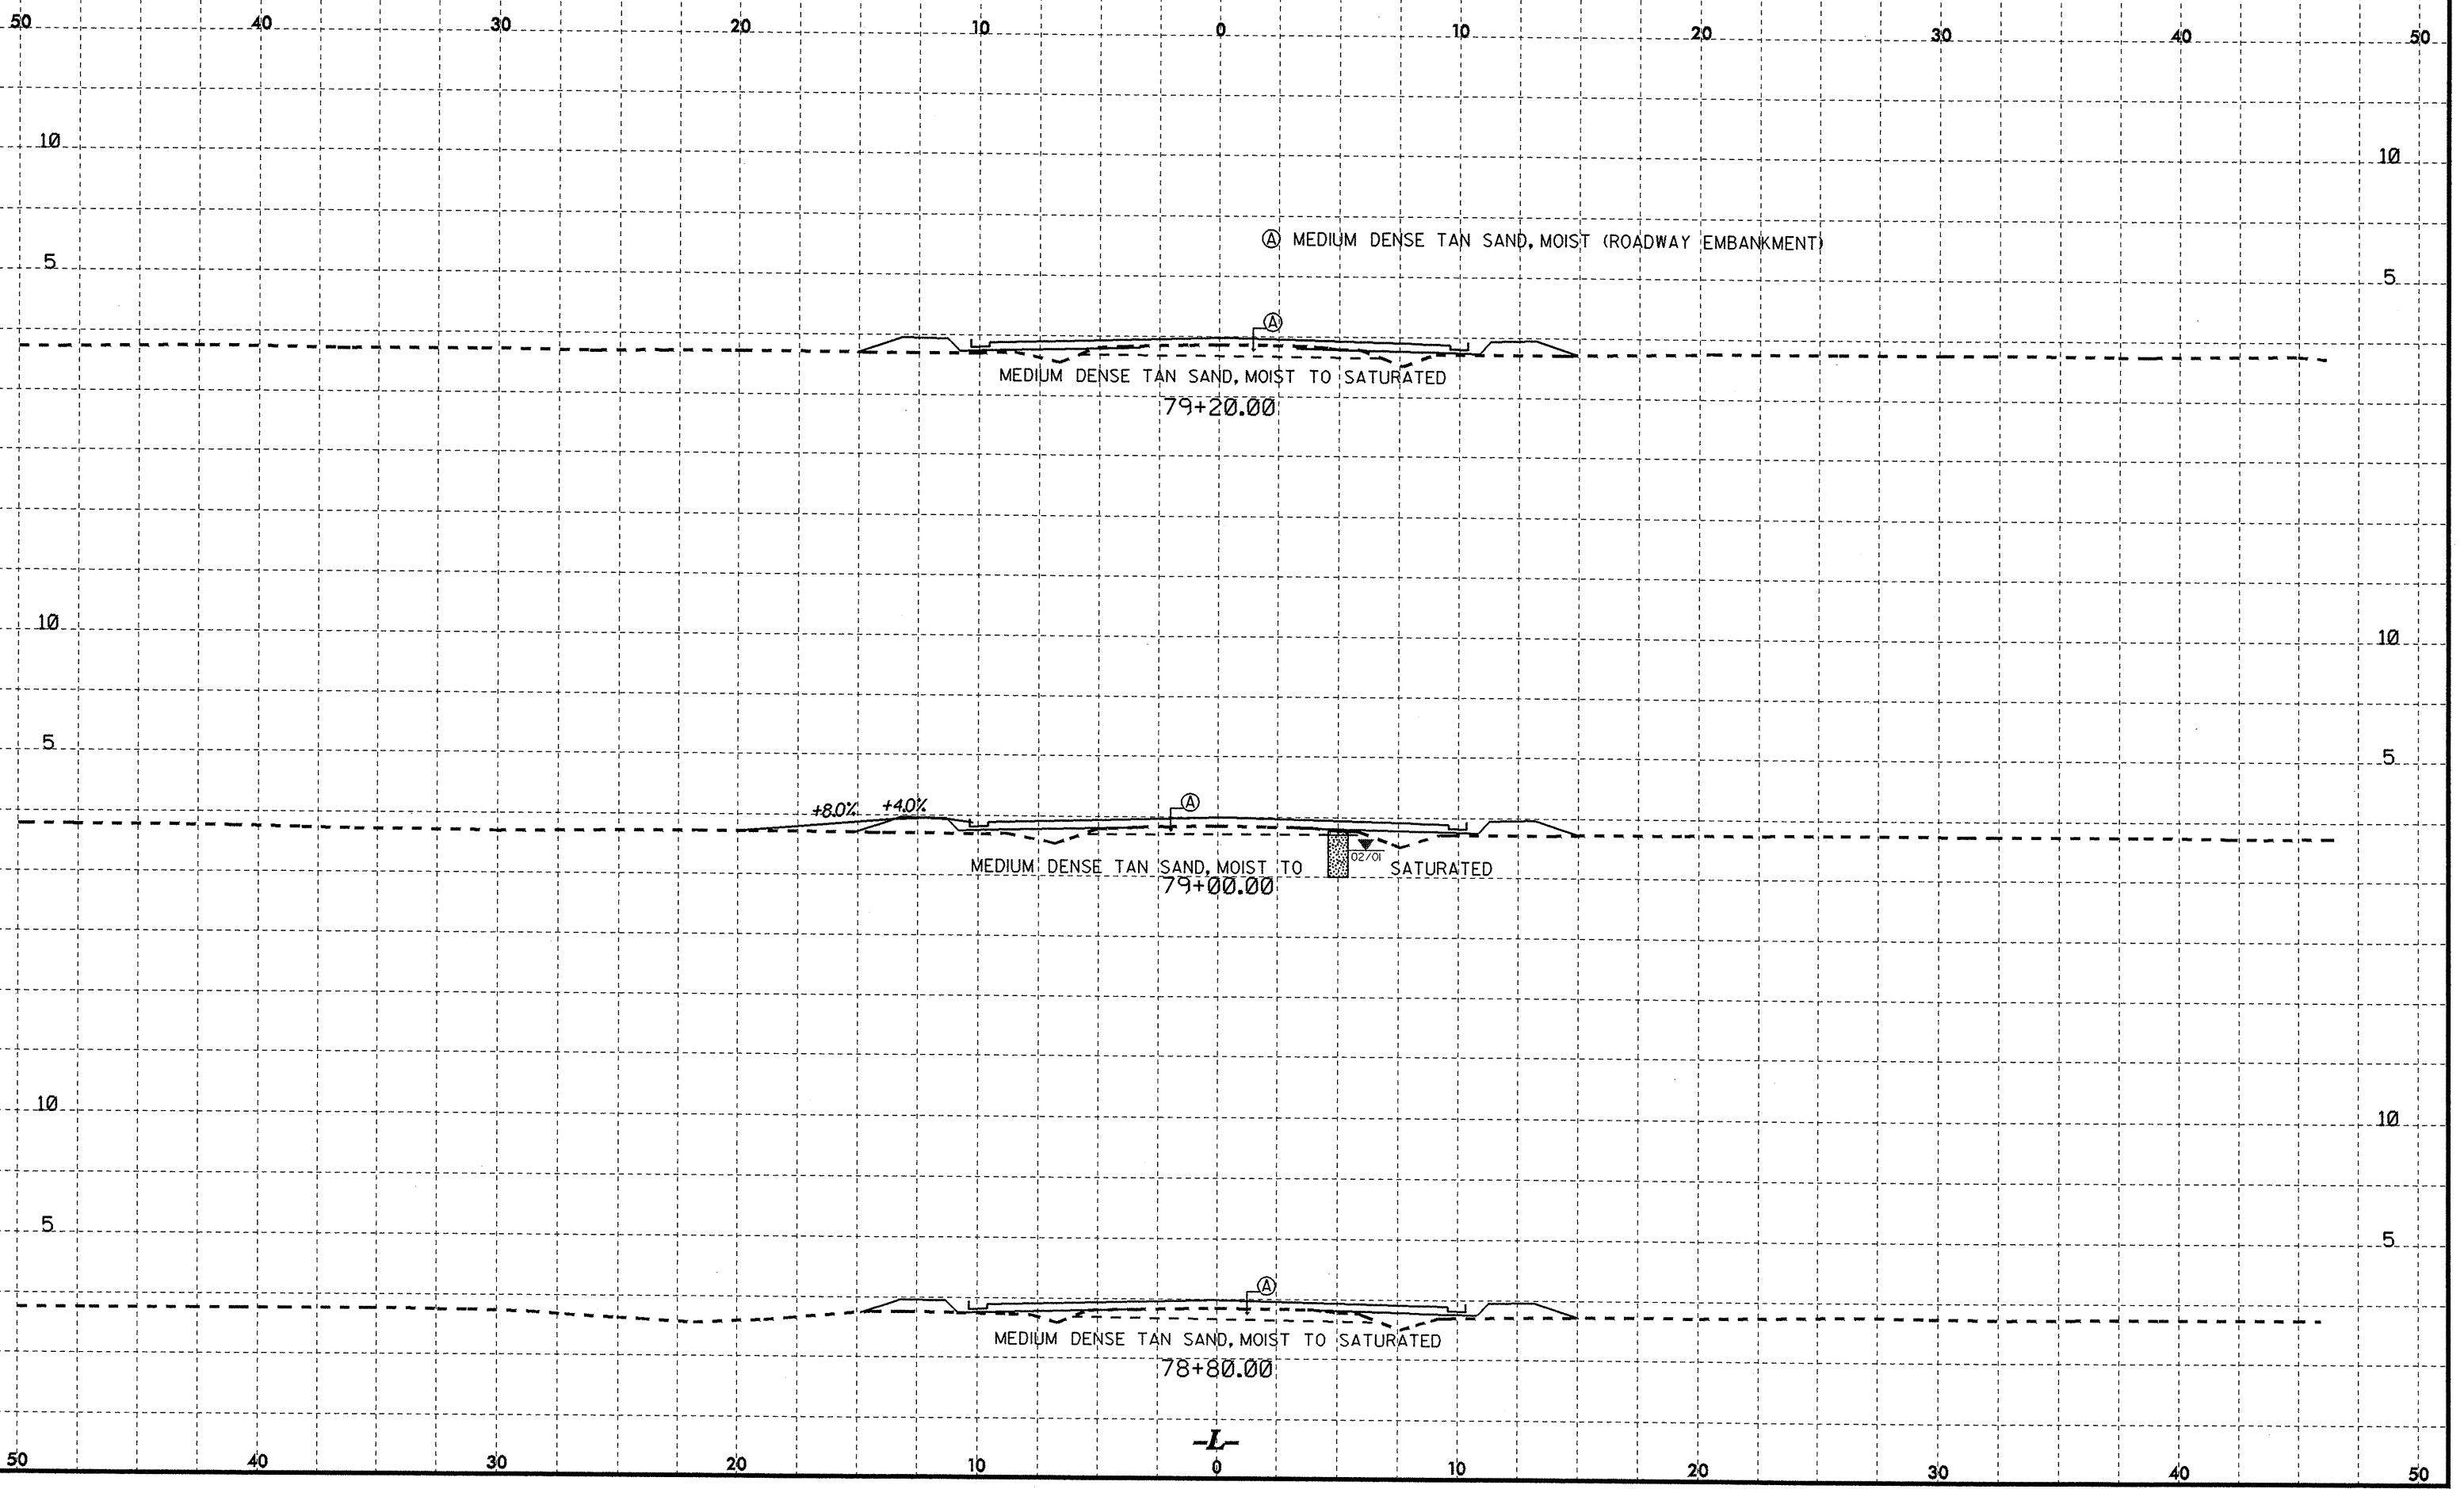

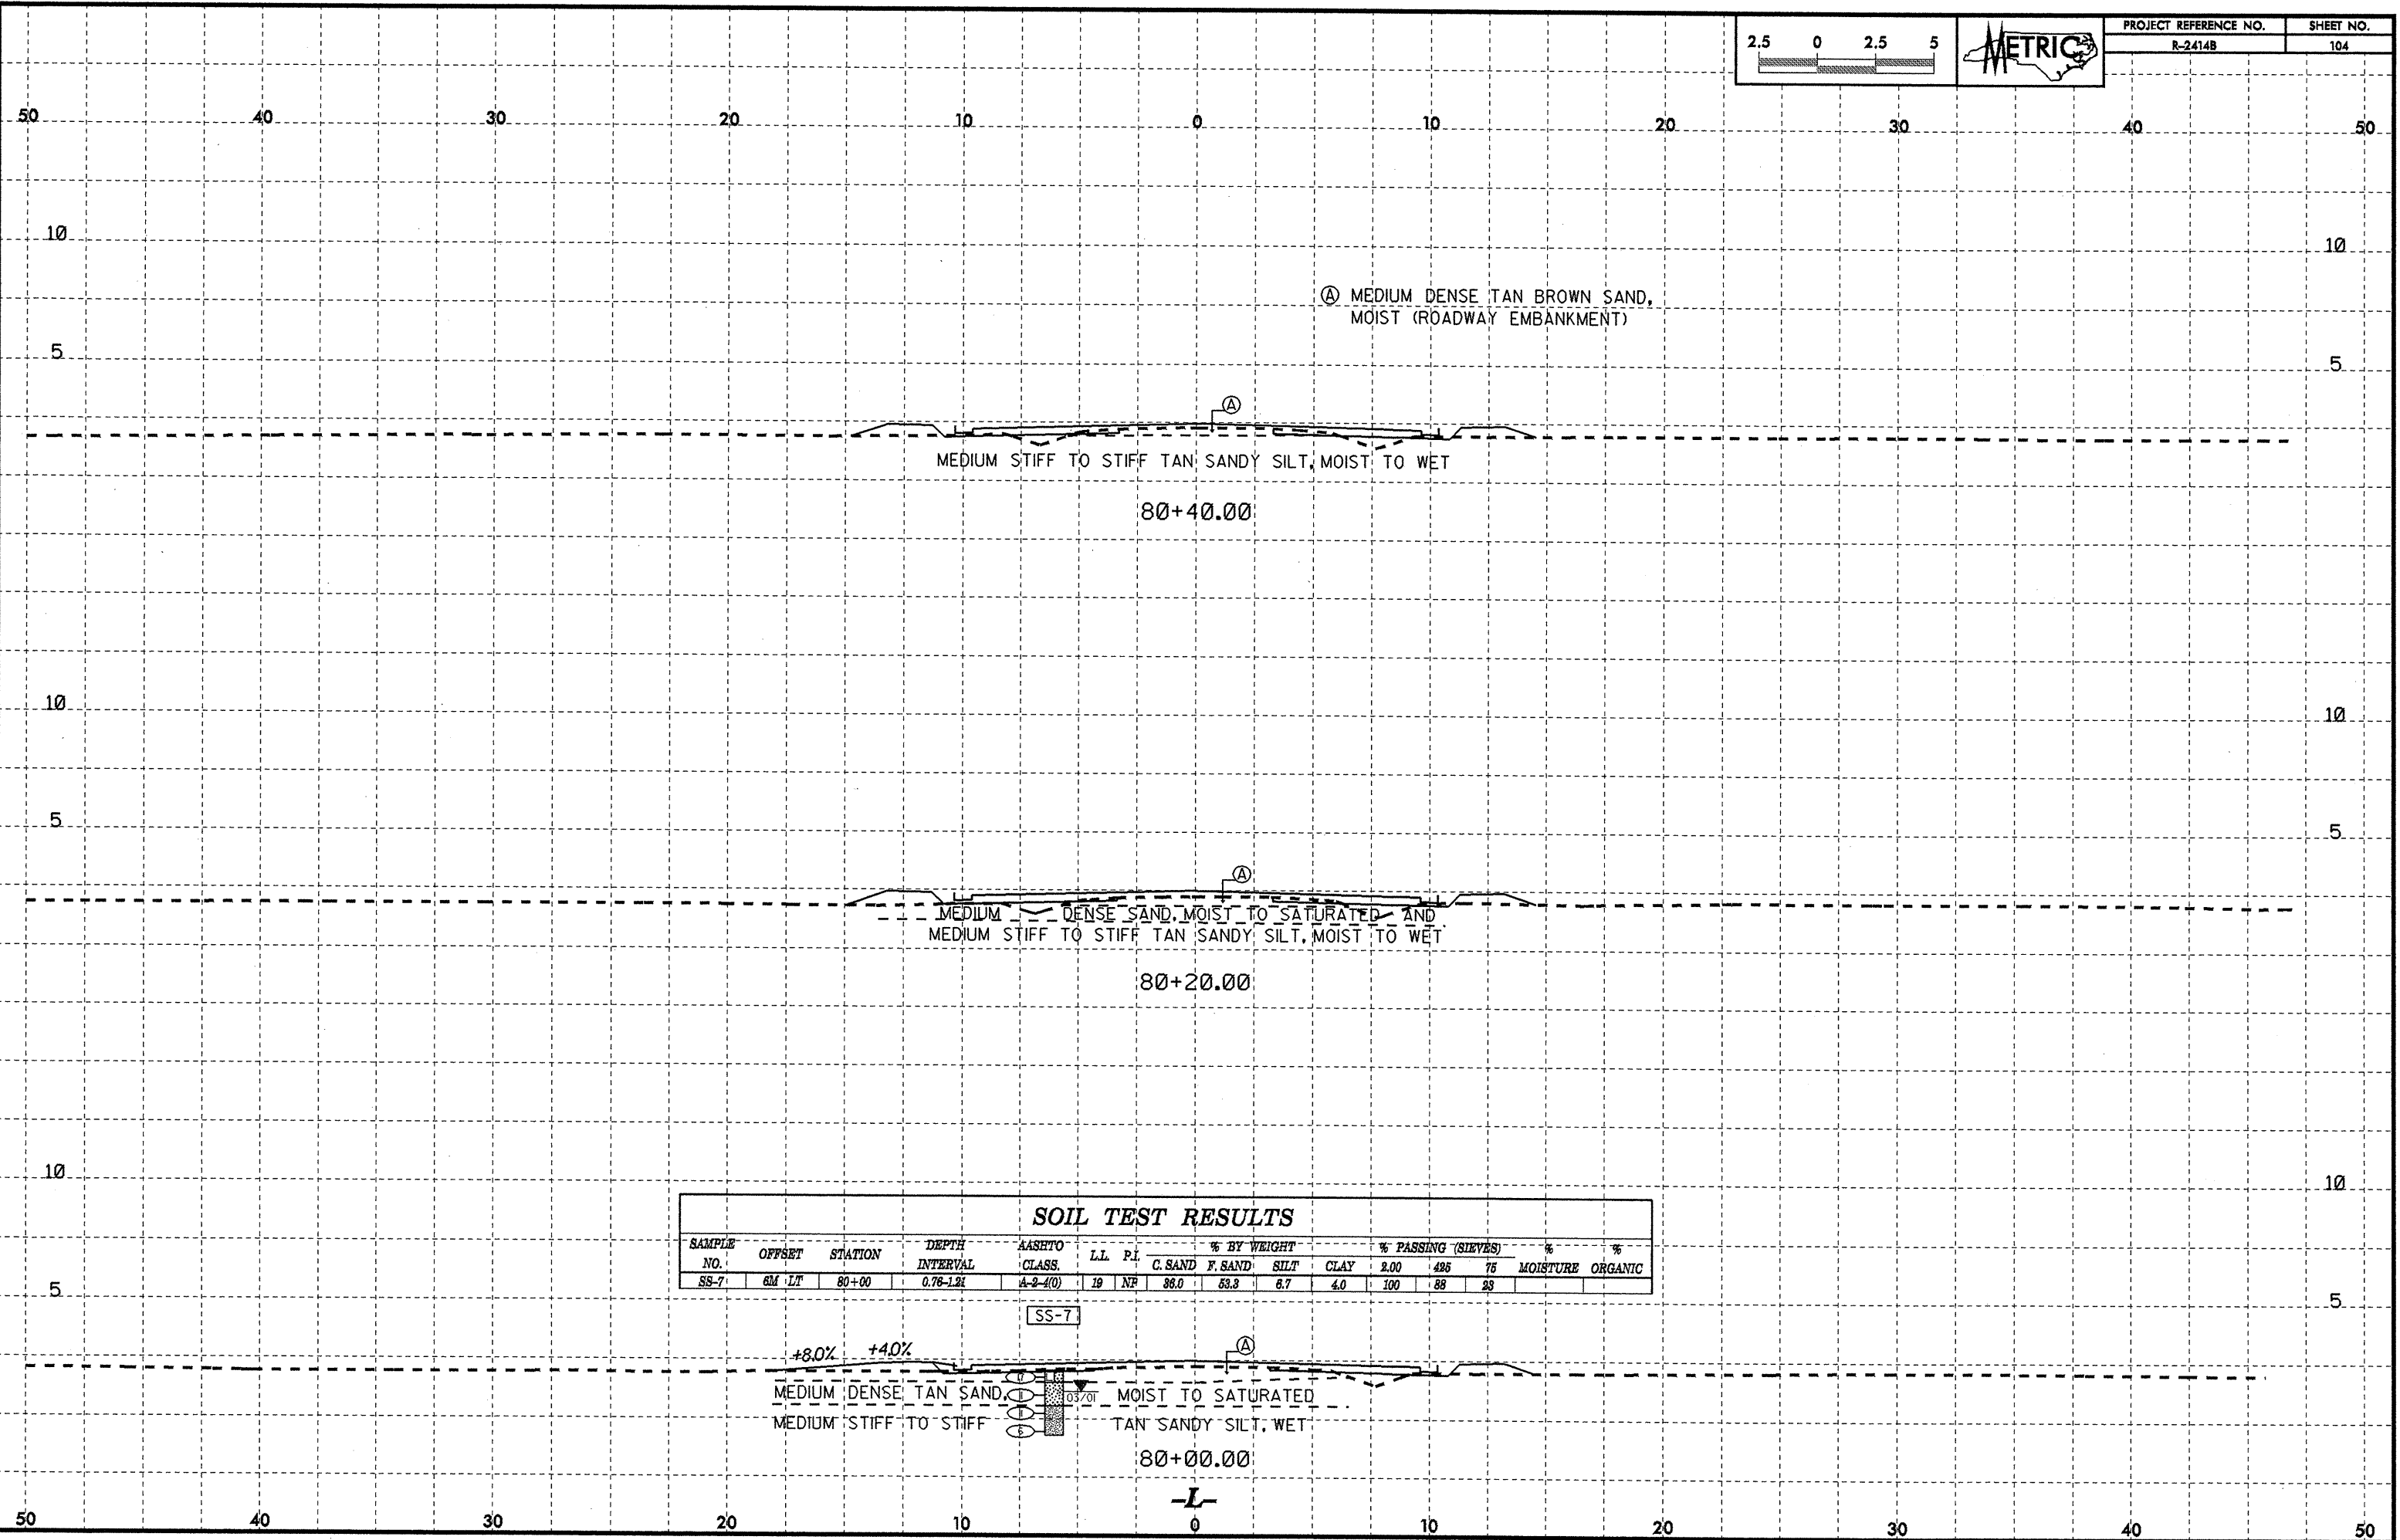


SOIL TEST RESULTS


SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
SS-7	6M LT	80+00	0.76-1.24	A-2-4(0)	19	NP	38.0	53.3	6.7	4.0	100	88	23		

SS-7

29-MAY-2008 15:21
 sgs\stacy\p\p\REV2\CADD\GEO\TECH\SS-7.dwg
 03/20/08
 03/20/08
 03/20/08



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	105

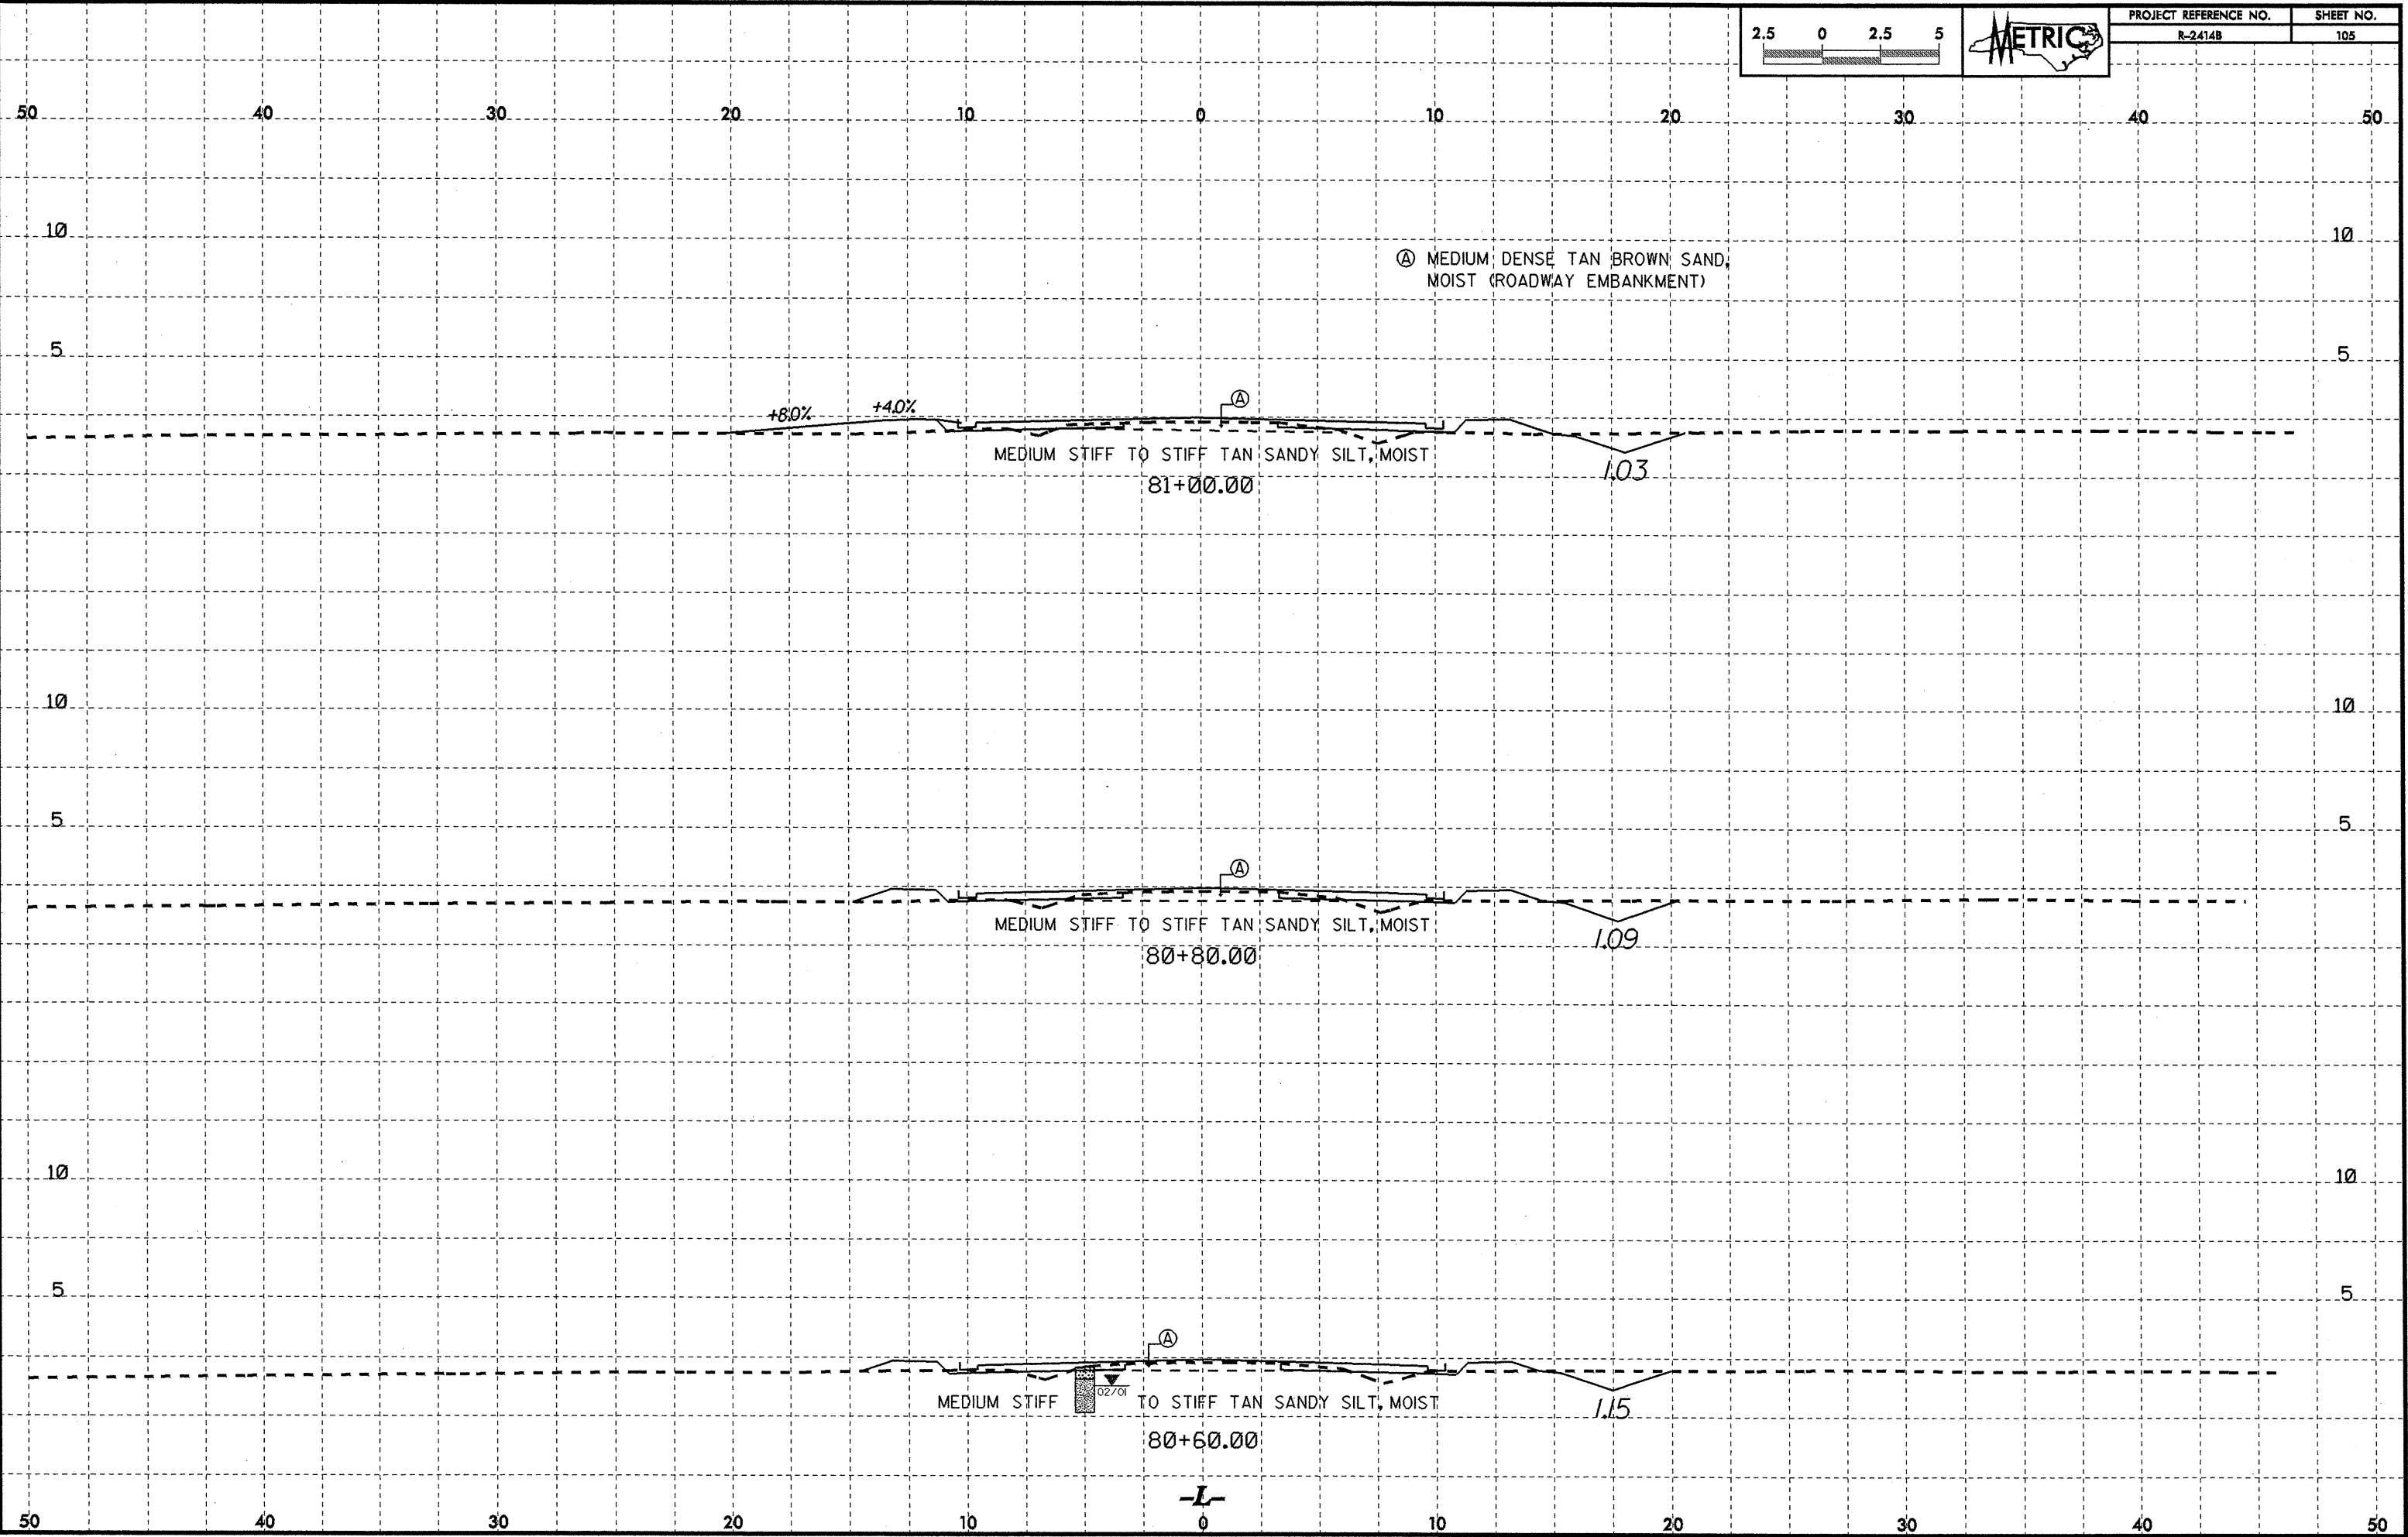

Ⓐ MEDIUM DENSE TAN BROWN SAND,
MOIST (ROADWAY EMBANKMENT)

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST
81+00.00

1.03

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST
80+80.00


1.09

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST
80+60.00


1.15

-L-

26 MAY 2006 15:22
 geotechnical\TIA\2414B\ROADWAY_REV2\CADD\GEO\TECH\sec\1-2414b_Rdy_xst1.dgn
 02/01



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	109

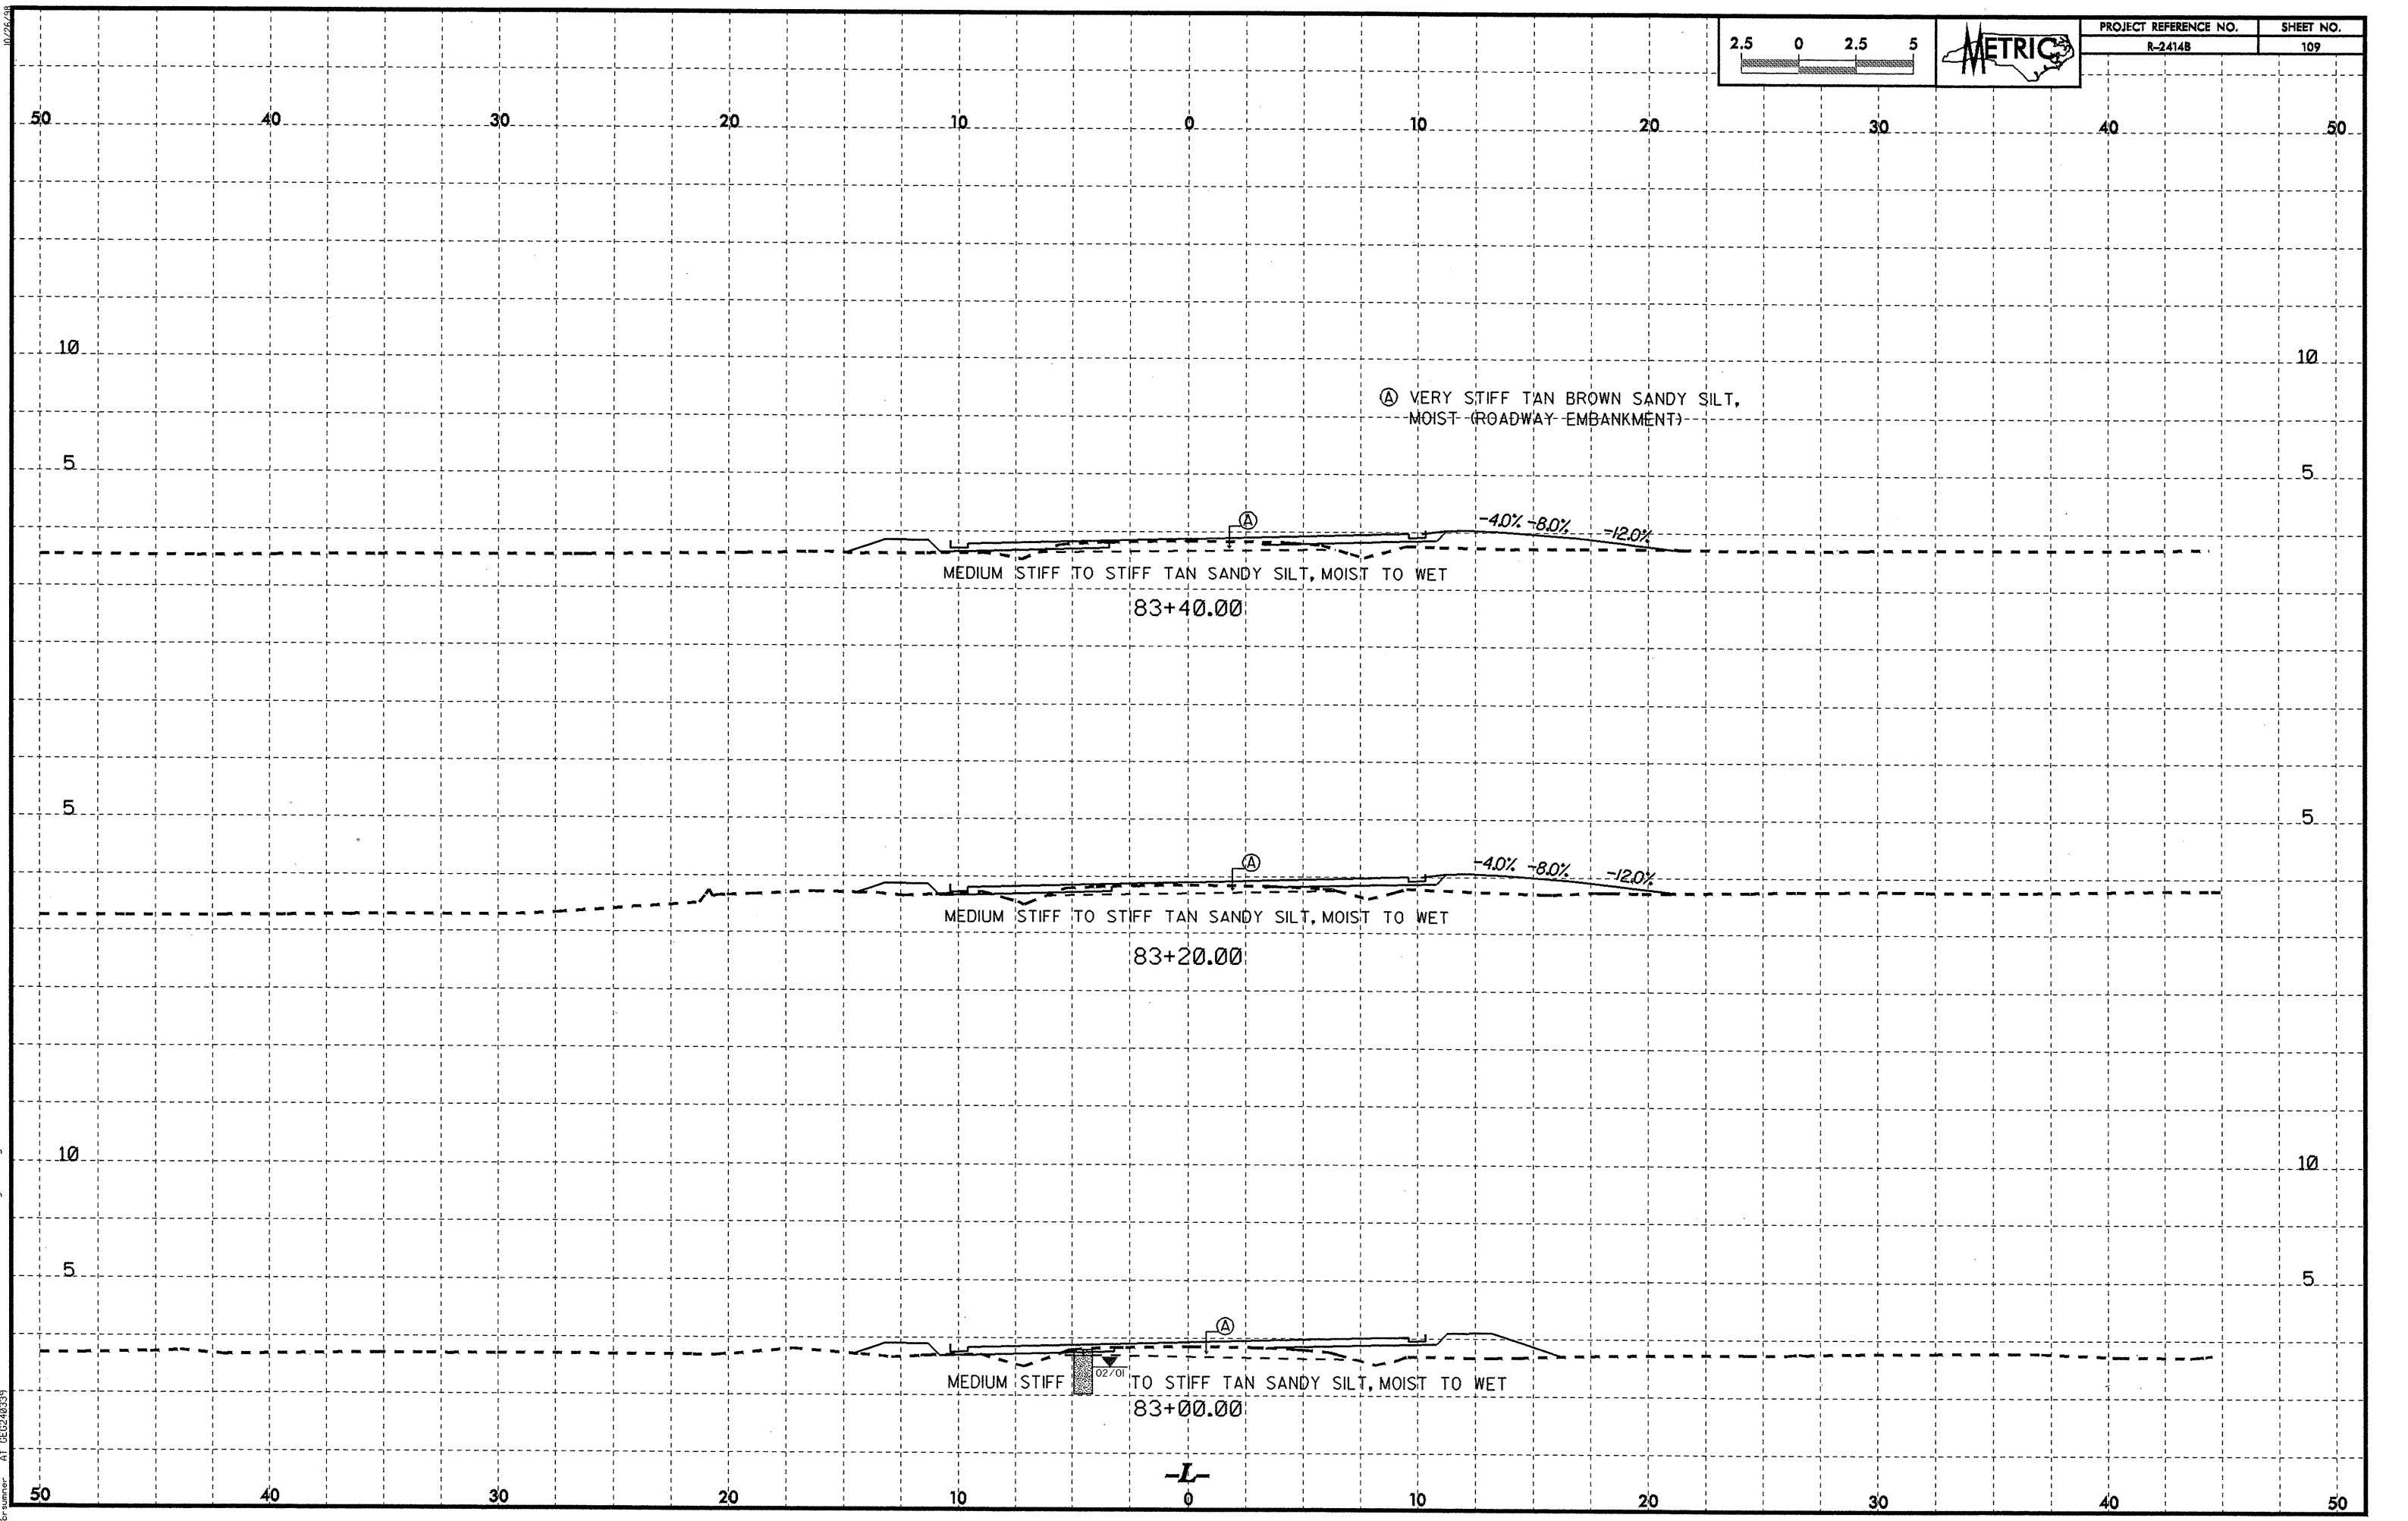

Ⓐ VERY STIFF TAN BROWN SANDY SILT,
MOIST (ROADWAY EMBANKMENT)

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET

83+40.00

-4.0% -8.0% -12.0%

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET

83+20.00

-4.0% -8.0% -12.0%



MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET

83+00.00

02/01

-L-

20-MAY-2008 15:22
agoston\T\HWY2414B_1500\HWY_2414B_020240339
Primmer AT 020240339

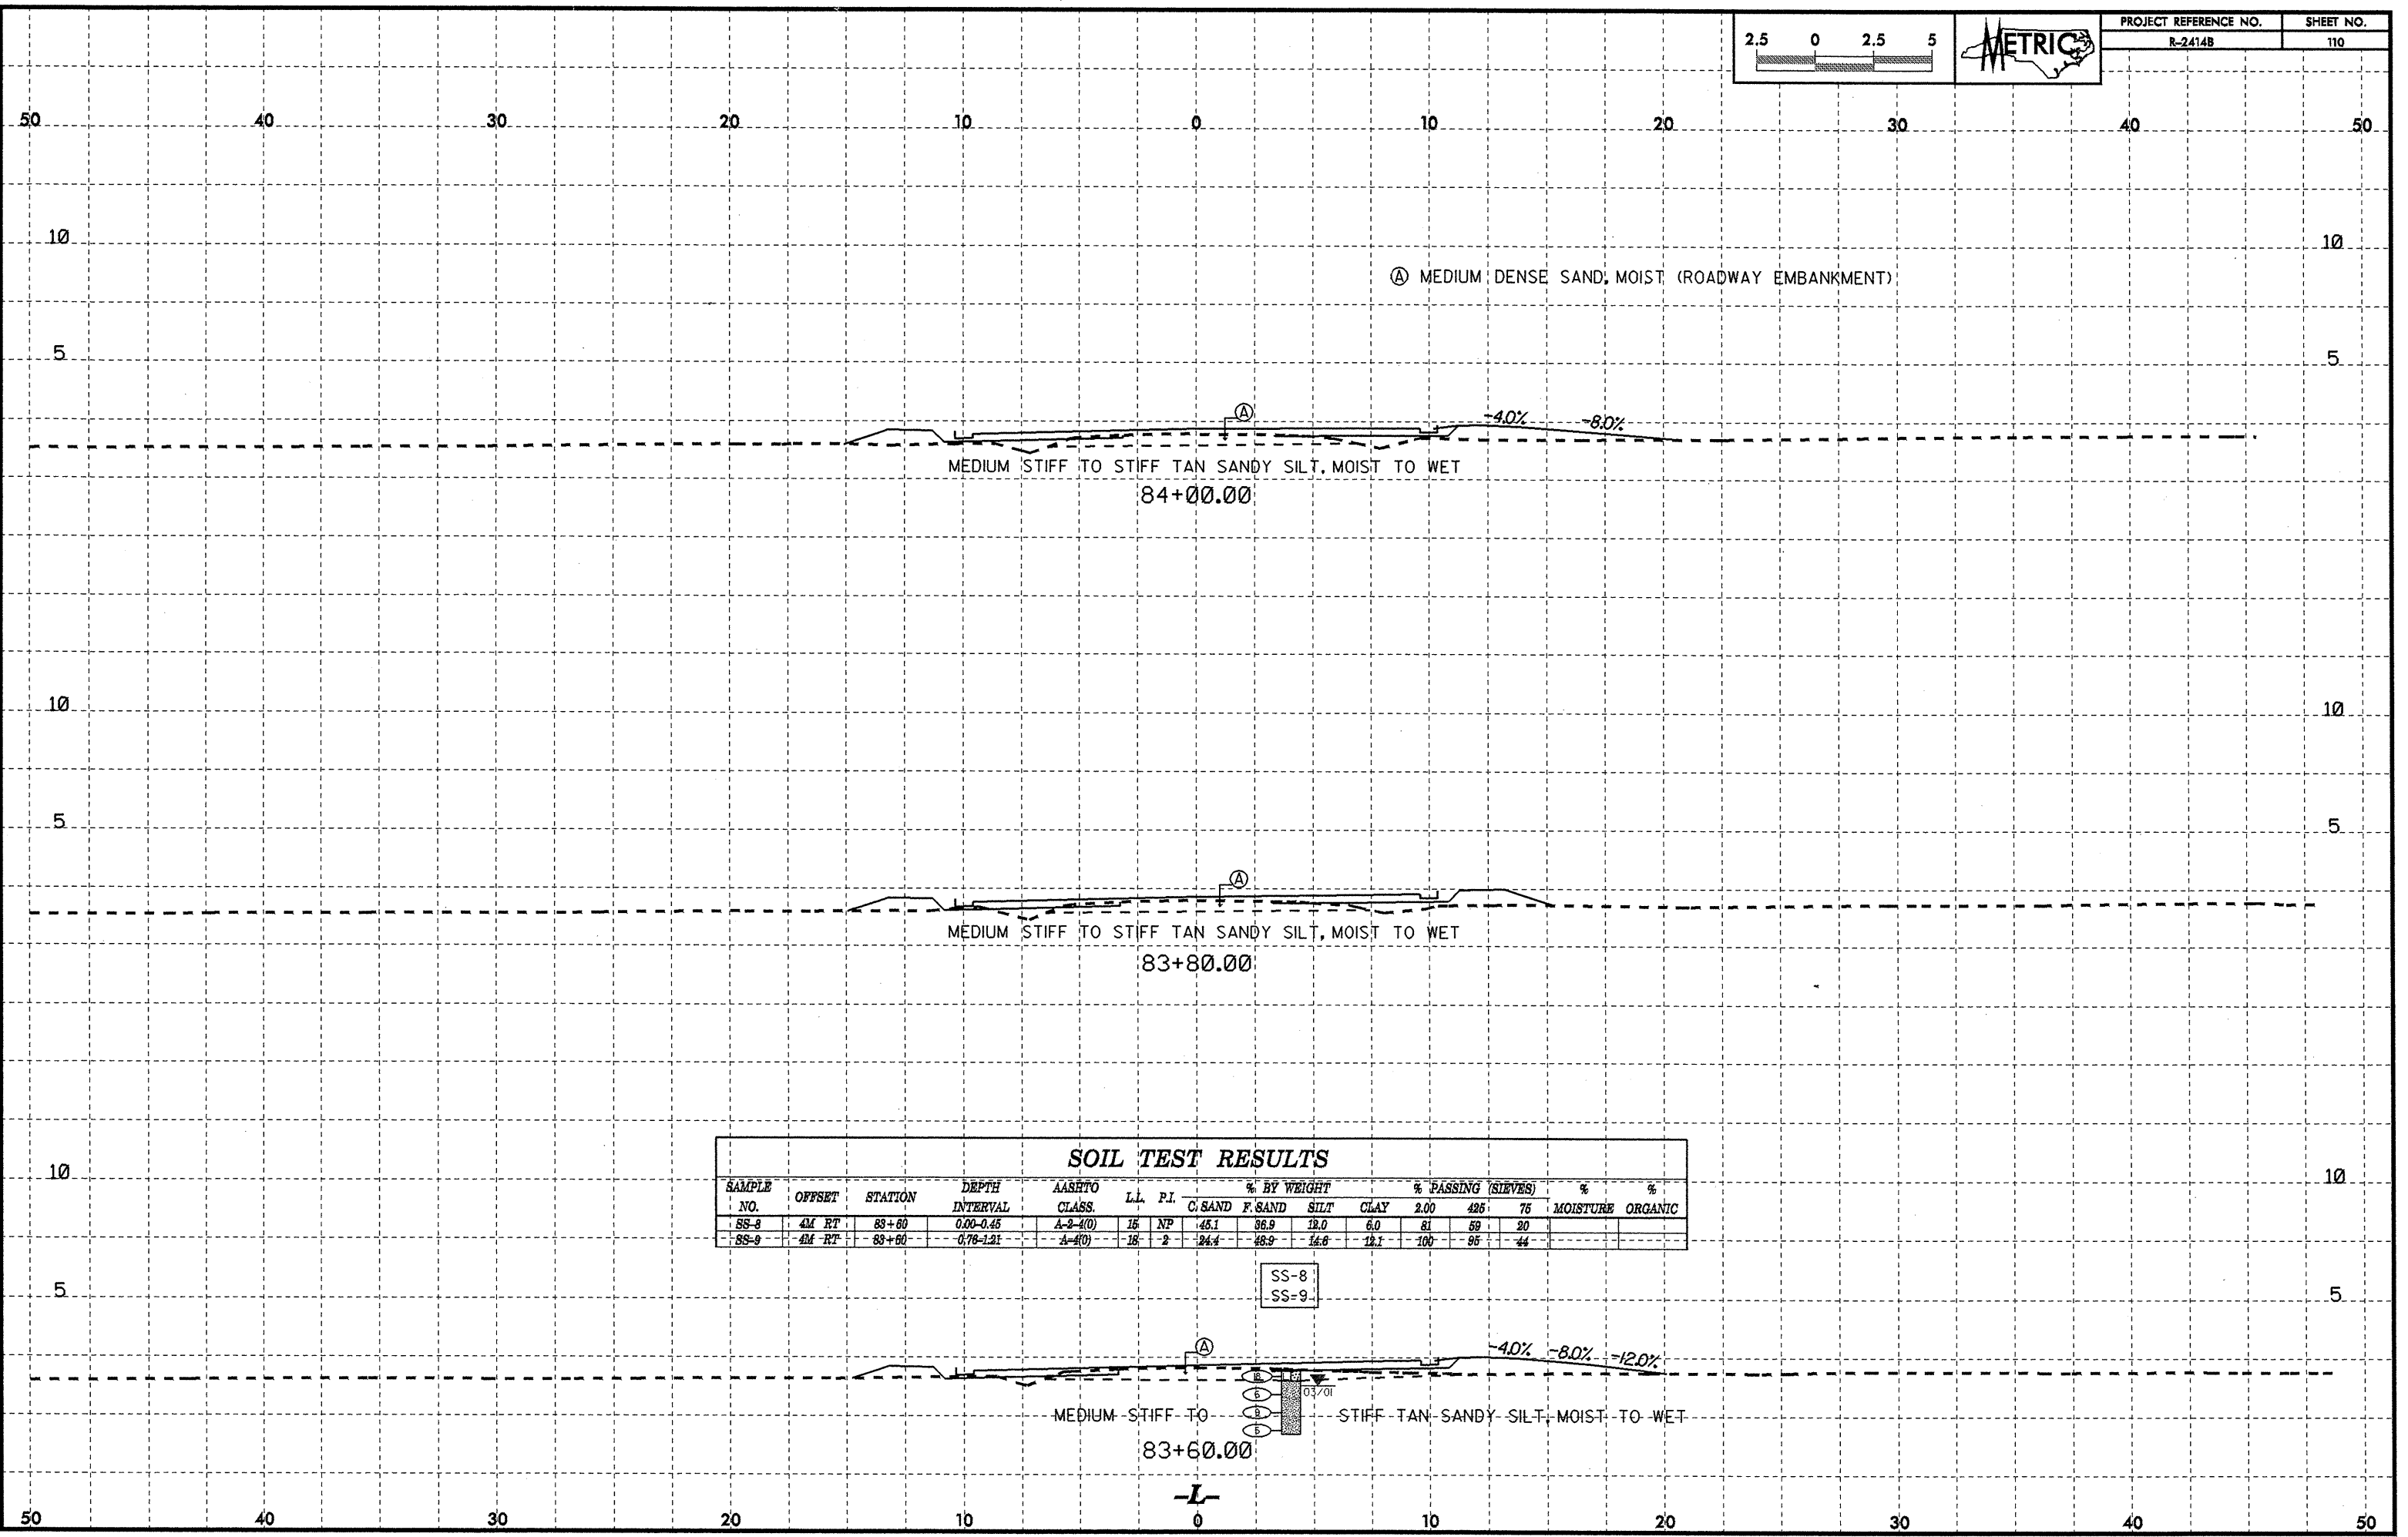


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
SS-8	4M RT	83+80	0.00-0.45	A-2-4(0)	16	NP	45.1	36.9	12.0	6.0	81	59	20		
SS-9	4M RT	83+80	0.78-1.21	A-4(0)	18	2	24.4	48.9	14.6	12.1	100	95	44		


SS-8
SS-9

10/26/2011 10:20:05 AM C:\BROWNE\REVISED\CADD\GEOTECH\sec\2414b_Rdy_xst_1.dgn
 User: broune

02/26/2008 15:07 600V:REV2\CADD_GEO\TECH\pse\2414b_Rdg_xsi_1.dgn
 age:sof\j\p\2414b_Rdg_xsi_1.dgn
 Cr:summer AT 08/29/03




PROJECT REFERENCE NO. R-2414B	SHEET NO. 113
----------------------------------	------------------

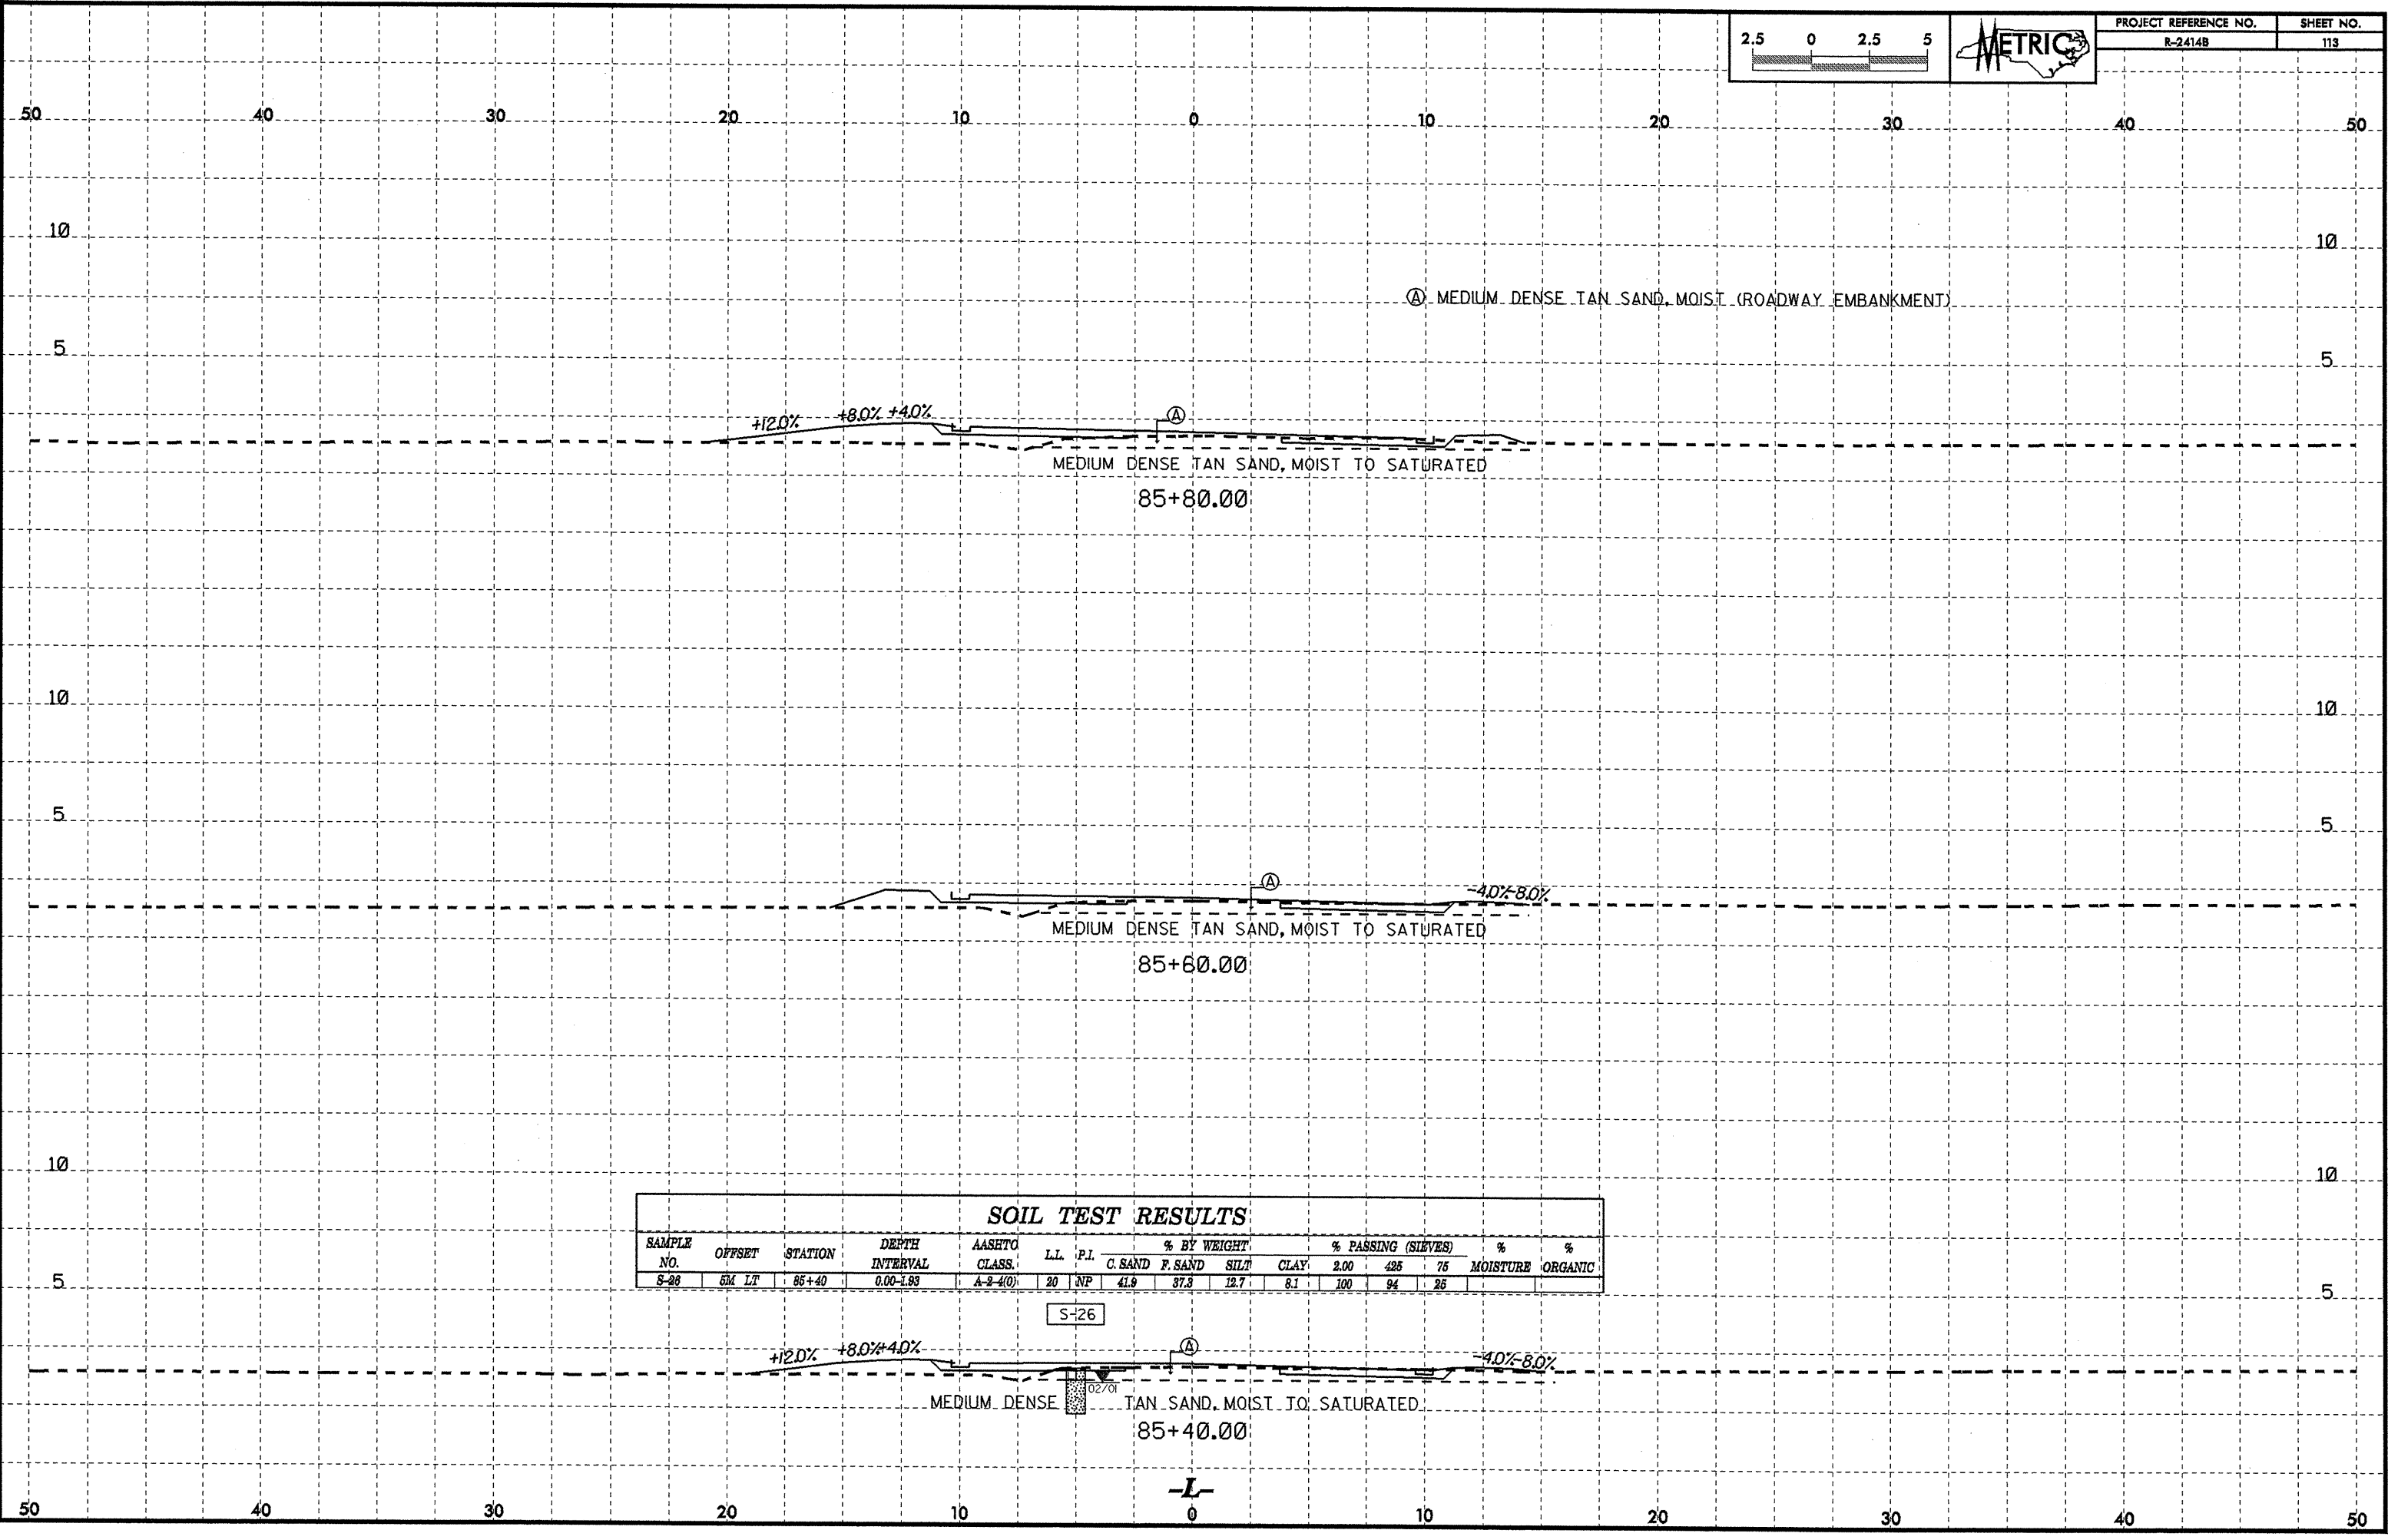


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-28	5M LT	85+40	0.00-1.83	A-2-4(0)	20	NP	41.9	37.3	12.7	8.1	100	94	26		

S-26

-L-



PROJECT REFERENCE NO. R-2414B	SHEET NO. 116
----------------------------------	------------------

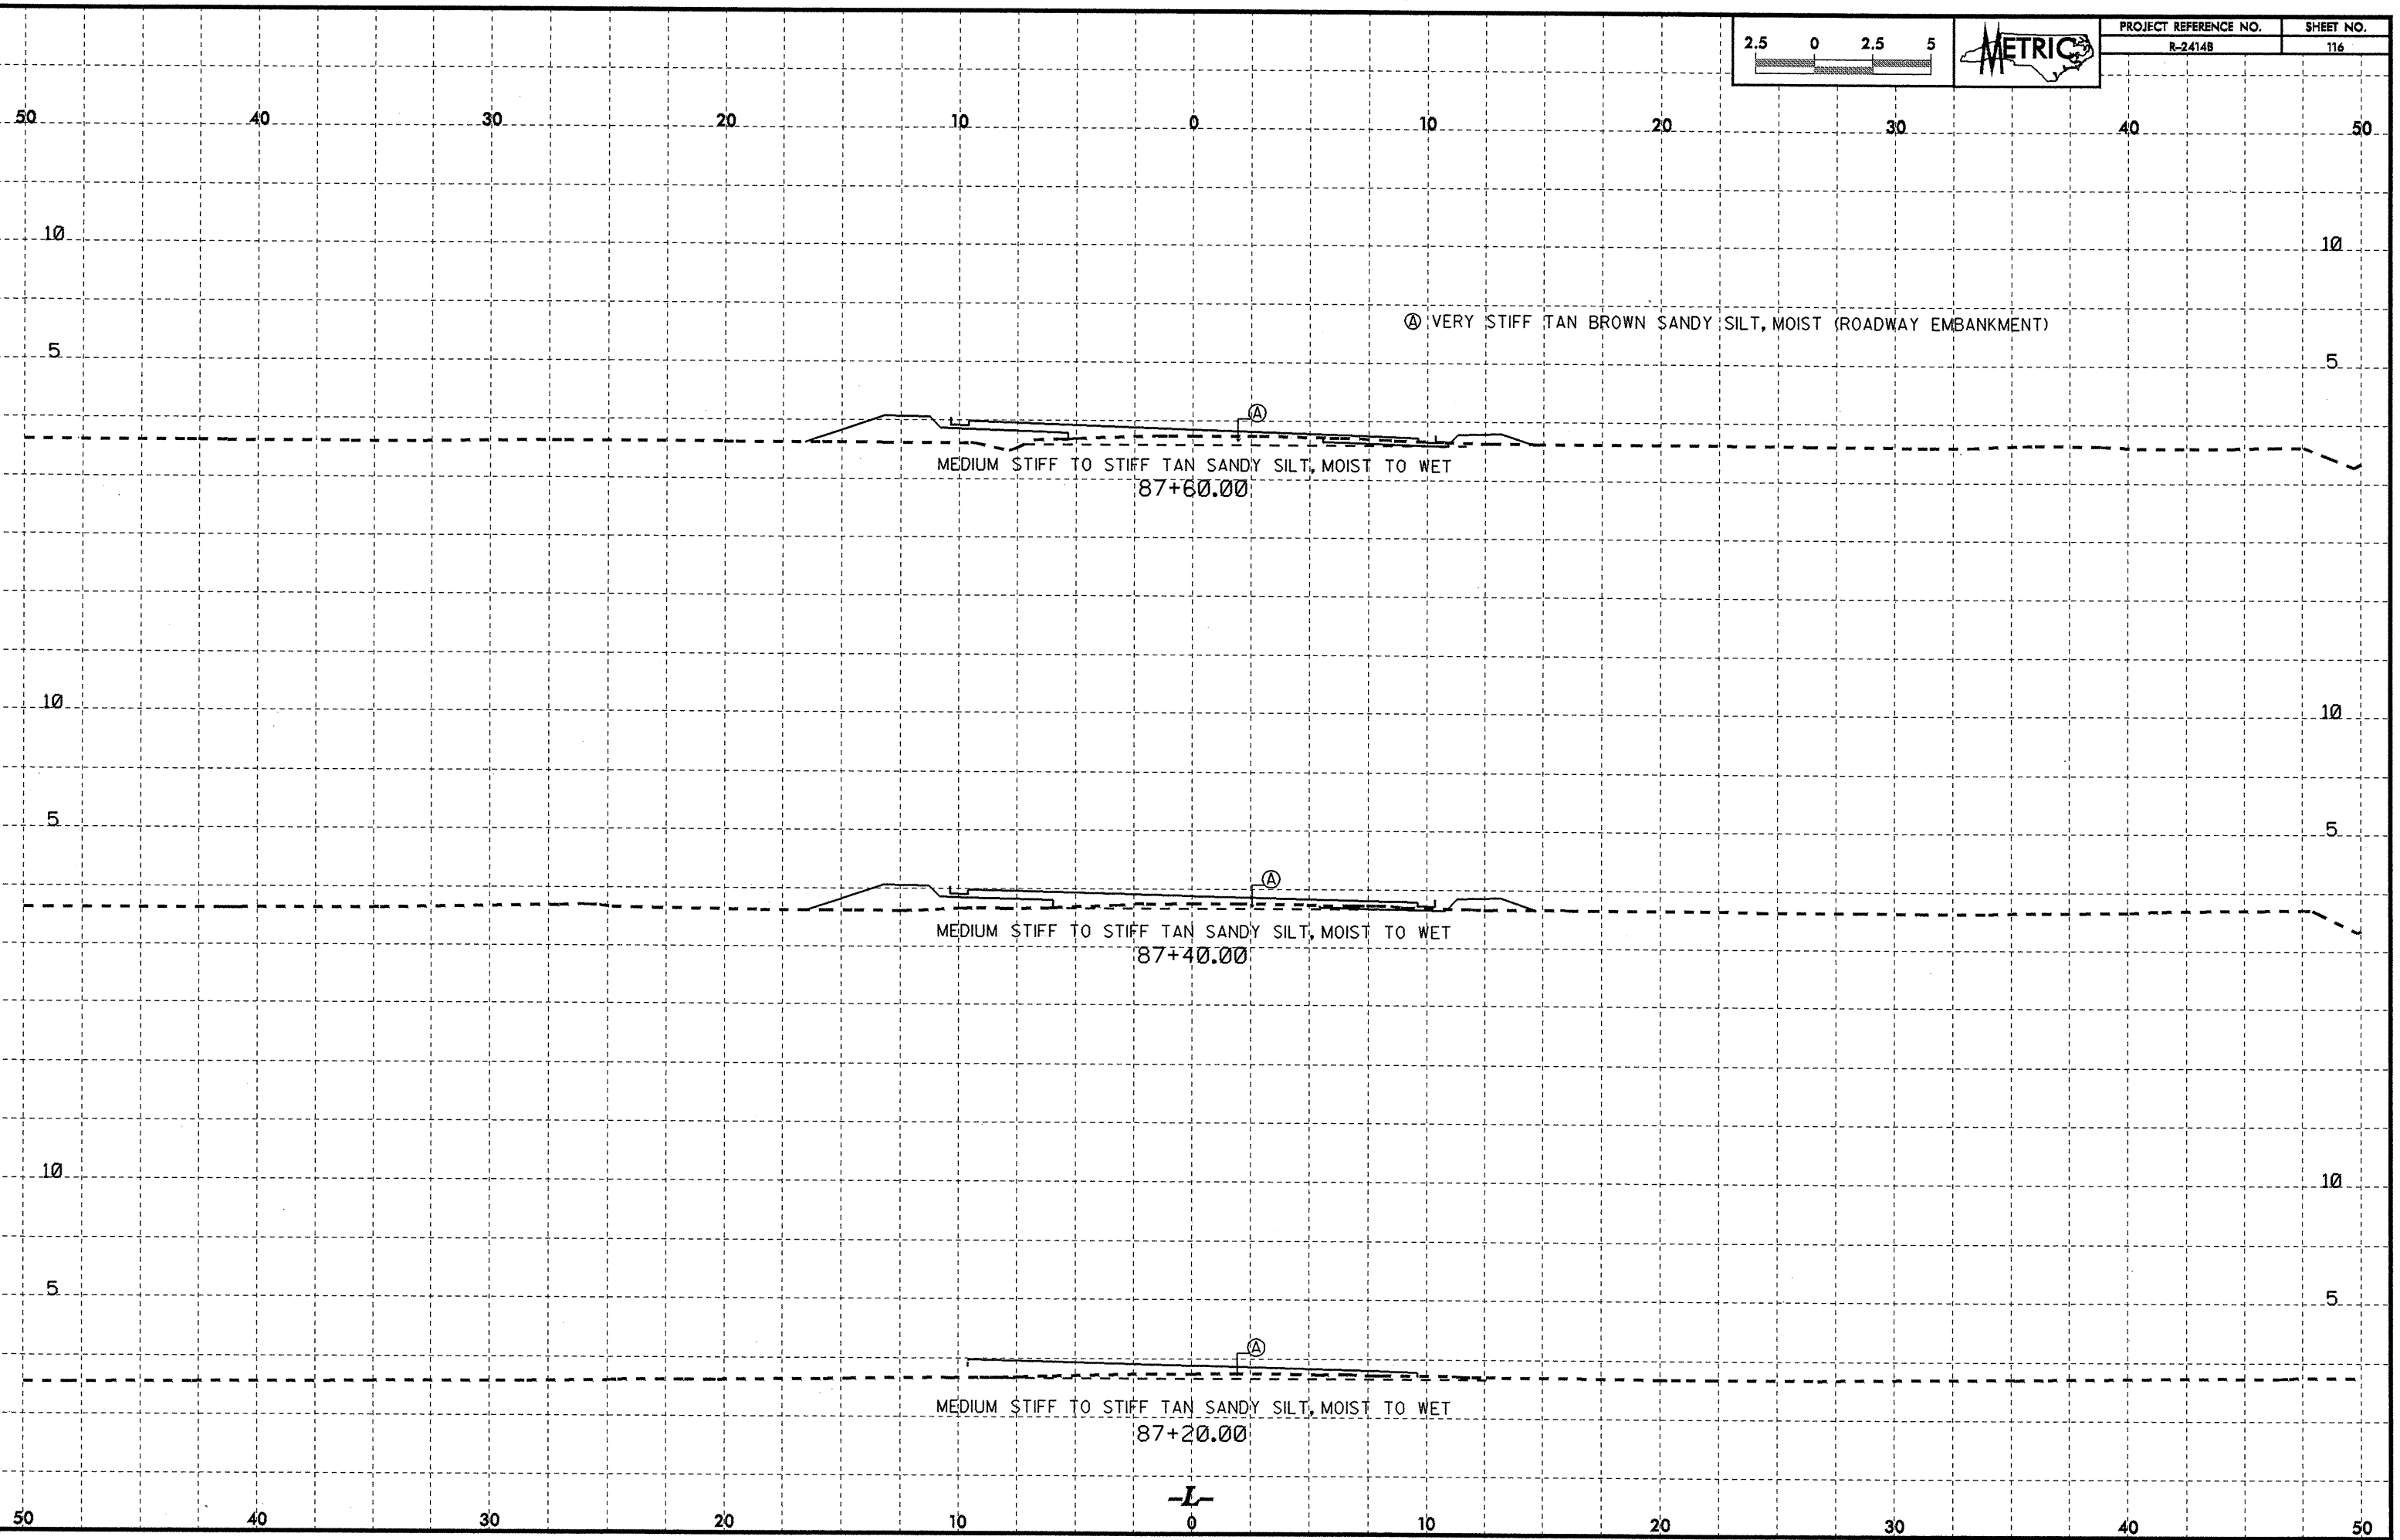

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET
87+60.00


Ⓐ VERY STIFF TAN BROWN SANDY SILT, MOIST (ROADWAY EMBANKMENT)

MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET
87+40.00


MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET
87+20.00

-L-
0

23-MAY-2008 15:27
s:\station\116\116.dgn



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	123

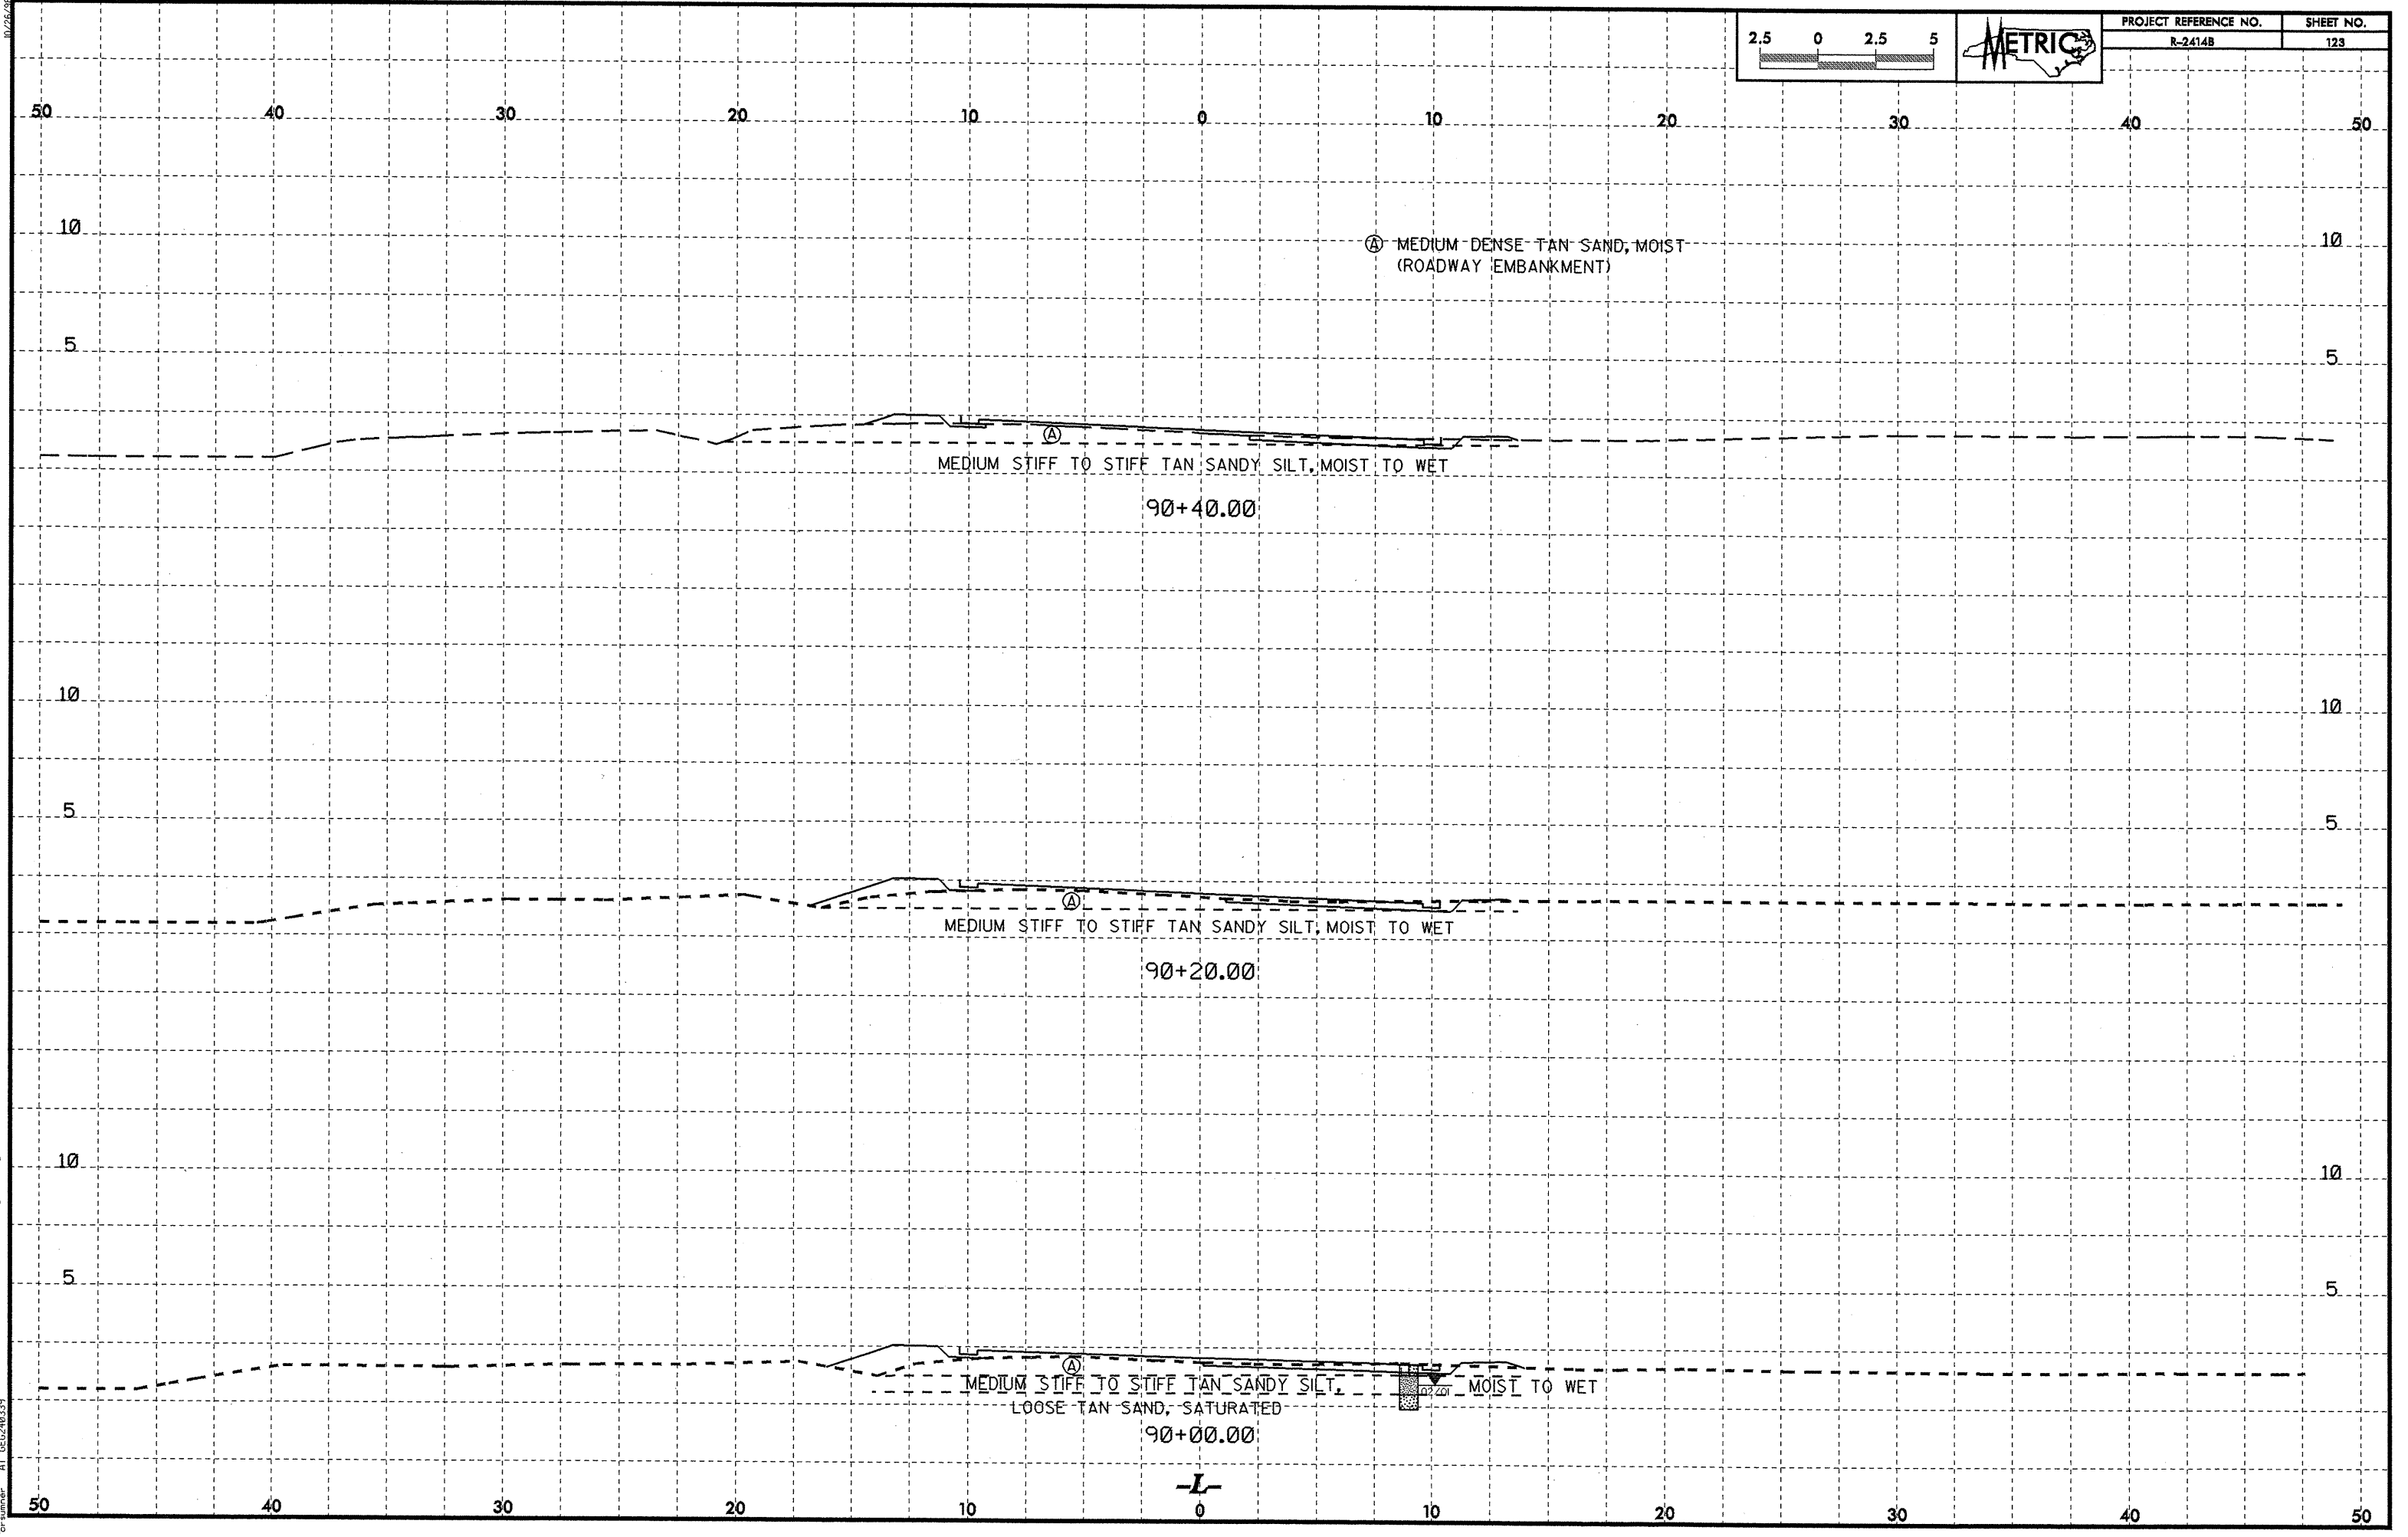

Ⓐ MEDIUM-DENSE TAN SAND, MOIST
(ROADWAY EMBANKMENT)

Ⓐ MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET

90+40.00

Ⓐ MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET

90+20.00


Ⓐ MEDIUM STIFF TO STIFF TAN SANDY SILT, MOIST TO WET
LOOSE TAN SAND, SATURATED

90+00.00


-L-
0

23-MAY-2008 15:29
C:\Users\jtrivelpy\Documents\REV2\CADD\GEOTECH\ssr\2414b_Rdy_xsi.dgn
jtrivelpy

10/26/09
29-MAY-2008 15:29
C:\Users\j\Documents\2008\1560\1560.dwg
C:\Users\j\Documents\2008\1560\1560.dwg
C:\Users\j\Documents\2008\1560\1560.dwg



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	124

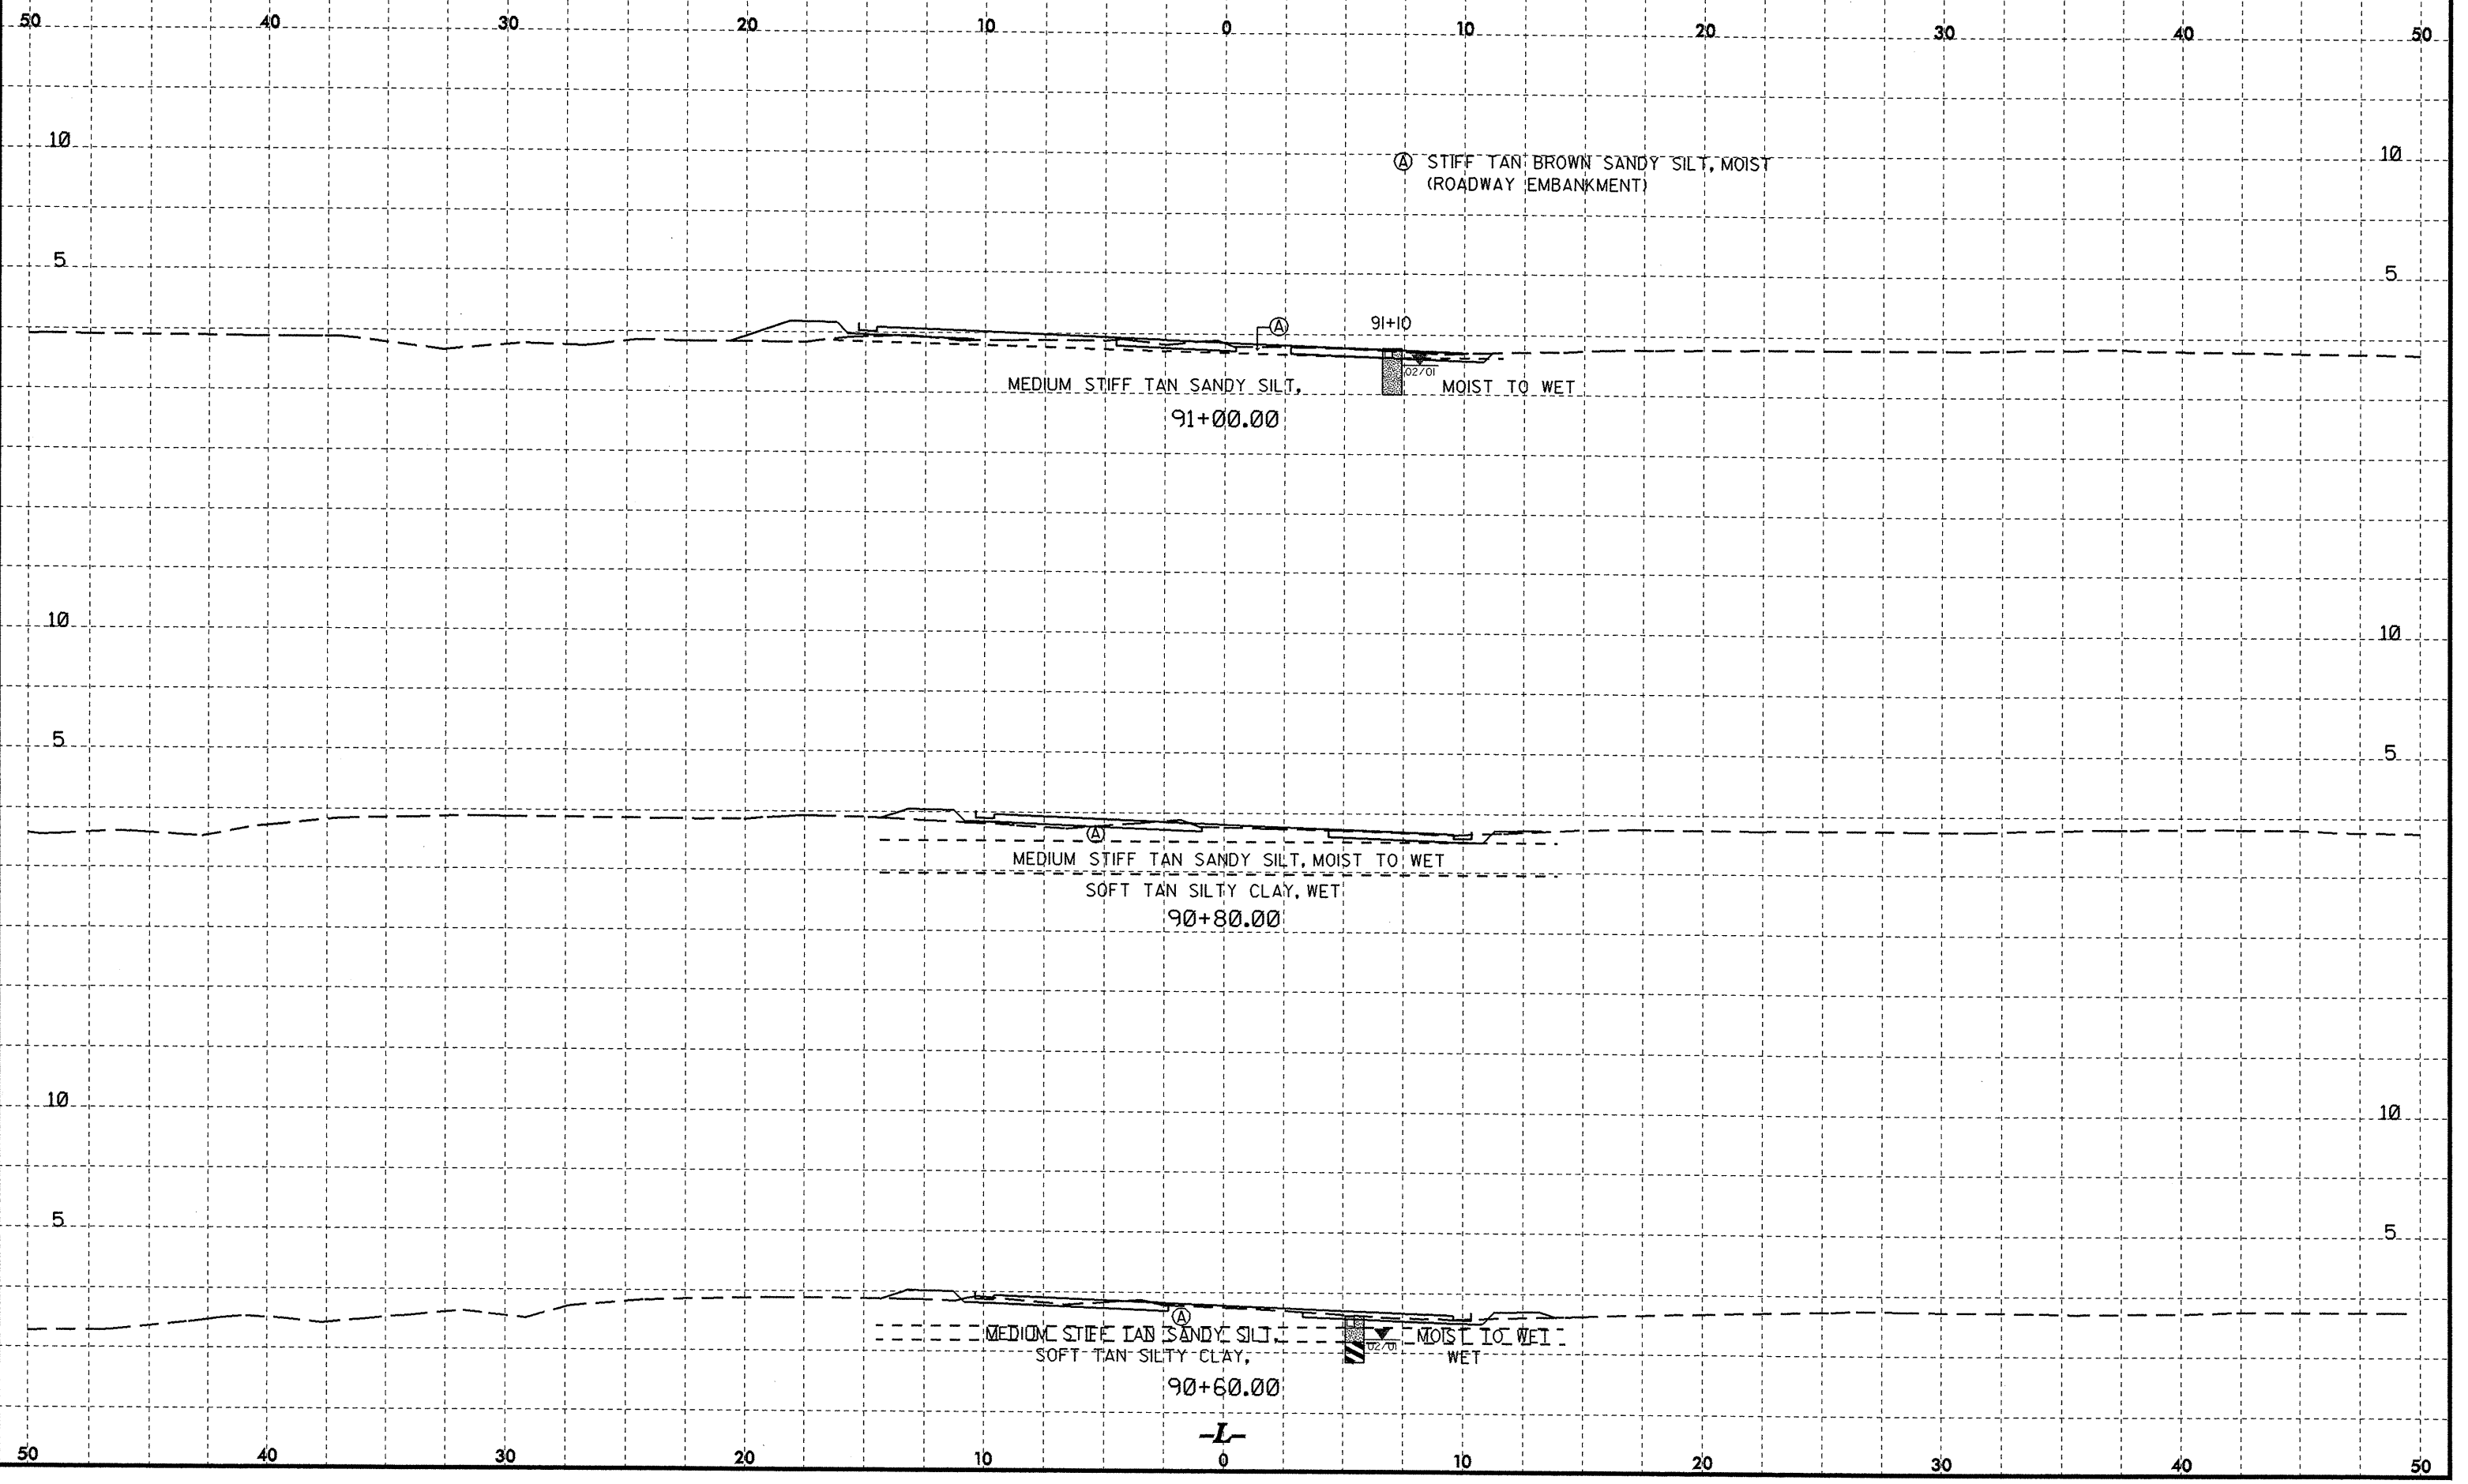



Ⓐ STIFF TAN BROWN SANDY SILT, MOIST
(ROADWAY EMBANKMENT)

MEDIUM STIFF TAN SANDY SILT,
91+00.00
MOIST TO WET

Ⓐ MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
SOFT TAN SILTY CLAY, WET
90+80.00



Ⓐ MEDIUM STIFF TAN SANDY SILT,
SOFT TAN SILTY CLAY,
90+60.00
MOIST TO WET
WET

-L-

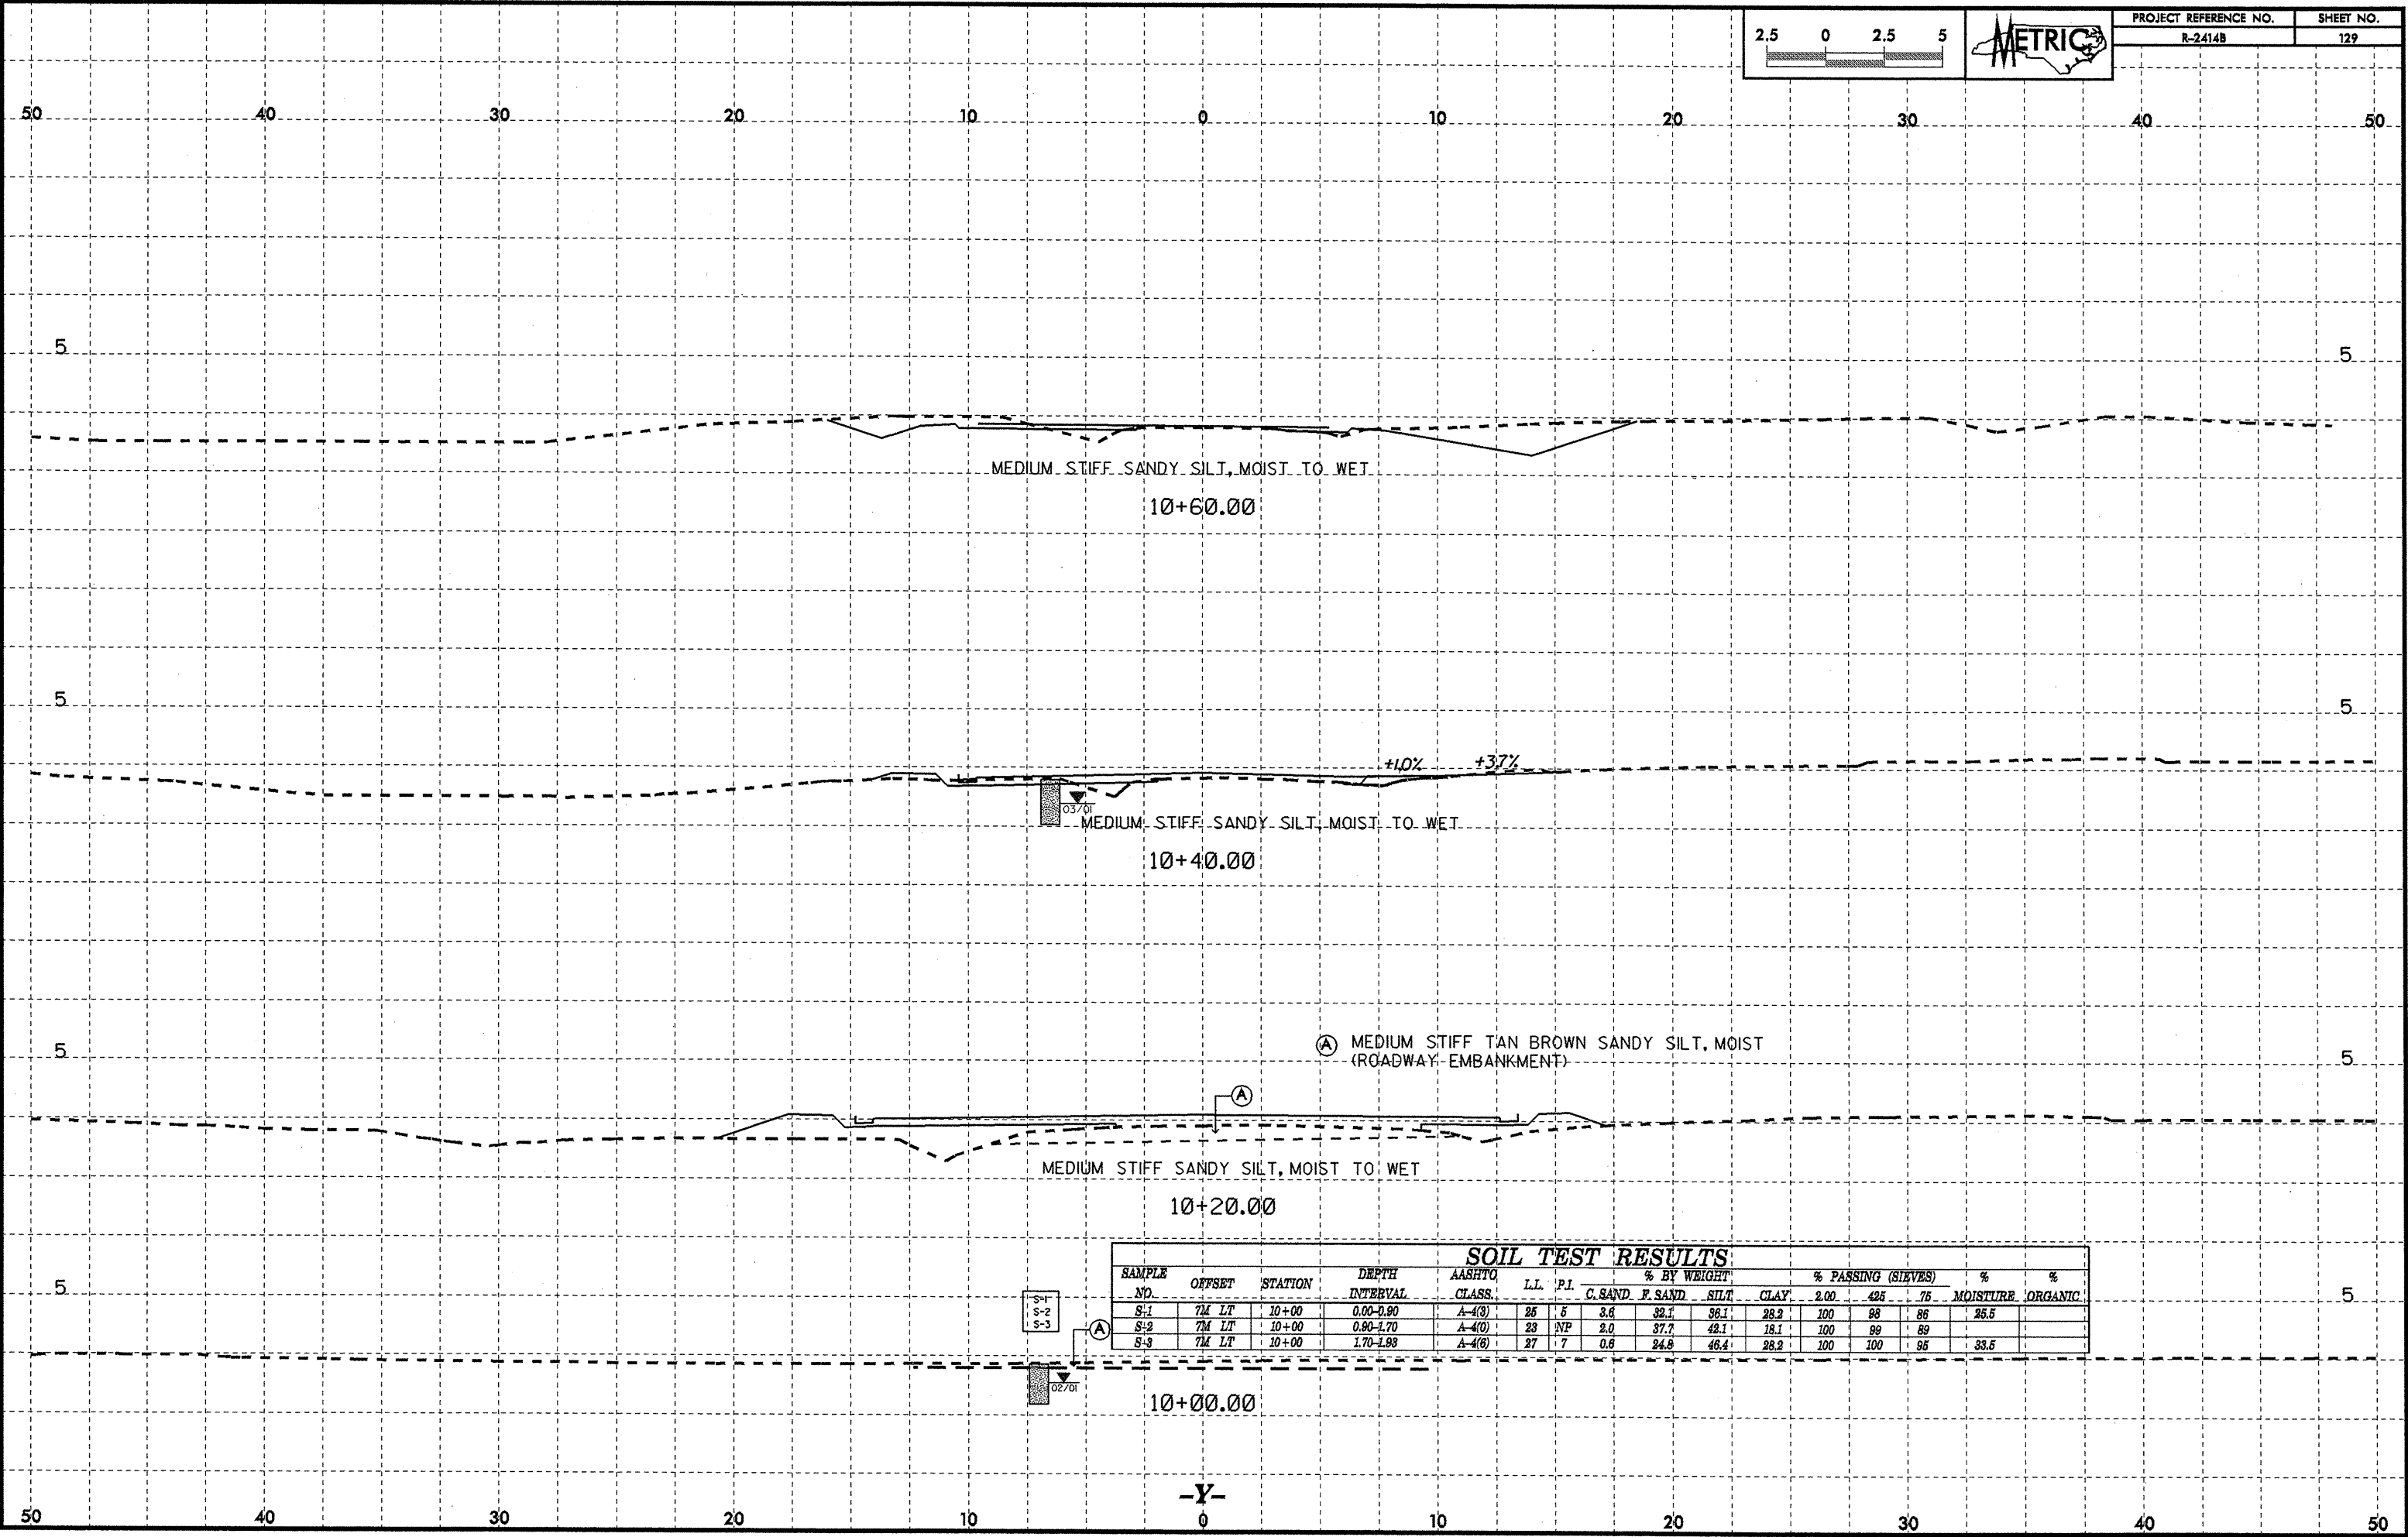

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-1	7M LT	10+00	0.00-0.90	A-4(3)	26	5	8.6	32.1	56.1	28.2	100	98	86	25.5	
S-2	7M LT	10+00	0.90-1.70	A-4(0)	23	NP	2.0	37.7	42.1	18.1	100	99	89		
S-3	7M LT	10+00	1.70-1.98	A-4(0)	27	7	0.6	24.8	46.4	28.2	100	100	95	33.5	

10/26/2018 11:37 AM C:\WORK\REV2\ROAD\GEOTECH\2414B\rdy_sst.dgn
 User: rdymiller

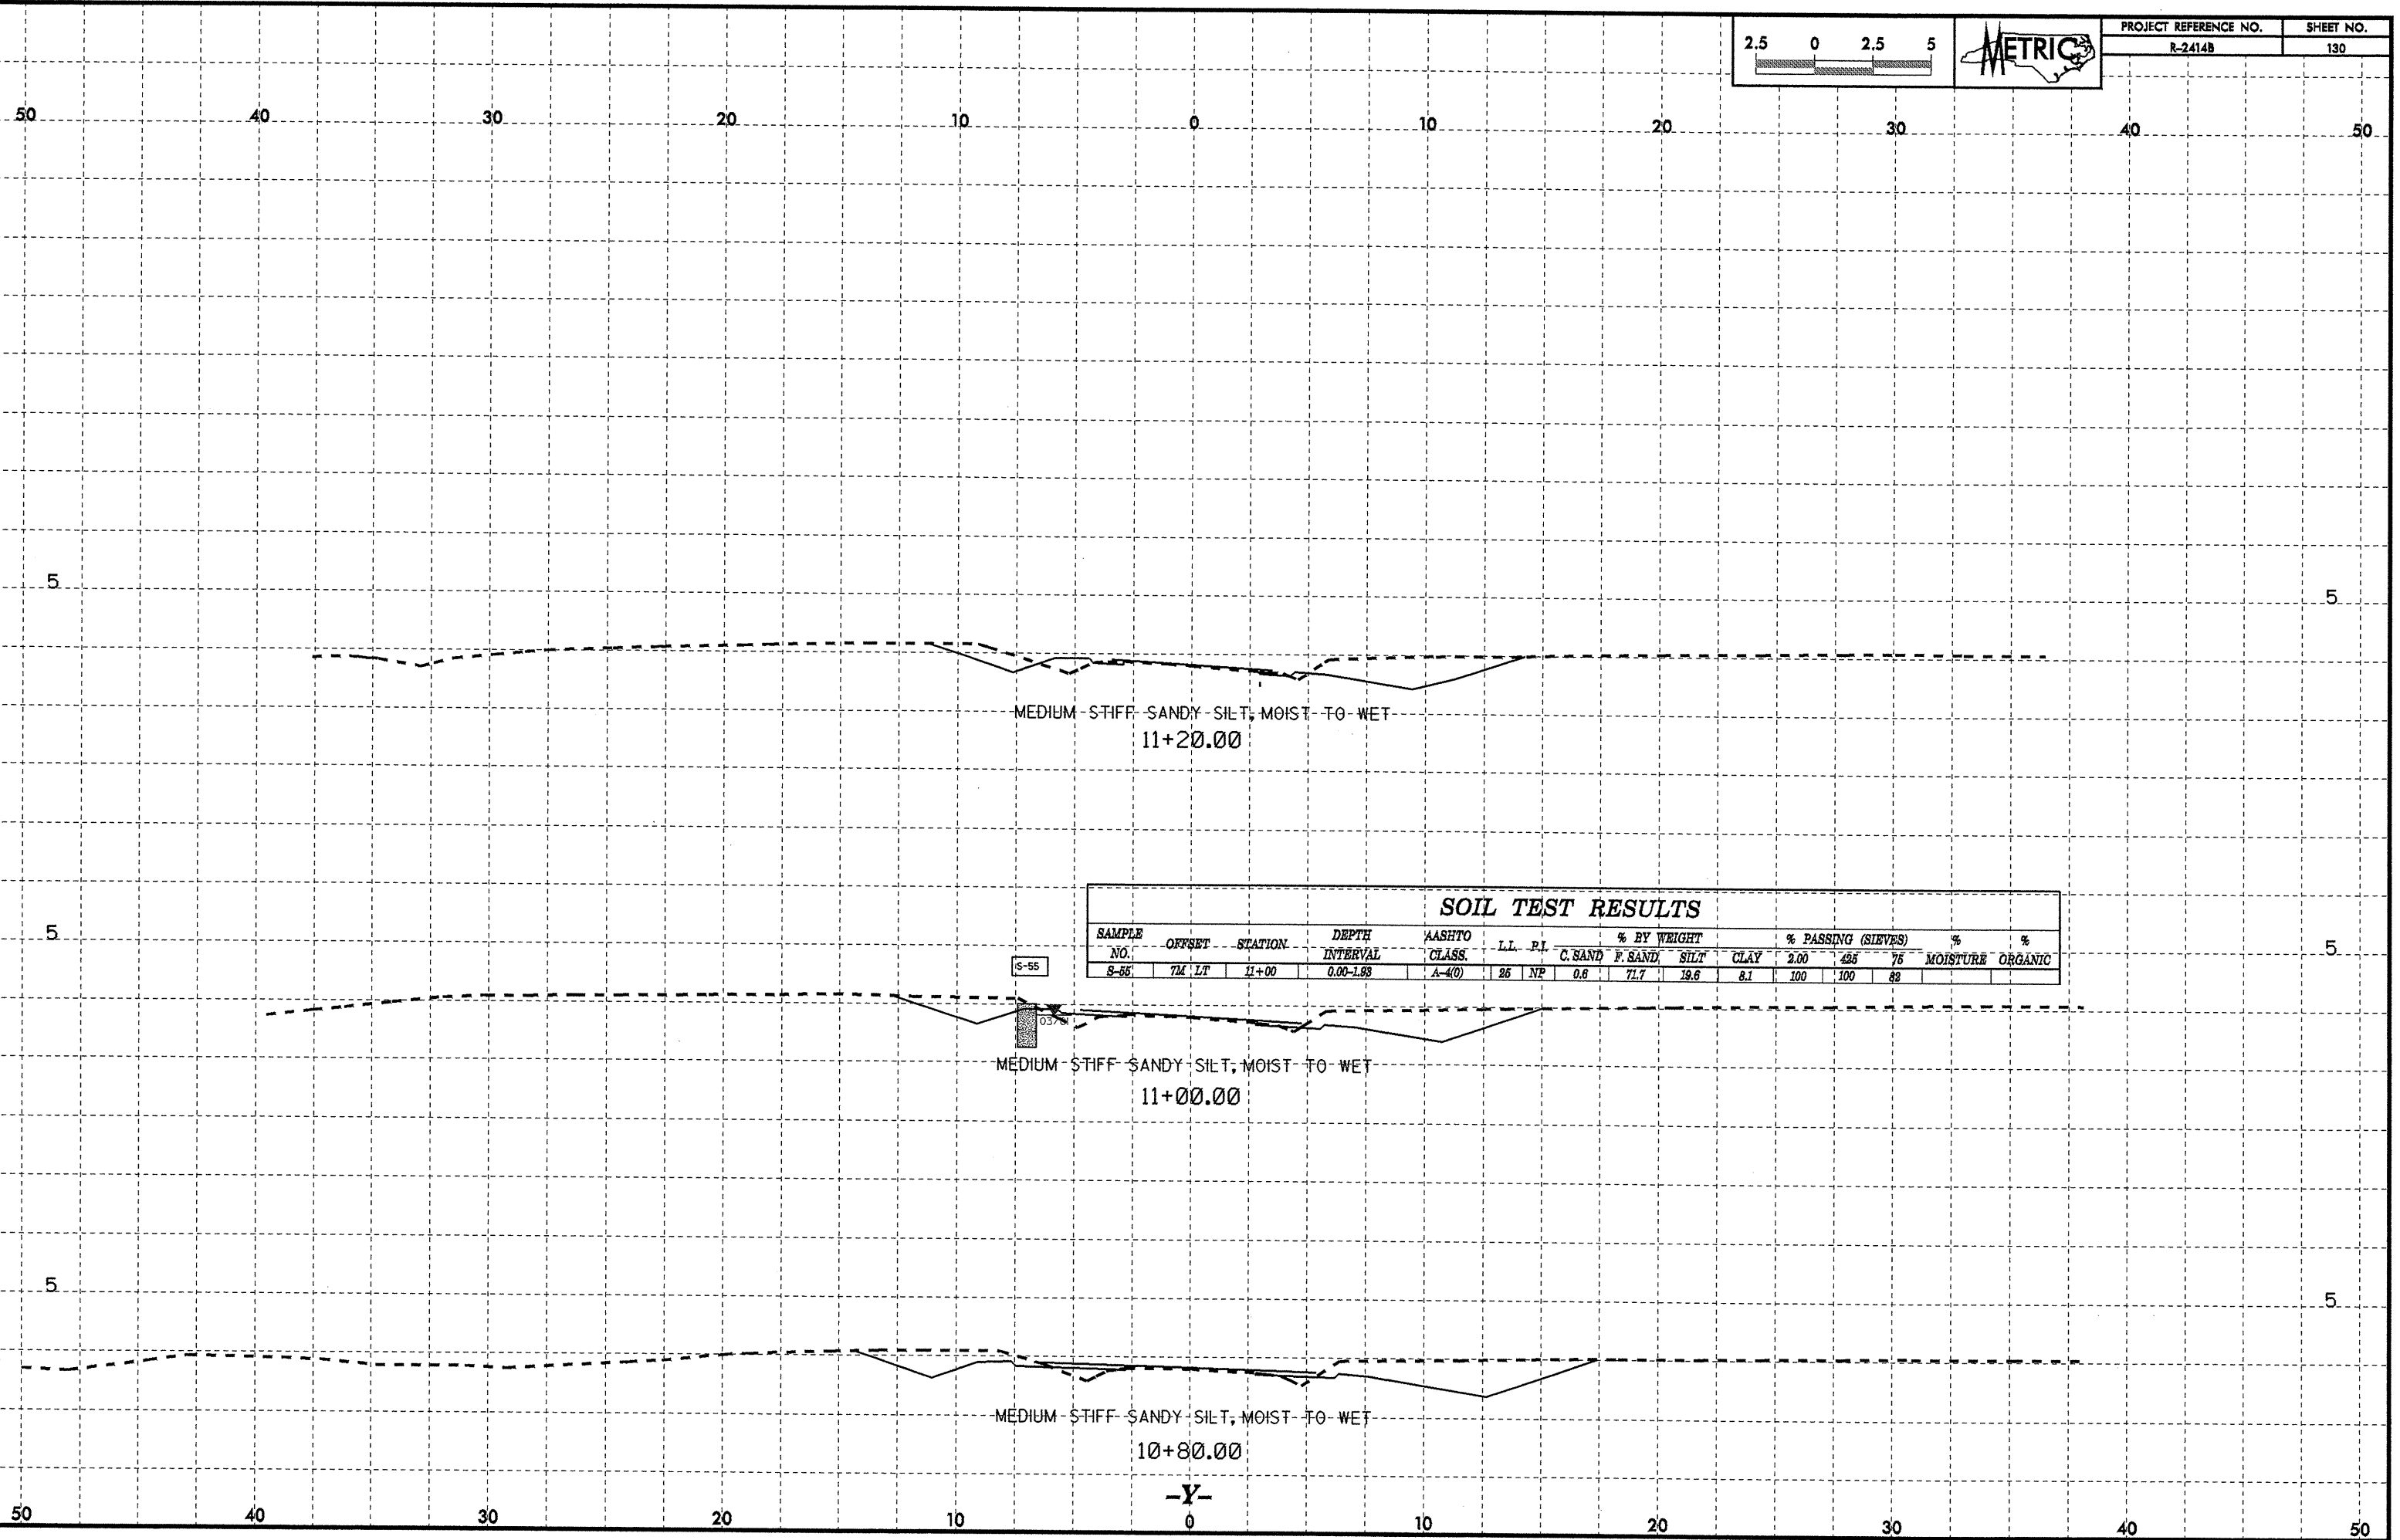

MEDIUM-STIFF SANDY SILT; MOIST TO WET
11+20.00

S-55

MEDIUM-STIFF SANDY SILT; MOIST TO WET
11+00.00

MEDIUM-STIFF SANDY SILT; MOIST TO WET
10+80.00



-Y-
0

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PI	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-55	7M LT	11+00	0.00-1.93	A-4(0)	26	NP	0.6	71.7	19.6	8.1	100	100	88		


10/26/2006 14:37:00 REVISED: 10/26/2006 14:37:00
 10/26/2006 14:37:00 REVISED: 10/26/2006 14:37:00
 10/26/2006 14:37:00 REVISED: 10/26/2006 14:37:00

10/26/08
 201414B-2008-14538000-REV2\CADD\GEOTECH\14538000-201414B-rdy.vst-1.dgn
 14538000-201414B-2008-14538000-REV2

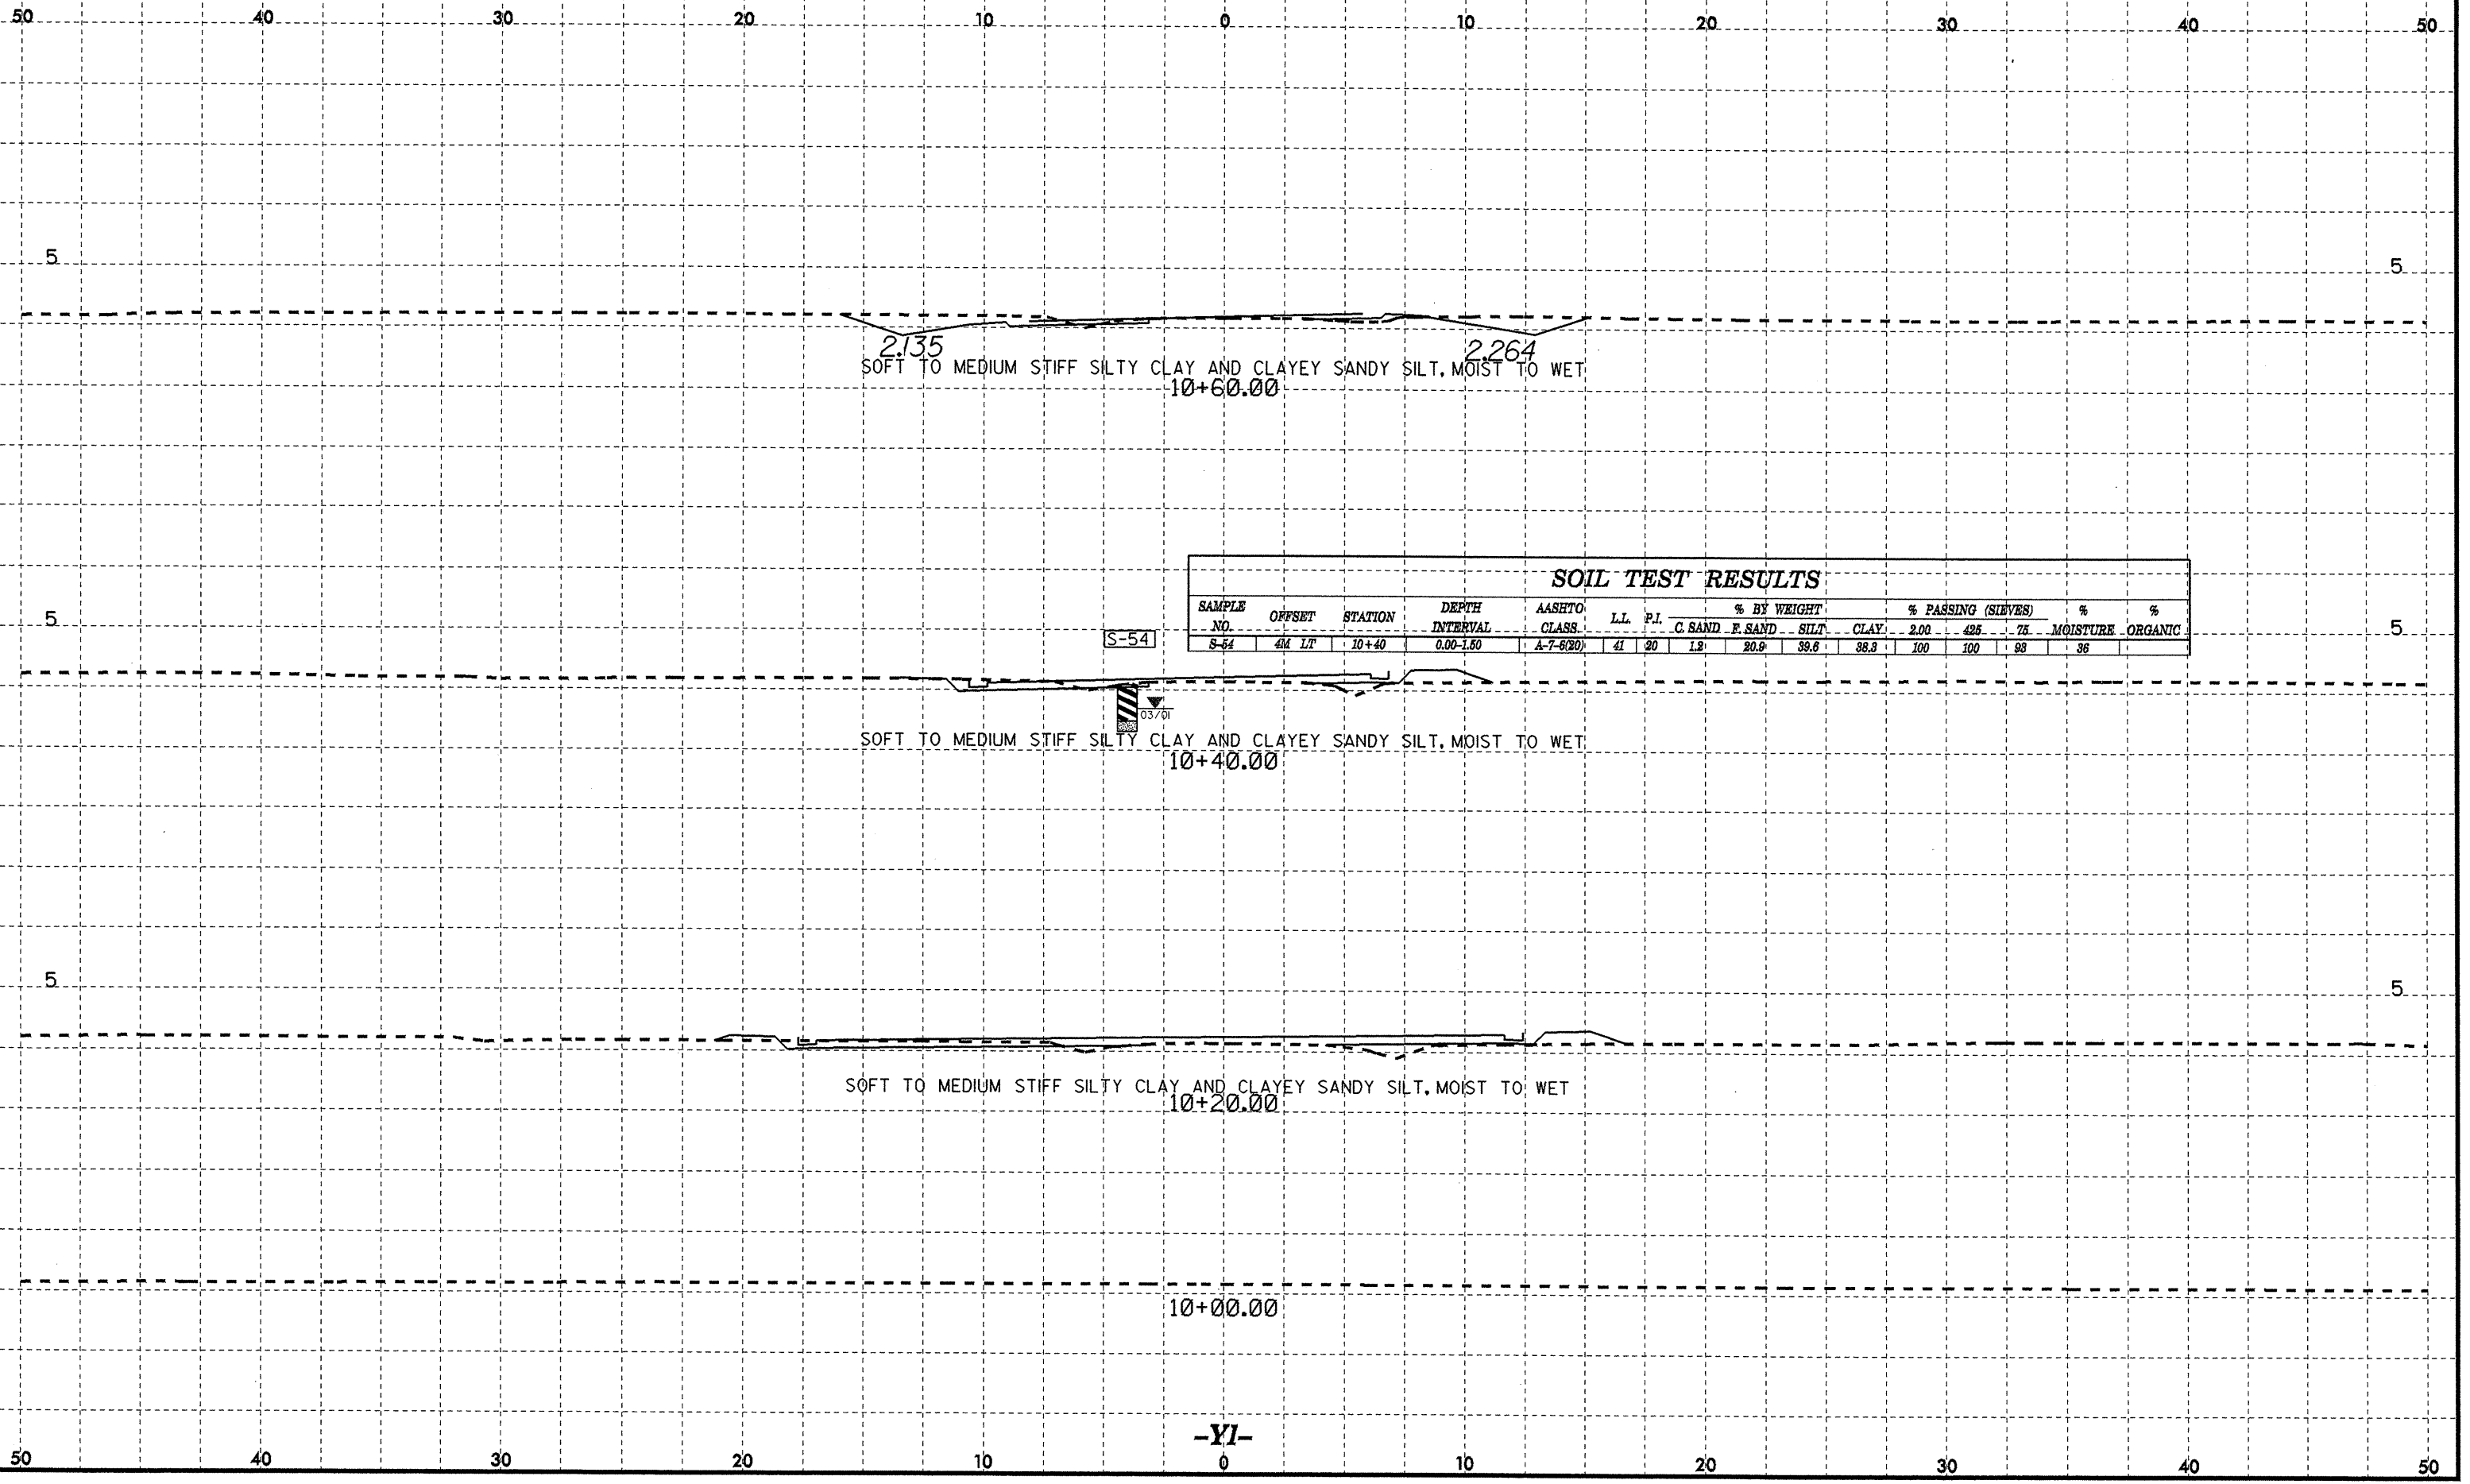


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	2.00	425	75		
S-54	4M LT	10+40	0.00-1.50	A-7-6(20)	41	20	1.2	20.0	39.6	38.3	100	100	93	36	


10/26/98
C:\Users\TJH\Documents\2008\1133\OPERATION\TJH\21414B\GEO\ROADWAY\REV2\CADD\GEO\TECH\REV2\21414b_rdy_vst_1p2.dgn




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	133

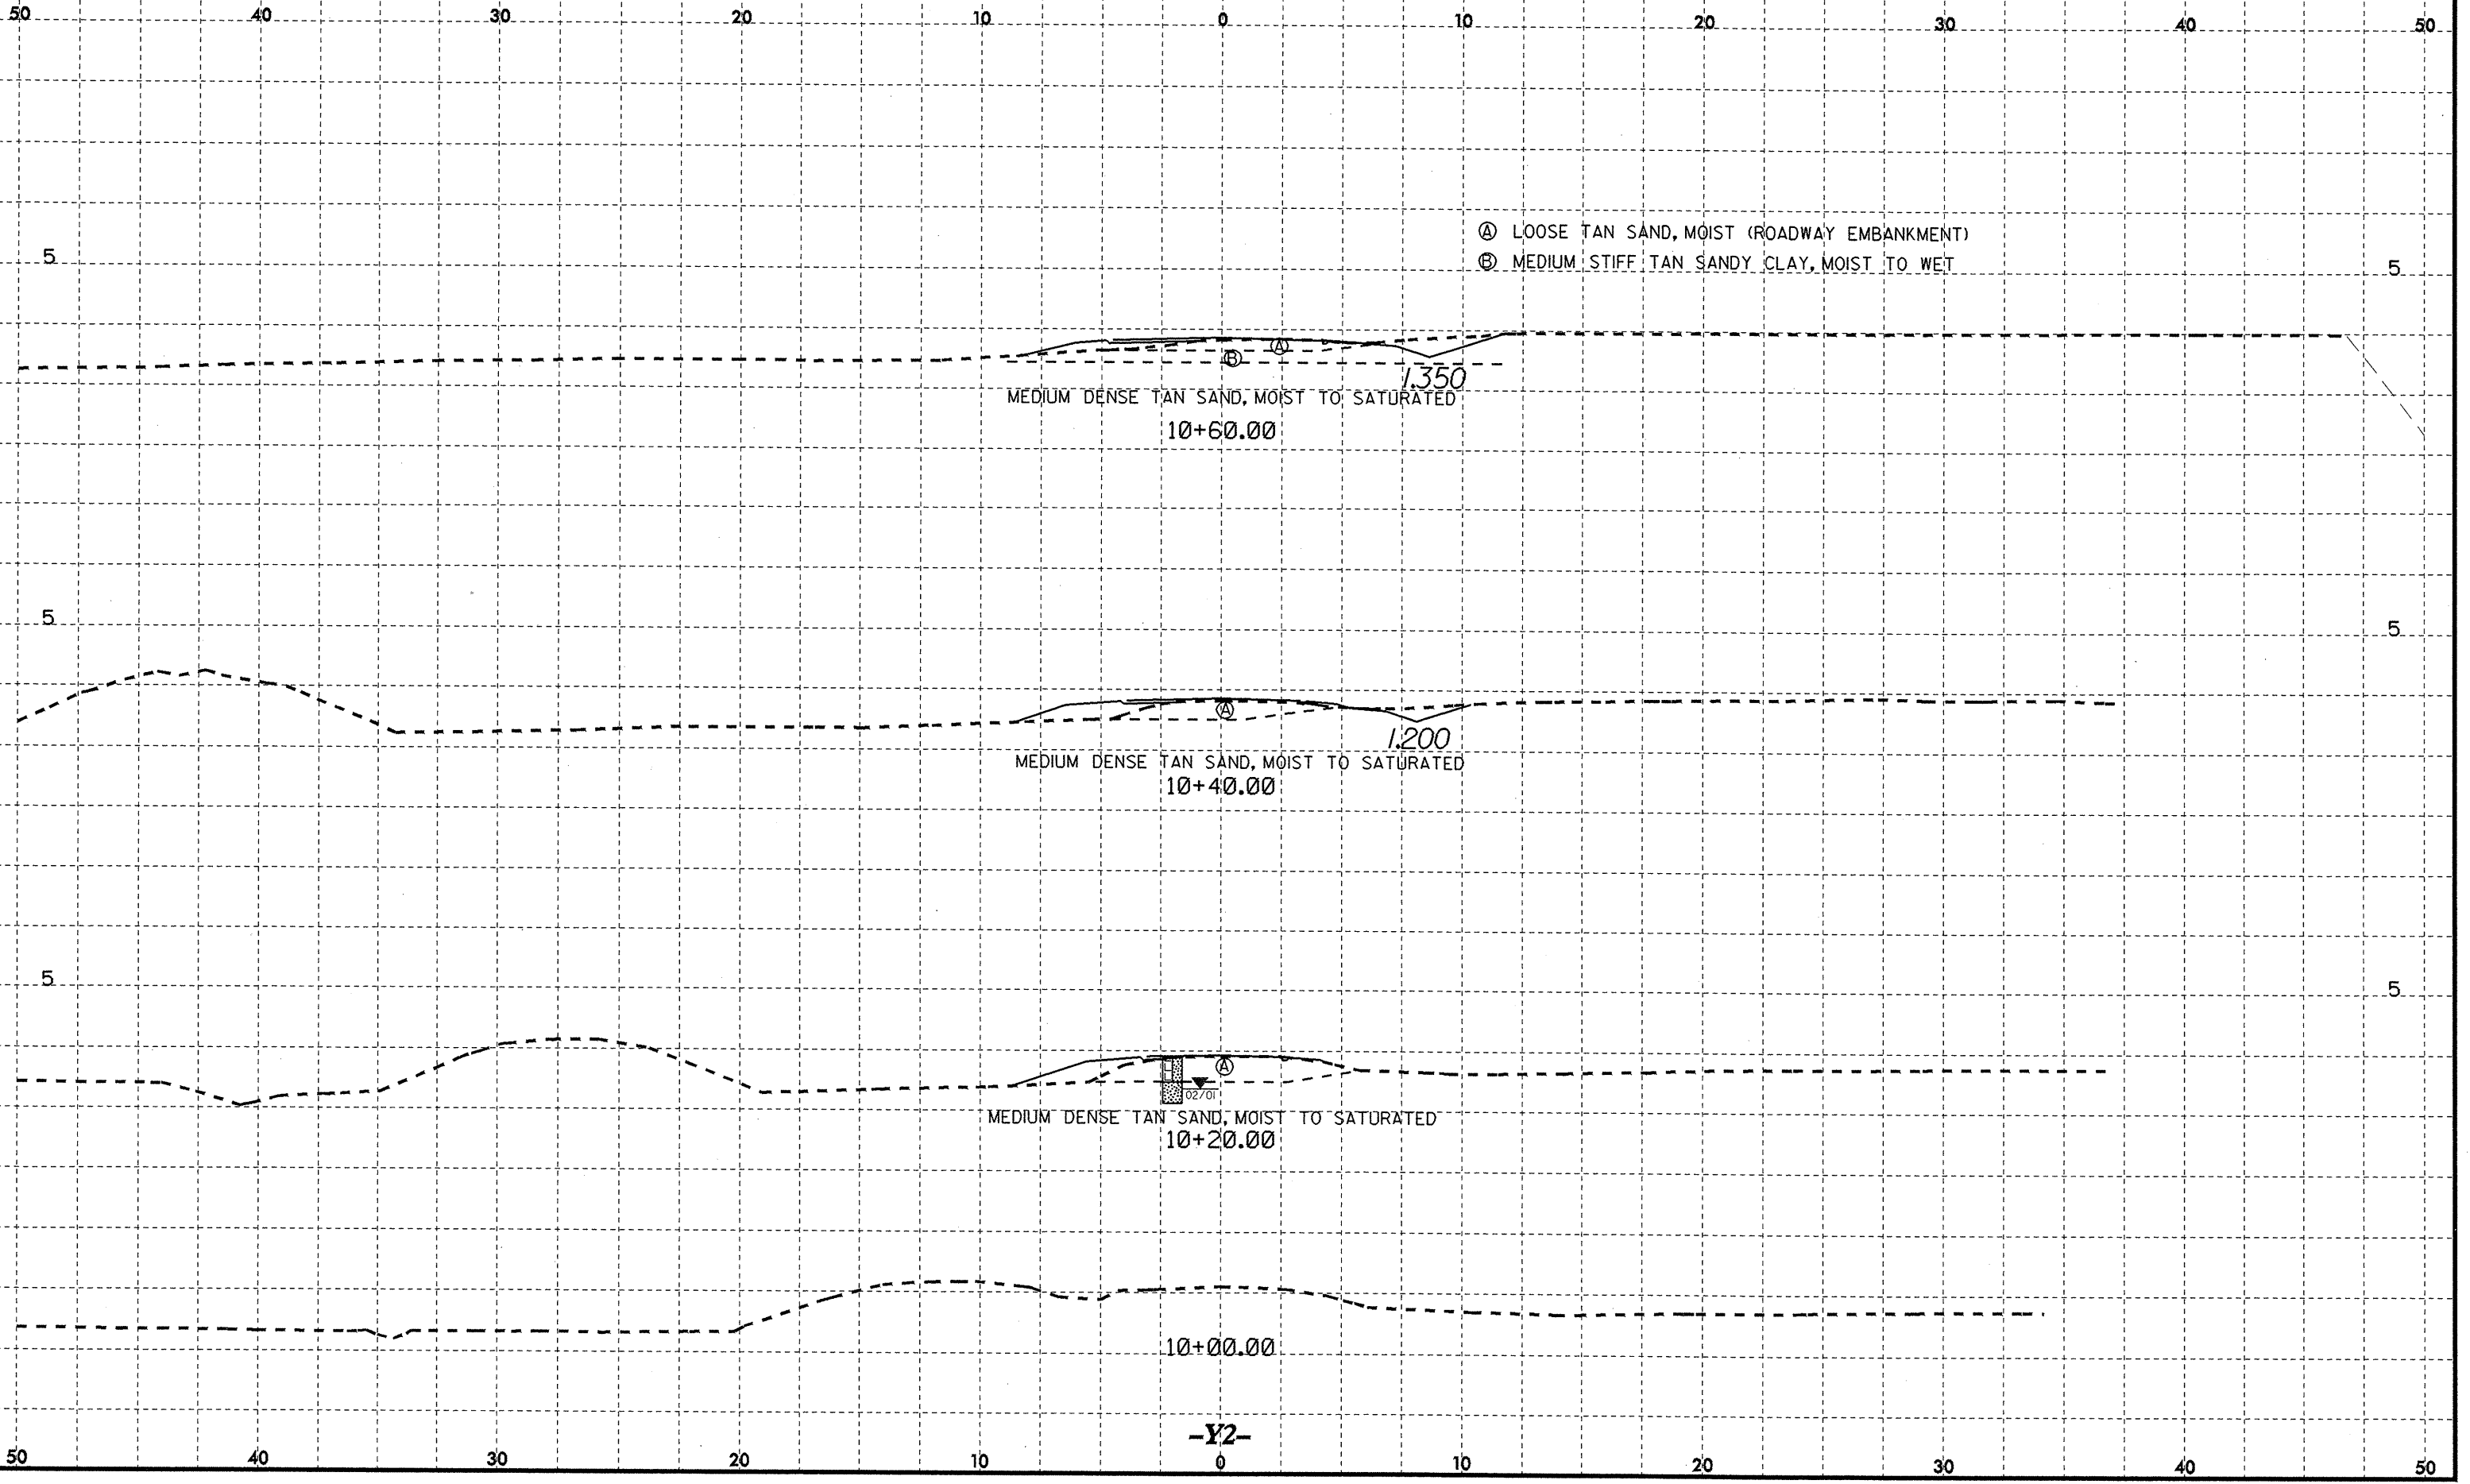


02/26/08
20:45:30
geotechnical\2008\135\135.dgn
02/26/08
10:27:01
02/26/08
10:27:01




PROJECT REFERENCE NO.	SHEET NO.
R-2414B	135

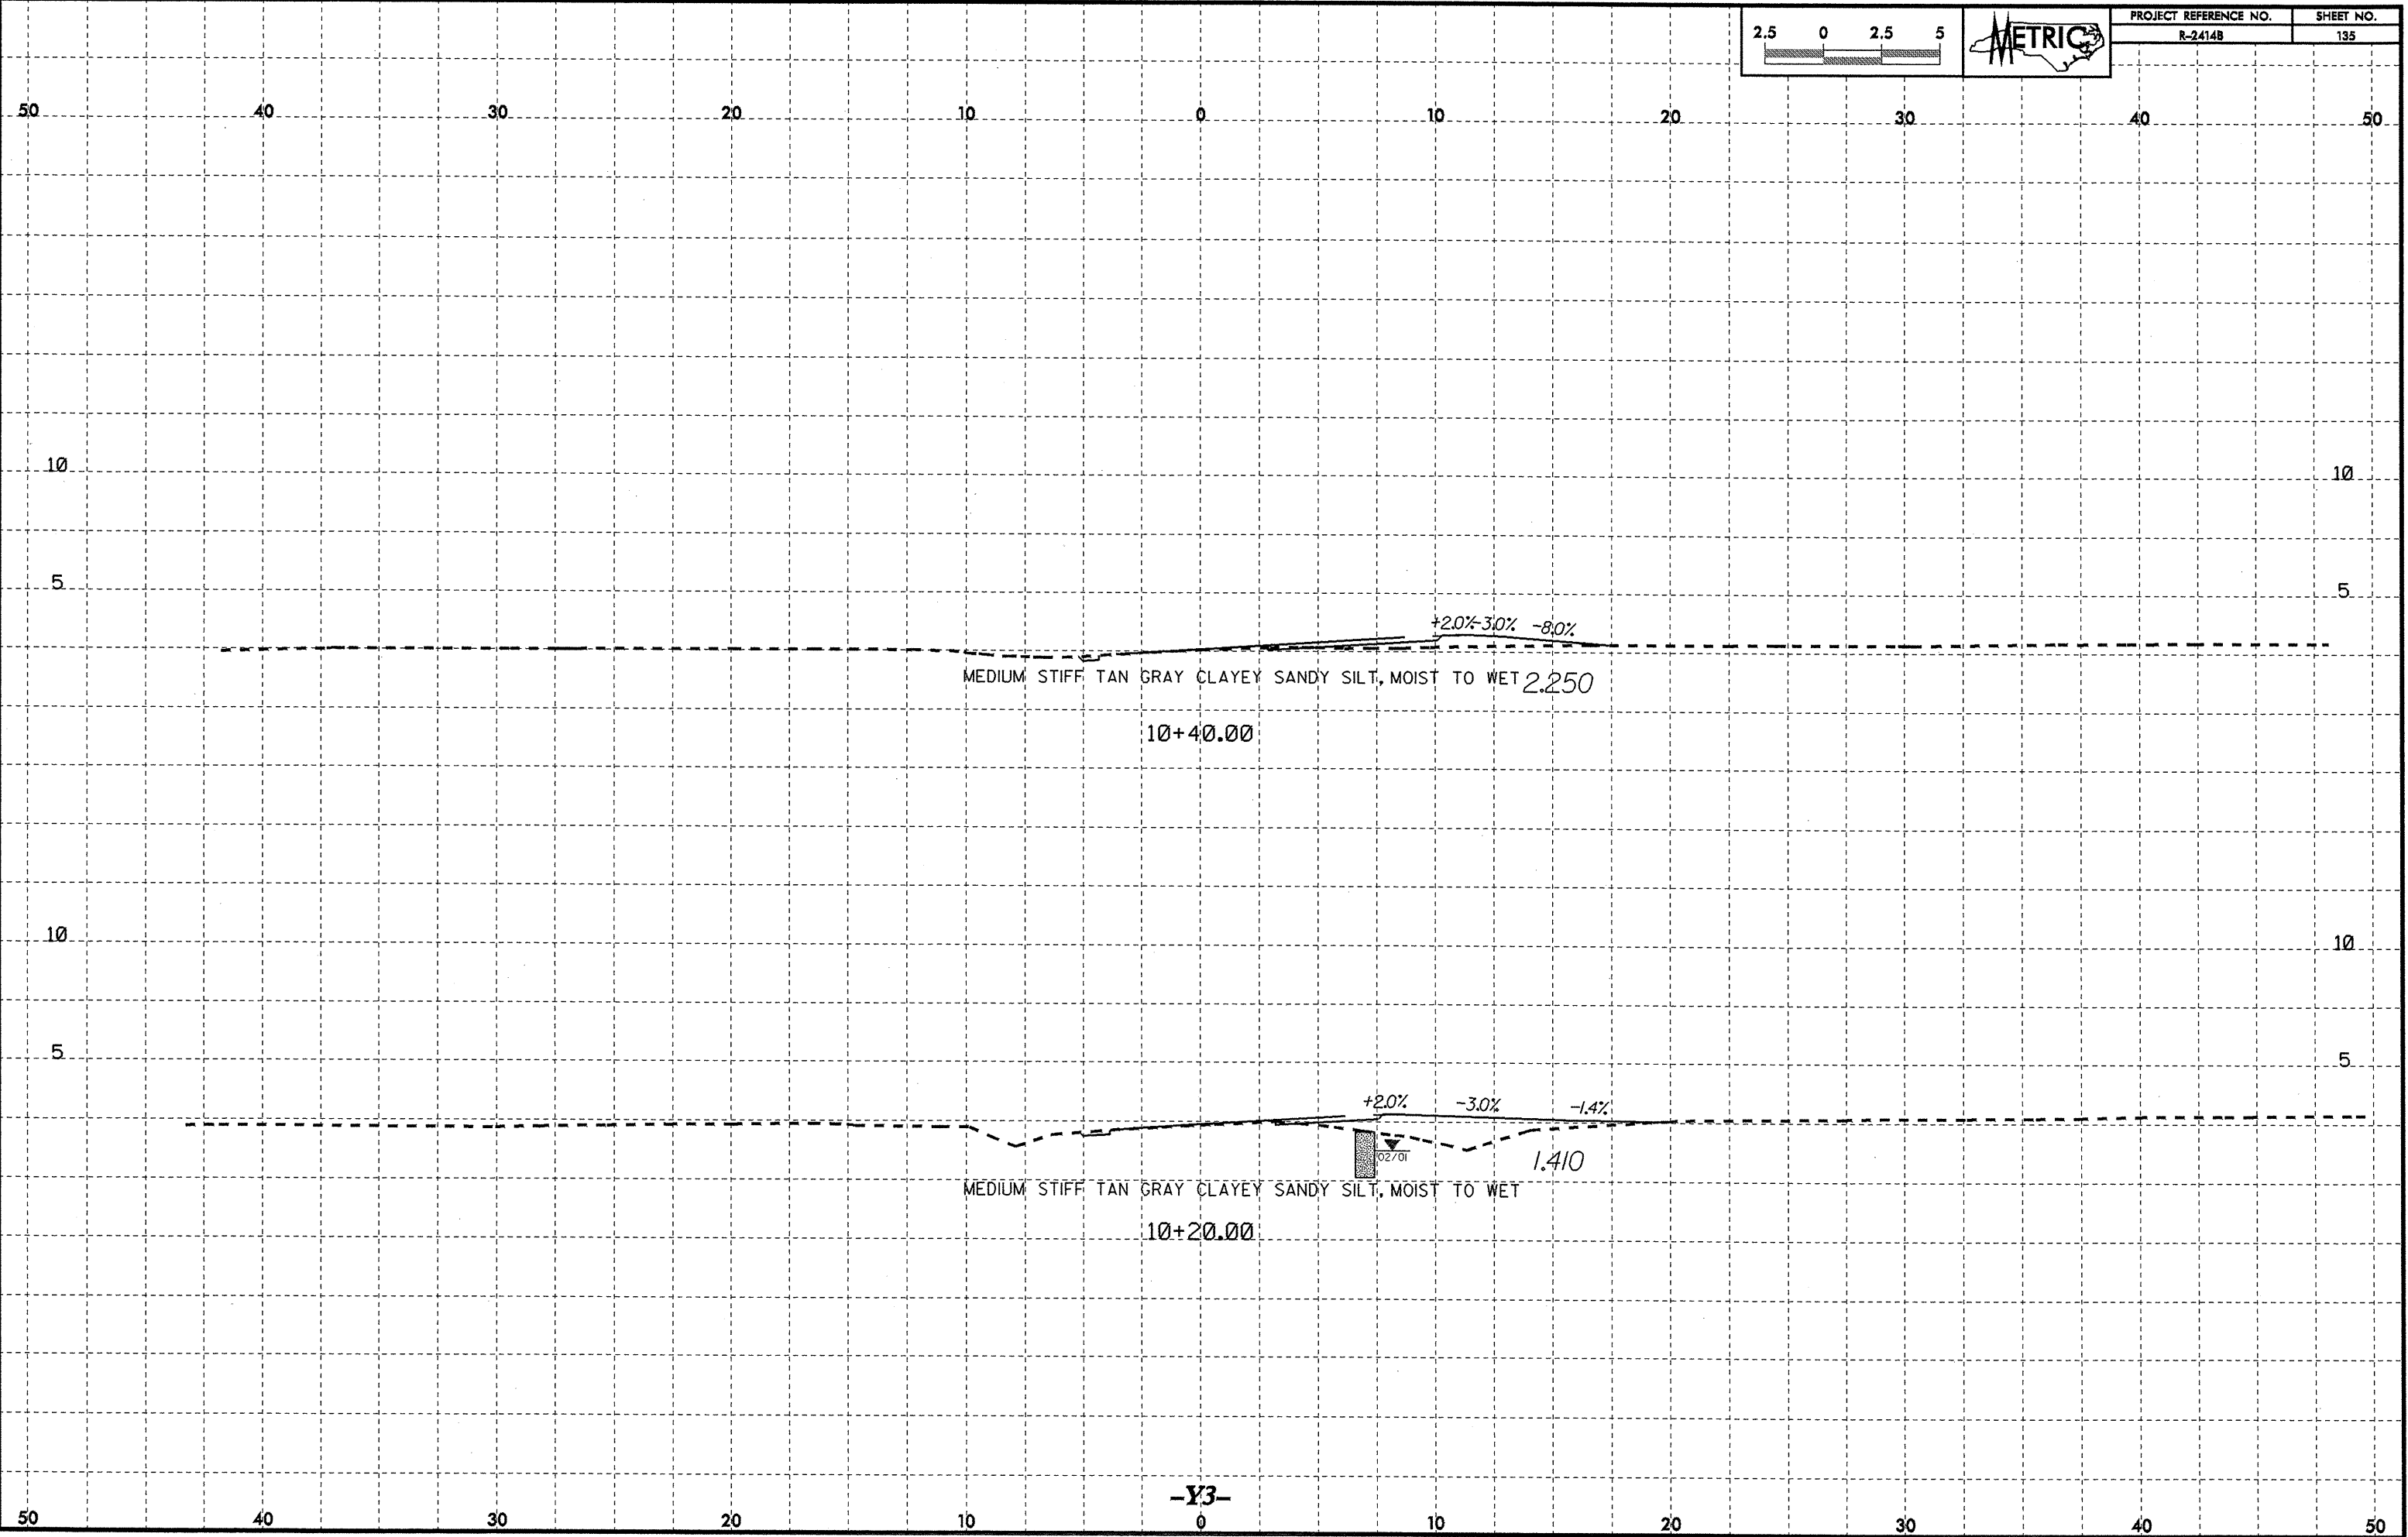

29-MAY-2008 14:38
g:\stac\TIP\TIP\REV2\CRD00.BE0TECH\sec\2414b_rdy_xa_y4.dgn
11:06:03 AM



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	139

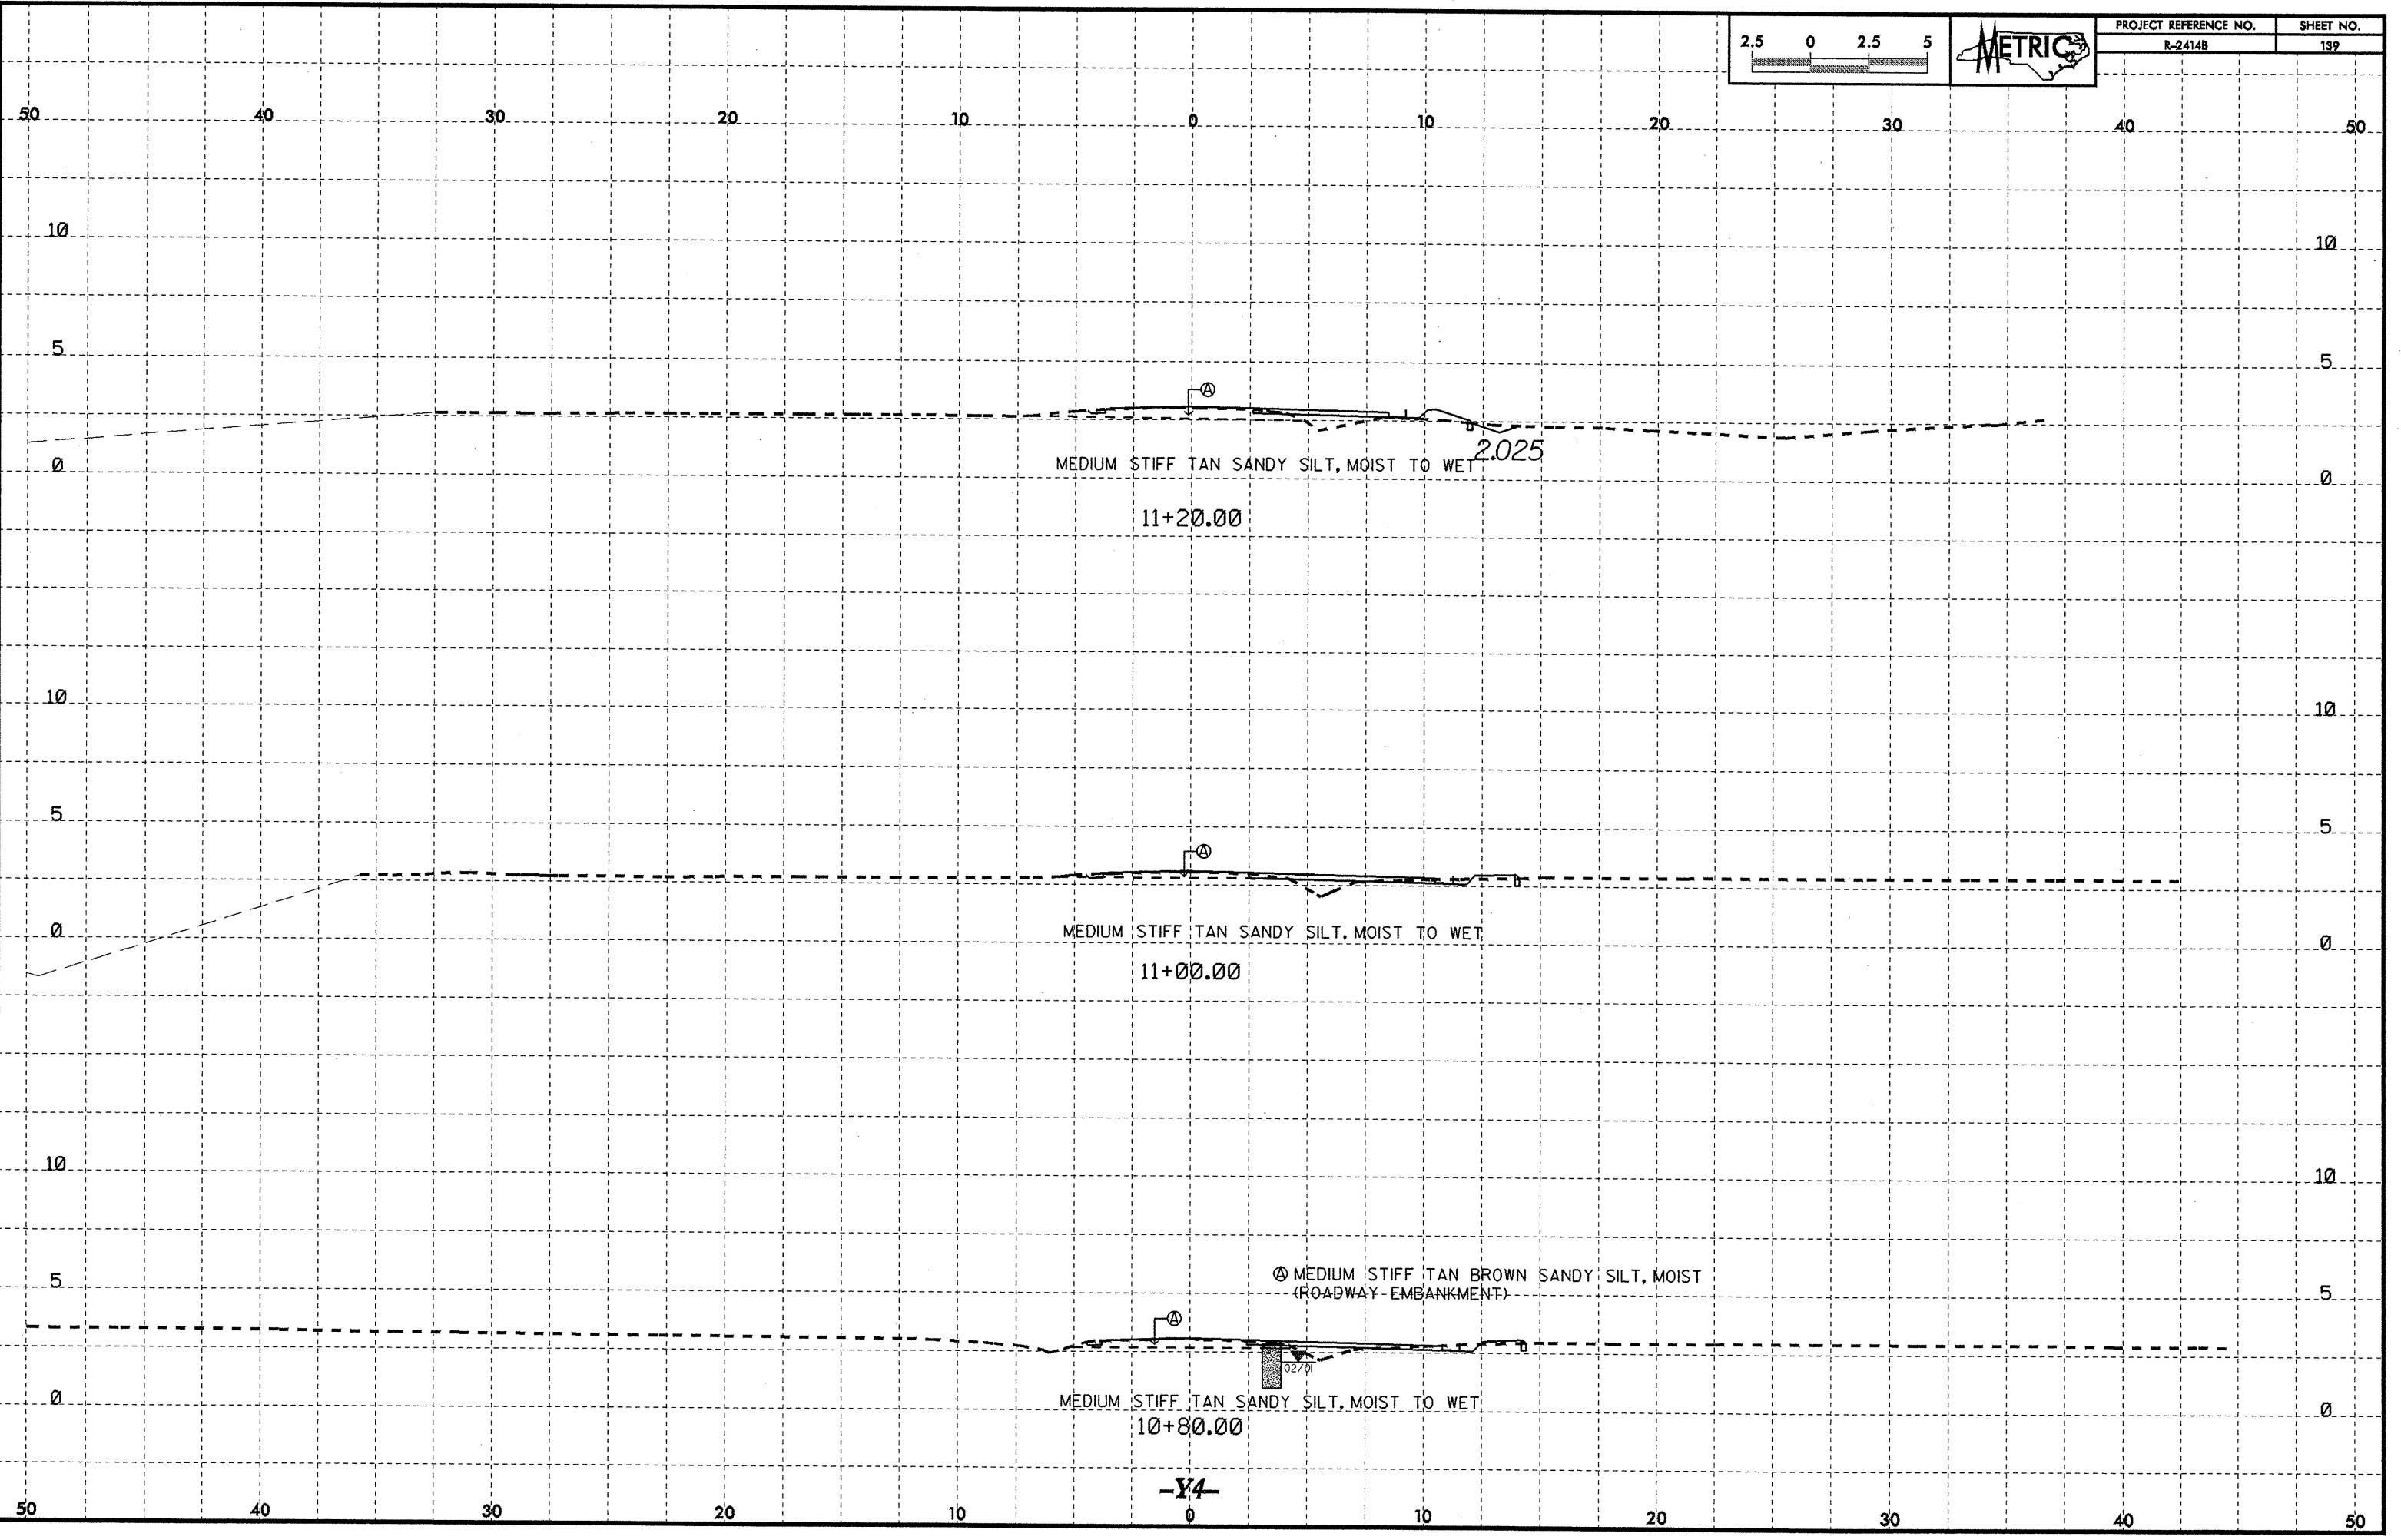

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET 2025

11+20.00

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET

11+00.00


Ⓐ MEDIUM STIFF TAN BROWN SANDY SILT, MOIST
(ROADWAY EMBANKMENT)

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET


10+80.00

-Y4-

10/26/08
g:\station\17\1711\1711\REV2\0400_0600\0301\REV2\0400_0600\0301.dgn
08/26/08
08/26/08
08/26/08



PROJECT REFERENCE NO.	SHEET NO.
R-2414B	141

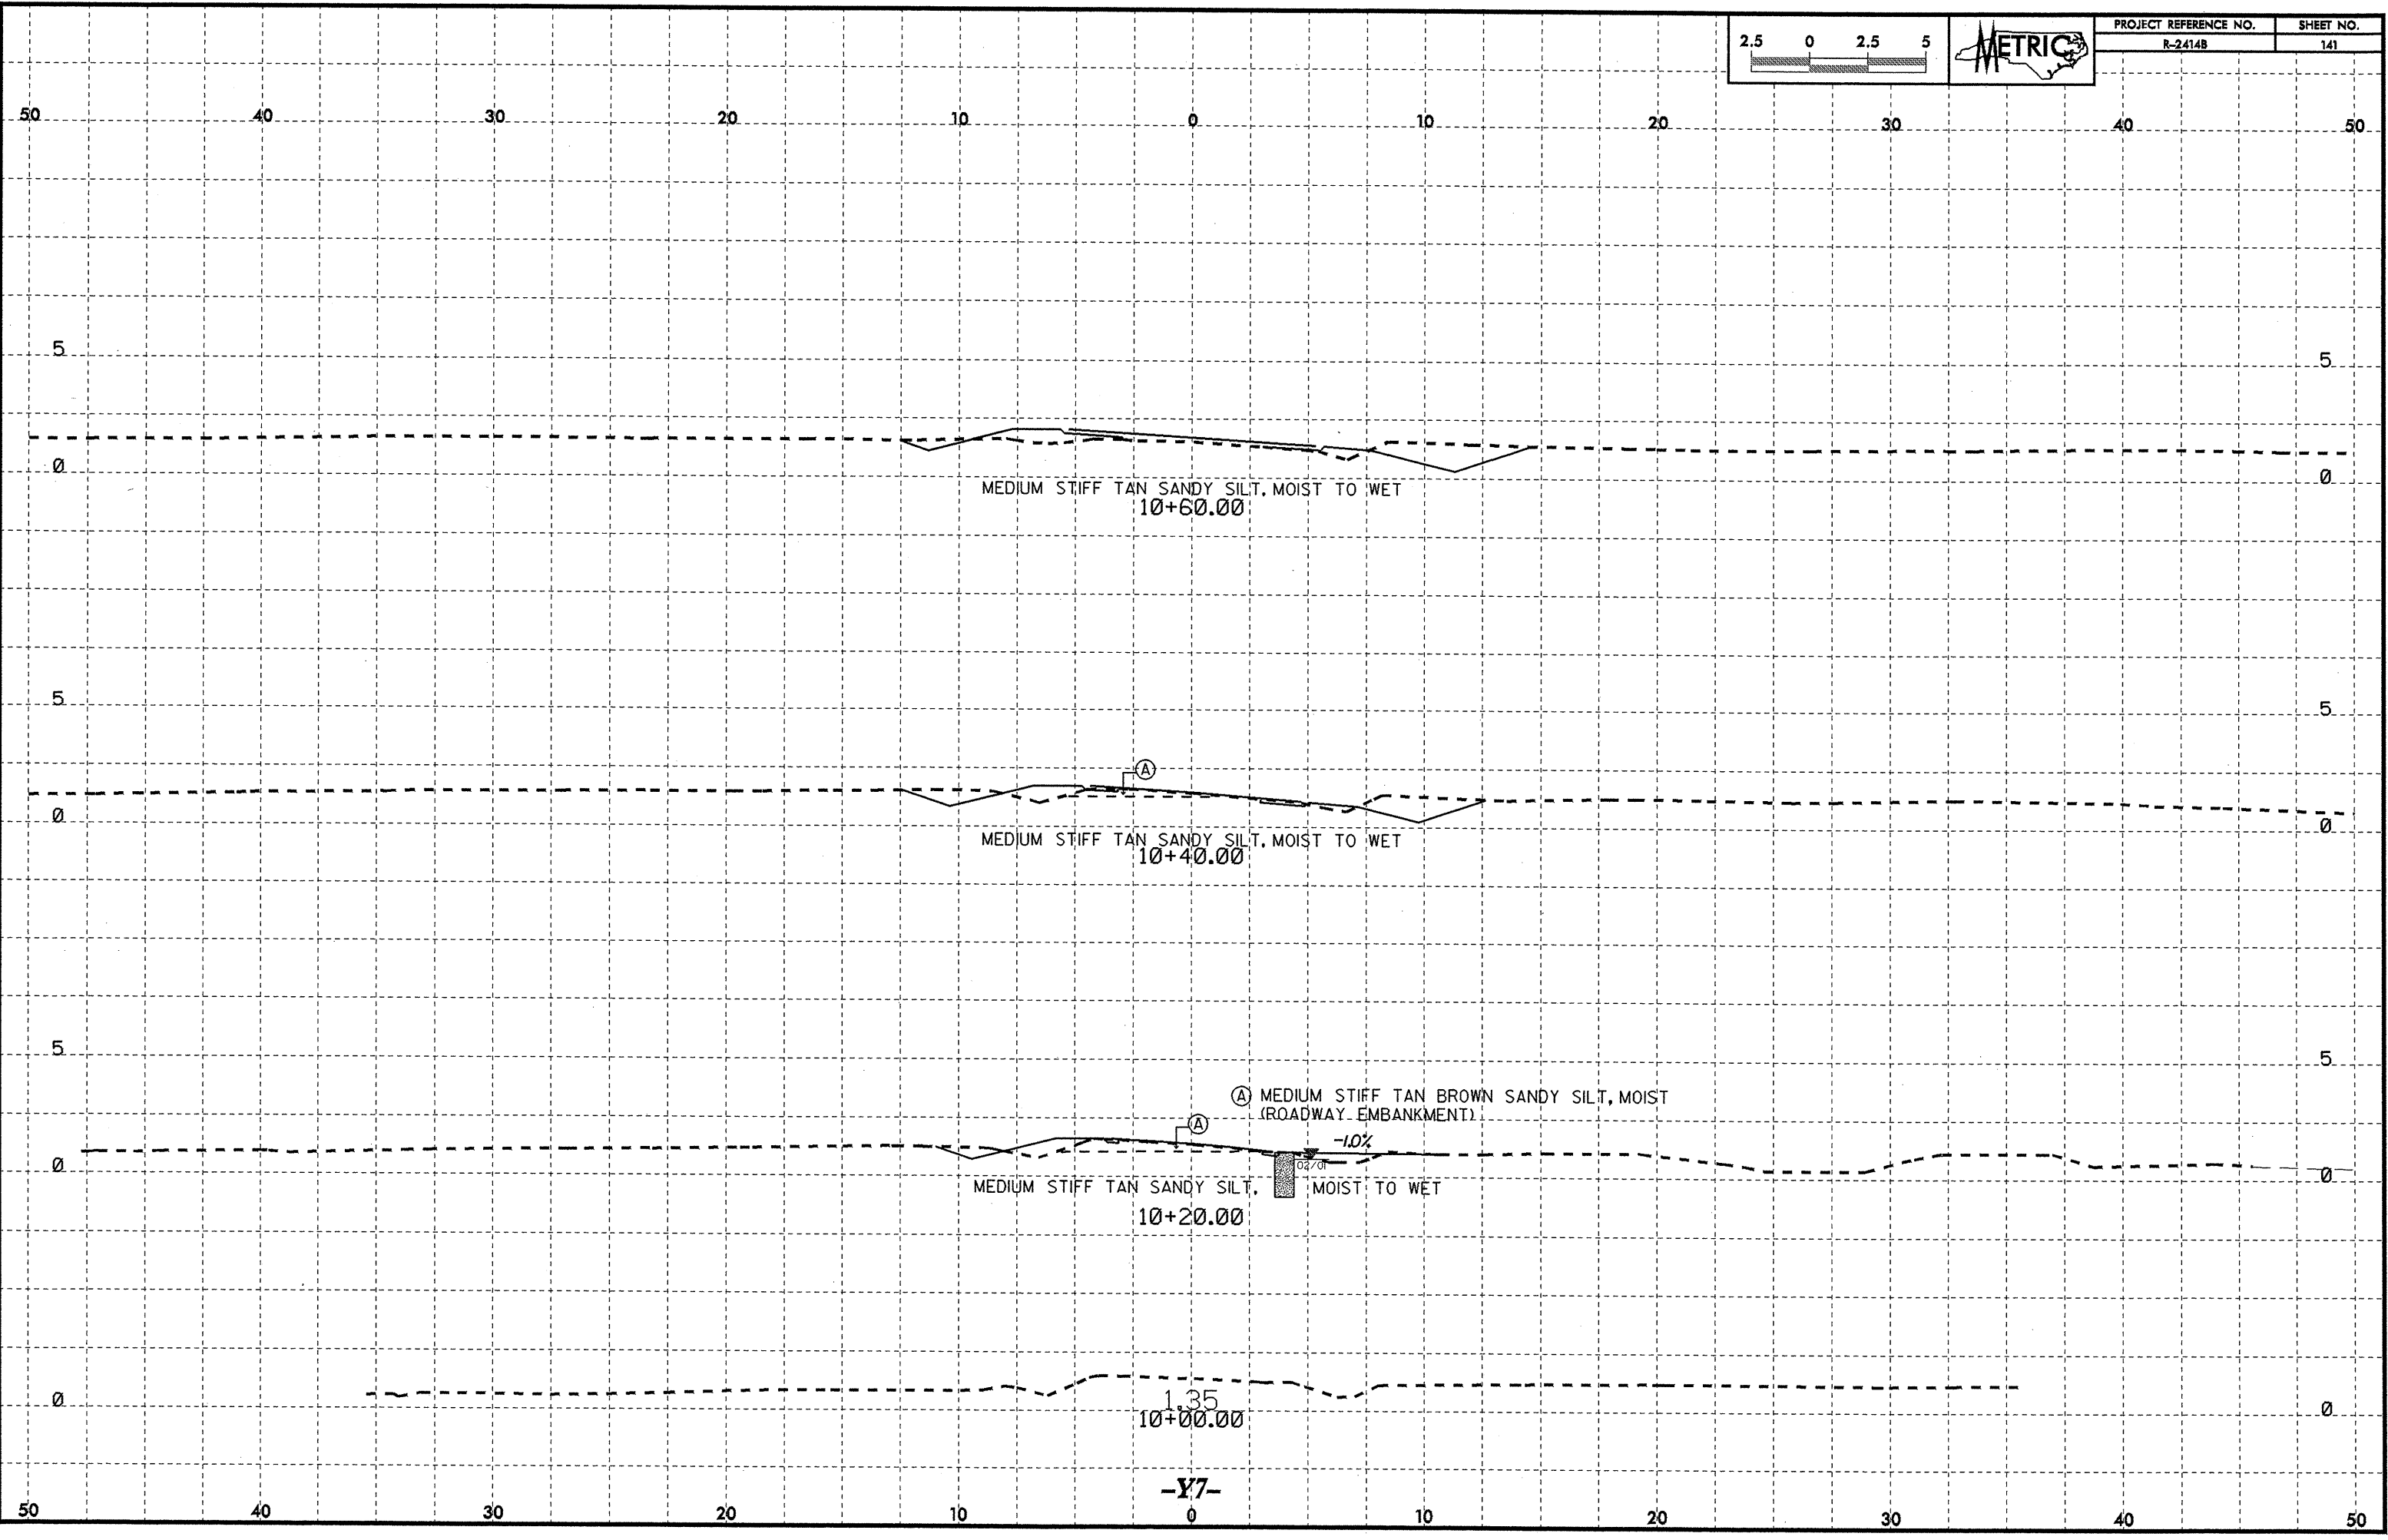

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
10+60.00

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
10+40.00

MEDIUM STIFF TAN SANDY SILT, MOIST TO WET
10+20.00

(A) MEDIUM STIFF TAN BROWN SANDY SILT, MOIST
(ROADWAY EMBANKMENT)

-1.0%

0.4'

1.35
10+00.00

-Y7-

