

PLANTING DETAILS

SEEDLING / LINER BAREROOT PLANTING DETAIL


HEALING IN


- 1. Locate a healing-in site in a shady, well protected area.
- 2. Excavate a flat bottom trench 12 inches deep and provide drainage.

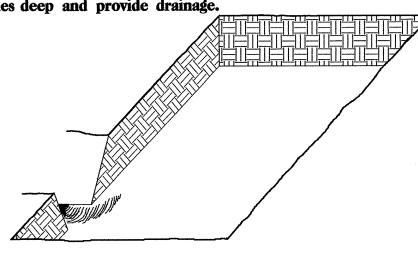

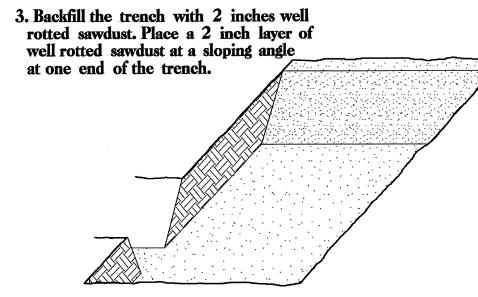


4. Place a single layer of plants against the sloping end so that the root collar is at ground level.

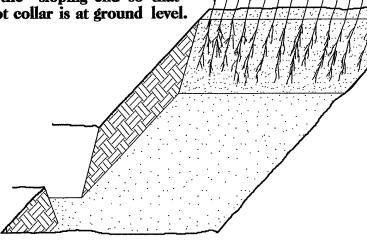

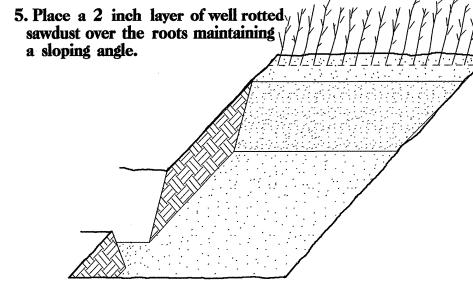


6. Repeat layers of plants and sawdust as necessary and water thoroughly.


DIBBLE PLANTING METHOD USING THE KBC PLANTING BAR




1. Insert planting bar as shown and pull handle




2. Remove planting bar and place seedling at




3. Insert planting bar
2 inches toward planter
from seedling.



4. Pull handle of bar toward planter, firming soil at bottom.



5. Push handle forward firming soil at top.



6. Leave compaction hole open. Water thoroughly.


PLANTING NOTES:

PLANTING BAG
During planting, seedlings shall be kept in a moist canvas bag or similar container to prevent the root systems from drying.



KBC PLANTING BAR
Planting bar shall have a
blade with a triangular
cross section, and shall
be 12 inches long,
4 inches wide and
1 inch thick at center.

ROOT PRUNING
All seedlings shall be root
pruned, if necessary, so that no roots extend more than 10 inches below the root collar.



PROJECT REFERENCE NO	. SHEET NO.]
B-4273	RF-I	
R/W SHEET N	O.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER	

REFORESTATION

☐ TREE REFORESTATION SHALL BE PLANTED 6 FT. TO 10 FT. ON CENTER, RANDOM SPACING, AVERAGING 8 FT. ON CENTER, APPROXIMATELY 680 PLANTS PER ACRE.

REFORESTATION

MIXTURE, TYPE, SIZE, AND FURNISH SHALL CONFORM TO THE FOLLOWING:

30% TAXODIUM DISTICHUM

BALD CYPRESS

12 in - 18 in BR

30% QUERCUS NIGRA

WATER OAK

12 in - 18 in BR

40% NYSSA SYLVATICA

BLACKGUM

12 in - 18 in BR

REFORESTATION DETAIL SHEET

N.C.D.O.T. - ROADSIDE ENVIRONMENTAL UNIT