

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	40157.1.1 B-4987	1	7

**STATE OF NORTH CAROLINA**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
**GEOTECHNICAL ENGINEERING UNIT**

**STRUCTURE**  
**SUBSURFACE INVESTIGATION**

**CONTENTS**

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4	CROSS SECTIONS
5-6	BORE LOG REPORTS
7	SCOUR REPORT

PROJ. REFERENCE NO. 40157.1.1 B-4987 F.A. PROJ. BRZ-1572(2)  
COUNTY HENDERSON  
PROJECT DESCRIPTION BRIDGE NO. 35 ON SR-1572  
OVER CLEAR CREEK

SITE DESCRIPTION \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**CAUTION NOTICE**

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 250-4088. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU UN-PLACED TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

**PROJECT: 40157.1.1 ID: B-4987**

**PERSONNEL**

D.C. ELLIOTT

C.J. COFFEY


L.A. RIDDLE

INVESTIGATED BY J.W. MANN

CHECKED BY W.D. FRYE

SUBMITTED BY W.D. FRYE

DATE 03/22/11



DRAWN BY: J.W. MANN

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IS IT CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.


NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
GEOTECHNICAL ENGINEERING UNIT

SUBSURFACE INVESTIGATION


SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS



SOIL DESCRIPTION		GRADATION		ROCK DESCRIPTION		TERMS AND DEFINITIONS			
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAY, SILTY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HOBY PLASTIC, A-7-6</i>		WELL-GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.		HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:		ALUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS, MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (ROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SCRC) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.			
SOIL LEGEND AND AASHTO CLASSIFICATION		MINERALOGICAL COMPOSITION		WEATHERING		WEATHERING			
GENERAL CLASS. GRANULAR MATERIALS (< 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS		MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.		WEATHERED ROCK (WR) NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED. CRYSTALLINE ROCK (CR) FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC. NON-CRYSTALLINE ROCK (NCR) FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLITE, SLATE, SANDSTONE, ETC. COASTAL PLAIN SEDIMENTARY ROCK (CP) COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.		FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY, ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SL.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH, OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED, CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL. SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT, SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, YIELDS SPT N VALUES > 100 BPF. VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. IF TESTED, YIELDS SPT N VALUES < 100 BPF. COMPLETE ROCK REDUCED TO SOIL, ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.		FRESH VERY SLIGHT (V SL.) SLIGHT (SL.) MODERATE (MOD.) MODERATELY SEVERE (MOD. SEV.) SEVERE (SEV.) VERY SEVERE (V SEV.) COMPLETE	
COMPRESSION		PERCENTAGE OF MATERIAL		GROUND WATER		MISCELLANEOUS SYMBOLS			
SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE		ORGANIC MATERIAL GRANULAR SOILS SILT - CLAY SOILS OTHER MATERIAL TRACE OF ORGANIC MATTER 2 - 3% 3 - 5% TRACE 1 - 10% LITTLE ORGANIC MATTER 3 - 5% 5 - 12% LITTLE 10 - 20% MODERATELY ORGANIC 5 - 10% 12 - 20% SOME 20 - 35% HIGHLY ORGANIC >10% >20% HIGHLY 35% AND ABOVE		WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP		ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES SOUNDING ROD SPT TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION SPT N-VALUE SPT REFUSAL			
CONSISTENCY OR DENSENESS		TEXTURE OR GRAIN SIZE		ABBREVIATIONS		EQUIPMENT USED ON SUBJECT PROJECT			
PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/F <sup>2</sup> )		U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.76 2.00 0.42 0.25 0.075 0.053 BOULDER (BLDR.) COBBLE (COB.) GRAVEL (GR.) COARSE SAND (CSE. SD.) FINE SAND (F. SD.) SILT (SL.) CLAY (CL.) GRAIN SIZE MM 305 75 2.0 0.25 0.05 0.005 IN. 12 3		AR - AUGER REFUSAL HI. - HIGHLY W - MOISTURE CONTENT BT - BORING TERMINATED MED. - MEDIUM V - VERY CL - CLAY MICA - MICACEOUS VST - VANE SHEAR TEST CPT - CONE PENETRATION TEST MOD. - MODERATELY WE - WEATHERED CSE - COARSE NP - NON PLASTIC UNIT WEIGHT DMT - DILATOMETER TEST ORG. - ORGANIC DRY UNIT WEIGHT DPT - DYNAMIC PENETRATION TEST PMT - PRESSUREMETER TEST FIAD - FILLED IN AFTER DRILLING e - VOID RATIO SAP. - SAPROLITIC SD. - SAND, SANDY F - FINE SL. - SILT, SILTY FOSS. - FOSSILIFEROUS SLI. - SLIGHTLY FRAC. - FRACTURED, FRACTURES TCR - TRICONE REFUSAL FRAGS. - FRAGMENTS		DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING w/ ADVANCER TRICONE *STEEL TEETH TRICONE *TUNG-CARB. CORE BIT HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST			
PLASTICITY		COLOR		FRACTURE SPACING		BEDDING			
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY		DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.		TERM SPACING VERY WIDE MORE THAN 10 FEET WIDE 3 TO 10 FEET MODERATELY CLOSE 1 TO 3 FEET CLOSE 0.16 TO 1 FEET VERY CLOSE LESS THAN 0.16 FEET		TERM THICKNESS VERY THICKLY BEDDED > 4 FEET THICKLY BEDDED 1.5 - 4 FEET THINLY BEDDED 0.16 - 1.5 FEET VERY THINLY BEDDED 0.03 - 0.16 FEET THICKLY LAMINATED 0.008 - 0.03 FEET THINLY LAMINATED < 0.008 FEET			
ELEVATION		NOTES		INDURATION		INDURATION			
ELEVATION: 2155.05' FT.		NOTES:		FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.		FRIABLE RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. MODERATELY INDURATED GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. INDURATED GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. EXTREMELY INDURATED SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.			

# SITE PLAN





SKEW=105°

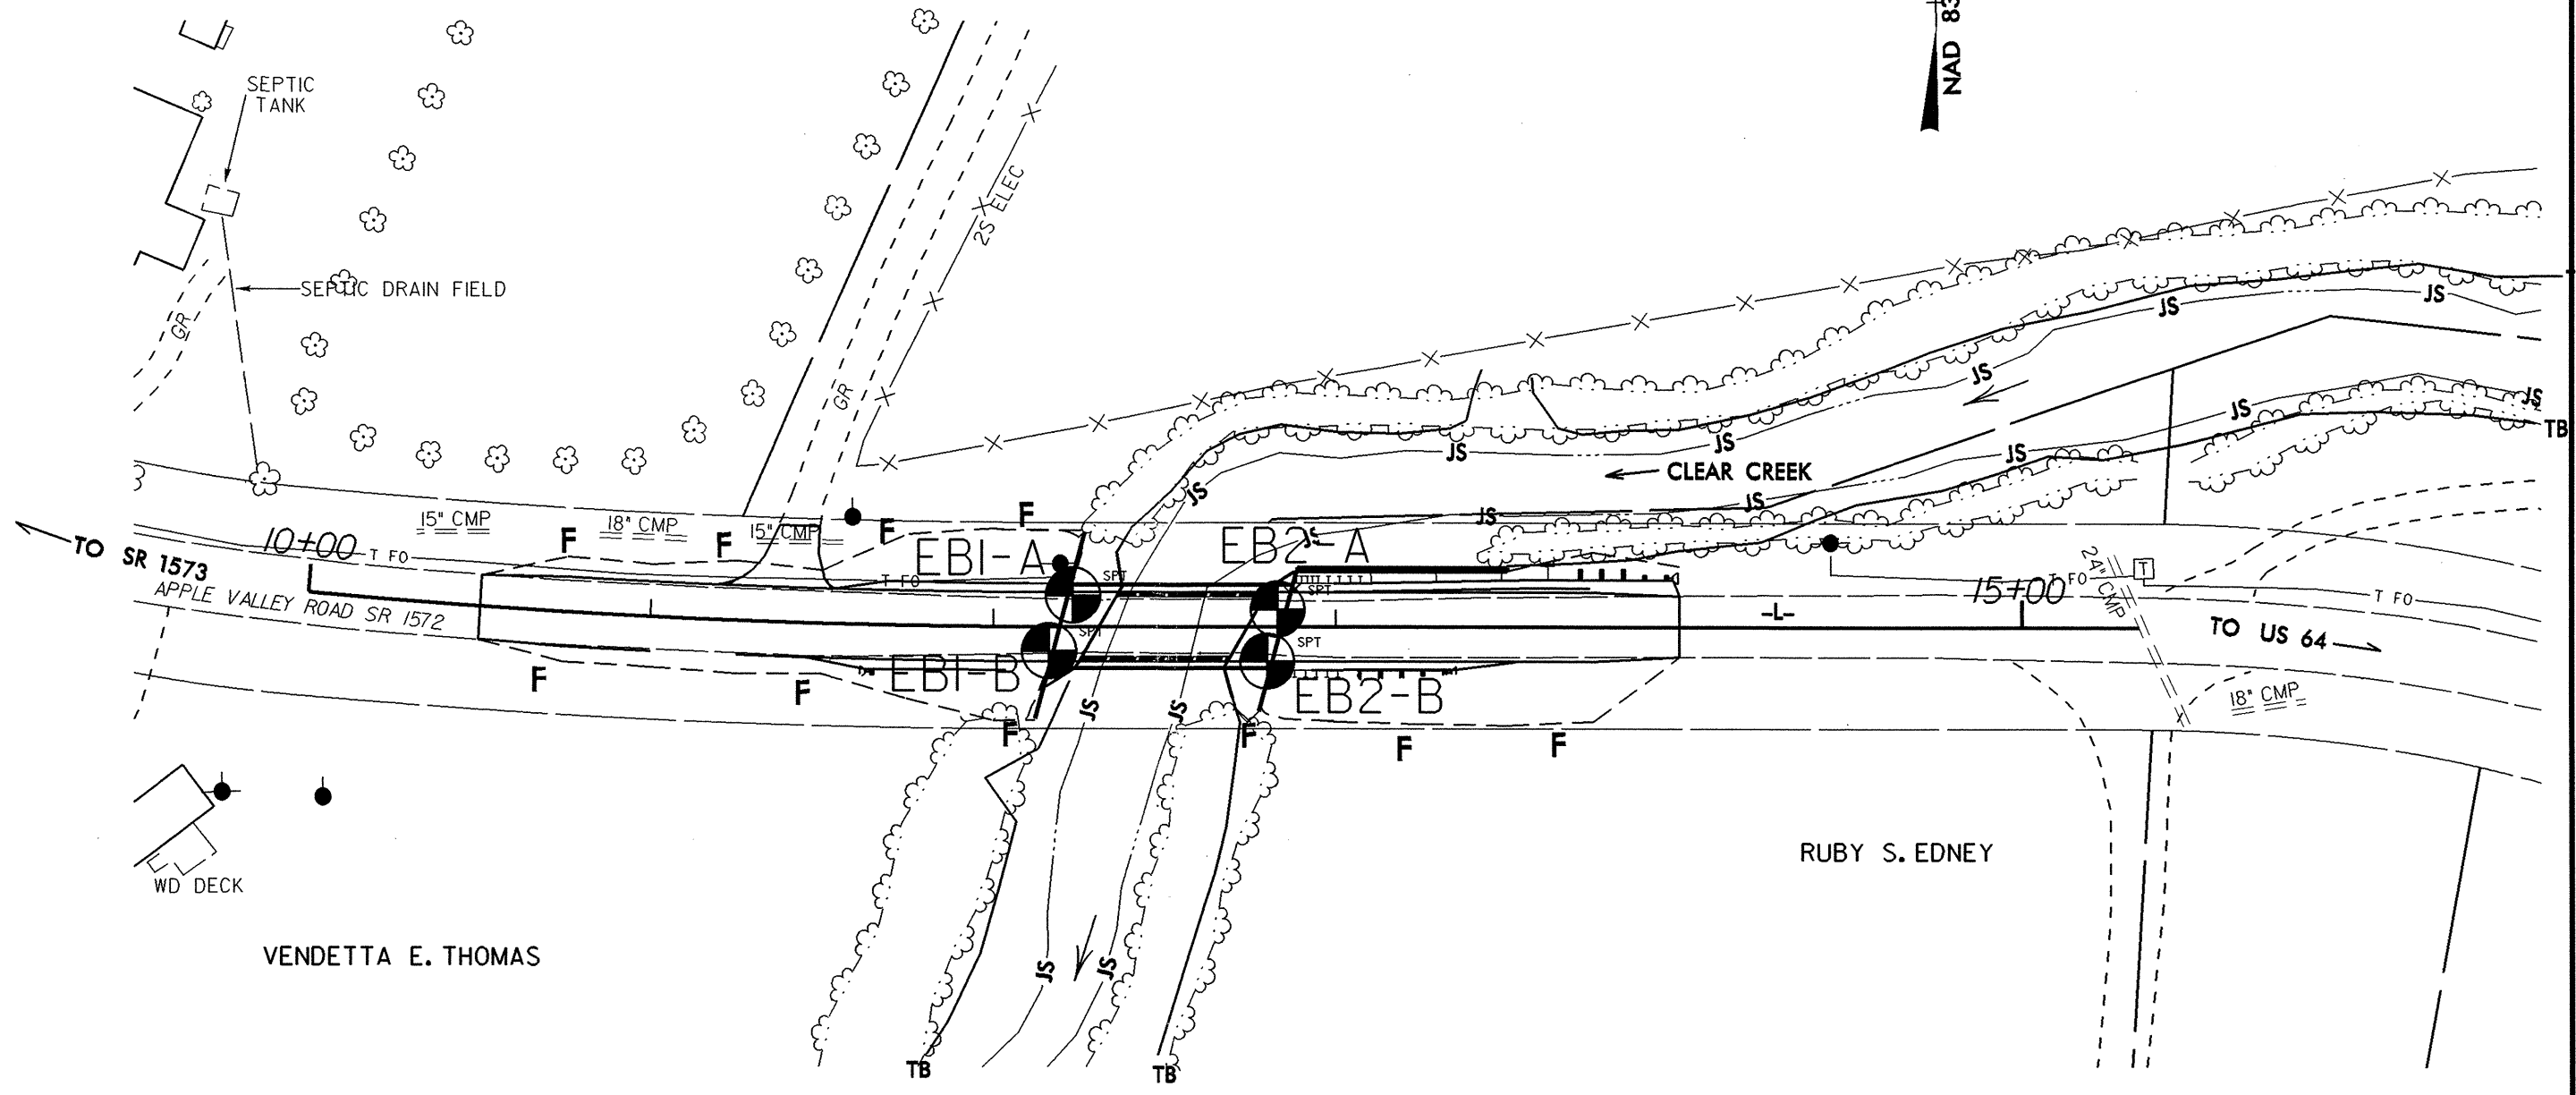

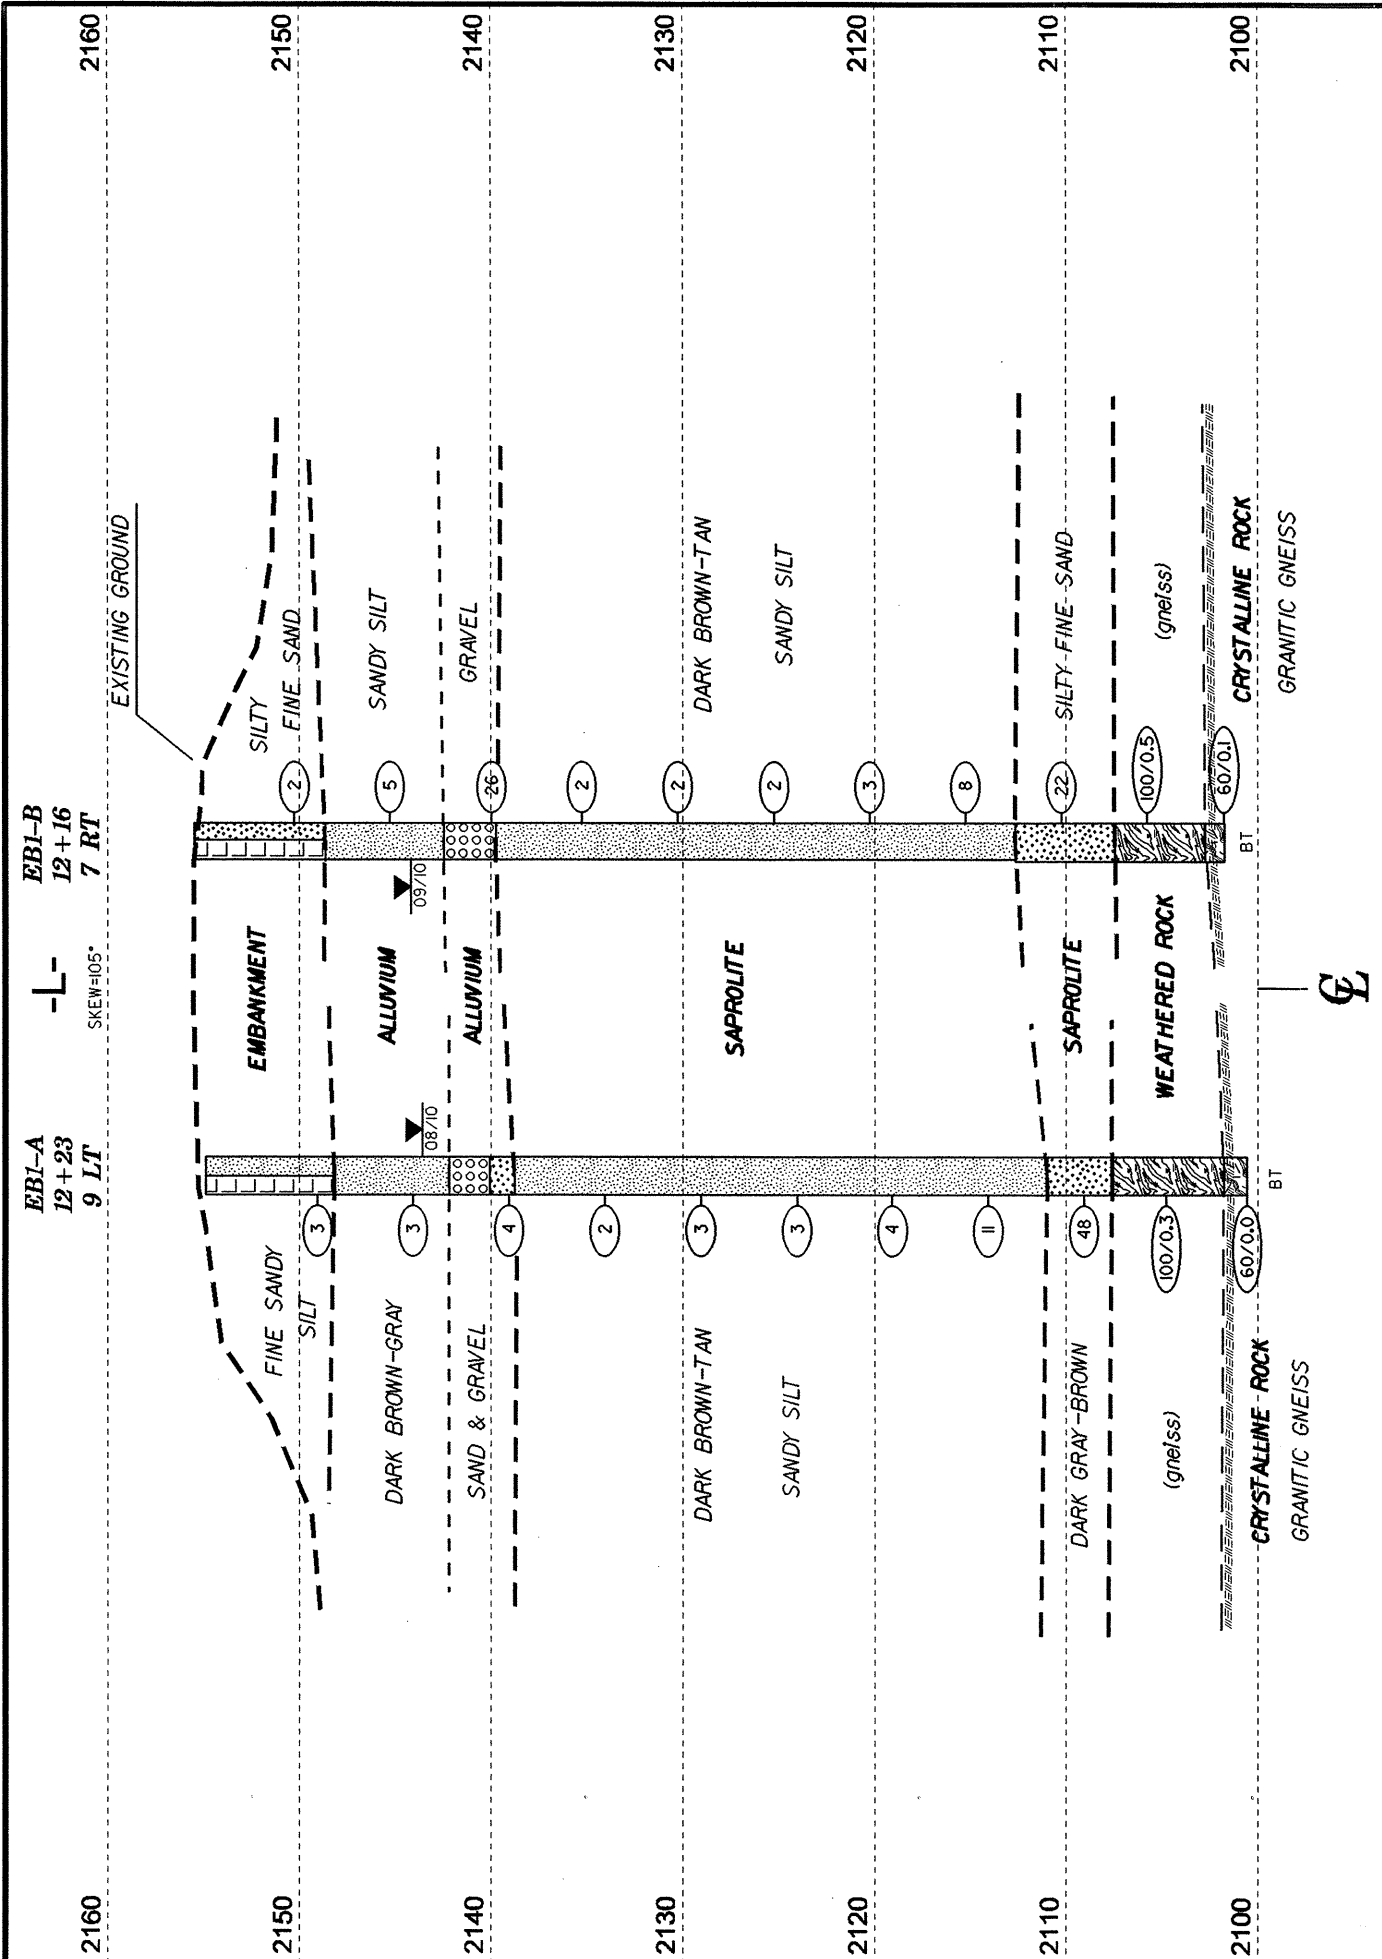

VE = 1

SECTION THRU END BENT ONE

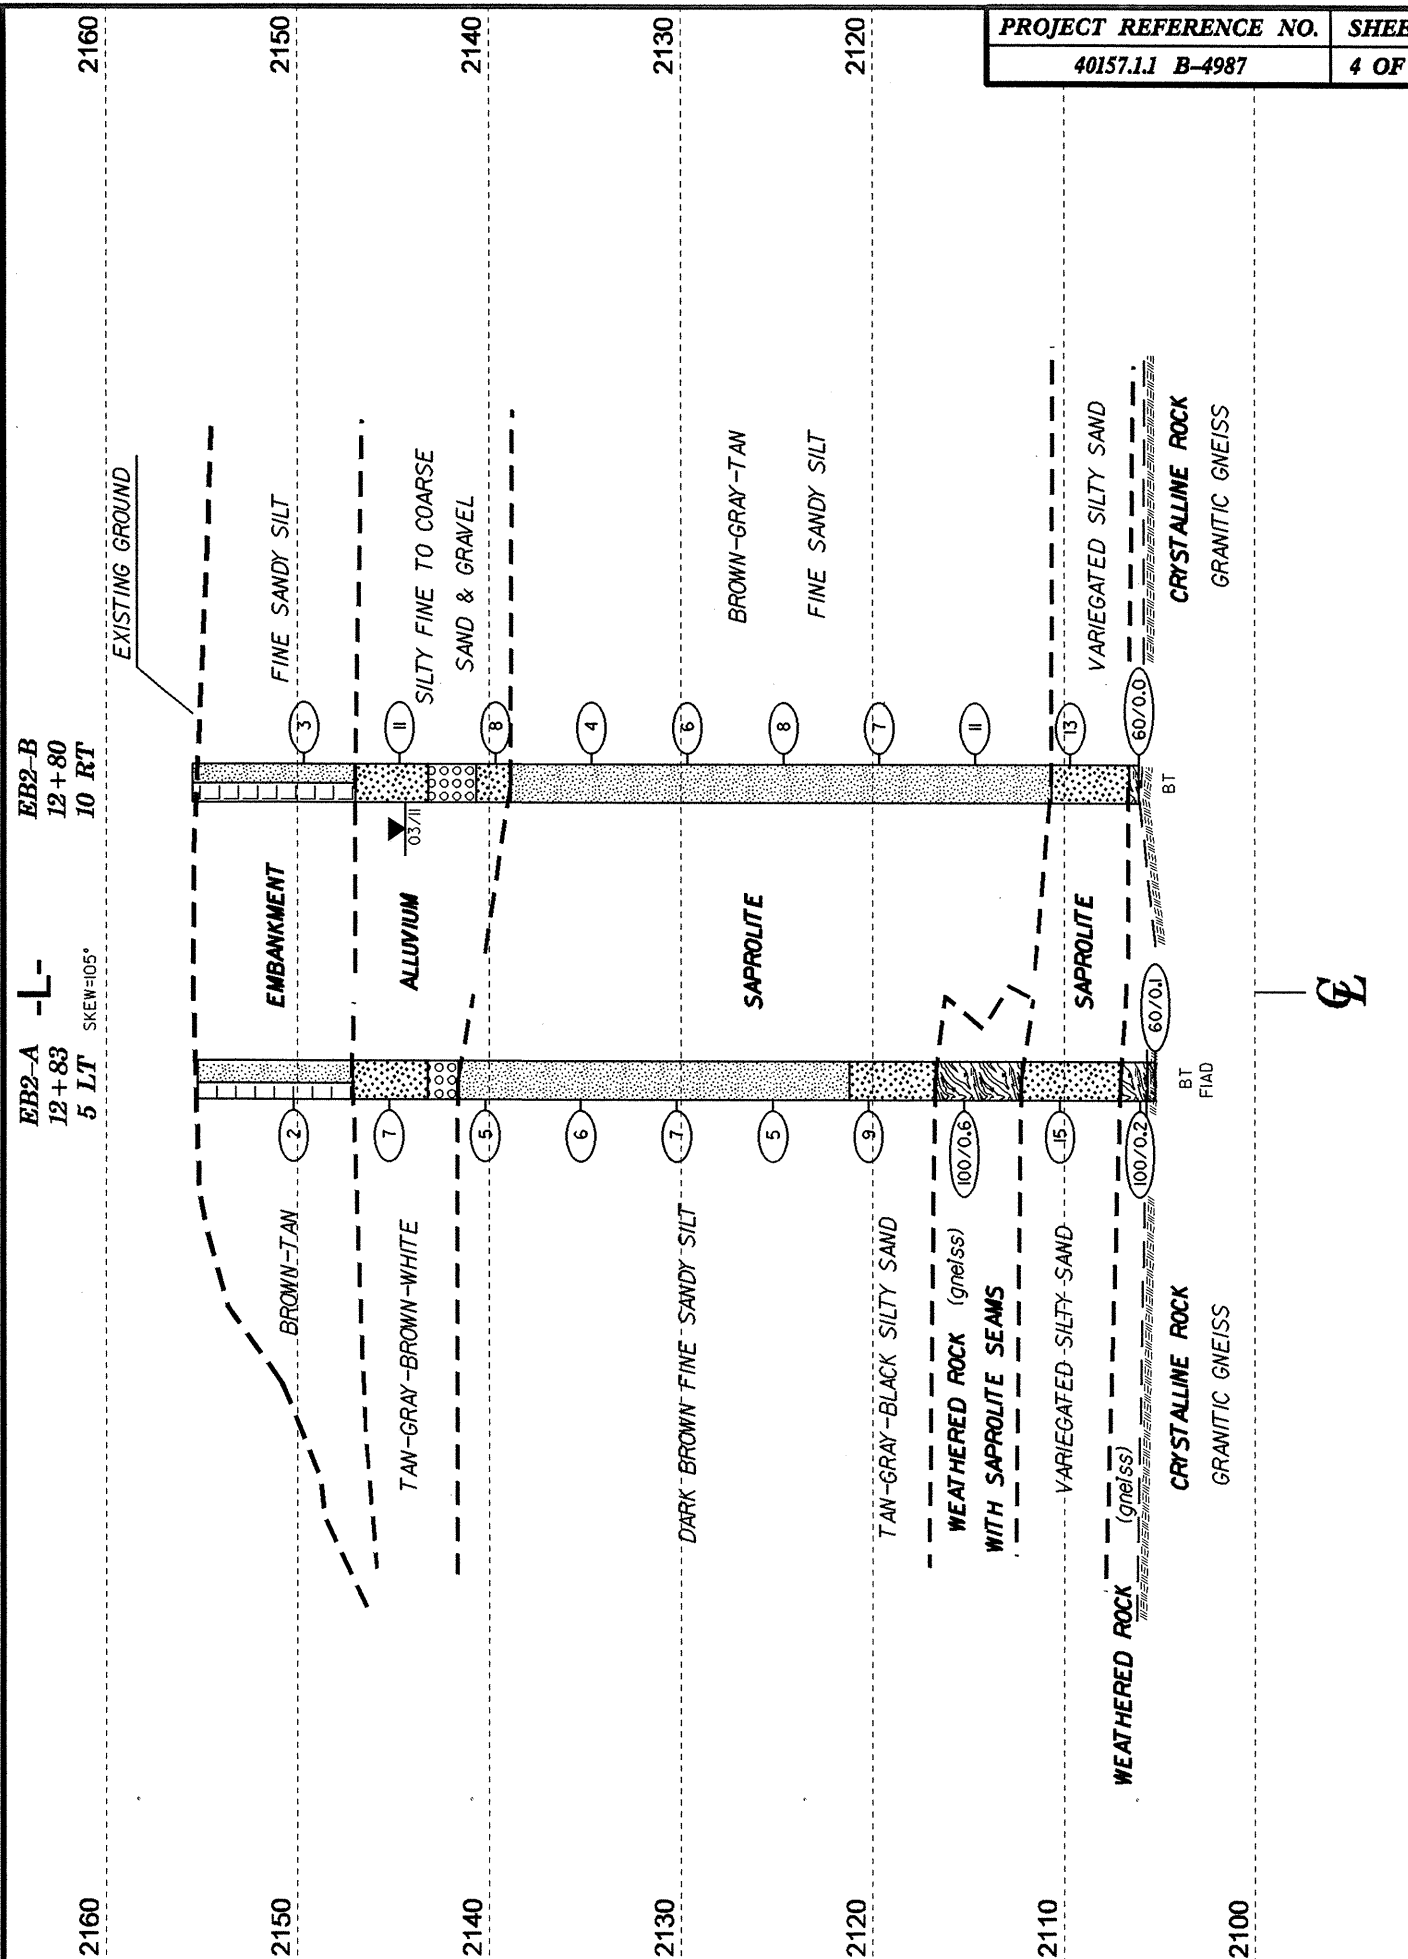

VE = 1

SECTION THRU END BENT TWO



WBS 40157.1.1		TIP B-4987		COUNTY HENDERSON		GEOLOGIST Elliott, D. C.										
SITE DESCRIPTION Bridge No. 35 on SR 1572 over Clear Creek							GROUND WTR (ft)									
BORING NO.	STATION	OFFSET	ALIGNMENT			0 HR.	N/A									
EB1-A	12+23	9 ft LT	-L-			24 HR.	11.3									
COLLAR ELEV. 2,154.9 ft		TOTAL DEPTH 54.3 ft		NORTHING 618,712		EASTING 995,306										
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing w/ SPT		HAMMER TYPE Automatic										
DRILLER Coffey, Jr., C.		START DATE 08/19/10		COMP. DATE 08/19/10		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2155														2,154.9	0.0	GROUND SURFACE
																ROADWAY EMBANKMENT Tan-brown fine sandy SILT
2150	2,150.1	4.8	0	1	2									2,148.2	6.7	ALLUVIAL Gray sandy SILT
2145	2,145.1	9.8	0	1	2									2,142.2	12.7	ALLUVIAL GRAVEL
2140	2,140.1	14.8	3	2	2									2,140.1	14.8	ALLUVIAL Tan-brown-white fine to coarse SAND
2135	2,135.1	19.8	1	1	1									2,138.8	16.1	SAPROLITE Brown-tan sandy SILT
2130	2,130.1	24.8	1	1	2											
2125	2,125.1	29.8	1	2	1											
2120	2,120.1	34.8	1	2	2											
2115	2,115.1	39.8	2	3	8											
2110	2,110.1	44.8	9	19	29									2,111.0	43.9	SAPROLITE Dark gray-brown silty SAND
2105	2,105.1	49.8	100/0.3											2,107.6	47.3	WEATHERED ROCK (gneiss)
	2,100.6	54.3	60/0.0											2,101.8	53.1	CRYSTALLINE ROCK Granitic GNEISS
														2,100.6	54.3	Boring Terminated with Standard Penetration Test Refusal at Elevation 2,100.6 ft In Crystalline Rock: Granitic Gneiss

WBS 40157.1.1		TIP B-4987		COUNTY HENDERSON		GEOLOGIST Elliott, D. C.										
SITE DESCRIPTION Bridge No. 35 on SR 1572 over Clear Creek							GROUND WTR (ft)									
BORING NO.	STATION	OFFSET	ALIGNMENT			0 HR.	N/A									
EB1-B	12+16	7 ft RT	-L-			24 HR.	11.3									
COLLAR ELEV. 2,155.4 ft		TOTAL DEPTH 53.7 ft		NORTHING 618,697		EASTING 995,299										
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing w/ SPT		HAMMER TYPE Automatic										
DRILLER Coffey, Jr., C.		START DATE 09/08/10		COMP. DATE 09/08/10		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2160														2,155.4	0.0	GROUND SURFACE
																ROADWAY EMBANKMENT Brown-tan silty fine SAND
2155														2,151.2	4.2	ALLUVIAL Dark brown-gray fine sandy SILT
2150														2,146.2	9.2	ALLUVIAL Dark brown-gray fine sandy SILT
2145														2,141.2	14.2	ALLUVIAL GRAVEL & coarse SAND
2140														2,136.2	19.2	SAPROLITE Dark brown fine sandy SILT
2135														2,131.2	24.2	
2130														2,126.2	29.2	
2125														2,121.2	34.2	
2120														2,116.2	39.2	
2115														2,111.2	44.2	SAPROLITE Dark gray-brown silty fine SAND
2110														2,106.2	49.2	WEATHERED ROCK (gneiss)
2105														2,101.8	53.6	CRYSTALLINE ROCK Granitic GNEISS
														2,101.7	53.7	Boring Terminated with Standard Penetration Test Refusal at Elevation 2,101.7 ft In Crystalline Rock: Granitic Gneiss

NCDOT BORE DOUBLE B4987\_GEO\_BH\_BRD0035.GPJ NC DOT.GDT 3/21/11



WBS 40157.1.1		TIP B-4987		COUNTY HENDERSON		GEOLOGIST Elliott, D. C.										
SITE DESCRIPTION Bridge No. 35 on SR 1572 over Clear Creek							GROUND WTR (ft)									
BORING NO.	STATION	OFFSET	ALIGNMENT			0 HR. N/A										
COLLAR ELEV.	TOTAL DEPTH	NORTHING	EASTING			24 HR. Caved@10.4										
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing w/ SPT		HAMMER TYPE Automatic										
DRILLER Coffey, Jr., C.		START DATE 09/13/10	COMP. DATE 09/13/10	SURFACE WATER DEPTH N/A												
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2160																
2155															2,155.2	GROUND SURFACE
																ROADWAY EMBANKMENT Brown-tan fine sandy SILT
2150	2,151.2	4.0	0	1	1											
2145	2,146.2	9.0	2	3	4										2,147.1	ALLUVIAL Tan-brown-gray silty fine SAND
															2,143.2	ALLUVIAL Tan-gray-white silty fine to coarse SAND
2140	2,141.2	14.0	2	2	3										2,141.6	ALLUVIAL Gravel
																SAPROLITE Dark brown fine sandy SILT
2135	2,136.2	19.0	2	3	3											
2130	2,131.2	24.0	1	4	3											
2125	2,126.2	29.0	1	2	3											
2120	2,121.2	34.0	3	4	5										2,121.2	SAPROLITE Tan-gray-black silty SAND
															2,116.7	WEATHERED ROCK (gneiss) with Saprolite seams
2115	2,116.2	39.0	19	81	19/0.1										2,112.2	SAPROLITE Dark gray-white-black silty SAND
																WEATHERED ROCK (gneiss)
2110	2,111.2	44.0	5	5	10										2,107.0	CRYSTALLINE ROCK Granitic GNEISS
	2,106.2	49.0													2,105.6	WEATHERED ROCK (gneiss)
	2,105.3	49.9													2,105.2	CRYSTALLINE ROCK Granitic GNEISS
																Boring Terminated with Standard Penetration Test Refusal at Elevation 2,105.2 ft in Crystalline Rock: Granitic Gneiss

WBS 40157.1.1		TIP B-4987		COUNTY HENDERSON		GEOLOGIST Elliott, D. C.										
SITE DESCRIPTION Bridge No. 35 on SR 1572 over Clear Creek							GROUND WTR (ft)									
BORING NO.	STATION	OFFSET	ALIGNMENT			0 HR. N/A										
COLLAR ELEV.	TOTAL DEPTH	NORTHING	EASTING			24 HR. 11.1										
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing w/ SPT		HAMMER TYPE Automatic										
DRILLER Coffey, Jr., C.		START DATE 03/01/11	COMP. DATE 03/01/11	SURFACE WATER DEPTH N/A												
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2160																
2155															2,155.5	GROUND SURFACE
																ROADWAY EMBANKMENT Brown-tan fine sandy SILT
2150	2,150.7	4.8	3	2	1											
2145	2,145.7	9.8	7	7	4										2,147.0	ALLUVIAL Tan-gray-white silty fine to coarse SAND
															2,143.2	ALLUVIAL Gravel
2140	2,140.7	14.8	4	4	4										2,140.7	ALLUVIAL Silty SAND
															2,138.9	SAPROLITE Brown-gray-tan fine sandy SILT
2135	2,135.7	19.8	1	2	2											
2130	2,130.7	24.8	1	3	3											
2125	2,125.7	29.8	2	3	5											
2120	2,120.7	34.8	2	3	4										2,120.7	SAPROLITE Dark gray-tan-black silty SAND
																WEATHERED ROCK (gneiss)
2115	2,115.7	39.8	3	5	6										2,110.7	CRYSTALLINE ROCK Granitic GNEISS
																Boring Terminated with Standard Penetration Test Refusal at Elevation 2,106.1 ft On Crystalline Rock: Granitic Gneiss
2110	2,110.7	44.8	3	6	7											
	2,106.1	49.4													2,106.6	WEATHERED ROCK (gneiss)
															2,106.1	CRYSTALLINE ROCK Granitic GNEISS

NCDOT BORE DOUBLE B4987\_GEO\_BH\_BRD0035.GPJ NC\_DOT\_GDT 3/21/11



**FIELD  
 SCOUR REPORT**

WBS: 40157.1.1 TIP: B-4987 COUNTY: Henderson

DESCRIPTION(1): Bridge No. 35 on SR 1572 over Clear Creek

**EXISTING BRIDGE**

Information from: Field Inspection  Microfilm \_\_\_\_\_ (reel \_\_\_\_\_ pos: \_\_\_\_\_)  
 Other (explain) BSR dated 11/10

Bridge No.: 35 Length: ~43' Total Bents: 2 Bents in Channel: \_\_\_\_\_ Bents in Floodplain: 2  
 Foundation Type: Piles

**EVIDENCE OF SCOUR(2)**

Abutments or End Bent Slopes: Some undercutting at EB2-B

Interior Bents: n/a

Channel Bed: Adjacent to End Bent 2

Channel Bank: Upstream of EB2

**EXISTING SCOUR PROTECTION**

Type(3): Vertical abutments

Extent(4): Wingwalls extend ~ 10' either side of abutments

Effectiveness(5): Good

Obstructions(6): None noted

**INSTRUCTIONS**

- 1 Describe the specific site's location, including route number and body of water crossed.
- 2 Note scour evidence at existing end bents or abutments (e.g. undermining, sloughing, degradations).
- 3 Note existing scour protection (e.g. rip rap).
- 4 Describe extent of existing scour protection.
- 5 Describe whether or not the scour protection appears to be working.
- 6 Note obstructions such as dams, fallen trees, debris at bents, etc.
- 7 Describe the channel bed material based on observation and/or samples. Include any lab results with report.
- 8 Describe the channel bank material based on observation and/or samples. Include any lab results with report.
- 9 Describe the material covering the banks (e.g. grass, trees, rip rap, none).
- 10 Determine the approximate floodplain width from field observation or a topographic map.
- 11 Describe the material covering the floodplain (e.g. grass, trees, crops).
- 12 Use professional judgement to specify if the stream is degrading, aggrading, or static.
- 13 Describe potential and direction of the stream to migrate laterally during the bridge's life (approx. 100 years).
- 14 Give the design scour elevation (DSE) expected over the life of the bridge (approx. 100 years). This elevation can be given as a range across the site, or for each bent. Discuss the relationship between the Hydraulics Unit theoretical scour and the DSE. If the DSE is dependent on scour counter measures, explain (e.g. rip rap armoring on slopes). The DSE is based on the erodability of materials, giving consideration to the influence of joints, foliation, bedding characteristics, % core recovery, % RQD, differential weathering, shear strength, observations at existing structures, other tests deemed appropriate, and overall geologic conditions at the site.

**DESIGN INFORMATION**

Channel Bed Material(7): Sand, gravel, cobbles, boulders

Channel Bank Material(8): Silt, sand

Channel Bank Cover(9): Underbrush with trees

Floodplain Width(10): >100'

Floodplain Cover(11): Grass and trees

Stream is(12): Aggrading \_\_\_\_\_ Degrading  Static \_\_\_\_\_

Channel Migration Tendency(13): West

Observations and Other Comments: \_\_\_\_\_

**DESIGN SCOUR ELEVATIONS(14)**

Feet  Meters \_\_\_\_\_

**BENTS**


Comparison of DSE to Hydraulics Unit theoretical scour:

There is no predicted scour due to excavation proposed at the end bents on the BSR dated 11/16/10

**SOIL ANALYSIS RESULTS FROM CHANNEL BED AND BANK MATERIAL**

Bed or Bank																				
Sample No.																				
Retained #4																				
Passed #10																				
Passed #40																				
Passed #200																				
Coarse Sand																				
Fine Sand																				
Silt																				
Clay																				
LL																				
PI																				
AASHTO																				
Station																				
Offset																				
Depth																				

Reported by: J.W. Mann

Date: 3/11/2011